

Fairview

**HEAVY
DUTY**

FTTC-S

**HOSE &
ASSEMBLIES**

TUBE

HOSE ENDS

FITTINGS

**QUICK
DISCONNECTS**

**VALVES &
SHUT-OFF
COCKS**

**PRESSURE
GAUGES**

**CLAMPS &
TUBE STRAPS**

**CABINETS,
TOOLS &
ACCESSORIES**

COPYRIGHT 2025





**Fairview Ltd.
Head Office
Oakville, Ontario**



**Fairview USA Inc.
Head Office
Wheatfield, New York**

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HERE IN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Fairview, its subsidiaries and authorized distributors provide product and / or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system, in the current catalogue. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuming that all performance, safety and warning requirements are met.

AGGRESSIVE WATER WARNING:

Water quality can significantly influence the life of Fairview products. Test for corrosive elements, acidity and other relevant contaminants, including chlorine and treat water appropriately. Failure to do so will void warranty and may lead to premature failure of tubes, valves and fittings. The product described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Fairview and its subsidiaries at any time without notice.

LA DÉFAILLANCE, LA MAUVAISE SÉLECTION OU LE MAUVAIS USAGE DES PRODUITS OU SYSTÈMES DÉCRITS CI-DESSOUS OU ARTICLES CONNEXES PEUT CAUSER LA MORT, DES BLESSURES CORPORELLES OU DES DOMMAGES MATÉRIELS.

Ce document et les autres renseignements fournis par Fairview, ses filiales et distributeurs autorisés offrent des options de produits ou systèmes pour les utilisateurs ayant de l'expertise technique. Il est important d'analyser tous les aspects de votre application et de revoir l'information concernant le produit ou système dans le catalogue actuel. À cause des conditions de fonctionnement et des applications variées de ces produits ou systèmes, l'utilisateur, par sa propre analyse et ses essais, est le seul responsable de la sélection finale des produits et systèmes, en présumant que toutes les exigences de rendement, de sécurité et d'avertissement sont respectées.

AVERTISSEMENT RELATIF À L'EAU AGRESSIVE

La qualité de l'eau peut avoir une incidence sur la durée de vie des produits Fairview. Analyser l'eau pour vérifier le niveau d'acidité, la présence d'éléments corrosifs ou d'autres polluants connexes, y compris le chlore, et traiter l'eau en conséquence. L'observation de cet avertissement annulera la garantie et pourrait causer la défaillance prématurée des tubes, des robinets et des raccords. Le produit décrit aux présentes, y compris mais sans s'y limiter, les caractéristiques du produit, spécifications, conceptions, disponibilité et prix sont sujets à changement par Fairview et ses filiales en tout temps et sans préavis.

LA FALTA DE SELECCIÓN, UNA SELECCIÓN INADECUADA O EL USO INDEBIDO DE LOS PRODUCTOS, SISTEMAS O ARTÍCULOS AFINES QUE SE DESCRIBEN AQUÍ PUEDEN CAUSAR LA MUERTE, LESIONES A LAS PERSONAS Y DAÑOS A LA PROPIEDAD.

Este documento, junto con otra información de parte de Fairview, sus subsidiarias y distribuidores autorizados ofrecen opciones de productos o sistemas para que los usuarios que tengan pericia técnica realicen una investigación posterior. Es importante que analice todos los aspectos de su aplicación y revise la información del presente catálogo con respecto al producto o sistema. Debido a la diversidad de condiciones operativas y aplicaciones de estos productos o sistemas, el usuario - a través de su propio análisis y prueba - es el único responsable de hacer la selección final de los productos y sistemas, y de que se cumplan todos los requisitos de rendimiento, seguridad y advertencia.

ADVERTENCIA DE AGUA AGRESIVA:

La calidad del agua puede influir en forma significativa en la vida de los productos Fairview. Haga los análisis necesarios para determinar si existen elementos corrosivos, acidez y otros contaminantes pertinentes, incluso cloro, y trate al agua de manera adecuada. El incumplimiento de este requisito anulará la garantía y podría causar la falla prematura de los tubos, las válvulas y los accesorios. Los productos que se describen en el presente, que incluyen sin ningún límite, las características, las especificaciones, los diseños, la disponibilidad y los precios de los productos, están sujetos a cambios sin aviso en cualquier momento por parte de Fairview y sus subsidiarias.

TABLE OF CONTENTS

SECTION A

HOSE & ASSEMBLIES

AIR BRAKE HOSE	6
AIR BRAKE HOSE ASSEMBLIES.....	6-8, 9
AIR BRAKE HOSE ASSEMBLY KITS	6
AIR BRAKE TRUCK TO TRAILER ASSEMBLIES	13-14
AIR HOSE ASSEMBLIES.....	32-34
AIR SEAT GUN KIT.....	35
BULKHEAD AND SLIDER HOSE ASSEMBLIES	9
ELECTRICAL ASSEMBLIES.....	11
ELECTRICAL CONNECTIONS	12
FIFTH WHEEL SLIDER ASSEMBLIES	35
FUEL LINE HOSE	30
GENERAL PURPOSE HOSE - P.V.C.....	33
GENERAL PURPOSE HOSE - RUBBER.....	32
GREASE WHIP HOSES.....	35
HYDRAULIC HOSE (SAE / DIN).....	16-22
HYDRAULIC HOSE CRIMPER.....	24
PRESSURE WASH HOSE & ASSEMBLIES.....	38-40
PTFE STAINLESS STEEL BRAIDED HOSE	23
PUSH ON RUBBER GRIP-TITE HOSE	31
RUBBER HEATER HOSE	30
SILICONE HOSE AND CONNECTORS.....	25-29
SILICONE HOSE KITS.....	29
SILICONE TURBO CHARGER CONNECTORS.....	28
TRUCK HOSE (SAE 100R5).....	15
WATER HOSE ASSEMBLIES	36-37

SECTION B

TUBE

AIR BRAKE TUBE.....	42
COPPER TUBE - GENERAL USE (ASTM B75)	46
COPPER TUBE - REFRIGERATION (ASTM B280).....	46
POLYETHYLENE TUBE (INDUSTRIAL GRADE)	43
POLYURETHANE (FUEL LINE) CLEAR TUBE	45
STEEL TUBE (S.A.E. 527)	46
VINYL TUBE (CLEAR)	44

SECTION C

HOSE ENDS

AIR BRAKE HOSE END COUPLINGS	48
AIR BRAKE HOSE MENDERS & QUICK SERVICE KITS.....	49
COMBINATION NIPPLES AND HOSE MENDERS (STEEL).....	53
HOSE BARBS (BRASS).....	51-52
HOSE BARBS (NYLON)	52
HOSE BARBS (FUEL LINE).....	53
HOSE END CRIMP FITTINGS FOR SAE 100R5	64
HOSE END CRIMP FITTINGS FOR SAE 100R7/R8/R18	66
HOSE END FERRULES (BRASS).....	53
HOSE END INSERTS	61
HYDRAULIC HOSE BITE-WIRE CRIMP FITTINGS.....	55-56, 59
HYDRAULIC HOSE COMPRESSION CRIMP FITTINGS.....	57-58
HYDRAULIC HOSE CRIMPING INSTRUCTIONS.....	60
LUBE HOSE CRIMP ENDS	61
LUBE HOSE REUSABLE ENDS.....	61
PTFE HOSE CRIMP ENDS.....	62
PTFE REUSABLE HOSE ENDS	63

SECTION C CONTINUED

HOSE ENDS

PUSH-IN HOSE GRIP-TITE FITTINGS	50
REUSABLE GENERAL PURPOSE HOSE FITTINGS	54
REUSABLE HOSE ENDS FOR SAE 100R1/R2	62
REUSABLE HOSE ENDS FOR SAE 100R5.....	65
RING-BARBS FOR POLY TUBE.....	54
TERMINAL BOLTS.....	48

SECTION D

FITTINGS

AIR BRAKE FITTINGS (D.O.T.) FOR COPPER.....	72
AIR BRAKE FITTINGS (D.O.T.) FOR TUBE	71
AIR BRAKE FITTINGS (D.O.T.) PUSH-TO-CONNECT (BRASS).....	74-75
AIR BRAKE FITTINGS (D.O.T.) PUSH-TO-CONNECT (COMPOSITE)	73
AIR BRAKE SERVICE KITS.....	68-69
AIR SHIFT TRANSMISSION FITTINGS & KITS	85
GREASE FITTINGS	86
GREASE FITTING ASSORTMENT KITS.....	86
HYDRAULIC ADAPTERS - 37° J.I.C. FLARE.....	89-90
HYDRAULIC ADAPTERS - 37° J.I.C. FLARE BULKHEAD	91
HYDRAULIC ADAPTERS - 37° J.I.C. FLARE SWIVEL	88
HYDRAULIC ADAPTERS - FLARELESS.....	96
HYDRAULIC ADAPTERS - NPSM PIPE SWIVEL	100
HYDRAULIC ADAPTERS - O-RING BOSS	93-94
HYDRAULIC ADAPTERS - O-RING BOSS TO NPSM	99
HYDRAULIC ADAPTERS - O-RING FACE SEAL.....	95-96
HYDRAULIC ADAPTERS - STEEL PIPE	97-99
HYDRAULIC CAP AND PLUG KITS	87
HYDRAULIC FLANGE ADAPTERS AND KITS.....	92
HYDRAULIC O-RING KIT	87
PIPE FITTINGS (BLACK IRON).....	80-82
PIPE FITTINGS (BRASS)	76-79
S.A.E. 45° FLARE (BRASS)	82-84
TOWING AIR COUPLER KIT - HEAVY DUTY	70

SECTION E

QUICK DISCONNECTS

AGRICULTURAL INTERCHANGE (PIONEER 4000)	104
ARO210 / ARO310 PNEUMATIC INTERCHANGE	111
AUTOMOTIVE INTERCHANGE (TRU-FLATE).....	111
HIGH PRESSURE THREAD-TO-CONNECT (PARKER 3000)	107
HYDRAULIC (ISO A) INTERCHANGE.....	106
HYDRAULIC (ISO B) INTERCHANGE.....	105
HYDRAULIC FLUSH FACE (ISO 16028 HTMA).....	107
HYDRAULIC QUICK DISCONNECT CROSSOVER LISTING.....	102
INDUSTRIAL INTERCHANGE - AUTOMATIC	110
INDUSTRIAL INTERCHANGE - MANUAL	109
LINCOLN INTERCHANGE.....	112
MINIATURE HIGH CAPACITY AIR.....	112
PNEUMATIC QUICK DISCONNECT CROSSOVER.....	108
SNOW PLOW Q.D	104
SWING COUPLINGS	113
UNIVERSAL PNEUMATIC INTERCHANGE	112
WATER / PRESSURE WASH COUPLINGS	114
WING COUPLINGS & ACCESSORIES - HEAVY DUTY.....	103

TABLE OF CONTENTS

SECTION F

VALVES & SHUT-OFF COCKS

AIR CHUCKS AND TANK VALVES	131
AIR CONTROL PRESSURE REGULATORS	132
AIR VENTS AND MUFFLERS	130
BALL VALVES (BRASS)	116-117
BALL VALVES (STEEL)	119-121
BALL VALVES (STAINLESS STEEL)	119-121
BALL VALVES - MINIATURE	118
BALL VALVES - SAFETY EXHAUST	117
CHECK VALVES	125
DRAIN COCKS AND VALVES	124
GLADHANDS (S.A.E.- J318) & ACCESSORIES	126-128
SHUT-OFF COCKS	123
UTILITY VALVES	122
PRESSURE PROTECTION VALVE	131
SOLENOID VALVES	132

SECTION G

PRESSURE GAUGES

DRY PRESSURE GAUGES	137
EQUALIZER DRY PRESSURE GAUGES	138-140
LIQUID FILLED PRESSURE GAUGES	134, 136
LIQUID FILLED PRESSURE GAUGES (ALL STAINLESS STEEL)	135

SECTION H

CLAMPS & TUBE STRAPS

AIR BRAKE HOSE SUPPORT CLAMPS	147
CLAMP DISPLAY RACKS	145
EAR CLAMP KIT	146
EAR CLAMPS	146
EXTENDED TONGUE CLAMPS	142
FLEX SEAL CLAMPS	144
FUEL INJECTION HOSE CLAMPS	145
GEAR CLAMP KITS	142
GEAR CLAMPS	142
HANGER STRAP	148
POGO STICKS	147
QUICK RELEASE CLAMPS	145
T-BOLT HOSE CLAMPS	143
TENDER KITS & SPRINGS	147
TUBE STRAPS	148

SECTION I

CABINETS, TOOLS & ACCESSORIES

AIR GUNS	154
AIR TOOL SWIVEL	154
CLAMP DISPLAY RACKS	153
DISPLAY CABINETS	150-151
DISPLAY CABINET PRODUCT SUGGESTIONS	152
DISPLAY RACK	151
HOSE & TUBE CUTTERS	156
HOSE PROTECTION	157
LEAK DETECTOR FLUID	159
O-CLAMP PINCERS	156
PIPE THREAD SEALANT	159
PROPANE TORCHES	158
STOCK BOXES	153
WATER GUNS & NOZZLES	155

HOSE & ASSEMBLIES

AIR BRAKE HOSE	6
AIR BRAKE HOSE ASSEMBLIES.....	6-8, 9
AIR BRAKE HOSE ASSEMBLY KITS	6
AIR BRAKE TRUCK TO TRAILER ASSEMBLIES	13-14
AIR HOSE ASSEMBLIES.....	32-34
AIR SEAT GUN KIT	35
BULKHEAD AND SLIDER HOSE ASSEMBLIES	9
ELECTRICAL ASSEMBLIES	11
ELECTRICAL CONNECTIONS	12
FIFTH WHEEL SLIDER ASSEMBLIES	35
FUEL LINE HOSE	30
GENERAL PURPOSE HOSE - P.V.C	33
GENERAL PURPOSE HOSE - RUBBER.....	32
GREASE WHIP HOSES.....	35
HYDRAULIC HOSE (SAE / DIN).....	16-22
HYDRAULIC HOSE CRIMPER	24
PRESSURE WASH HOSE & ASSEMBLIES	38-40
PTFE STAINLESS STEEL BRAIDED HOSE	23
PUSH ON RUBBER GRIP-TITE HOSE	31
RUBBER HEATER HOSE	30
SILICONE HOSE AND CONNECTORS.....	25-29
SILICONE HOSE KITS.....	29
SILICONE TURBO CHARGER CONNECTORS.....	28
TRUCK HOSE (SAE 100R5).....	15
WATER HOSE ASSEMBLIES	36-37



CAUTION:

Some agents used in the curing of rubber hose may leach out over time. Trace amounts may be enough to cause problems for sensitive hands. Gloves should be worn and care taken in handling of rubber hose products.

RUBBER AIR BRAKE HOSE

S.A.E. J1402



Rubber air brake hose is for use in truck and trailer air brake systems. It is certified to meet S.A.E. J1402 and D.O.T. F.M.V.S.S. 106 requirements. This air brake hose features a synthetic rubber oil-resistant tube and cover which is reinforced with synthetic cord for high performance strength.

MEETS – D.O.T. F.M.V.S.S. 106

HAB-6: MEETS TABLE AI AND TABLE AII

HAB-8: MEETS TABLE A

PART No.	Hose I.D. (IN.)	Actual O.D. (IN.)	Working Pressure (P.S.I.)	Reel/Coil Lengths (FT.)
HAB-4-REEL	1/4	.620	225	250
HAB-6-REEL	3/8	.750	225	250
HAB-6-50	3/8	.750	225	50
HAB-6-50P	3/8	.750	225	50
HAB-6-100	3/8	.750	225	100
HAB-8-REEL	1/2	.875	225	250
HAB-8-50	1/2	.875	225	50
HAB-8-50P	1/2	.875	225	50
HAB-8-100	1/2	.875	225	100

- **TEMPERATURE:** -40°C to +100°C (-40°F to +212°F)
- **PACKAGING:** Reels, 50 Ft. and 100 Ft.
Coils-50P are retail packaged
- **COLOR:** Standard HAB color is Black;
Red and Blue hose is available in -6 on request
(minimum quantity applies)
- **FITTINGS:** 4120RK Hose Menders, 1490 Series

ARCTIC AIR BRAKE HOSE

S.A.E. J1402



Rubber air brake hose is for use in truck and trailer air brake systems. It is certified to meet S.A.E. J1402 and D.O.T. F.M.V.S.S. 106 requirements. This air brake hose features a synthetic rubber tube and cover designed for low temperatures. It is oil-resistant and reinforced with spiral polyester cord for high performance strength.

MEETS – D.O.T. F.M.V.S.S. 106

HABA-6: MEETS TABLE AI AND TABLE AII

HABA-8: MEETS TABLE A

PART No.	Hose O.D. (IN.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)	Reel/Coil Lengths (FT.)
HABA-6-REEL	3/8	.750	200	250
HABA-6-50	3/8	.750	200	50
HABA-8-REEL	1/2	.875	200	250
HABA-8-50	1/2	.875	200	50

- **TEMPERATURE:** -54°C to +100°C (-65°F to +212°F)
- **PACKAGING:** Reels
- **FITTINGS:** 4120RK Hose Menders, 1490 Series

AIR BRAKE HOSE ASSEMBLY KITS

Ideal for start-up, each Fairview air brake hose assembly kit contains three of each of our most popular assemblies (45 hoses total). Specify English or French language rack when ordering.

PART No. HAB-6-KIT 3/8" I.D. Hose Assemblies

3/8 Swivel X 3/8 Rigid Male Pipe (For Swivel b/e use suffix -SW)

Each kit contains 3 of each hose:

PART No.	Length (IN.)	PART No.	Length (IN.)	PART No.	Length (IN.)
HAB-6-18C	18	HAB-6-32C	32	HAB-6-60C	60
HAB-6-20C	20	HAB-6-36C	36	HAB-6-72C	72
HAB-6-24C	24	HAB-6-36C-SW	36	HAB-6-96C	96
HAB-6-26C	26	HAB-6-40C	40	HAR-15 (Rack) English	
HAB-6-28C	28	HAB-6-42C	42	HAR-15-FR (Rack) French	
HAB-6-30C	30	HAB-6-48C	48		



PART No. HAB-8-KIT 1/2" I.D. Hose Assemblies

1/2 Swivel X 1/2 Rigid Male Pipe (For Swivel b/e use suffix -SW)

Each kit contains 3 of each hose:

PART No.	Length (IN.)	PART No.	Length (IN.)	PART No.	Length (IN.)
HAB-8-20C	20	HAB-8-34C	32	HAB-8-60C	60
HAB-8-24C	24	HAB-8-36C	36	HAB-8-72C	72
HAB-8-26C	26	HAB-8-36C-SW	36	HAB-8-96C	96
HAB-8-28C	28	HAB-8-42C	42	HAR-15 (Rack) English	
HAB-8-30C	30	HAB-8-48C	48	HAR-15-FR (Rack) French	
HAB-8-32C	32	HAB-8-54C	54		




CRIMPED AIR BRAKE HOSE ASSEMBLIES D.O.T.

Fairview


- D.O.T. Listed
- Common Lengths Available From Stock. Custom Lengths On Request.
- For Assemblies Requiring -54°C (-65°F) Cold Weather Arctic Hose Simply Replace "HAB" Prefix With "HABA" (HABA-6-24B).

Length	Tolerance
Up to 36"	±1/4"
Above 36"	±1% of length

• NOTE: ___ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

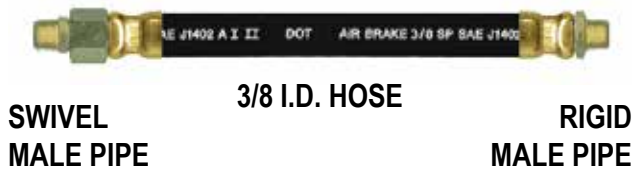


PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-6-__B	1/4	3/8	Rubber
HAB-6-__C	3/8	3/8	Rubber
HABA-6-__B	1/4	3/8	Arctic Hose
HABA-6-__C	3/8	3/8	Arctic Hose

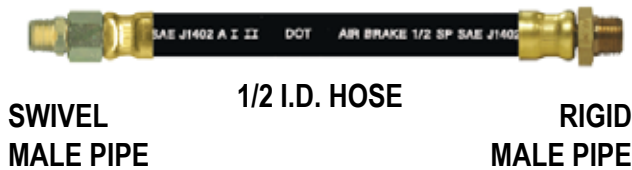

PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-8-__C	3/8	1/2	Rubber
HAB-8-__CD	1/2 to 3/8	1/2	Rubber
HABA-8-__C	3/8	1/2	Arctic Hose
HABA-8-__CD	1/2 to 3/8	1/2	Arctic Hose



PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-6-__BLSB	1/4	3/8	Rubber
HAB-6-__CLSC	3/8	3/8	Rubber
HABA-6-__BLSB	1/4	3/8	Arctic Hose
HABA-6-__CLSC	3/8	3/8	Arctic Hose

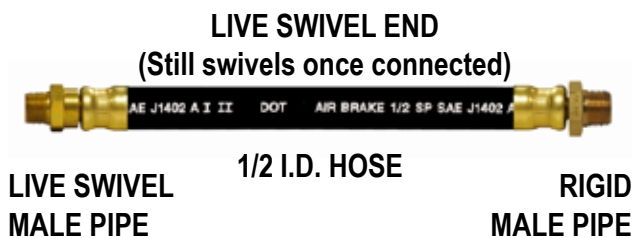

PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-8-__CLSC	3/8	1/2	Rubber
HAB-8-__DLSC	1/2 to 3/8	1/2	Rubber
HABA-8-__CLSC	3/8	1/2	Arctic Hose
HABA-8-__DLSC	1/2 to 3/8	1/2	Arctic Hose



PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-6-__FS	3/8	3/8	Rubber
HABA-6-__FS	3/8	3/8	Arctic Hose



PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-8-__FS	1/2	1/2	Rubber
HABA-8-__FS	1/2	1/2	Arctic Hose

CAUTION: Some agents used in the curing of rubber hose may leach out over time. Trace amounts may be enough to cause problems for sensitive hands. Gloves should be worn and care taken in handling of rubber hose products.

- D.O.T. Listed
- Common Lengths Available From Stock. Custom Lengths On Request.
- For Assemblies Requiring -54°C (-65°F) Cold Weather Arctic Hose Simply Replace “HAB” Prefix With “HABA” (HABA-6-24B).

Length	Tolerance
Up to 36"	±1/4"
Above 36"	±1% of length

• NOTE: ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.



SWIVEL
MALE PIPE

3/8 I.D. HOSE

SWIVEL
MALE PIPE

PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-6-__B-SW	1/4	3/8	Rubber
HAB-6-__C-SW	3/8	3/8	Rubber
HABA-6-__C-SW	3/8	3/8	Arctic Hose



SWIVEL
MALE PIPE

1/2 I.D. HOSE

SWIVEL
MALE PIPE

PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-8-__C-SW	3/8	1/2	Rubber
HAB-8-__D-SW	1/2	1/2	Rubber
HABA-8-__C-SW	3/8	1/2	Arctic Hose
HABA-8-__D-SW	1/2	1/2	Arctic Hose



3/8
LIVE SWIVEL
MALE PIPE

3/8 I.D. HOSE

3/8
LIVE SWIVEL
MALE PIPE

LIVE SWIVEL ENDS
(Still swivels once connected)

PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-6-__C-LSW	3/8	3/8	Rubber
HABA-6-__C-LSW	3/8	3/8	Arctic Hose



LIVE SWIVEL
MALE PIPE

1/2 I.D. HOSE

LIVE SWIVEL
MALE PIPE

LIVE SWIVEL ENDS
(Still swivels once connected)

PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-8-__C-LSW	3/8	1/2	Rubber
HABA-8-__C-LSW	3/8	1/2	Arctic Hose

PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-8-__D-LSW	1/2	1/2	Rubber
HABA-8-__D-LSW	1/2	1/2	Arctic Hose



3/8
LIVE SWIVEL
MALE PIPE

1/2 I.D. HOSE

3/8
SWIVEL
MALE PIPE

PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-8-__C-LSWSW	3/8	1/2	Rubber
HABA-8-__C-LSWSW	3/8	1/2	Arctic Hose

CAUTION: Some agents used in the curing of rubber hose may leach out over time. Trace amounts may be enough to cause problems for sensitive hands. Gloves should be worn and care taken in handling of rubber hose products.

BULKHEAD AND SLIDER HOSE ASSEMBLIES

Fairview

- D.O.T. Listed
- Common Lengths Available From Stock. Custom Lengths On Request.
- For Assemblies Requiring -54°C (-65°F) Cold Weather Arctic Hose Simply Replace "HAB" Prefix With "HABA" (HABA-6-24B).

Length	Tolerance
Up to 36"	±1/4"
Above 36"	±1% of length

BULKHEAD HOSE ASSEMBLY



**1/2 MALE
BULKHEAD x 1/4
FEMALE PIPE**

**3/8 I.D. HOSE
WITH SPRING
GUARDS
(-SG)
LIVE SWIVEL END
(Still swivels once connected)**

**3/8
LIVE SWIVEL
MALE PIPE**

PART No.	F Pipe Size	LSW Pipe Size	Hose I.D. (IN.)	Hose
HAB-6-__BHBLSC-SG	1/4	3/8	3/8	Rubber
HABA-6-__BHBLSC-SG	1/4	3/8	3/8	Arctic Hose

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

SERVICEABLE SLIDER HOSE ASSEMBLY



**DOT
AIR BRAKE
TUBE**

**3/8 I.D. HOSE
WITH SPRING
GUARDS
(-SG)
LIVE SWIVEL END
(Still swivels once connected)**

**3/8
LIVE SWIVEL
MALE PIPE**

PART No.	LSW Pipe Size	Tube O.D. (IN.)	Hose I.D. (IN.)	Hose
HAB-6-__SABH6-SG	3/8	3/8	3/8	Rubber
HAB-6-__SABH8-SG	3/8	1/2	3/8	Rubber
HABA-6-__SABH6-SG	3/8	3/8	3/8	Arctic Hose
HABA-6-__SABH8-SG	3/8	1/2	3/8	Arctic Hose

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

CONTROL LINE SLIDER HOSE ASSEMBLY



**DOT
AIR BRAKE
TUBE
(7/8-20 MOUNTING
THREAD)**

1/4 I.D. HOSE

**DOT
AIR BRAKE
TUBE**

PART No.	Tube O.D. (IN.)	Hose I.D. (IN.)	Hose
HAB-4-__ABH6	3/8	1/4	Rubber
HABA-4-__ABH6	3/8	1/4	Arctic Hose

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

SLIDER AXLE HOSE ASSEMBLY



**DOT
AIR BRAKE
TUBE
(7/8-20 MOUNTING
THREAD)**

**WITH SPRING
GUARDS
(-SG)**

**DOT
AIR BRAKE
TUBE**

PART No.	Tube O.D. (IN.)	Hose I.D. (IN.)	Hose
HAB-6-__ABH6-SG	3/8	3/8	Rubber
HAB-6-__ABH8-SG	1/2	3/8	Rubber
HAB-8-__ABH8-SG	1/2	1/2	Rubber
HABA-6-__ABH6-SG	3/8	3/8	Arctic Hose
HABA-6-__ABH8-SG	1/2	3/8	Arctic Hose
HABA-8-__ABH8-SG	1/2	1/2	Arctic Hose

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

CAUTION: Some agents used in the curing of rubber hose may leach out over time. Trace amounts may be enough to cause problems for sensitive hands. Gloves should be worn and care taken in handling of rubber hose products.

AIR BRAKE ASSEMBLIES D.O.T. (WITH SPRING GUARD)



3/8 I.D. HOSE

3/8 SWIVEL
MALE PIPE

1/2 RIGID
MALE PIPE

PART No.	Length (IN.)	Hose I.D. (IN.)
HAB-6-13.62CD-SG	13.62	3/8
HAB-8-13.62CD-SG	13.62	1/2

NOTE: ADDITIONAL LENGTHS AVAILABLE ON REQUEST.

AIR BRAKE ASSEMBLIES D.O.T. (GLADHAND ADAPTER)



- Greater Flexibility • Easy Attachment of Gladhand
- Cost Effective Alternative to the Swing Away Gladhand

PART No.
HAB-NOSE BOX-1

- Description:
- 3/8" I.D. Hose
 - 1/2 MPT Reusable End
 - 1/2 MPT Crimp End
 - 6" Overall Length

PART No.
HAB-NOSE BOX-2

- Description:
- 3/8" I.D. Hose
 - 1/2 MPT Reusable End
 - 1/2 FPT Crimp End
 - 6" Overall Length

GLADHAND SOLD SEPARATELY.

ARLECTRIC[®]

by Fairview

3-IN-1 AIR BRAKE & ELECTRICAL LINES

Fairview's **ARLECTRIC** 3-in-1 Air Brake & Electric assembly set was developed to simplify and protect air brake and electrical lines between the tractor and the trailer. The unique live swivel hose ends and superior flexibility of the **ARLECTRIC** set promotes longer hose life, helps prevent tangling and means less time is required to make connections.

Live
Swivel
All Ends

Color
Coded Ends



Technical Specifications:

- MEETS OR EXCEEDS: S.A.E J2394, J560, J1402 D.O.T F.M.V.S.S 106 TYPE F
- TEMPERATURE: -65°C to +93°C (-85°F to +200°F)
- FITTINGS: 1/2" live swivel male pipe each end



Limited
Warranty

www.fairview.inc

Contact Fairview for Details....

ARLECTRIC is a registered trademark of Fairview
Oakville, ON L6H 6G1 / Wheatfield, NY 14120

TRUCK TO TRAILER ELECTRICAL ASSEMBLIES



7-WAY ABS ELECTRICAL ASSEMBLIES



- **MEETS OR EXCEEDS:** SAE J2394 & SAE J560
- **TEMPERATURE:** -65°C to +100°C (-85°F to +212°F)
- Weather-seal rubber boots
- **PACKAGING:** Individually bagged with color label / UPC

**LOW TEMPERATURE RATED
-65°C (-85°F)**



PART No.	7-Way Electrical Assemblies	Length (FT.)
ECC-ABS7GRN-12L12	Coiled Wiring Assembly: 1/8, 2/10, 4/12 Ga.	12
ECC-ABS7GRN-15L12	Coiled Wiring Assembly: 1/8, 2/10, 4/12 Ga.	15
ECC-ABS7GRN-15L48	Coiled Wiring Assembly with 48 inch Lead: 1/8, 2/10, 4/12 Ga.	15
ECS-ABS7GRN-12	Straight Wiring Assembly: 1/8, 2/10, 4/12 Ga.	12
ECS-ABS7GRN-15	Straight Wiring Assembly: 1/8, 2/10, 4/12 Ga.	15

7-WAY NON-ABS (SAE J2394 Type F)



PART No.	Description	Length (FT.)
ECC-BLK-15L12	Coiled Assembly: 1/12, 6/14 Ga.	15

SINGLE POLE LIFT-GATE



PART No.	Description	Length (FT.)
ECC-1GRN-15L12	Liftgate Cable-Coiled, Single Pole, 15Ft, W 12In Leads (Grn)	15

DUAL POLE LIFT-GATE



PART No.	Description	Length (FT.)
ECC-2BW-15L12	Liftgate Cable-Coiled, Dual Pole, 15Ft, W 12In Leads (Blk&Wht)	15

7 SPLIT-PIN ABS ZINC SOCKET WITH RING & BOLT



PART No.

EC-ZNSR-7ABS-SPL

Description

Fairview's Heavy Duty Zinc 7 Split-Pin ABS Socket features weather protective rubber boot and utilizes ring & bolt wire connections

7 SPLIT-PIN ABS NYLON SOCKET WITH BULLETS



PART No.

EC-NYSB-7ABS-SPL

Description

Fairview's Nylon 7 Split-Pin ABS Socket utilizes bullet wire connections

7 BLADE RV / TRAILER NYLON SOCKET



PART No.

EC-NYS-7RV-BLD

Description

Fairview's 7 Blade RV / Trailer Nylon Socket includes jacketed sealing for wire protection

2 PIN LIFT-GATE SOCKET



PART No.

EC-ZNSR-2LG-SOL

Description

Fairview's 2 Pin Lift-Gate Socket is heavy duty zinc with Ring & Bolt wire connections

Horizontal Pin Orientation Available on Request.

7 PIN ZINC AUX / ISO PLUG



PART No.

EC-ZNP-7AUX

Description

Fairview's 7 Pin Aux / ISO Plug features sturdy, corrosion-resistant die cast zinc construction and metal springs with 100 hour advanced salt-spray protection

7 BLADE RV / TRAILER NYLON PLUG



PART No.

EC-NYP-7RV

Description

Fairview's 7 Blade RV / Trailer Nylon Plug includes jacketed sealing for wire protection

2 PIN ZINC LIFT-GATE PLUG



PART No.

EC-ZNP-2LG


Description

Fairview's 2 Pin Lift-Gate Plug features sturdy, corrosion-resistant die cast zinc construction and metal springs with 100 hour advanced salt-spray protection

AIR BRAKE TRUCK TO TRAILER ASSEMBLIES




AIR BRAKE / ELECTRIC LINE BUNDLES

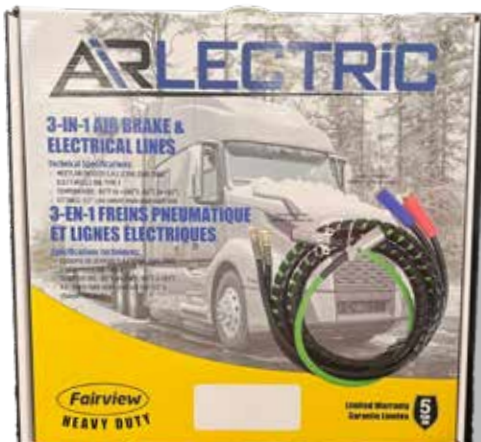

Fairview's **ARLECTRIC** 3-in-1 Air Brake & Electric assembly set was developed to simplify and protect air brake and electrical lines between the tractor and the trailer. The unique live swivel hose ends and superior flexibility of the **ARLECTRIC** set promotes longer hose life, helps prevent tangling and means less time is required to make connections.

Live Swivels
on Both
Ends.

Color
Coded

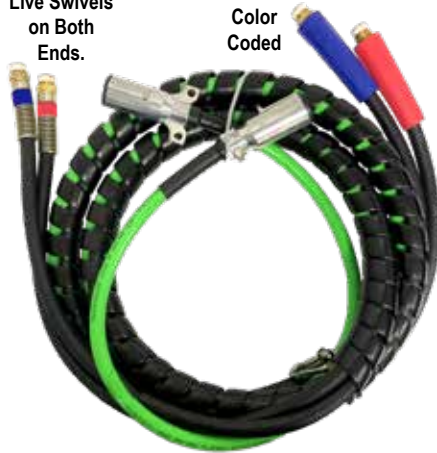

- **MEETS OR EXCEEDS:** S.A.E J2394, J560, J1402 D.O.T F.M.V.S.S 106 TYPE F
- **TEMPERATURE:** -65°C to +100°C (-85°F to +212°F)
- **FITTINGS:** 1/2" Live Swivel Male Pipe Each End
- Superior flexibility, promotes longer hose life
- **PACKAGING:** Suitcase box with handle

LOW TEMPERATURE RATED
-65°C (-85°F)

PART No.	3-In-1 Electrical & Air Brake Lines	Length (FT.)
HAB3-ABS-12	3/8 7-Way Green ABS cable & AB lines; color coded rubber grip	12
HAB3-ABS-15	3/8 7-Way Green ABS cable & AB lines; color coded rubber grip	15
HAB3-ABS-20	3/8 7-Way Green ABS cable & AB lines; color coded rubber grip	20

TRUCK TO TRAILER CONNECTIONS (Without Electric Cable)

Live Swivels
on Both
Ends.




PART No.	Length (FT.)	Swivel Male Pipe	Low Temp.
HABRED-12GGSG	12	1/2	-40°C (-40°F)
HABBLU-12GGSG	12	1/2	-40°C (-40°F)
HABRED-15GGSG	15	1/2	-40°C (-40°F)
HABBLU-15GGSG	15	1/2	-40°C (-40°F)
HABRED-20GGSG	20	1/2	-40°C (-40°F)
HABBLU-20GGSG	20	1/2	-40°C (-40°F)

Part numbers above are for **ONE** Assembly with Glad Grip & Spring Guard.



To Order
Complete with
Gladhands (GHE / GHS)
Suffix Part No. with -GH

Live Swivels
on Both
Ends.

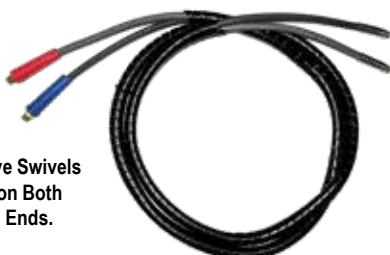

PART No.	Length (FT.)	Swivel Male Pipe	Low Temp.	Spiral Wrap
HABSPW-12GGSG	12	1/2	-40°C (-40°F)	Yes
HABSPW-15GGSG	15	1/2	-40°C (-40°F)	Yes
HABSPW-20GGSG	20	1/2	-40°C (-40°F)	Yes
HAB-12GGSG	12	1/2	-40°C (-40°F)	No
HAB-15GGSG	15	1/2	-40°C (-40°F)	No
HAB-20GGSG	20	1/2	-40°C (-40°F)	No

Part numbers above are for a **TWO** assembly set with Glad Grips & Spring Guards.



To Order
Complete with
Gladhands (GHE / GHS)
Suffix Part No. with -GH

LOW TEMPERATURE S.A.E. J844 RETRACTABLE AIR BRAKE COILS


- **MEETS:** S.A.E. J884D Type 3B D.O.T. F.M.V.S.S. 106
- **COLORS:** Red, Blue
- **TEMPERATURE:** -65°C to +93°C (-85°F to +200°F)
- **FITTINGS:** 1/2" Male Pipe Each End
- **PACKAGING:** Individually bagged with color label / UPC

LOW TEMPERATURE RATED
-65°C (-85°F)



PART No.	Working Length (FT.)	Tube O.D (IN.)	Pigtail Length (IN.)	Male Pipe Ends	Low Temp.
1486L-8-15	15	1/2	12"	1/2	-65°C (-85°F)
1486L-8-15L40	15	1/2	40"	1/2	-65°C (-85°F)
1486L-8-20	20	1/2	12"	1/2	-65°C (-85°F)

Part numbers above are for a TWO assembly set.

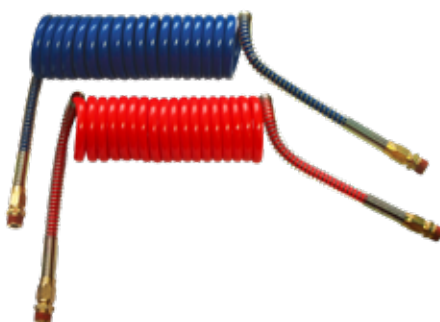


PART No.	Working Length (FT.)	Tube O.D (IN.)	Pigtail Length (IN.)	Male Pipe Ends	Low Temp.
1486L-8RED-15	15	1/2	12"	1/2	-65°C (-85°F)
1486L-8BLU-15	15	1/2	12"	1/2	-65°C (-85°F)
1486L-8RED-20	20	1/2	12"	1/2	-65°C (-85°F)
1486L-8BLU-20	20	1/2	12"	1/2	-65°C (-85°F)

Part numbers above are for a SINGLE assembly.

STANDARD S.A.E. J844 RETRACTABLE AIR BRAKE COILS

- **MEETS:** S.A.E. J884D Type 3B D.O.T. F.M.V.S.S. 106
- **COLORS:** Red, Blue
- **TEMPERATURE:** -40°C to +104°C (-40°F to +220°F)
- **FITTINGS:** 1/2" Male Pipe Each End

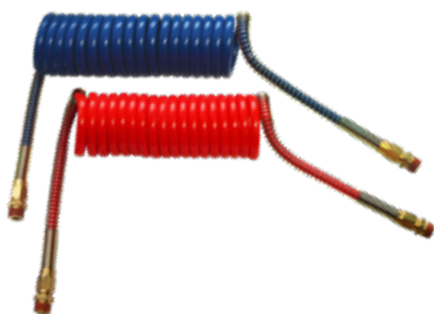

PART No.	Working Length (FT.)	Tube O.D (IN.)	Pigtail Length (IN.)	Male Pipe Ends
1486LE-8-12	12	1/2	12"	1/2
1486LE-8-15	15	1/2	12"	1/2
1486LE-8-20	20	1/2	12"	1/2

Part numbers above are for a TWO assembly set.



To Order
Complete with
Aluminum Glad-Grips
Suffix Part No. with -GGAL

PART No.	Working Length (FT.)	Tube O.D (IN.)	Pigtail Length (IN.)	Male Pipe Ends
1486LE-8BLU-12	12	1/2	12"	1/2
1486LE-8RED-12	12	1/2	12"	1/2
1486LE-8BLU-15	15	1/2	12"	1/2
1486LE-8RED-15	15	1/2	12"	1/2
1486LE40-8BLU-15	15	1/2	40"	1/2
1486LE40-8RED-15	15	1/2	40"	1/2
1486LE-8BLU-20	20	1/2	12"	1/2
1486LE-8RED-20	20	1/2	12"	1/2

Part numbers above are for a SINGLE assembly.



To Order
Complete with
Gladhands (GHE / GHS)
Suffix Part No. with -GH



For medium pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils, air and water. Recommended for power steering and power steering return lines, fuel filters, turbo chargers, tilt lines, lube oil lines and machine tools. Not suitable for use with phosphate esters.

S.A.E. 100R5 / S.A.E. J1402

- MEETS D.O.T. F.M.V.S.S. - 106
- ONE WIRE BRAID WITH TWO COTTON BRAIDS

CONSTRUCTION: Textile inner braid with single wire braid reinforcement

TUBE: Oil and heat-resistant synthetic rubber inner tube

COVER: Textile outer braid and a cotton braided black cover

COLOR: Black

TEMPERATURE: -40°C to +100°C (-40°F to +212°F)

PACKAGING: For reel lengths, coils and carton quantities see below

FITTINGS: SCW500 Crimp & SR500 Reusable

Max. temperature recommended for air +60°C (+140°F)

PART No.	Nominal I.D.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel / Coil Lengths (FT.)
HR5-4-50	1/4	3/16	.52	3,000	12,000	3.00	.16	50
HR5-4-100	1/4	3/16	.52	3,000	12,000	3.00	.16	100
HR5-4-REEL	1/4	3/16	.52	3,000	12,000	3.00	.16	250
HR5-5-100	5/16	1/4	.58	2,500	10,000	3.38	.18	100
HR5-5-REEL	5/16	1/4	.58	2,500	10,000	3.38	.18	250
HR5-6-50	3/8	5/16	.68	2,250	9,000	4.00	.22	50
HR5-6-100	3/8	5/16	.68	2,250	9,000	4.00	.22	100
HR5-6-REEL	3/8	5/16	.68	2,250	9,000	4.00	.22	250
HR5-8-50	1/2	13/32	.77	2,000	8,000	4.62	.27	50
HR5-8-100	1/2	13/32	.77	2,000	8,000	4.62	.27	100
HR5-8-REEL	1/2	13/32	.77	2,000	8,000	4.62	.27	250
HR5-10-50	5/8	1/2	.92	1,750	7,000	5.50	.34	50
HR5-10-100	5/8	1/2	.92	1,750	7,000	5.50	.34	100
HR5-10-REEL	5/8	1/2	.92	1,750	7,000	5.50	.34	250
HR5-12-50	3/4	5/8	1.08	1,500	6,000	6.50	.42	50
HR5-12-100	3/4	5/8	1.08	1,500	6,000	6.50	.42	100
HR5-12-REEL	3/4	5/8	1.08	1,500	6,000	6.50	.42	250
HR5-16-50	1	7/8	1.24	800	3,200	7.38	.44	50
HR5-16-100	1	7/8	1.24	800	3,200	7.38	.44	100
HR5-16-REEL	1	7/8	1.24	800	3,200	7.38	.44	250
HR5-20-CTN	1-1/4	1-1/8	1.50	625	2,500	9.00	.52	100
HR5-24-CTN	1-1/2	1-3/8	1.75	500	2,000	10.50	.62	100
HR5-32-CTN	2	1-13/16	2.22	350	1,400	13.25	.93	100

MEDIUM PRESSURE HOSE



Meets or Exceeds S.A.E. 100R1 AT / EN853 1SN

- ONE WIRE BRAID

For medium to high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils and water. Not suitable for use with phosphate esters.

CONSTRUCTION: One ply of steel wire braid

TUBE: Oil and heat-resistant synthetic rubber inner tube

COVER: Oil, weather and flame-resistant synthetic rubber cover

COLOR: Black

TEMPERATURE: -40°C to +121°C (-40°F to +250°F)

PACKAGING: For reel lengths see below

FITTINGS: SC600 Compression, SC900 Bite-To-The-Wire & SRT100 Reusable

For a low temp option, see 100R17

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel Lengths (FT.)
T1SN-4-REEL	1/4	.531	3,260	13,000	4.00	.17	328
T1SN-6-REEL	3/8	.687	2,610	10,400	5.00	.26	328
T1SN-8-REEL	1/2	.812	2,320	9,300	7.00	.31	328
T1SN-12-REEL	3/4	1.093	1,520	6,100	9.50	.47	164
T1SN-16-REEL	1	1.409	1,280	5,075	11.80	.61	164

HIGH PRESSURE HOSE



Meets or Exceeds S.A.E. 100R2 AT / EN853 2SN

- TWO WIRE BRAID

For high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils and water. Not suitable for use with phosphate esters.

CONSTRUCTION: Two plies of steel wire braid

TUBE: Oil and heat-resistant synthetic rubber inner tube

COVER: Oil, weather and flame-resistant synthetic rubber cover

COLOR: Black

TEMPERATURE: -40°C to +121°C (-40°F to +250°F)

PACKAGING: For reel lengths see below

FITTINGS: SC600 Compression, SC900 Bite-To-The-Wire & SRT200 Reusable

For a low temp option, see 100R16LT

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel Lengths (FT.)
T2SN-4-REEL	1/4	.593	5,800	23,200	4.00	.26	328
T2SN-6-REEL	3/8	.750	4,785	19,100	5.00	.38	328
T2SN-8-REEL	1/2	.875	3,990	16,000	7.00	.48	328
T2SN-12-REEL	3/4	1.187	3,120	12,500	9.50	.61	164
T2SN-16-REEL	1	1.500	2,390	9,500	12.00	.95	164

MEDIUM PRESSURE HOSE (SMOOTH COVER)



S.A.E. 100R1 AT / EN853 1SN

- ONE WIRE BRAID

For medium to high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils and water. Not suitable for use with phosphate esters.

CONSTRUCTION: One ply of steel wire braid

TUBE: Oil and heat-resistant synthetic rubber inner tube

COVER: Oil, weather and flame-resistant M.S.H.A. approved, synthetic rubber cover

COLOR: Black

TEMPERATURE: -40°C to +100°C (-40°F to +212°F)

PACKAGING: For reel lengths see below

FITTINGS: SC600 Compression, SC900 Bite-To-The-Wire & SRT100 Reusable

For a low temp option, see 100R17

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel Lengths (FT.)
T1-4-REEL	1/4	.520	3,265	13,053	3.94	.14	300
T1-6-REEL	3/8	.677	2,610	10,443	4.92	.23	300
T1-8-REEL	1/2	.803	2,320	9,282	7.09	.28	300
T1-12-REEL	3/4	1.094	1,525	6,092	9.45	.42	250

HIGH PRESSURE HOSE (SMOOTH COVER)



S.A.E. 100R2 AT / EN853 2SN

- TWO WIRE BRAID

For high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils and water. Not suitable for use with phosphate esters.

CONSTRUCTION: Two plies of steel wire braid

TUBE: Oil and heat-resistant synthetic rubber inner tube

COVER: Oil, weather and flame-resistant M.S.H.A. approved, synthetic rubber cover

COLOR: Black

TEMPERATURE: -40°C to +100°C (-40°F to +212°F)

PACKAGING: For reel lengths see below

FITTINGS: SC600 Compression, SC900 Bite-To-The-Wire & SRT200 Reusable

For a low temp option, see 100R16LT

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel Lengths (FT.)
T2-4-REEL	1/4	.591	5,800	23,206	3.94	.22	300
T2-5-REEL	5/16	.650	5,075	20,305	4.53	.27	300
T2-6-REEL	3/8	.748	4,800	19,145	4.92	.36	300
T2-8-REEL	1/2	.870	4,000	15,954	7.09	.42	300
T2-10-REEL	5/8	1.000	3,625	15,954	8.07	.52	250
T2-12-REEL	3/4	1.161	3,100	12,473	9.45	.64	250
T2-16-REEL	1	1.500	2,400	9,573	11.81	.95	150
T2-20-CTN	1-1/4	1.866	1,820	7,252	16.54	1.25	130

SUCTION HOSE



Meets or Exceeds Performance Characteristics S.A.E. 100R4

- TWO TEXTILE SPIRAL PLIES WITH WIRE HELIX

For hydraulic suction (29 Inch/hg) and low pressure hydraulic return lines. Will handle petroleum based hydraulic fluids, diesel fuels, water and lubricating oils. Wire helix prevents collapsing under vacuum service. Not suitable for use with phosphate esters.

- CONSTRUCTION:** Two textile spiral plies with wire helix
TUBE: Oil and heat-resistant synthetic rubber inner tube
COVER: Oil, weather and flame-resistant M.S.H.A. approved, synthetic rubber cover
COLOR: Black
TEMPERATURE: -40°C to +121°C (-40°F to +250°F)
PACKAGING: 50 Ft. and 100 Ft. Coils
FITTINGS: SC600 Compression (Up to 1-1/4 Size), S1100 & SO1100 Steel Hose Inserts, Steel Combination Nipples & Hose Menders

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Vacuum Service (IN./HG)	Approx. Wgt. / Ft. (LBS.)	Coil Lengths (FT.)
HR4-12-100	3/4	1.160	300	1,200	4.90	29	.60	100
HR4-16-100	1	1.480	250	1,000	5.90	29	.70	100
HR4-20-100	1-1/4	1.770	200	800	7.87	29	.90	100
HR4-24-100	1-1/2	2.050	150	600	10.00	29	1.20	100
HR4-32-100	2	2.500	100	400	11.80	29	1.50	100

WET LINE KITS

A Wet Line Kit uses a hydraulic pump installed on a trailer to power anything with a hydraulic motor, such as a boom or crane, or the hydraulics on a dump truck. The Wet Line Kit is attached to the truck's PTO (Power Take Off) and transfers an engine's mechanical power to another piece of equipment. Custom kits available.



HYDRAULIC
ASSEMBLIES



RETURN
LINES




HYDRAULIC
ADAPTERS



T-BOLT
CLAMPS



BALL
VALVES



HOSE
CONNECTOR



HYDRAULIC
WING Q.D. COUPLERS

MEDIUM PRESSURE HOSE



For medium pressure hydraulic service in the handling of most hydraulic fluids, diesel fuels, grease and lubricating oils. Not suitable for use with phosphate esters. This hose combines the best features of conventional rubber hose with the unique advantages of synthetic materials.

S.A.E. 100R7

- MEETS OR EXCEEDS S.A.E. J517
- EXCEEDS 100R7 IMPULSE REQUIREMENTS
- LIGHTWEIGHT AND FLEXIBLE

CONSTRUCTION: High tensile strength fiber reinforcement braided synthetic fiber

TUBE: Oil and heat-resistant nylon inner tube

COVER: Resistant polyurethane, pin pricked cover

COLOR: Black

TEMPERATURE: -40°C to +93°C (-40°F to +200°F)

PACKAGING: For reel lengths see below

FITTINGS: SC700 & SCTP Series

PART No.	Nominal Hose O.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Weight. / Ft. (LBS.)	Reel Lengths (FT.)
HR7-2-REEL	1/8	.322	3,000	12,000	.75	.03	250
HR7-3-REEL	3/16	.415	3,000	12,000	.75	.05	250
HR7-4-REEL	1/4	.496	2,750	11,000	1.50	.06	250
HR7-5-REEL	5/16	.580	2,500	10,000	1.75	.08	250
HR7-6-REEL	3/8	.650	2,250	9,000	2.00	.11	250
HR7-8-REEL	1/2	.834	2,000	8,000	3.00	.16	250
HR7-12-REEL	3/4	1.050	1,250	5,000	6.00	.22	250

HIGH CONSTANT PRESSURE HOSE



For hydraulic systems with high peak pressures, tight bend radii and strenuous operating conditions.

CONSTRUCTION: Four spirals of high tensile steel wire

TUBE: Oil and heat-resistant synthetic rubber

COVER: MSHA approved fire-resistant, abrasion, ozone, oil and weather resistant synthetic rubber

COLOR: Black

TEMPERATURE: -40°C to +121°C (-40°F to +248°F)

PACKAGING: For coil lengths see below

FITTINGS: SCT900MS Bite-To-The-Wire

S.A.E. 100R12 / DIN - EN856

- ULTRA FLEXIBLE CONSTANT PRESSURE
- FOUR SPIRAL WIRE

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Coil Lengths (FT.)
HRA12UF-8	1/2	0.925	4,100	16,400	3.54	0.578	131
HRA12UF-12	3/4	1.209	4,100	16,400	4.76	0.827	131
HRA12UF-16	1	1.500	4,100	16,400	5.98	1.257	131
HRA12UF-20	1-1/4	1.854	4,100	16,400	8.27	2.150	131
HRA12UF-24	1-1/2	2.110	4,100	16,400	10.00	3.025	131

HIGH PRESSURE HOSE



For high pressure hydraulic service in the handling of most hydraulic fluids, diesel fuels, water and lubricating oils. Not suitable for use with phosphate esters.

S.A.E. 100R12 / EN856

- EXTREMELY FLEXIBLE
- FOUR SPIRAL WIRE

CONSTRUCTION: Four spirals of high tensile steel wire

TUBE: Oil and heat-resistant synthetic rubber

COVER: MSHA approved fire-resistant, abrasion, ozone, oil and weather resistant synthetic rubber cover

COLOR: Black

TEMPERATURE: -40°C to +121°C (-40°F to +248°F)

LOW TEMPERATURE: -55°C to +93°C (-67°F to +200°F)

PACKAGING: For coil lengths see below

FITTINGS: SCT900MS Bite-To-The-Wire

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Coil Lengths (FT.)
HRA12-8	1/2	.937	4,060	16,240	3.54	.470	150
HRA12-12	3/4	1.197	4,060	16,240	4.72	.672	150
HRA12-16	1	1.476	4,060	16,240	5.91	1.035	150
HRA12-20	1-1/4	1.850	3,050	12,180	8.27	1.505	150
HRA12-24	1-1/2	2.106	2,540	10,150	10.00	1.720	150

LOW TEMPERATURE HIGH PRESSURE HOSE



For hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels lubricating oils and water. Not suitable with phosphate esters. Fairview recommends the use of Bite-To-The-Wire fittings only for our low temperature 100R16 hose.

CONSTRUCTION: Two plies of steel wire braid

TUBE: Oil and heat-resistant synthetic rubber inner tube

COVER: Oil, weather and flame-resistant M.S.H.A. Approved synthetic rubber cover

COLOR: Black

LOW TEMPERATURE: -55°C to +127°C (-67°F to +260°F)

PACKAGING: For reel lengths see below

FITTINGS: SC900 Bite-To-The-Wire

S.A.E. 100R16 / DIN 2SC

- EXTREMELY FLEXIBLE
- TWO WIRE BRAID

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel Lengths (FT.)
HR16LT-4-REEL	1/4	.53	6,500	26,000	2.00	.20	328
HR16LT-6-REEL	3/8	.69	5,300	21,200	2.50	.30	328
HR16LT-8-REEL	1/2	.81	4,500	18,000	3.50	.39	328
HR16LT-10-REEL	5/8	.93	4,000	16,000	4.00	.46	250
HR16LT-12-REEL	3/4	1.10	3,500	14,000	4.75	.59	164
HR16LT-16-REEL	1	1.42	3,000	12,000	6.00	.85	164

LOW TEMPERATURE MEDIUM PRESSURE HOSE



For low temperature medium to high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels lubricating oils and water. Not suitable with phosphate esters. Fairview recommends the use of Bite-To-The-Wire fittings only for our low temperature 100R17 hose.

CONSTRUCTION: One braid of high tensile steel wire reinforcement for 1/4" ID through to 1/2" ID hose • Two braids of high tensile steel wire reinforcement for 3/4" ID through to 1" ID hose

TUBE: Oil and heat resistant synthetic rubber inner tube

COVER: Oil, weather and flame-resistant synthetic rubber cover

COLOR: Black

TEMPERATURE: -55°C to +100°C (67°F to +212°F)

PACKAGING: For reel lengths see below

FITTINGS: SC900 Bite-To-The-Wire

S.A.E. 100R17

PART No.	Actual I.D. (IN.)	Nominal Hose O.D. (IN.)	Maximum Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel Lengths (FT.)
HR17LT-4-REEL	1/4	.480	.500	3,000	12,000	2.00	.12	328
HR17LT-6-REEL	3/8	.610	.630	3,000	12,000	2.50	.18	328
HR17LT-8-REEL	1/2	.750	.770	3,000	12,000	3.50	.25	328
HR17LT-12-REEL	3/4	1.090	1.114	3,000	12,000	4.72	.58	164
HR17LT-16-REEL	1	1.420	1.441	3,000	12,000	5.90	.86	164

HR18 CONSTANT PRESSURE HOSE



Exceeds 100R18 Impulse requirements • Lightweight and Flexible • Ideal for general purpose high pressure hydraulic applications • Industrial Hydraulic • Construction • Material Handling • Agricultural Equipment • Hydraulic Tools • Lubrication Lines and Man Lifts

CONSTRUCTION: Braided synthetic fiber reinforcement

TUBE: Seamless polyester inner tube

COVER: Abrasion resistant polyurethane cover

COLOR: Black

TEMPERATURE: -40°C to +93°C (-40°F to +200°F)

Petroleum-based hydraulic fluids

-40°C to +60°C (-40°F to +140°F)

PACKAGING: With water-based or fire resistant fluids



FITTINGS: For reel lengths see below

SCTP Series

S.A.E. 100R18

- MEETS OR EXCEEDS
S.A.E. J517 SPECIFICATIONS

PART No.	Nominal Hose I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel Lengths (FT.)
HR18-4-REEL	1/4	.496	3,000	12,000	1.50	.064	250
HR18-6-REEL	3/8	.650	3,000	12,000	2.00	.110	250
HR18-8-REEL	1/2	.834	3,000	12,000	3.00	.160	250

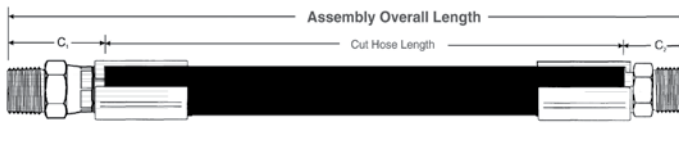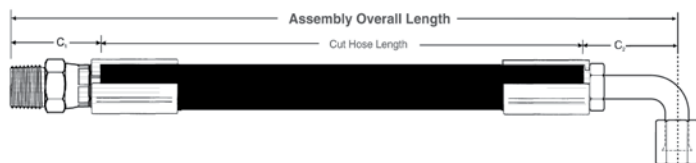

Length Tolerances for Hydraulic Hose Assemblies and Specified Hose Lengths.

Length Tolerance
0 to and including 36" $\pm 1/4$ "
Above 36" $\pm 1\%$ of length
measured to the nearest 1/8 of an inch.

ASSEMBLY OVERALL LENGTH

The overall length of the assembly is measured in Inches including hose ends. Example: 2' = 24.00

10' = 120.0

④ 100' = 1200.

Must fill all 5 spaces in the Overall Length Code

SAMPLE HOSE ASSEMBLY PART NUMBER

① ② ③ ④ ⑤ ⑥ ⑦ ⑧
HA T2SN 06 C 120.0 FV C MP C

HYDRAULIC ASSEMBLY → HA
HOSE CODE → T2SN
HOSE SIZE CODE → 06
ASSEMBLY TYPE CODE → C
OVERALL LENGTH (IN.) → 120.0
HOSE END CODE 1 → FV
SIZE CODE 1 → C
HOSE END CODE 2 → MP
SIZE CODE 2 → C

⑤ ⑦ HOSE END FITTING CODES

CODE	DESCRIPTION
B9	Female British Parallel 90° Elbow
BF	Female BSPP Swivel Female Cone
BM	Female BSPP Swivel Male Cone
FH	Female Heavy Metric
H9	Female Heavy Metric 90° Metric
JS	Female JIS 30° Flare
KM	Female Komatsu 30° Flare
FL	Female Light Metric
L9	Female Light Metric 90° Elbow
FV	Female NPSM Swivel
RS	Female O-Ring Face Seal
R5	Female O-Ring Face Seal 45° Elbow
R9	Female O-Ring Face Seal 90° Elbow
FP	Female Pipe
FJ	Female Swivel 37° S.A.E.
J5	Female Swivel 37° S.A.E. 45° Elbow
J9	Female Swivel 37° S.A.E. 90° Elbow
JL	Female Swivel 37° S.A.E. 90° Elbow (Long)
FS	Female Swivel 45° S.A.E.
S5	Female Swivel 45° S.A.E. 45° Elbow
S9	Female Swivel 45° S.A.E. 90° Elbow

① HOSE CODES

CODE	DESCRIPTION
T1SN	S.A.E. 100R1 ACCUTEK
T1XX	S.A.E. 100R1 KOMAN
T2SN	S.A.E. 100R2 ACCUTEK
T2XX	S.A.E. 100R2 KOMAN
HR4X	S.A.E. 100R4
HR5X	S.A.E. 100R5
HR7X	S.A.E. 100R7
R7NC	100R7 Non-Conductive
HR8X	S.A.E. 100R8
R8NC	100R8 Non-Conductive
HR12	S.A.E. 100R12
HR16	S.A.E. 100R16
HR17	S.A.E. 100R17
R16L	100R16 Low Temp.
R17L	100R17 Low Temp.
HR18	S.A.E. 100R18

② ⑥ ⑧ SIZE CODES

HOSE SIZE	TUBE	SIZE CODE
02	1/8"	A
03	3/16"	F
04	1/4"	B
05	5/16"	G
06	3/8"	C
08	1/2"	D
10	5/8"	I
12	3/4"	E
16	1"	H
20	1-1/4"	J
24	1-1/2"	K
32	2"	M

③ SIZE CODES

ASSEMBLY TYPE CODES

CODE	TYPE
C	Crimp Ends
R	Reusable Ends
T	Twin-Line Hose

C5	Flange code 61 45° Elbow
C9	Flange code 61 90° Elbow
C1	Flange code 61 Straight
D5	Flange code 62 45° Elbow
D9	Flange code 62 90° Elbow
D2	Flange code 62 Straight

TR	Flareless Tube Repair
----	-----------------------

GT	Grease Tap
----	------------

MJ	Male 37° S.A.E.
MS	Male 45° S.A.E.
BP	Male British Parallel
BT	Male British Tapered
MH	Male Heavy Metric
MI	Male Inverted Flare
I5	Male Inverted Flare 45° Elbow
I9	Male Inverted Flare 90° Elbow
ML	Male Light Metric
MO	Male O-Ring
O5	Male O-Ring Boss 45° Elbow
O9	Male O-Ring Boss 90° Elbow
RM	Male O-Ring Face Seal
SO	Male O-Ring Boss Swivel
MP	Male Pipe
SP	Male Pipe Swivel
P9	Male Pipe Swivel 90° Elbow
ST	Stand Pipe

PTFE (MEDIUM PRESSURE SMOOTH BORE)



PTFE hose can solve almost all "problem" applications. It is suitable for use with steam, solvents, fuels, hydraulic fluids, most chemicals and acids. Vibration absorption, extra long shelf life, high temperature and pressure ranges, make PTFE hose the most versatile hose in the industry today.

TYPICAL USES INCLUDE: Pneumatic, hot oil lines, compressor discharge, gases, steering lines, brake lines, high pressure hydraulic lines.

CONSTRUCTION: Braided outer cover

TUBE: PTFE inner tube

COVER: Stainless Steel (TYPE 304)

TEMPERATURE: -54°C to +232°C (-65°F to + 450°F)

PACKAGING: Bulk Coils - Random Lengths

FITTINGS: SCT400 One Piece Crimp or SR400 Reusable Ends

S.A.E. 100R14

PART No.	Nominal I.D.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I)	Min. Burst Pressure (P.S.I)	Min. Bend Radius (IN.)
HT-4	1/4	3/16	.30	3,000	12,000	1.50
HT-5	5/16	1/4	.38	3,000	12,000	2.00
HT-6	3/8	5/16	.44	2,500	10,000	3.50
HT-8	1/2	13/32	.54	2,000	8,000	4.50
HT-10	5/8	1/2	.63	1,750	7,000	5.00
HT-12	3/4	5/8	.76	1,500	6,000	6.00
HT-16	1	7/8	1.03	1,000	4,000	9.00

NOTE: WORKING PRESSURE RATED AT +21°C (+70°F) .

ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

HOW TO ORDER CUSTOM FACTORY MADE PTFE HOSE ASSEMBLIES (STAINLESS STEEL BRAIDED COVER - BRASS ENDS)



Note: When ordering elbow on assemblies please note measurements are measured from the center of elbow to opposite end of assembly.

SAMPLE HOSE ASSEMBLY PART NUMBER		HOSE END FITTING CODE	END SIZE CODE
HT 6 C 120 AC 10 ST 10 HOSE CODE HOSE SIZE END TYPE CODE OVERALL LENGTH (IN.) HOSE END CODE 1 SIZE CODE 1 HOSE END CODE 2 SIZE CODE 2		AC AIRBRAKE COMPRESSION FJ FEMALE SWIVEL 37° (J.I.C.) FLARE FS FEMALE SWIVEL 45° (S.A.E.) FLARE MI MALE INVERTED FLARE SWIVEL MP MALE PIPE ST STRAIGHT TUBE J5 45° ELBOW SWIVEL 37° (J.I.C.) FLARE J9 90° ELBOW SWIVEL 37° (J.I.C.) FLARE	END TYPE CODE "C" = Crimp Ends "R" = Reusable Ends 1/4" 4 5/16" 5 3/8" 6 1/2" 8 5/8" 10 3/4" 12 1" 16

Fairview FF-UA4 Vertical Service Hose Crimper

The powerful FF-UA4 crimper has the ability to crimp a wide range of hoses, up to 1 ¼ SAE R12. Greaseless slide bearing technology allows open, horizontally slidable compression dies to spring open to facilitate crimping of short 90° fittings with long necks. Standardly equipped with 120V single-phase power (240V available on request - Part No. FF-UA4-240).

DIE RACK is available on request - Part No. FF-UA4-DIE



Micrometer provides variable adjustment resulting in exact crimping dimensions.

*FF-UA4 Comes Complete
With 8 Sets of Dies:
Φ 14,17,20,24,25,28,32,40(mm)*

Large Diameter Crimping Capability

Allows crimping up to 1½" SAE 100R12
1 piece fitting and 1¼ - 2 piece fittings.

Slide Bearing Technology

Consistently accurate crimp result.
No greasing improves cleanliness
of machine life and prolongs machine.
End product can be used in sanitary
applications without cleaning.

Compact Engineered Design

Fits easily into any workshop or service
vehicle.

Optimum Accessibility

*Open compression die.
Horizontally sliding die pusher.
Divided crimping die set for simple
and rapid tool changing.*

Specifications

Crimp force: 135 ton
No grease: 20% less friction
Crimp range: 65mm
Opening: 15mm
Opening without die: 73mm
Drive: 0,75 kW
Hydraulic oil: 5L of AW46 that meets
DIN 51524 requirements.

(Note: oil changes to be done every
12 months / 2,000 hrs of operation)
L x W x H: 380 x 390 x 500 mm
Weight: 90 kg (198 Lbs)
100-120 Volt 50/60Hz 1Ph standard
**220 - 240 Volt 50/60Hz 1Ph available
(FF-UA4-240)

FAIRVIEW'S PREMIUM SILICONE HOSE AND CONNECTORS




Fairview
HEAVY DUTY

HOSE | VALVES | FITTINGS

HIGH PERFORMANCE SILICONE HEATER HOSE

SPECIFICATIONS & CHARACTERISTICS:

- SAE J20 R3
- Single Ply Braided Reinforced
- Ozone and Oil Splash Resistant
- Colors: Blue (Black available on request - minimums apply)



PART No.	Actual I.D. (IN.)	Length (FT.)	Min. Burst Pressure (P.S.I.)	PART No.	Actual I.D. (IN.)	Length (FT.)	Min. Burst Pressure (P.S.I.)	PART No.	Actual I.D. (IN.)	Length (FT.)	Min. Burst Pressure (P.S.I.)
HHS-4-25	1/4	25	249	HHS-8-50	1/2	50	249	HHS-14-25	7/8	25	175
HHS-4-50	1/4	50	249	HHS-8-REEL	1/2	250	249	HHS-14-50	7/8	50	175
HHS-5-25	5/16	25	249	HHS-10-25	5/8	25	249	HHS-16-25	1	25	175
HHS-5-50	5/16	50	249	HHS-10-50	5/8	50	249	HHS-16-50	1	50	175
HHS-6-25	3/8	25	249	HHS-10-REEL	5/8	250	249	HHS-16-REEL	1	250	175
HHS-6-50	3/8	50	249	HHS-12-25	3/4	25	200	HHS-20-25	1-1/4	25	125
HHS-6-REEL	3/8	250	249	HHS-12-50	3/4	50	200	HHS-20-50	1-1/4	50	125
HHS-8-25	1/2	25	249	HHS-12-REEL	3/4	250	200	• Additional Sizes Available			

HIGH PERFORMANCE 4 PLY SILICONE COOLANT HOSE

SPECIFICATIONS & CHARACTERISTICS:

- SAE J20 R3
- 4 Ply Silicone with Polyester Fabric Reinforcement
- Ozone & Oil Splash Resistant
- Suitable for Heavy Duty Applications
- Meets and Exceeds All Performance and Physical Requirements of:
 - SAE J20 RI
 - RP 303B Class 1
 - Mil-Spec A-A-52426
 - OEM Heavy-Duty Vehicle Requirements
- Available with Fluorosilicone or Fluorocarbon Liner (Petroleum & Chemical Applications)
- Available with Meta-Aramid Fabric Reinforcement for Extreme High-Temperature Applications
- Available with Helical Wire Reinforcement for Vacuum Resistance
- Colors: Blue (Black available on request - minimums apply)
- Larger Diameters Available Upon Request (up to 20" ID)



PART No.	Actual I.D. (IN.)	Length (FT.)	Min. Burst Pressure (P.S.I.)	PART No.	Actual I.D. (IN.)	Length (FT.)	Min. Burst Pressure (P.S.I.)	PART No.	Actual I.D. (IN.)	Length (FT.)	Min. Burst Pressure (P.S.I.)
CHS-6-3	3/8	3	638	CHS-18-3	1-1/8	3	277	CHS-36-3	2-1/4	3	180
CHS-6-12	3/8	12	638	CHS-20-3	1-1/4	3	270	CHS-38-3	2-3/8	3	172
CHS-8-12	1/2	12	529	CHS-22-3	1-3/8	3	245	CHS-40-3	2-1/2	3	169
CHS-10-3	5/8	3	455	CHS-24-3	1-1/2	3	236	CHS-42-3	2-5/8	3	159
CHS-10-12	5/8	12	455	CHS-26-3	1-5/8	3	217	CHS-44-3	2-3/4	3	154
CHS-12-3	3/4	3	403	CHS-28-3	1-3/4	3	207	CHS-48-3	3	3	87
CHS-12-12	3/4	12	403	CHS-30-3	1-7/8	3	198	CHS-52-3	3-1/4	3	87
CHS-14-3	7/8	3	362	CHS-32-3	2	3	187	CHS-56-3	3-1/2	3	75
CHS-16-3	1	3	330	CHS-34-3	2-1/8	3	182	CHS-64-3	4	3	62

• Additional Sizes Available

HIGH PERFORMANCE 45° SILICONE ELBOWS



PART No.	Actual I.D. (IN.)	Leg Length (IN.)	Min. Burst Pressure (P.S.I)
CHS45-12-10	3/4	10	403
CHS45-16-10	1	10	330
CHS45-20-10	1-1/4	10	277
CHS45-24-10	1-1/2	10	255
CHS45-28-10	1-3/4	10	255
CHS45-32-10	2	10	220
CHS45-36-10	2-1/4	10	200
CHS45-40-10	2-1/2	10	160
CHS45-44-10	2-3/4	10	134
CHS45-48-10	3	10	95
CHS45-56-10	3-1/2	10	83
CHS45-64-10	4	10	68

• Additional Sizes Available

SPECIFICATIONS & CHARACTERISTICS:

- 5 Ply Silicone with Polyester Fabric Reinforcement
- Ozone & Oil Splash Resistant
- Suitable for Heavy Duty Applications
- Meets and Exceeds All Performance and Physical Requirements of:
 - SAE J20 RI
 - RP 303B Class 1
 - Mil-Spec A-A-52426
 - OEM Heavy-Duty Vehicle Requirements
- Available with Meta-Aramid Fabric Reinforcement for Extreme High-Temperature (Upon Request)
- Available with Fluorosilicone or Fluorocarbon Liner (Petroleum & Chemical Applications)
- Available with Helical Wire Reinforcement for Vacuum Resistance
- Colors: Blue (Black available on request - minimums apply)
- 10" Long Legs From Center of the Bend
- Leg Lengths Are Measured From the Centerline of the Hose

TEMPERATURE RANGE:
-54°C to +177°C (-65°F to +350°F)
CONTINUOUS

HIGH PERFORMANCE 90° SILICONE ELBOWS



PART No.	Actual I.D. (IN.)	Leg Length (IN.)	Min. Burst Pressure (P.S.I)
CHS90-12-10	3/4	10	403
CHS90-16-10	1	10	330
CHS90-20-10	1-1/4	10	277
CHS90-24-10	1-1/2	10	255
CHS90-28-10	1-3/4	10	255
CHS90-32-10	2	10	220
CHS90-36-10	2-1/4	10	200
CHS90-40-10	2-1/2	10	160
CHS90-44-10	2-3/4	10	134
CHS90-48-10	3	10	95
CHS90-56-10	3-1/2	10	83
CHS90-64-10	4	10	68

• Additional Sizes Available

SPECIFICATIONS & CHARACTERISTICS:

- 5 Ply Silicone with Polyester Fabric Reinforcement
- Ozone & Oil Splash Resistant
- Suitable for Heavy Duty Applications
- Meets and Exceeds All Performance and Physical Requirements of:
 - SAE J20 RI
 - RP 303B Class 1
 - Mil-Spec A-A-52426
 - OEM Heavy-Duty Vehicle Requirements
- Available with Meta-Aramid Fabric Reinforcement for Extreme High-Temperature (Upon Request)
- Available with Fluorosilicone or Fluorocarbon Liner (Petroleum & Chemical Applications)
- Available with Helical Wire Reinforcement for Vacuum Resistance
- Colors: Blue (Black available on request - minimums apply)
- 10" Long Legs From Center of the Bend
- Leg Lengths Are Measured From the Centerline of the Hose

TEMPERATURE RANGE:
-54°C to +177°C (-65°F to +350°F)
CONTINUOUS

HIGH PERFORMANCE SILICONE REDUCERS



SPECIFICATIONS & CHARACTERISTICS:

- 4 Ply Silicone with Polyester Fabric Reinforcement
- Ozone & Oil Splash Resistant
- Suitable for Heavy Duty Applications
- Available with Meta-Aramid Fabric Reinforcement for Extreme High-Temperature Applications
- Meets and Exceeds All Performance and Physical Requirements of:
 - SAE J20 RI
 - RP 303B Class 1
 - Mil-Spec A-A-52426
 - OEM Heavy-Duty Vehicle Requirements
- Available with Fluorosilicone or Fluorocarbon Liner (Petroleum & Chemical Applications)
- Available with Helical Wire Reinforcement for Vacuum Resistance
- Colors: Blue (Black available on request - minimums apply)

PART No.	Actual I.D. (IN.)	Length (IN.)
CHSR-3224-6	1-1/2 to 2	6
CHSR-3632-6	2 to 2-1/4	6
CHSR-4036-6	2-1/4 to 2-1/2	6

• Additional Sizes Available



TEMPERATURE RANGE:
-54°C to +177°C (-65°F to +350°F)
CONTINUOUS

HIGH PERFORMANCE SILICONE TURBO CHARGER CONNECTOR



PART No.	Actual I.D. (IN.)	Length (IN.)
HOT SIDE (RED) NOMEX META-ARIMID REINFORCED		
TCS3-40-6	2-1/2	6
TCS3-48-6	3	6
TCS3-56-6	3-1/2	6
TCS3-64-6	4	6
TCS3-64-8	4	8
TCS3-72-6	4-1/2	6
TCS3-80-6	5	6
COLD SIDE (BLUE) POLYESTER REINFORCED		
TCS3BLU-48-6	3	6
TCS3BLU-56-6	3-1/2	6
TCS3BLU-64-6	4	6
TCS3BLU-72-6	4-1/2	6

• Additional Sizes Available

SPECIFICATIONS & CHARACTERISTICS:

- 4 Ply Silicone
- Ozone & Oil Splash Resistant
- Suitable for Heavy Duty Applications
- Meets and Exceeds All Performance and Physical Requirements of:
 - Mil-Spec A-A-52426
 - OEM Heavy-Duty Vehicle Requirements
- Meta-Aramid Fabric Reinforcement for Extreme High-Temperature (Iron Oxide)
- Polyester Fabric Reinforced (Blue)



TEMPERATURE RANGE:
-54°C to +260°C (-65°F to +500°F)
(RED META- ARAMID REINFORCED)
-54°C to +177°C (-65°F to +350°F)
(BLUE POLYESTER REINFORCED)

TURBO CHARGER CONNECTOR KITS WITH 2 T-BOLT CLAMPS

SPECIFICATIONS & CHARACTERISTICS:

- 4 Ply Silicone
- Ozone & Oil Splash Resistant
- Suitable for Heavy Duty Applications
- Meets and Exceeds All Performance and Physical Requirements of:
 - Mil-Spec A-A-52426
 - OEM Heavy-Duty Vehicle Requirements
- Meta-Aramid Fabric Reinforcement for Extreme High-Temperature (Iron Oxide)
- Polyester Fabric Reinforced (Blue)
- Available Packaging with Header Card & Bagged



TEMPERATURE RANGE:
-54°C to +260°C (-65°F to +500°F)
(RED META- ARAMID REINFORCED)
-54°C to +177°C (-65°F to +350°F)
(BLUE POLYESTER REINFORCED)

PART No.

Actual I.D. (IN.)

Length (IN.)

HOT SIDE (RED) NOMEX META-ARIMID REINFORCED

TCS3-64-6KIT

4

6

TCS3-64-8KIT

4

8

COLD SIDE (BLUE) POLYESTER REINFORCED

TCS3BLU-64-6KIT

4

6

- Additional Sizes Available



SILICONE COOLANT HOSE KITS WITH 2 T-BOLT CLAMPS

SPECIFICATIONS & CHARACTERISTICS:

- SAE J20 R3
- 4 Ply Silicone with Polyester Fabric Reinforcement
- Ozone & Oil Splash Resistant
- Suitable for Heavy Duty Applications
- Meets and Exceeds All Performance and Physical Requirements of:
 - SAE J20 RI
 - RP 303B Class 1
 - Mil-Spec A-A-52426
 - OEM Heavy-Duty Vehicle Requirements
- Available with Fluorosilicone or Fluorocarbon Liner (Petroleum & Chemical Applications)
- Available with Meta-Aramid Fabric Reinforcement for Extreme High-Temperature Applications
- Available with Helical Wire Reinforcement for Vacuum Resistance
- Colors: Blue (Black available on request - minimums apply)
- Larger Diameters Available Upon Request (up to 20" ID)
- Available Packaging with Header Card & Bagged



TEMPERATURE RANGE:
-54°C to +177°C (-65°F to +350°F)
CONTINUOUS

PART No.

Actual I.D. (IN.)

Length (IN.)

CHS-32-1KIT

2

12

CHS-36-1KIT

2-1/4

12

CHS-40-1KIT

2-1/2

12

CHS-48-1KIT

3

12

- Additional Sizes Available



EACH KIT INCLUDES 2 FAIRVIEW ACCUTEK® FLEX SEAL HEAVY DUTY T-BOLT CLAMPS

Designed specifically for silicone hose connections in turbocharged diesel engine air intake and air charge air systems.

BAND: Stainless Steel, **BRIDGE:** Stainless Steel, **T-BOLT:** Carbon Steel, **SPRING:** High Carbon Steel, **FINISH:** (T-BOLT): Zinc Plated

RUBBER HEATER HOSE



This standard hose is for normal duty service. Withstands the abuse of corrosive solutions and additives. Resists weathering to provide long and trouble-free service.

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Min. Burst Pressure (P.S.I.)
HH-8-50	1/2	.806	200
HH-10-REEL	5/8	.932	140
HH-10-50	5/8	.932	140
HH-12-REEL	3/4	1.057	125
HH-12-50	3/4	1.057	125
HH-16-50	1	1.406	100

MEETS: S.A.E. 20R3 Class D2

COLOR: Black

TEMPERATURE: -40°C to +120°C (-40°F to +250°F)

PACKAGING: 250 Ft. Reels, 50 Ft. Coils

FITTINGS: Brass Hose Barbs (100 Series)

CLAMPS: HC5, HC6, & ET

**NOTE: WORKING PRESSURE RATED AT +21°C (+70°F).
ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.**

FUEL LINE HOSE



Designed to convey most fuels in cars, trucks, buses etc. Durable cover resists deterioration from oil, grease, heat and ozone and gives long service life.

MEETS: S.A.E. 30R7

COLOR: Black

TEMPERATURE: -40°C to +125°C (-40°F to +257°F)

PACKAGING: 250 Ft. Reels, 50 and 100 Ft. Coils

FITTINGS: Brass Hose Barbs (300 Series)

CLAMPS: HC5 & HC6

NOTE: FLH IS NOT DESIGNED FOR MARINE
USE WITH ALCOHOL BLENDED FUELS.

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Length (FT.)
FLH-3-25	3/16	.406	50	250	25
FLH-3-50	3/16	.406	50	250	50
FLH-3-100	3/16	.406	50	250	100
FLH-3-250	3/16	.406	50	250	250
FLH-4-25	1/4	.500	50	250	25
FLH-4-50	1/4	.500	50	250	50
FLH-4-100	1/4	.500	50	250	100
FLH-4-250	1/4	.500	50	250	250
FLH-5-25	5/16	.563	50	250	25
FLH-5-50	5/16	.563	50	250	50
FLH-5-100	5/16	.563	50	250	100
FLH-5-250	5/16	.563	50	250	250
FLH-6-25	3/8	.625	50	250	25
FLH-6-50	3/8	.625	50	250	50
FLH-6-100	3/8	.625	50	250	100
FLH-6-250	3/8	.625	50	250	250

**NOTE: WORKING PRESSURE RATED AT +21°C (+70°F).
ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.**

RUBBER GRIP-TITE (PUSH-ON) HOSE



MSHA approved, lightweight, flexible, low pressure, general purpose hose with one fiber braid reinforcement. **Good for use with gasoline and diesel fuels.** Also used for conveying hydraulic oils, antifreeze solutions, most agricultural sprays and other diluted chemical solutions.

MSHA Approved (Black Only)

TUBE: Nitrile

COVER: Chloroprene

COLOR: Black & Gray, (Blue & Red RTO)

TEMPERATURE: -40°C to +93°C (-40°F to +200°F)

PACKAGING: 50, 100 Ft. Coils, Bulk Reels

FITTINGS: 700 Series Grip Barbs

THE SPECIAL BRAIDING PROCESS USED IN THE MANUFACTURE OF THIS HOSE PERMITS THE USE OF GRIP-TITE FITTINGS, WHICH ELIMINATES THE NEED FOR CLAMPS.

PART No.	Hose I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Length (FT.)	Weight (LBS/FT.)
761-4-50	1/4	0.551	300	50	0.10
761-4-100	1/4	0.551	300	100	0.10
761-4-REEL	1/4	0.551	300	500	0.10
761-4GRY-REEL	1/4	0.551	300	500	0.10
761-5-50	5/16	0.618	300	50	0.12
761-5-REEL	5/16	0.618	300	500	0.12
761-6-50	3/8	0.689	300	50	0.15
761-6-100	3/8	0.689	300	100	0.15
761-6-REEL	3/8	0.689	300	500	0.15
761-6GRY-REEL	3/8	0.689	300	500	0.15
761-8-50	1/2	0.811	300	50	0.18
761-8-100	1/2	0.811	300	100	0.18
761-8-REEL	1/2	0.811	300	500	0.18
761-8GRY-REEL	1/2	0.811	300	500	0.18
761-10-50	5/8	0.917	300	50	0.20
761-10-REEL	5/8	0.917	300	500	0.20
761-12-50	3/4	1.047	300	50	0.22
761-12-REEL	3/4	1.047	300	250	0.22

**NOTE: WORKING PRESSURE RATED AT +21°C (+70°F).
ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.**

QUALITY RUBBER HOSE



NOTE
WORKING PRESSURE RATED
AT +21°C (+70°F). ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.

Fairview RGP series hose features EPDM cover and tube with high tensile spiral synthetic yarn reinforcement. It is best suited for applications requiring maximum flexibility or a lighter weight rubber hose.

TUBE: EPDM (ARPM CLASS C)

COVER: EPDM (ARPM CLASS C)

REINFORCEMENT: Spiral synthetic yarn

COLOR: Black & Red

TEMPERATURE: -30°C to +75°C (-22°F to +167°F)

PACKAGING: Reels

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Reel Length (FT.)
RGP-4BLK-REEL	1/4	.500	200	300
RGP-4RED-REEL	1/4	.500	200	300
RGP-4/2RED-REEL	1/4	.527	250	300
RGP-6RED-REEL	3/8	.669	200	300
RGP-6/2RED-REEL	3/8	.700	250	300
RGP-8BLK-REEL	1/2	.810	200	300
RGP-8RED-REEL	1/2	.810	200	300
RGP-8/2RED-REEL	1/2	.838	250	300

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Reel Length (FT.)
RGP-10BLK-REEL	5/8	.930	200	700
RGP-10RED-REEL	5/8	.968	200	700
RGP-12BLK-REEL	3/4	1.080	200	200
RGP-12RED-REEL	3/4	1.118	200	200
RGP-12/2RED-REEL	3/4	1.141	250	500-700
RGP-16RED-REEL	1	1.440	200	200
RGP-20RED-REEL	1-1/4	1.750	200	550
RGP-24RED-REEL	1-1/2	2.000	200	400

QUALITY RUBBER HOSE ASSEMBLIES



NOTE
WORKING PRESSURE RATED
AT +21°C (+70°F). ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.

The RG Series of assemblies is constructed with RGP hose. All assemblies have factory crimped ends with either B - 1/4", C - 3/8" or D - 1/2" brass male pipe ends. Standard lengths are -25, 50, 75 or 100 Ft.

COLOR: Black, Red

TEMPERATURE: -30°C to +75°C (-22°F to +167°F)

PACKAGING: Individually shrink wrapped with bar coded label

FITTINGS: Machined Brass

Custom lengths available upon request.

1/4 I.D. HOSE 1/4 NPT ENDS

PART No.	Length (FT.)	Working Pressure (P.S.I.)
RG4RED-25B	25	200
RG4RED-50B	50	200
RG4RED-100B	100	200
RG4/2RED-25B	25	250
RG4/2RED-50B	50	250
RG4/2RED-100B	100	250

3/8 I.D. HOSE 1/4 NPT ENDS

PART No.	Length (FT.)	Working Pressure (P.S.I.)
RG6RED-25B	25	200
RG6RED-50B	50	200
RG6RED-100B	100	200
RG6/2RED-25B	25	250
RG6/2RED-50B	50	250
RG6/2RED-100B	100	250

1/2 I.D. HOSE 1/2 NPT ENDS

PART No.	Length (FT.)	Working Pressure (P.S.I.)
RG8/2RED-25D	25	250
RG8/2RED-50D	50	250
RG8/2RED-100D	100	250

QUALITY P.V.C. HOSE



Fairview's Arctic Force multi-purpose hose is more flexible than most rubber hoses even at extremely low temperatures. Its' light weight and relatively high pressure rating make it ideal for pneumatic hand tool and shop air applications. ARPM Class B oil resistance.

REINFORCEMENT: Spiral high tensile yarn

COLOR: Green, Red, Yellow

TEMPERATURE: -54°C to +65°C (-65°F to +150°F)

WORKING PRESSURE: 300 P.S.I.

PACKAGING: Loose coils or plastic core reels

LOW TEMP. RATED
-54°C (-65°F)

NOTE
WORKING PRESSURE RATED
AT +21°C (+70°F). ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Length (FT.)
GLH-4RED-REEL	1/4	.500	300	500
GLH-4YEL-REEL	1/4	.500	300	500
GLH-6RED-REEL	3/8	.625	300	500
GLH-6YEL-REEL	3/8	.625	300	500
GLH-8GRN-COIL	1/2	.781	300	500
GLH-8RED-COIL	1/2	.781	300	500
GLH-10GRN-COIL	5/8	.906	250	500

ARCTIC FORCE RUBBER HOSE ASSEMBLIES



The Arctic Force Series of assemblies is constructed with GLH hose. All assemblies have factory crimped ends with either B - 1/4" or C - 3/8" brass male pipe ends. Bend protectors are standard on these assemblies.

COLOR: Red, Yellow or Green

TEMPERATURE: -54°C to +65°C (65°F to +150°F)

WORKING PRESSURE: 300 P.S.I.

PACKAGING: Individually shrink wrapped with bar coded label

FITTINGS Machined Brass

Custom lengths available upon request.

NOTE
WORKING PRESSURE RATED
AT +21°C (+70°F). ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.

1/4 I.D. HOSE 1/4 NPT ENDS			3/8 I.D. HOSE 1/4 NPT ENDS			3/8 I.D. HOSE 3/8 NPT ENDS			1/2 I.D. HOSE 3/8 NPT ENDS		
PART No.	Length (FT.)	Working Pressure (P.S.I.)	PART No.	Length (FT.)	Working Pressure (P.S.I.)	PART No.	Length (FT.)	Working Pressure (P.S.I.)	PART No.	Length (FT.)	Working Pressure (P.S.I.)
GL4RED-25B	25	300	GL6RED-25B	25	300	GL6RED-25C	25	300	GL8RED-25C	25	300
GL4RED-50B	50	300	GL6RED-50B	50	300	GL6RED-50C	50	300	GL8RED-50C	50	300
GL4RED-100B	100	300	GL6RED-100B	100	300	GL6RED-100C	100	300			
GL4YEL-25B	25	300	GL6YEL-25B	25	300	GL6YEL-25C	25	300			
GL4YEL-50B	50	300	GL6YEL-50B	50	300	GL6YEL-50C	50	300			
GL4YEL-100B	100	300	GL6YEL-100B	100	300	GL6YEL-100C	100	300			

AIR ASSEMBLY WITH GLADHAND

Connects directly to the Gladhand port on a truck cab. This assembly is complete with Universal Gladhand and dual foot air chuck end which allows for the easy filling of tires.

ARCTIC FORCE
by Fairview
-54°C (-65°F)



GHU



PART No.	Hose Type	Actual I.D. (IN.)	Length (FT.)	Working Pressure (P.S.I.)
GL6RED-50GHU-DF	Arctic Force	3/8	50	300
GL6YEL-50GHU-DF	Arctic Force (Low Temp)	3/8	50	300

Custom lengths available upon request.

CONTRACTORS INDUSTRIAL P.V.C. AIR HOSE ASSEMBLIES

Heavy-duty brass reusable ends and spring guard bend protectors make these light weight uniquely blended P.V.C hose assemblies ideal for pneumatic nail guns and air powered industrial tools at the job site.

COLOR: Red, Blue and Yellow

TEMPERATURE: -15°F to +150°F, -26°C to +66°C

PACKAGING: Individually shrink wrapped with bar coded Label

QUICK DISCONNECT: QD-TFM Series (Optional)

Custom lengths available upon request.



NOTE
WORKING PRESSURE RATED AT +21°C (+70°F). ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.



3/8 I.D. HOSE 1/4 NPT ENDS

PART No.	Length (FT.)	Working Pressure (P.S.I.)
PAR6RED-50B-SG	50	300
PAR6RED-100B-SG	100	300
PAR6BLU-50B-SG	50	300
PAR6BLU-100B-SG	100	300

3/8 I.D. HOSE 3/8 NPT ENDS

PART No.	Length (FT.)	Working Pressure (P.S.I.)
PAR6RED-50C-SG	50	300
PAR6RED-100C-SG	100	300
PAR6BLU-100C-SG	100	300

POLYURETHANE SELF-STORING AIR HOSE ASSEMBLIES

These polyurethane assemblies are produced using an ether based resin for better strength, flexibility and superior memory. This hose has excellent resistance to water, chemicals, oxidation, hydrolysis and ozone. It is kink resistant, light weight and mobile.

PART No.	Actual I.D. (IN.)	Swivel Pipe	Length (FT.)	Working Pressure (P.S.I.)
1936-4-12	1/4	1/4	12	125
1936-4-15	1/4	1/4	15	125
1936-4-20	1/4	1/4	20	125
1936-4-25	1/4	1/4	25	125
1936-4-50	1/4	1/4	50	125
1936-6-12	3/8	3/8	12	125
1936-6-15	3/8	3/8	15	125
1936-6-20	3/8	3/8	20	125
1936-6-25	3/8	3/8	25	125
1936-6-50	3/8	3/8	50	125

Note: 1936 Series supplied in assemblies only.

COLOR: Blue
TEMPERATURE: -40°C to +79°C (-40°F to +175°F)
PACKAGING: Individually Bagged With Header/ Display Ready
FITTINGS: 360° Working Male Pipe Swivels, Each End

NOTE
WORKING PRESSURE RATED AT +21°C (+70°F). ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.



SPECIALTY HOSE ASSEMBLIES

Fairview

HOSE & ASSEMBLIES

NYLON GREASE WHIPS



3/16" I.D. Thermoplastic, fiber reinforced hose with 1/8 steel male pipe couplings. This hose combines the best features of conventional rubber hose with the unique advantages of synthetic materials.

PART No.	Length (IN.)	Working Pressure (P.S.I.)	Burst Pressure (PSI)
GWN-3-12	12	3,000	12,000
GWN-3-18	18	3,000	12,000
GWN-3-24	24	3,000	12,000

Available packaged, suffix PART No. with the letter "P".

D.O.T. AIR SHIFT TRANSMISSION ASSEMBLIES



Male Pipe
LIVE SWIVEL END
(Still swivels once connected)
Male Pipe Thread

PART No.	Swivel Pipe	Male Pipe	Hose I.D. (IN.)	Length (IN.)
2815-4-2	1/8	1/8	1/4	15
2831-4-2	1/8	1/8	1/4	31
2832-4-2	1/8	1/8	1/4	32
2834-4-2	1/8	1/8	1/4	34
2836-4-2	1/8	1/8	1/4	36

Custom lengths available upon request.

AIR SEAT GUN SPICER KIT



PART No. ASGK-1

Simply splice the air seat line with the push-to-connect tee end of the assembly. This handy kit features an industrial air gun for cleaning out the cab on site.

Kit Includes:

- 70" Working Length of 1/4" O.D. S.A.E. J844-A coiled air tube
- One brass male pipe
- Two spring guard hose end protectors
- Push-to-connect splicer tee (No tools required)
- Chrome plated, lever handle air gun

RUBBER GREASE WHIPS



These assemblies are manufactured from 3/16" I.D. S.A.E. 100R1 rubber hose. The one braid hose is permanently crimped with 1/8 brass male pipe couplings on both ends.

PART No.	Length (IN.)	Working Pressure (P.S.I.)	Burst Pressure (PSI)
GWR-3-12	12	3,000	12,000
GWR-3-18	18	3,000	12,000
GWR-3-24	24	3,000	12,000
GWR-3-28	28	3,000	12,000
GWR-3-36	36	3,000	12,000
GWR-3-48	48	3,000	12,000
GWR-3-54	54	3,000	12,000
GWR-3-60	60	3,000	12,000
GWR-3-72	72	3,000	12,000
GWR-3-84	84	3,000	12,000
GWR-3-96	96	3,000	12,000
GWR-3-132	132	3,000	12,000
GWR-3-144	144	3,000	12,000



Available packaged, suffix PART No. with the letter "P".

FIFTH WHEEL SLIDER ASSEMBLY

Male Pipe Thread
Male Pipe Thread

MEETS S.A.E. J844D TYPE 3A D.O.T. F.M.V.S.S.106
COLOR: Black

TEMPERATURE: -40°C to +93°C (-40°F to +200°F)

FITTINGS: Brass male pipe each end

PART No.	Working Length (IN.)	Tube O.D. (IN.)	Pigtail Length (IN.)	Male Pipe Ends
1486S-4-10	70	1/4	4	1/4

FIFTH WHEEL SLIDER KIT



PART No. FWSK-1

Designed for use on sliding fifth wheels, this kit includes most everything you need to complete the connections.

Kit Includes:

- 70" Working Length of 1/4" O.D. S.A.E. J844 coiled air tube
- Brass male pipe each end
- Spring guard hose end protectors
- 90° brass adapter elbow
- Frame mounting terminal bolt



WHBLU SERIES



WHBLK SERIES



WHGL SERIES

Material	PVC blend	EPDM rubber	Engineered PVC based resin
Color	Blue	Black	Green
ID Sizes Available	1/2, 5/8, 3/4	1/2, 5/8, 3/4	1/2, 5/8
Max Working Pressure	1/2 300 PSI, 5/8 and 3/4 250 PSI	1/2, 5/8 200 PSI, 3/4 150 PSI	1/2 300 PSI, 5/8 250 PSI
Temperature Range	-40°C to +66°C (-40°F to +150°F)	-30°C to +75°C (-22°F to +167°F)	-54°C to +65°C (-65°F to +150°F)
Cold Temp Flexibility	❄️❄️❄️❄️	❄️❄️❄️❄️	❄️❄️❄️❄️❄️
Features	• Very good flexibility • Easily re-coiled after use • Non-marking cover • U. V. and weather resistant • ROHS 2011/65/EU & 2015/863 compliant • Heavy machined brass ends	• Very good flexibility • Durable and long-lasting • Excellent resistance to heat • U.V., ozone and weather resistant • Heavy machined brass ends	• Unparalleled low temperature flexibility • Non-kinking / excellent shape retention • Non-marking cover • Excellent abrasion resistance • U.V. and weather resistant • Heavy machined brass ends



WHRVBLU SERIES



WHYEL SERIES

Material	PVC	PVC
Color	Blue	Yellow
ID Sizes Available	1/2	1/2, 3/4
Max Working Pressure	300 PSI	125 PSI
Temperature Range	-26°C to +66°C (-15°F to +150°F)	-4°C to +65°C (+25°F to +150°F)
Cold Temp Flexibility	❄️❄️❄️	❄️❄️
Features	• Economical • Lightweight • Excellent abrasion resistance • U.V. and weather resistant • Heavy machined brass ends	• High visibility • Economical • Extremely lightweight • U.V. resistant • Heavy machined brass ends

NOTE: WORKING PRESSURE RATED AT +21°C (+70°F). ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

INDUSTRIAL WATER HOSE ASSEMBLIES

Fairview

HOSE &
ASSEMBLIES

- HEAVY BRASS MACHINED ENDS, FOR ALL ASSEMBLIES.
- OTHER LENGTHS AND END COMBINATIONS AVAILABLE UPON REQUEST.

WHBLU SERIES

Premium Blue Assemblies

Heavy Hex Female Water Thread

x Male Water Thread

Working Pressure: 1/2" I.D. 300 P.S.I.,
5/8" & 3/4" I.D. 250 P.S.I.

Temp: -40°C to +66°C (-40°F to +150°F)

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WH8BLU-25H	25	1/2	300
WH8BLU-50H	50	1/2	300
WH8BLU-75H	75	1/2	300
WH8BLU-100H	100	1/2	300
WH10BLU-25H	25	5/8	250
WH10BLU-50H	50	5/8	250
WH10BLU-75H	75	5/8	250
WH10BLU-100H	100	5/8	250
WH12BLU-25H	25	3/4	250
WH12BLU-50H	50	3/4	250
WH12BLU-75H	75	3/4	250
WH12BLU-100H	100	3/4	250

Quality Blue PVC Assemblies

Female End x Male Water Thread

Working Pressure: 300 P.S.I.

Temp: -26°C to +66°C (-15°F to +150°F)

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WHRV8BLU-50H	50	1/2	300



WHBLK SERIES

High Quality Contractor's Black Rubber

Heavy Hex Female Water Thread

x Male Water Thread

Working Pressure: 1/2" & 5/8" I.D. 200 P.S.I.,
3/4" I.D. 150 P.S.I.

Temp: -30°C to +75°C (-22°F to +167°F)

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WH8BLK-25H	25	1/2	200
WH8BLK-50H	50	1/2	200
WH8BLK-75H	75	1/2	200
WH8BLK-100H	100	1/2	200
WH10BLK-25H	25	5/8	200
WH10BLK-50H	50	5/8	200
WH10BLK-75H	75	5/8	200
WH10BLK-100H	100	5/8	200
WH12BLK-25H	25	3/4	150
WH12BLK-50H	50	3/4	150
WH12BLK-75H	75	3/4	150
WH12BLK-100H	100	3/4	150



WHGL SERIES

Green Arctic Force - Low Temp

Heavy Hex Female Water Thread

x Male Water Thread

Working Pressure: 1/2" I.D. 300 P.S.I.,
5/8" I.D. 250 P.S.I.

Temp: -54°C to +65°C (-65°F to +150°F)

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WHGL8GRN-25H	25	1/2	300
WHGL8GRN-50H	50	1/2	300
WHGL8GRN-75H	75	1/2	300
WHGL8GRN-100H	100	1/2	300
WHGL10GRN-25H	25	5/8	250
WHGL10GRN-50H	50	5/8	250
WHGL10GRN-75H	75	5/8	250
WHGL10GRN-100H	100	5/8	250



WHYEL SERIES

Commercial Yellow PVC

Female End x Male Water Thread

Working Pressure: 1/2" & 3/4" I.D. 125 P.S.I.

Temp: -4°C to +65°C (+25°F to +150°F)

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WH8YEL-50H	50	1/2	125
WH12YEL-50H	50	3/4	125



NOTE: WORKING PRESSURE RATED AT +21°C (+70°F). ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

BULK PRESSURE WASH HOSE



BLACK COVER (4,000 P.S.I.)

(PW2) is a one wire construction, wrapped black, covered hose. Its tube is specially formulated to handle high pressure water. Suitable for pressures up to 4,000 P.S.I., at +21°C (+70°F), or temperatures up to +121°C (+250°F) at lower pressures.

GREY COVER HIGH PRESSURE (6,000 P.S.I.)

(PW4) is a two wire construction, grey wrapped cover hose. Suitable for pressures up to 6,000 P.S.I., at +21°C (+70°F), or temperatures up to +121°C (+250°F), at lower pressures.

BLUE NON-MARKING COVER (4,000 P.S.I.)

(PW3) is a one wire construction hose with a special Blue non-marking smooth cover. Suitable for pressures up to 4,000 P.S.I., at +21°C (+70°F), or temperatures up to +135°C (+275°F).

RED NON-MARKING HIGH TEMP (3,000 P.S.I.)

Heat-Star-Combo (PW5) is a one wire construction, Red non-marking heat resistant smooth cover, dual purpose hose. This hose will handle steam up to +163°C (+325°F) at 350 P.S.I. and hot water to +121°C (+250°F) at 3,000 P.S.I.

NOTE: The outer cover of PW5 hose must be skived (removed) before attaching over the wire crimp ends.

NOTE
WORKING PRESSURE RATED
AT +21°C (+70°F). ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.

PREVAILER™ YELLOW (ARPM CLASS A) (4,000 P.S.I.)

(PW6) Yellow oil and fat resistant (ARPM CLASS A) special synthetic rubber covered hose providing superior strength, flexibility, abrasion resistance and long service life. One high tensile steel wire braid. Suitable for pressures up to 4,000 P.S.I., at +21°C (+70°F), or temperatures up to +121°C (+250°F) at lower pressures.

PART No.	Color	Actual I.D. (IN.)	Maximum Working Pressure (P.S.I.)	Approximate Weight per Foot (LBS.)	Reel Length (FT.)
PW2-6-REEL	Black	3/8	4,000	.23	300
PW3-4-REEL	Blue	1/4	4,000	.15	300
PW3-6-REEL	Blue	3/8	4,000	.25	300
PW4-6-REEL	Grey	3/8	6,000	.35	300
PW5-6-REEL	Red	3/8	3,000	.21	300
PW6-6-REEL	Yellow	3/8	4,000	.22	300



PRESSURE WASH HOSE ASSEMBLIES

BLACK COVER (4,000 P.S.I.)

(PW2) is a one wire construction, black, blue or grey covered hose. Its' tube is specially formulated to handle high pressure water. Suitable for pressures up to 4,000 P.S.I., at +21°C (+70°F) or temperatures up to +121°C (+250°F) at lower pressures.

PART No.	Length (FT.)	Actual I.D. (IN.)
PW2A-6-25	25	3/8
PW2A-6-30	30	3/8
PW2A-6-50	50	3/8
PW2A-6-75	75	3/8
PW2A-6-100	100	3/8



Style of bend protectors may vary.

BLUE NON-MARKING COVER (4,000 P.S.I.)

(PW3) is a one wire construction hose with a special blue non-marking cover. Suitable for pressures up to 4,000 P.S.I., at +21°C (+70°F) or temperatures up to +135°C (+275°F)

Swivels on both ends available upon request.

Suffix PART No. with "SW" Example: PW3A-6-50SW

PART No.	Length (FT.)	Actual I.D. (IN.)
PW3A-4-30	30	1/4
PW3A-4-50	50	1/4
PW3A-4-100	100	1/4
PW3A-6-25	25	3/8
PW3A-6-30	30	3/8
PW3A-6-35	35	3/8
PW3A-6-50	50	3/8
PW3A-6-75	75	3/8
PW3A-6-100	100	3/8
PW3A-6-50SW	50	3/8



GREY COVER HIGH PRESSURE (6,000 P.S.I.)

(PW4) is a two wire construction, grey wrapped cover hose. Suitable for pressures up to 6,000 P.S.I., at +21°C (+70°F) or temperatures up to +121°C (+250°F) at lower pressures.

PART No.	Length (FT.)	Actual I.D. (IN.)
PW4A-6-30	30	3/8
PW4A-6-50	50	3/8
PW4A-6-75	75	3/8
PW4A-6-100	100	3/8



RED NON-MARKING HIGH TEMP (3,000 P.S.I.)

(PW5) is a one wire construction, Red non-marking heat resistant smooth cover, dual purpose hose. This hose will handle steam up to +163°C (+325°F) at 350 P.S.I. and hot water to +121°C (+250°F) at 3,000 P.S.I.

NOTE: The outer cover of PW5 hose must be skived (removed) before attaching over the wire crimp ends.

PART No.	Length (FT.)	Actual I.D. (IN.)
PW5A-6-30	30	3/8
PW5A-6-50	50	3/8
PW5A-6-75	75	3/8
PW5A-6-100	100	3/8



NOTE: Any ambient or internal increase in temperature will lower the above listed working pressures.

PRESSURE WASH HOSE ASSEMBLIES

OIL AND FAT RESISTANT COVER (4,000 P.S.I.)

(PW6 PREVAILER™) is a yellow cover, oil and fat resistant hose providing superior strength, flexibility, abrasion resistance and long service life. Excellent resistance to oils and animal fats. Suitable for pressures up to 4,000 P.S.I., at +21°C (+70°F), or temperatures up to +121°C (+250°F) at lower pressures.

PART No.	Length (FT.)	Actual I.D. (IN.)
PW6A-6-30	30	3/8
PW6A-6-50	50	3/8
PW6A-6-100	100	3/8



- ASSEMBLIES CAN BE MADE TO ORDER • ALL ASSEMBLIES COME WITH THERMOPLASTIC BEND PROTECTORS • SYNTHETIC RUBBER BEND PROTECTORS ALSO AVAILABLE • STANDARD HOSE ASSEMBLIES CONSIST OF SWIVEL MALE PIPE X SOLID MALE PIPE ENDS

NOTE: Any ambient or internal increase in temperature will lower the above listed working pressures.

KARCHER STYLE PRESSURE WASH HOSE ASSEMBLIES

BLACK / GREY COVER (4,000 P.S.I.)

(PW2) is a one wire construction, black cover hose. (also available in blue) Its' tube is specially formulated to handle high pressure water. Suitable for pressures up to 4,000 P.S.I., at +21°C (+70°F), or temperatures up to +121°C (+250°F) at lower pressures.

PART No.	Length (FT.)	Actual I.D. (IN.)
PW2K-6-20	20	3/8
PW2K-6-30	30	3/8
PW2K-6-50	50	3/8

Complete with KARCHER style M22 X 1.5 female swivel power washer machine attachments on both ends.



BLUE NON-MARKING COVER (4000 P.S.I.)

(PW3) is a one wire construction hose with a special blue non-marking cover. Suitable for pressures up to 4,000 P.S.I., at +21°C (+70°F), or temperatures up to +135°C (+275°F).

PART No.	Length (FT.)	Actual I.D. (IN.)
PW3K-6-30	30	3/8
PW3K-6-50	50	3/8

Complete with KARCHER style M22 X 1.5 female swivel power washer machine attachments on both ends.



* Any increase in temp. up to a maximum of 275°F will lower the working pressure considerably. For more than Intermittent applications in this environment (275°F Max) we recommend our PW5 High Temp Non Marking Hose.

CAUTION

A pressure washer's powerful spray is hazardous when misdirected, strong enough to damage skin in an instant. With pressures up to 6000 psi they can cause serious injury. Appropriate protection should be worn during use.

- ASSEMBLIES CAN BE MADE TO ORDER • ALL ASSEMBLIES COME WITH THERMOPLASTIC BEND PROTECTORS

NOTE: Any ambient or internal increase in temperature will lower the above listed working pressures.

TUBE

ALUMINUM - COPPER - NYLON - STEEL- VINYL

AIR BRAKE TUBE.....	42
COPPER TUBE - GENERAL USE (ASTM B75)	46
COPPER TUBE - REFRIGERATION (ASTM B280).....	46
POLYETHYLENE TUBE (INDUSTRIAL GRADE)	43
POLYURETHANE (FUEL LINE) CLEAR TUBE	45
STEEL TUBE (S.A.E. 527)	46
VINYL TUBE (CLEAR)	44



TUBE

NOTE:

Use of Fairview hose and tube with other than Fairview original recommended fittings may void warranty. Verify with a Fairview representative prior to installation.



100 Ft. COILS
STANDARD COLOR
IS BLACK



Air brake tube is designed for use with truck, trailer and other mobile air brake and auxiliary systems.

This lightweight, flexible and UV stabilized tube is highly resistant to abrasion, oil, grease and road salt.

COLOR: Black, Blue, Green, Orange, Red, Yellow

TEMPERATURE: -65°C to +93°C (-85°F to +200°F)

Other colors quoted on request.

Minimum runs apply.

PACKAGING: Reels, Coils -50, -100

FITTINGS: 1400, PC1400, PCDOT, CPC1400 Series, & 800 Series

*** MEETS OR EXCEEDS:** D.O.T. F.M.V.S.S. 106 S.A.E. J844 TEST REQUIREMENTS

*** NOTE** 1/8 does not comply with F.M.V.S.S. 106

**** NOTE** S.A.E. does not recognize 5/32 O.D. for airbrake systems

NOTE:

THE WORKING PRESSURES LISTED FOR THIS TUBE IS RATED AT +21°C (+70°F).
ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE
ABOVE LISTED WORKING PRESSURES.

TYPE 3A NON-REINFORCED


PART No.	Tube O.D. (IN.)	Wall Thickness (IN.)	Working Pressure (P.S.I.)	Reel-Coil Length (FT.)
* 1485-2-100	1/8	0.023	250	100
* 1485-2-REEL	1/8	0.023	250	2000
** 1485-2-1/2-100	5/32	0.036	250	100
** 1485-2-1/2-REEL	5/32	0.036	250	1000
1485-3-100	3/16	0.035	250	100
1485-3-REEL	3/16	0.035	250	1000
1485-4-50	1/4	0.040	300	50
1485-4-100	1/4	0.040	300	100
1485-4-REEL	1/4	0.040	300	1000
1485-4BLU-100	1/4	0.040	300	100
1485-4BLU-REEL	1/4	0.040	300	1000
1485-4GRN-100	1/4	0.040	300	100
1485-4GRN-REEL	1/4	0.040	300	1000
1485-4ORA-100	1/4	0.040	300	100
1485-4ORA-REEL	1/4	0.040	300	1000
1485-4RED-100	1/4	0.040	300	100
1485-4RED-REEL	1/4	0.040	300	1000
1485-4YEL-100	1/4	0.040	300	100
1485-4YEL-REEL	1/4	0.040	300	1000
1485-5-100	5/16	0.040	250	100
1485-5-REEL	5/16	0.040	250	500

TYPE 3B REINFORCED

PART No.	Tube O.D. (IN.)	Wall Thickness (IN.)	Working Pressure (P.S.I.)	Reel-Coil Length (FT.)
1485-6-50	3/8	0.062	350	50
1485-6-100	3/8	0.062	350	100
1485-6-REEL	3/8	0.062	350	500
1485-6BLU-100	3/8	0.062	350	100
1485-6BLU-REEL	3/8	0.062	350	500
1485-6GRN-100	3/8	0.062	350	100
1485-6GRN-REEL	3/8	0.062	350	500
1485-6ORA-100	3/8	0.062	350	100
1485-6ORA-REEL	3/8	0.062	350	500
1485-6RED-100	3/8	0.062	350	100
1485-6RED-REEL	3/8	0.062	350	500
1485-6YEL-100	3/8	0.062	350	100
1485-6YEL-REEL	3/8	0.062	350	500
1485-8-50	1/2	0.062	240	50
1485-8-100	1/2	0.062	240	100
1485-8-REEL	1/2	0.062	240	500
1485-8BLU-100	1/2	0.062	240	100
1485-8BLU-REEL	1/2	0.062	240	500
1485-8GRN-100	1/2	0.062	240	100
1485-8GRN-REEL	1/2	0.062	240	500
1485-8ORA-100	1/2	0.062	240	100
1485-8ORA-REEL	1/2	0.062	240	500
1485-8RED-100	1/2	0.062	240	100
1485-8RED-REEL	1/2	0.062	240	500
1485-8YEL-100	1/2	0.062	240	100
1485-8YEL-REEL	1/2	0.062	240	500
1485-10-50	5/8	0.092	225	50
1485-10-100	5/8	0.092	225	100
1485-10-REEL	5/8	0.092	225	250
1485-10GRN-100	5/8	0.092	225	100
1485-10GRN-REEL	5/8	0.092	225	250
1485-10ORA-100	5/8	0.092	225	100
1485-10ORA-REEL	5/8	0.092	225	250
1485-10RED-50	5/8	0.092	225	50
1485-10RED-100	5/8	0.092	225	100
1485-10RED-REEL	5/8	0.092	225	250
1485-10YEL-100	5/8	0.092	225	100
1485-10YEL-REEL	5/8	0.092	225	250
1485-12-50	3/4	0.092	200	50
1485-12-100	3/4	0.092	200	100
1485-12-REEL	3/4	0.092	200	250
1485-12BLU-100	3/4	0.092	200	100
1485-12BLU-REEL	3/4	0.092	200	250
1485-12GRN-100	3/4	0.092	200	100
1485-12GRN-REEL	3/4	0.092	200	250
1485-12ORA-100	3/4	0.092	200	100
1485-12ORA-REEL	3/4	0.092	200	250
1485-12RED-100	3/4	0.092	200	100
1485-12RED-REEL	3/4	0.092	200	250

INDUSTRIAL GRADE POLYETHYLENE TUBE

Fairview

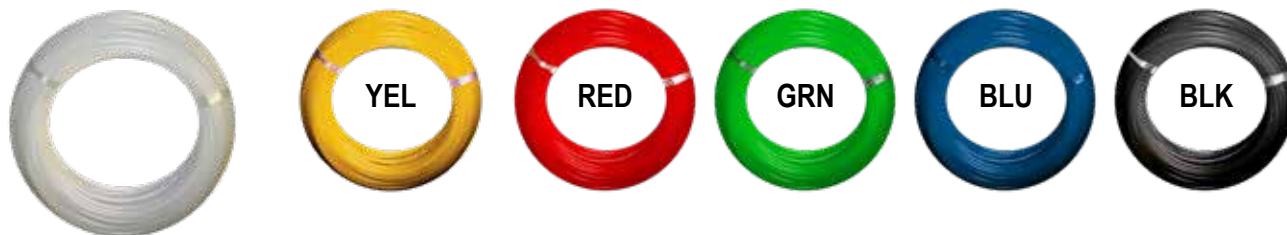

Fairview's industrial grade Linear Low Density Polyethylene Tubing (LLDPE) is UV resistant and provides excellent environmental stress crack resistance. It is ideal for general applications such as transfer of industrial air and liquids, humidifier fill lines and air conditioning drain lines.

Features:

- Economical and lightweight
- LLDPE resin provides excellent environmental stress crack resistance
- Resistant to sunlight and ultra-violet radiation
- Chemically inert
- Excellent resistance to solvents
- Phthalate free

TEMPERATURE: -45°C (-50°F) to +60°C (+140°F)

PACKAGING: 50 Ft., 100 Ft., 500 Ft. & 1000 Ft.

FITTINGS: 400 Series, PC60 Series
& 900 Series

COLOR CODES: BLK (Black), BLU (Blue), GRN (Green),
RED (Red), YEL (Yellow)

***Not all sizes are available in all
colors. minimum runs may apply.***

ORDERING INFORMATION: To order a color, suffix the size code
with a color code.

Example: 361-6GRN-100,
361-6RED-1000. For natural color
(opaque) omit the color code. Dark
colors have better U.V. resistance
for outdoor applications.

PART No.	Tube O.D. (IN.)	Actual I.D. (IN.)	Working Pressure(P.S.I)	Coil Length (Ft.)
361-4-50	1/4	.170	140	50
361-4-100	1/4	.170	140	100
361-4-500	1/4	.170	140	500
361-4-1000	1/4	.170	140	1000
361-4H-100	1/4	.125	150	100
361-5-100	5/16	.188	150	100
361-6-50	3/8	.250	125	50
361-6-100	3/8	.250	125	100
361-6-500	3/8	.250	125	500
361-6-1000	3/8	.250	125	1000
361-8-50	1/2	.375	100	50
361-8-100	1/2	.375	100	100
361-8-500	1/2	.375	100	500
361-8-1000	1/2	.375	100	1000
361-10-50	5/8	.500	75	50
361-10-100	5/8	.500	75	100
361-12-100	3/4	.625	50	100



WARNING

**THIS PRODUCT IS NOT SUITABLE FOR INSTALLATION IN CONCEALED
LOCATIONS (BEHIND WALLS, CEILINGS, FLOORS) OR USE AS A POTABLE
WATER SUPPLY LINE (REFRIGERATORS, DISHWASHERS, WATER COOLERS).
USE ONLY IN CONJUNCTION WITH FAIRVIEW RECOMMENDED FITTINGS.**

WARNING

**USE OF THIS TUBE WITH FITTINGS OTHER THAN
FAIRVIEW ORIGINAL WILL VOID WARRANTY.**

NOTE:

**THE WORKING PRESSURES LISTED FOR THIS TUBE IS RATED AT +21°C
(+70°F). ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL
LOWER THE ABOVE LISTED WORKING PRESSURES.**



**CERTIFIED
UNDER
STANDARD
51 and 61**

Clear polyvinyl-chloride tube is manufactured from F.D.A. approved resins. It is clear, flexible, easy to clean, abrasion resistant and non-contaminating. It is suitable for the conveyance of air and water and is used extensively where food and beverages are conveyed.

PACKAGING: 50 Ft. & 100 Ft. Coils 1/8" to 1-1/4" I.D.
500 Ft. reels 1/8" to 1/2" I.D.

TEMPERATURE: -4°C to +65 °C (+25°F to +149°F)

FITTINGS: Hose barbs

NOTE: To order reel lengths change -100 to -REEL
To order 50 foot coils change -100 to -50



**Certain Sizes Now Available
Packaged x 10 Ft. (Series JFTA)**

PART No.	Tube O.D. (IN.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
JFT-42-100	1/4	1/8	65
JFT-53-100	5/16	3/16	55
JFT-63-100	3/8	3/16	65
JFT-64-100	3/8	1/4	55
JFT-75-100	7/16	5/16	50
JFT-84-100	1/2	1/4	70
JFT-85-100	1/2	5/16	60
JFT-86-100	1/2	3/8	45
JFT-106-100	5/8	3/8	55
JFT-108-100	5/8	1/2	30
JFT-128-100	3/4	1/2	45
JFT-1210-100	3/4	5/8	30
JFT-1410-100	7/8	5/8	40
JFT-1612-100	1	3/4	35
JFT-1812-100	1-1/8	3/4	50
JFT-2014-100	1-1/4	7/8	35
JFT-2016-100	1-1/4	1	25
JFT-2416-100	1-1/2	1	35
JFT-2420-100	1-1/2	1-1/4	20
JFT-3224-50	2	1-1/2	35

PART No.	Tube O.D. (IN.)	Actual I.D. (IN.)	Length (FT.)
JFTA-42-10P	1/4	1/8	10
JFTA-53-10P	5/16	3/16	10
JFTA-64-10P	3/8	1/4	10
JFTA-75-10P	7/16	5/16	10
JFTA-86-10P	1/2	3/8	10

NOTE:
THE WORKING PRESSURES LISTED FOR THIS TUBE IS RATED AT +21°C
(+70°F). ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL
LOWER THE ABOVE LISTED WORKING PRESSURES.



This Ether based polyurethane tube has been specially formulated for use with gasoline and is also suitable for such applications as air transfer lines, granular transfer lines, lubrication lines and robotics control lines. It is clear with a blue tint to allow see-through convenience. Polyurethane tube features abrasion and cut resistance, good flex fatigue and resilience and excellent resistance to ozone, solvents and fuel. Items and colors not shown are subject to minimum runs.

- PACKAGING: 25 Ft. & 100 Ft. Coils
- TEMPERATURE: -40°C to +79°C (-40°F to +175°F)
- FITTINGS: Hose barbs
- For fuel line hose

PART No.	Tube O.D. (IN.)	Actual I.D. (IN.)	Wall Thickness	Working Pressure (P.S.I.)
FLT-42-25	1/4	1/8	1/16	100
FLT-42-100	1/4	1/8	1/16	100
FLT-53-25	5/16	3/16	1/16	75
FLT-53-100	5/16	3/16	1/16	75
FLT-64-25	3/8	1/4	1/16	60
FLT-64-100	3/8	1/4	1/16	60
FLT-75-25	7/16	5/16	1/16	50
FLT-75-100	7/16	5/16	1/16	50
FLT-86-25	1/2	3/8	1/16	45
FLT-86-100	1/2	3/8	1/16	45
FLT-128-25	3/4	1/2	1/8	60
FLT-128-100	3/4	1/2	1/8	60

NOTE:
THE WORKING PRESSURES LISTED FOR THIS TUBE IS RATED AT +21°C (+70°F). ANY
AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE ABOVE LISTED
WORKING PRESSURES.

GENERAL USE (ASTM B75)

FAIRVIEW COPPER TUBE IS SOFT, SEAMLESS AND ANNEALED FOR FLEXIBILITY. CHECK LOCAL CODES TO ENSURE PROPER COPPER TUBE SELECTION TO MEET APPLICATION REQUIREMENTS.



CERTIFIED UNDER
STANDARD 61

PART No.	Tube O.D. (IN.)	Working Pressure(P.S.I.)	Wall Thickness	Coil Length (FT.)
CTG-4-25	1/4	1,406	.030	25
CTG-5-25	5/16	1,197	.032	25
CTG-6-25	3/8	984	.032	25
CTG-8-25	1/2	727	.032	25
CTG-10-25	5/8	618	.035	25
CTG-12-25	3/4	511	.035	25

Working pressure rated @ +38°C (+100°F).

REFRIGERATION (ASTM B280)



PART No.	Tube O.D. (IN.)	Working Pressure(P.S.I.)	Wall Thickness	Coil Length (FT.)
CTR-2-50	1/8	3,074	.030	50
CTR-3-50	3/16	1,935	.030	50
CTR-4-50	1/4	1,406	.030	50
CTR-4-100	1/4	1,406	.030	100
CTR-5-50	5/16	1,197	.032	50
CTR-6-50	3/8	984	.032	50
CTR-6-100	3/8	984	.032	100
CTR-8-50	1/2	727	.032	50
CTR-8-100	1/2	727	.032	100
CTR-10-50	5/8	618	.035	50
CTR-10-100	5/8	618	.035	100
CTR-12-50	3/4	511	.035	50
CTR-14-50	7/8	582	.045	50

Working pressure rated @ +38°C (+100°F).

S.A.E. - 527 STEEL TUBE



The green (GRN)
anti-corrosion poly
coating complies with
GM123M-ASV and
S.A.E. J527B

PART No.	Tube O.D. (IN.)	Working Pressure(P.S.I.)	Wall Thickness	Coil Length (FT.)
BLT-3-25	3/16	5,000	.028	25
BLT-3-100	3/16	5,000	.028	100
BLT-4-25	1/4	5,000	.028	25
BLT-5-25	5/16	5,000	.028	25
BLT-6-25	3/8	5,000	.028	25
BLT-3GRN-25	3/16	5,000	.028	25
BLT-4GRN-25	1/4	5,000	.028	25
BLT-5GRN-25	5/16	5,000	.028	25
BLT-6GRN-25	3/8	5,000	.028	25

FITTINGS: Threaded sleeve

***NOTE:**

THE WORKING PRESSURES LISTED FOR THIS TUBE IS RATED AT +21°C (+70°F). ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE ABOVE LISTED WORKING PRESSURES.

HOSE ENDS

BRASS - STEEL - BLACK IRON- NYLON

AIR BRAKE HOSE END COUPLINGS	48
AIR BRAKE HOSE MENDERS & QUICK SERVICE KITS	49
COMBINATION NIPPLES AND HOSE MENDERS (STEEL)	53
HOSE BARBS (BRASS)	51-52
HOSE BARBS (NYLON)	52
HOSE BARBS (FUEL LINE)	53
HOSE END CRIMP FITTINGS FOR SAE 100R5	64
HOSE END CRIMP FITTINGS FOR SAE 100R7/R8/R18	66
HOSE END FERRULES (BRASS)	53
HOSE END INSERTS	61
HYDRAULIC HOSE BITE-WIRE CRIMP FITTINGS	55-56, 59
HYDRAULIC HOSE COMPRESSION CRIMP FITTINGS	57-58
HYDRAULIC HOSE CRIMPING INSTRUCTIONS	60
LUBE HOSE CRIMP ENDS	61
LUBE HOSE REUSABLE ENDS	61
PTFE HOSE CRIMP ENDS	62
PTFE REUSABLE HOSE ENDS	63
PUSH-IN HOSE GRIP-TITE FITTINGS	50
REUSABLE GENERAL PURPOSE HOSE FITTINGS	54
REUSABLE HOSE ENDS FOR SAE 100R1/R2	62
REUSABLE HOSE ENDS FOR SAE 100R5	65
RING-BARBS FOR POLY TUBE	54
TERMINAL BOLTS	48



BRASS D.O.T. AIR BRAKE HOSE COUPLINGS AND STEEL TERMINAL BOLTS



Sleeve

PART No.	For Hose I.D.
1490-6	3/8
1490-8	1/2



Nut

PART No.	For Hose I.D.
1491-6	3/8
1491-8	1/2



**Coupler Assembly
(Nut, Sleeve & Coupler)**

PART No.	For Hose I.D.	Pipe
1492-6B	3/8	1/4
1492-6C	3/8	3/8
1492-6D	3/8	1/2
1492-8C	1/2	3/8
1492-8D	1/2	1/2

Swivel Coupler



**Assembly
(Nut, Sleeve
& Coupler)**

PART No.	For Hose I.D.	Pipe
1492SW-6	3/8	--
1492SW-8	1/2	--
1492SW-6B *	3/8	1/4
1492SW-6C *	3/8	3/8
1492SW-6D *	3/8	1/2
1492SW-8C *	1/2	3/8

* Complete with 4134 series adapter.

**Coupler
Assembly
with Spring
Guard
(Nut, Sleeve,
Coupler & Spring)**



PART No.	For Hose I.D.	Pipe
1493-6B	3/8	1/4
1493-6C	3/8	3/8
1493-6D	3/8	1/2
1493-8C	1/2	3/8
1493-8D	1/2	1/2

**Swivel Coupler
Assembly
with
Spring Guard
(Nut, Sleeve,
Coupler & Spring)**



PART No.	For Hose I.D.	Pipe
1493SW-6	3/8	--
1493SW-8	1/2	--
1493SW-6B *	3/8	1/4
1493SW-6C *	3/8	3/8
1493SW-8C *	1/2	3/8

* Complete with 4134 series adapter.



**Terminal
Bolt
(Steel)**

PART No.	For Nylon Tube O.D.	For Hose I.D.
1499N-6 *	3/8	3/8

* Complete with 1461 series nut.

PART No.	For Copper Tube O.D.	For Hose I.D.
1499-6	3/8	3/8



**Hose Connector
for HAB Assemblies**

PART No.	Straight Thread	Pipe
4134-6B	3/4-20	1/4
4134-6C	3/4-20	3/8
4134-6D	3/4-20	1/2
4134-8C	3/4-20	3/8
4134-8D	3/4-20	1/2
4134-8C-WH	7/8-20	3/8
4134-8D-WH	7/8-20	1/2

Used with HAB Assemblies.



Hose Splicer

PART No.	For Hose I.D.
1492-6S	3/8
1492-8S	1/2



Coupler

PART No.	For Hose I.D.	Pipe
B1492-6B	3/8	1/4
B1492-6C	3/8	3/8
B1492-6D	3/8	1/2
B1492-8C	1/2	3/8
B1492-8D	1/2	1/2



**Nut with
Spring Hose
Guard**

PART No.	For Hose I.D.
1494-6	3/8
1494-8	1/2



**Terminal Bolt
(Steel)**

PART No.	Female Pipe	Length (IN.)
1495-C	3/8 X 3/8	1-3/8
1495-L	1/4 X 1/4	1-1/2
1495-S	1/4 X 1/4	31/32



**Terminal Bolt
(Brass)**

PART No.	Female Pipe	Length (IN.)
1495B-A	1/8 X 1/8	1-1/2
1495B-C	3/8 X 3/8	1-1/4
1495B-D	1/2 X 1/2	1-1/2
1495B-L	1/4 X 1/4	1-1/2
1495B-S	1/4 X 1/4	31/32



**Terminal
Bolt
(Steel)**

PART No.	Pipe	Length (IN.)
1496-DC	1/2M X 3/8F	2



**Terminal
Bolt**

PART No.	Pipe	Material	Length (IN.)
1497-DB	1/2M X 1/4F	Steel	2-3/4
1497-DBS	1/2M X 1/4F	Brass	1-5/8



**Bullhead
Adapter
(Brass)**

PART No.	For Nylon Tube O.D.	Female Pipe
1495N-6C	3/8	3/8
1495N-8C	1/2	3/8



**Push-to-Connect
Bulkhead Adapter
(Steel-Brass)**

PART No.	For Nylon Tube O.D.	Female Pipe
PC1495S-6D	1/2	3/8



**Push-to-Connect
Terminal Bolt
(Steel-Brass)**

PART No.	For Nylon Tube O.D.	Pipe	Length (IN.)
PC1483S-6D	3/8	1/2	2
PC1483S-8D	1/2	1/2	2



For Nylon

**Terminal Bolt
(Steel)**



For Copper

PART No.	For Nylon Tube O.D.	Pipe	Length (IN.)
1498N-6D	3/8	1/2M X 1/4F	2-5/8

Complete with 1461 series brass nut.

PART No.	For Copper Tube O.D.	Pipe	Length (IN.)
1498-6D	3/8	1/2M X 1/4F	3-1/4

Complete with 1161 series brass nut & sleeve.

AIR BRAKE HOSE MENDERS & QUICK SERVICE KITS

PART No. ABFR-KIT-HAB (AIR BRAKE HAB HOSE REPAIR KIT)
Designed for use in the field, this kit includes a selection of items to complete many temporary air brake hose repairs. Single sided carry case, with handle.

Kit Dimensions
Height: 12.0 In.
Width: 14.5 In.
Depth: 2.375 In.



D.O.T. Air Brake Hose Repair Kit Selection:

PART No.	Description	Qty.
HAB-6-CUT	DOT Air Brake Hose 3/8 ID	16 In.
HAB-8-CUT	DOT Air Brake Hose 1/2 ID	16 In.
110-CB	Pipe Bushing 3/8 to 1/4	2
110-DC	Pipe Bushing 1/2 to 3/8	2
121-M8	Thread Sealant Tape	1
1492-6S	DOT Air Brake Splicer 3/8 ID	1
1492-8S	DOT Air Brake Splicer 1/2 ID	1
1492SW-6	DOT Swivel Coupler 3/8 ID	1

PART No.	Description	Qty.
1492SW-8	DOT Swivel Coupler 1/2 ID	1
4134-6B	Hose Adapter 3/8 ID to 1/4 MPT	2
4134-6C	Hose Adapter 3/8 ID to 3/8 MPT	2
4134-8C-WH	Hose Adapter 1/2 ID to 3/8 MPT	2
4134-8D-WH	Hose Adapter 1/2 ID to 1/2 MPT	2
TK-1	Thumb knife	1
ABFR-BOX-1	1 Sided Case	1

ALL METAL FIELD ATTACHABLE AIR BRAKE HOSE MENDERS

Fairview's all metal hose menders are ruggedly designed for easy, reliable roadside or shop air brake hose repairs.

PART No.	Description	Swivel Pipe	For Hose I.D.	Min. Hose O.D.
4120R-6C-RK	Carded Repair Kit	3/8	3/8	.750
4120R-6D-RK	Carded Repair Kit	1/2	3/8	.750
4120R-8C-RK	Carded Repair Kit	3/8	1/2	.875

(HOSE TO HOSE UNION)

4129R-6-RK	Bagged Splicer Kit	3/8	3/8	.750
4129R-8-RK	Bagged Splicer Kit	1/2	1/2	.875

Patent
D759,216 D760,876



Allen wrench supplied with each kit.




D.O.T. LISTED - NO ADDITIONAL TOOLS REQUIRED



**Threaded Shell
On Hose**



**Push Stem and
Screw to Start**



**Hold Shell and
Tighten Stem
With Key**



WATCH OUR INSTRUCTIONAL VIDEO





Male Pipe

PART No.	Hose I.D.	Pipe
725-4A	1/4	1/8
725-4B	1/4	1/4
725-4C	1/4	3/8
725-5A	5/16	1/8
725-5B	5/16	1/4
725-6A	3/8	1/8
725-6B	3/8	1/4
725-6C	3/8	3/8
725-6D	3/8	1/2
725-8B	1/2	1/4
725-8C	1/2	3/8
725-8D	1/2	1/2
725-8E	1/2	3/4
725-10C	5/8	3/8
725-10D	5/8	1/2
725-10E	5/8	3/4
725-12D	3/4	1/2
725-12E	3/4	3/4



Working Male Pipe Swivel

PART No.	Hose I.D.	Pipe
725SW-4B	1/4	1/4
725SW-6B	3/8	1/4
725SW-6C	3/8	3/8
725SW-8C	1/2	3/8
725SW-8D	1/2	1/2
725SW-12E	3/4	3/4



Rigid Female Pipe

PART No.	Hose I.D.	Tube
726-4A	1/4	1/8
726-4B	1/4	1/4
726-6B	3/8	1/4
726-6C	3/8	3/8
726-8C	1/2	3/8
726-8D	1/2	1/2
726-8E	1/2	3/4
726-12E	3/4	3/4



45° S.A.E. Male Flare

PART No.	Hose I.D.	Tube
727-44	1/4	1/4
727-45	1/4	5/16
727-66	3/8	3/8
727-88	1/2	1/2



45° S.A.E. Female Flare Swivel

PART No.	Hose I.D.	Tube
728-44	1/4	1/4
728-45	1/4	5/16
728-66	3/8	3/8
728-68	3/8	1/2
728-86	1/2	3/8
728-88	1/2	1/2
728-810	1/2	5/8
728-108	5/8	1/2
728-1010	5/8	5/8
728-1212	3/4	3/4



Hose Splicer

PART No.	Hose I.D.
729-4	1/4
729-5	5/16
729-6	3/8
729-8	1/2
729-10	5/8
729-12	3/4



Female Straight Pipe Swivel

Ball Type

PART No.	Hose I.D.	Straight Pipe
731-4A	1/4	1/8
731-4B	1/4	1/4
731-6B	3/8	1/4
731-6C	3/8	3/8
731-8D	1/2	1/2
731-12E	3/4	3/4



Rigid Tube Shank

PART No.	Hose I.D.	Tube
732-44	1/4	1/4
732-66	3/8	3/8



45° S.A.E. Male Inverted Flare Swivel

PART No.	Hose I.D.	Tube
735-43	1/4	3/16
735-44	1/4	1/4
735-45	1/4	5/16
735-65	3/8	5/16
735-66	3/8	3/8
735-88	1/2	1/2
735-1010	5/8	5/8



45° S.A.E. Female Inverted Flare

PART No.	Hose I.D.	Tube
736-45	1/4	5/16
736-65	3/8	5/16
736-66	3/8	3/8



37° J.I.C. Male Flare

PART No.	Hose I.D.	Tube
737-44	1/4	1/4
737-66	3/8	3/8
737-88	1/2	1/2



37° J.I.C. Female Flare Swivel


PART No.	Hose I.D.	Tube
738-44	1/4	1/4
738-45	1/4	5/16
738-66	3/8	3/8
738-88	1/2	1/2
738-1010	5/8	5/8
738-1212	3/4	3/4



90° ELBOW Male Pipe

PART No.	Hose I.D.	Pipe
739-4A	1/4	1/8
739-4B	1/4	1/4
739-6B	3/8	1/4
739-6C	3/8	3/8
739-8C	1/2	3/8
739-8D	1/2	1/2
739-12E	3/4	3/4

ASSEMBLY INSTRUCTIONS



- LUBRICATE HOSE AND BARB
- PUSH HOSE ON FITTING UNTIL SEATED UNDER PROTECTIVE CAP
- NO CLAMPS REQUIRED WHEN USED WITH GRIP-TITE HOSE

BRASS HOSE BARB FITTINGS

Fairview

HOSE ENDS



**Coupler
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Pipe
125-2-10/32	1/8	10/32 UNF
125-2A	1/8	1/8
125-2B	1/8	1/4
125-3A	3/16	1/8
125-3B	3/16	1/4
125-4A	1/4	1/8
125-4B	1/4	1/4
125-4C	1/4	3/8
125-4D	1/4	1/2
125-5A	5/16	1/8
125-5B	5/16	1/4
125-5C	5/16	3/8
125-6A	3/8	1/8
125-6B	3/8	1/4
125-6C	3/8	3/8
125-6D	3/8	1/2
125-6E	3/8	3/4
125-8B	1/2	1/4
125-8C	1/2	3/8
125-8D	1/2	1/2
125-8E	1/2	3/4
125-10C	5/8	3/8
125-10D	5/8	1/2
125-10E	5/8	3/4
125-12D	3/4	1/2
125-12E	3/4	3/4
125-16E	1	3/4
125-16H	1	1



**Coupler
Hose Barb
to Male Pipe
(Cast Bronze)**

PART No.	Hose I.D.	Pipe
125CA-8D	1/2	1/2
125CA-12E	3/4	3/4
125CA-16H	1	1
125CA-20J	1-1/4	1-1/4
125CA-24K	1-1/2	1-1/2
125CA-32M	2	2



**Working
Swivel Coupler
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Pipe
1925-4B	1/4	1/4
1925-6B	3/8	1/4
1925-6C	3/8	3/8
1925-6D	3/8	1/2
1925-8C	1/2	3/8
1925-8D	1/2	1/2



**Coupler
Hose Barb
to Female Pipe**

PART No.	Hose I.D.	Pipe
126-2A	1/8	1/8
126-2B	1/8	1/4
126-3A	3/16	1/8
126-3B	3/16	1/4
126-4A	1/4	1/8
126-4B	1/4	1/4



**Coupler
Hose Barb
to Female Pipe
(Cont.)**

PART No.	Hose I.D.	Pipe
126-4C	1/4	3/8
126-5A	5/16	1/8
126-5B	5/16	1/4
126-5C	5/16	3/8
126-6A	3/8	1/8
126-6B	3/8	1/4
126-6C	3/8	3/8
126-6D	3/8	1/2
126-8B	1/2	1/4
126-8C	1/2	3/8
126-8D	1/2	1/2
126-12D	3/4	1/2
126-16H	1	1



**Swivel Coupler
Hose Barb
Flat Seat
with Gasket
to Female
Straight Pipe**

PART No.	Hose I.D.	Straight Pipe
130-4A	1/4	1/8
130-4B	1/4	1/4
130-6B	3/8	1/4
130-6C	3/8	3/8
130-6D	3/8	1/2
130-8D	1/2	1/2



**Swivel Coupler
Hose Barb
Ball Seat
to Female
Straight Pipe**

PART No.	Hose I.D.	Straight Pipe
131-3A	3/16	1/8
131-3B	3/16	1/4
131-4A	1/4	1/8
131-4B	1/4	1/4
131-4C	1/4	3/8
131-5B	5/16	1/4
131-6B	3/8	1/4
131-6C	3/8	3/8
131-8C	1/2	3/8
131-8D	1/2	1/2
131-12E	3/4	3/4



**Coupler
Hose Barb
to Male 45°
S.A.E. Flare**

PART No.	Hose I.D.	Pipe
127-4A	1/4	1/4
127-4B	1/4	3/8
127-55	5/16	5/16
127-66	3/8	3/8
127-68	3/8	1/2



**Connector
Male Straight
Pipe Thread
with Ball Seat
to Male Taper
Pipe Thread**

PART No.	Straight Pipe	Pipe
134-BB	1/4	1/4
134-CC	3/8	3/8
134-CD	3/8	1/2
134-DD	1/2	1/2

USE WITH 130, 131 SERIES.



**Swivel Coupler
Hose Barb
to Female 45°
S.A.E. Flare**

PART No.	Hose I.D.	Tube
128-34	3/16	1/4
128-44	1/4	1/4
128-46	1/4	3/8
128-55	5/16	5/16
128-56	5/16	3/8
128-66	3/8	3/8
128-68	3/8	1/2
128-88	1/2	1/2
128-810	1/2	5/8
128-1212	3/4	3/4



**90° Elbow
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Pipe
139-3A	3/16	1/8
139-4A	1/4	1/8
139-4B	1/4	1/4
139-4C	1/4	3/8
139-5A	5/16	1/8
139-5B	5/16	1/4
139-5C	5/16	3/8
139-6A	3/8	1/8
139-6B	3/8	1/4
139-6C	3/8	3/8
139-6D	3/8	1/2
139-8B	1/2	1/4
139-8C	1/2	3/8
139-8D	1/2	1/2
139-10C	5/8	3/8
139-10D	5/8	1/2
139-12D	3/4	1/2
139-12E	3/4	3/4
139-16E	1	3/4
139-16H	1	1



**45° Elbow
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Tube
140-4A	1/4	1/8
140-4B	1/4	1/4
140-5A	5/16	1/8
140-6A	3/8	1/8
140-6B	3/8	1/4
140-6C	3/8	3/8
140-8C	1/2	3/8
140-10C	5/8	3/8

BRASS HOSE BARB FITTINGS



**Splicer
Hose Barb**

PART No.	Hose I.D.
129-3	3/16
129-4	1/4
129-5	5/16
129-6	3/8
129-8	1/2
129-10	5/8
129-12	3/4



**Y Connector
Hose Barb
All Ends**

PART No.	Hose I.D.
123Y-4	1/4
123Y-6	3/8
123Y-8	1/2
123Y-10	5/8
123Y-12	3/4



**90° Elbow
Hose Barb
to Hose Barb**

PART No.	Hose I.D.
99HB-4	1/4
99HB-5	5/16
99HB-6	3/8
99HB-8	1/2



**TEE
Hose Barb
All Ends**

PART No.	Hose I.D.
123-4	1/4
123-5	5/16
123-6	3/8

NOTE: **Lead Free** Brass hose barbs are available on request. Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.

(Special Order)

Minimum quantities apply.

NYLON HOSE BARB FITTINGS (MADE WITH NSF APPROVED RESINS)



**Coupler
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Pipe
525-4A	1/4	1/8
525-4B	1/4	1/4
525-4D	1/4	1/2
525-6B	3/8	1/4
525-6C	3/8	3/8
525-6D	3/8	1/2
525-8C	1/2	3/8
525-8D	1/2	1/2
525-8E	1/2	3/4
525-10D	5/8	1/2
525-10E	5/8	3/4
525-12E	3/4	3/4



**Coupler
Hose Barb
to Female Pipe**

PART No.	Hose I.D.	Pipe
526-4B	1/4	1/4
526-4D	1/4	1/2
526-6B	3/8	1/4
526-6C	3/8	3/8
526-8D	1/2	1/2



**Splicer
Hose Barb**

PART No.	Hose I.D.
529-4	1/4
529-6	3/8
529-8	1/2
Reducing	
529-42	1/4 to 1/8
529-64	3/8 to 1/4
529-86	1/2 to 3/8



**90° Elbow
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Pipe
539-4A	1/4	1/8
539-4B	1/4	1/4
539-6B	3/8	1/4
539-6C	3/8	3/8
539-6D	3/8	1/2
539-8C	1/2	3/8
539-8D	1/2	1/2
539-10E	5/8	3/4



**90° Elbow
Hose Barb
to Hose Barb**

PART No.	Hose I.D.
555-4	1/4
555-6	3/8
555-8	1/2
555-10	5/8
555-12	3/4



**Tee
Hose Barb
All Ends**

PART No.	Hose I.D.
544-3	3/16
544-4	1/4
544-6	3/8
544-8	1/2
544-10	5/8

BRASS FUEL LINE HOSE BARBS

Fairview



**Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Pipe
325-3A	3/16	1/8
325-4A	1/4	1/8
325-4B	1/4	1/4
325-5A	5/16	1/8
325-5B	5/16	1/4
325-6A	3/8	1/8
325-6B	3/8	1/4
325-6C	3/8	3/8
325-10C	5/8	3/8
325-10D	5/8	1/2
325-12D	3/4	1/2



**Hose Barb
to Male
Inverted Flare**

PART No.	Hose I.D.	Pipe
335-54	5/16	1/4
335-55	5/16	5/16
335-65	3/8	5/16
335-66	3/8	3/8



**90° Elbow
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Pipe
339-4A	1/4	1/8
339-5A	5/16	1/8
339-5B	5/16	1/4
339-6A	3/8	1/8
339-6B	3/8	1/4
339-6C	3/8	3/8
339-10C	5/8	3/8

STEEL COMBINATION NIPPLES AND HOSE MENDERS (NOT RECOMMENDED FOR USE WITH AIR)



**Combination Nipple
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Pipe
BI-125-8D	1/2	1/2
BI-125-12E	3/4	3/4
BI-125-16H	1	1
BI-125-20J	1-1/4	1-1/4
BI-125-24K	1-1/2	1-1/2
BI-125-32M	2	2



**Plated
Combination Nipple
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Pipe
GI-125-8D	1/2	1/2
GI-125-12E	3/4	3/4
GI-125-16H	1	1
GI-125-20J	1-1/4	1-1/4
GI-125-24K	1-1/2	1-1/2
GI-125-32M	2	2



**Hose Mender
Hose Barb**

PART No.	Hose I.D.
BI-129-8	1/2
BI-129-12	3/4
BI-129-16	1
BI-129-20	1-1/4
BI-129-24	1-1/2
BI-129-32	2



**Plated
Hose Mender
Hose Barb**

PART No.	Hose I.D.
GI-129-12	3/4
GI-129-16	1
GI-129-20	1-1/4

BRASS STANDARD FERRULES (FBL - Ferrule Brass Long, FBS - Ferrule Brass Short)



FBL



FBS

- Size range from 3/8 to 1 inch outside diameter
- The part number designates the outside diameter of the hose or tube
- Wall thickness of the ferrule is .025

PART No.	I.D. (IN.)	Ferrule Length (IN.)	Hole Size (IN.)
FBL-450	.450	23/32	.328
FBL-475	.475	23/32	.328
FBL-500	.500	23/32	.328
FBL-525	.525	23/32	.453
FBL-550	.550	23/32	.438
FBL-575	.575	31/32	.438
FBL-600	.600	31/32	.453
FBL-625	.625	31/32	.453
FBL-650	.650	31/32	.453
FBL-675	.675	31/32	.500
FBL-700	.700	31/32	.500
FBL-725	.725	31/32	.500
FBL-750	.750	31/32	.500
FBL-775	.775	31/32	.500
FBL-800	.800	31/32	.625

PART No.	I.D. (IN.)	Ferrule Length (IN.)	Hole Size (IN.)
FBL-825	.825	31/32	.625
FBL-850	.850	31/32	.586
FBL-875	.875	31/32	.750
FBL-900	.900	31/32	.750
FBL-925	.925	31/32	.750
FBL-975	.975	31/32	.875
FBL-1000	1.000	31/32	.875
FBL-1025	1.025	31/32	.875
FBL-1100	1.100	31/32	.875
FBL-1125	1.125	31/32	.875
FBL-1150	1.150	31/32	.875
FBL-1175	1.175	55/64	.875
FBL-1275	1.275	31/32	.875
FBL-1500	1.500	31/32	.875



**Coupling
Tube
to Tube**

PART No.	Tube O.D.	Tube I.D.
962-4	1/4	.170
962-6	3/8	.250



**Connector
Tube to
Female pipe**

PART No.	Tube O.D.	Tube I.D.	Pipe
966-4A	1/4	.170	1/8
966-4B	1/4	.170	1/4



**Connector
Tube to
Male pipe**

PART No.	Tube O.D.	Tube I.D.	Pipe
968-4A	1/4	.170	1/8
968-4B	1/4	.170	1/4
968-6A	3/8	.250	1/8
968-6B	3/8	.250	1/4



**BulkHead
Union**

PART No.	Tube O.D.	Tube I.D.
977-4	1/4	.170



**90° Elbow
Tube
to Tube**

PART No.	Tube O.D.	Tube I.D.
965-4	1/4	.170
965-6	3/8	.250
965-8	1/2	.375



**90° Elbow
Tube to
Male Pipe**

PART No.	Tube O.D.	Tube I.D.	Pipe
969-4A	1/4	.170	1/8
969-4B	1/4	.170	1/4
969-6A	3/8	.250	1/8
969-6B	3/8	.250	1/4



**Tee Tube
Three Ends**

PART No.	Tube O.D.	Tube I.D.
964-4	1/4	.170
964-6	3/8	.250
964-8	1/2	.375

RING-BARB fittings are designed for use with FAIRVIEW POLYETHYLENE TUBE. The barb has a raised ring that imbeds into the tube. This assures a leakproof connection when used within the normal temperature and pressure range of the tube. Simply push fitting into tube to assemble. No tools or clamps required.



SEE TUBE SECTION FOR POLY TUBE

Note:

Use of Fairview hose and tube with other than Fairview original recommended fittings, may void warranty. Verify with a Fairview representative prior to installation.

BRASS SCREW-ON REUSABLE HOSE FITTINGS



**Hose
Ferrules**

PART No.	Hose O.D.	Hose I.D.
750-84	1/2	1/4
750-106	3/8	3/8
750-116	11/16	3/8



**Hose Stem
with Male
Pipe Thread**

PART No.	Hose I.D.	Pipe
751-4B	1/4	1/4
751-6B	3/8	1/4
751-6C	3/8	3/8



**Hose Stem
with Female
Pipe Thread
(Two Piece Swivel)**

PART No.	Hose I.D.	Pipe
752-4B	1/4	1/4
752-6B	3/8	1/4
752-6C	3/8	3/8

STEEL ONE PIECE CRIMP HOSE ENDS

(BITE-TO-THE-WIRE)



FOR USE WITH S.A.E. 100R1-AT, 100R2-AT, T1SN, T2SN, 100R16, 100R16LT, AND 100R17LT HOSE

**ITEMS SHOWN ARE INTERCHANGEABLE WITH PARKER "43" SERIES COUPLINGS.
(THEY ARE FAIRVIEW EQUIVALENTS AND ARE NOT PARKER ORIGINAL PRODUCT.)**

HOSE ENDS



Male Pipe

PART No.	Hose I.D.	Pipe
SC925-4A	1/4	1/8
SC925-4B	1/4	1/4
SC925-4C	1/4	3/8
SC925-4D	1/4	1/2
SC925-6B	3/8	1/4
SC925-6C	3/8	3/8
SC925-6D	3/8	1/2
SC925-8C	1/2	3/8
SC925-8D	1/2	1/2
SC925-8E	1/2	3/4
SC925-10D	5/8	1/2
SC925-12D	3/4	1/2
SC925-12E	3/4	3/4
SC925-12H	3/4	1
SC925-16E	1	3/4
SC925-16H	1	1
SC925-20J	1-1/4	1-1/4



**Male Pipe
(Working Swivel)**

PART No.	Hose I.D.	Pipe
SC925SW-4B	1/4	1/4
SC925SW-4C	1/4	3/8
SC925SW-6B	3/8	1/4
SC925SW-6C	3/8	3/8
SC925SW-6D	3/8	1/2
SC925SW-8D	1/2	1/2
SC925SW-12E	3/4	3/4
SC925SW-16H	1	1



Female Pipe

PART No.	Hose I.D.	Pipe
SC926-4B	1/4	1/4
SC926-6B	3/8	1/4
SC926-6C	3/8	3/8
SC926-6D	3/8	1/2
SC926-8D	1/2	1/2



**S.A.E. 37°
Male Flare**

PART No.	Hose I.D.	Tube
SC937-44	1/4	1/4
SC937-45	1/4	5/16
SC937-46	1/4	3/8
SC937-66	3/8	3/8
SC937-68	3/8	1/2
SC937-610	3/8	5/8
SC937-88	1/2	1/2
SC937-810	1/2	5/8
SC937-812	1/2	3/4
SC937-1010	5/8	5/8
SC937-1012	5/8	3/4
SC937-1212	3/4	3/4
SC937-1216	3/4	1
SC937-1616	1	1



**S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC938-44	1/4	1/4
SC938-45	1/4	5/16
SC938-46	1/4	3/8
SC938-48	1/4	1/2
SC938-64	3/8	1/4
SC938-66	3/8	3/8
SC938-68	3/8	1/2
SC938-610	3/8	5/8
SC938-86	1/2	3/8
SC938-88	1/2	1/2
SC938-810	1/2	5/8
SC938-812	1/2	3/4
SC938-1010	5/8	5/8
SC938-1012	5/8	3/4
SC938-1210	3/4	5/8
SC938-1212	3/4	3/4
SC938-1214	3/4	7/8
SC938-1216	3/4	1
SC938-1612	1	3/4
SC938-1616	1	1
SC938-2020	1-1/4	1-1/4
SC938-2424	1-1/2	1-1/2



**Female
NPSM Pipe
(Swivel)**

PART No.	Hose I.D.	Pipe
SC926SW-4B	1/4	1/4
SC926SW-6C	3/8	3/8
SC926SW-6D	3/8	1/2
SC926SW-8D	1/2	1/2
SC926SW-12E	3/4	3/4
SC926SW-16H	1	1



**Female
(Grease Tap)**

PART No.	Hose I.D.	Thread
SC926GT-4A	1/4	1/2 - 27



**S.A.E. 45°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC928-66	3/8	3/8
SC928-1212	3/4	3/4



**S.A.E. 45°
Inverted Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC935-44	1/4	1/4
SC935-66	3/8	3/8



**Male O-Ring
Boss**

PART No.	Hose I.D.	O-Ring
SC943-44	1/4	7/16 - 18
SC943-46	1/4	9/16 - 18
SC943-66	3/8	9/16 - 18
SC943-68	3/8	3/4 - 16
SC943-88	1/2	3/4 - 16
SC943-810	1/2	7/8 - 14
SC943-1212	3/4	1-1/16 - 12



**Male
O-Ring Boss
(Working Swivel)**

PART No.	Hose I.D.	O-Ring
SC943SW-68	3/8	3/4 - 16
SC943SW-88	1/2	3/4 - 16



**Male O-Ring
Face Seal**

PART No.	Hose I.D.	ORFS
SC953-44	1/4	9/16 - 18
SC953-66	3/8	11/16 - 16
SC953-68	3/8	13/16 - 16
SC953-88	1/2	13/16 - 16
SC953-810	1/2	1 - 14
SC953-1010	5/8	1 - 14
SC953-1212	3/4	1-3/16 - 12



**Female
O-Ring Face
Seal (Swivel)**

PART No.	Hose I.D.	ORFS
SC958-44	1/4	9/16 - 18
SC958-46	1/4	11/16 - 16
SC958-48	1/4	13/16 - 16
SC958-66	3/8	11/16 - 16
SC958-68	3/8	13/16 - 16
SC958-88	1/2	13/16 - 16
SC958-810	1/2	1 - 14
SC958-1010	5/8	1 - 14
SC958-1012	5/8	1-3/16 - 12
SC958-1210	3/4	1 - 14
SC958-1212	3/4	1-3/16 - 12
SC958-1616	1	1-7/16 - 12



**Tube Repair
(Flareless)**

PART No.	Hose I.D.	Tube
SC967-65	3/8	5/16
SC967-66	3/8	3/8
SC967-88	1/2	1/2
SC967-810	1/2	5/8
SC967-1212	3/4	3/4



**Splicer
Hose Barb**

PART No.	Hose I.D.
SC929-44	1/4
SC929-66	3/8
SC929-88	1/2
SC929-1212	3/4

STEEL ONE PIECE CRIMP HOSE ENDS

(BITE-TO-THE-WIRE)

FOR USE WITH S.A.E. 100R1-AT, 100R2-AT, T1SN, T2SN, 100R16, 100R16LT, AND 100R17LT HOSE

ITEMS SHOWN ARE INTERCHANGEABLE WITH PARKER "43" SERIES COUPLINGS.
(THEY ARE FAIRVIEW EQUIVALENTS AND ARE NOT PARKER ORIGINAL PRODUCT.)

HOSE ENDS



**British Standard
Pipe Parallel Female
(Swivel) (BSPP)**

PART No.	Hose I.D.	Pipe
SC931BSP-44	1/4	1/4 - 19
SC931BSP-66	3/8	3/8 - 19
SC931BSP-88	1/2	1/2 - 14



**Female 30° JIS Flare
Parallel Pipe Female
(Swivel)**

PART No.	Hose I.D.	Pipe
SC931JIS-66	3/8	3/8



**Metric
(Light) Female
(Swivel)**

PART No.	Hose I.D.	Tube	Metric
SC931LM-4-14	1/4	10 MM	M16X1.5
SC931LM-4-16	1/4	10 MM	M16X1.5
SC931LM-6-16	3/8	10 MM	M16X1.5
SC931LM-6-18	3/8	12 MM	M18X1.5
SC931LM-8-22	1/2	15 MM	M22X1.5
SC931LM-12-30	3/4	25 MM	M30X1.5



**90° Elbow
Male Pipe
(Working Swivel)**

PART No.	Hose I.D.	Pipe
SC916SW-4B	1/4	1/4
SC916SW-6C	3/8	3/8
SC916SW-8D	1/2	1/2



**90° Elbow
Male O-Ring Boss
(Working Swivel)**

PART No.	Hose I.D.	O-Ring
SC936-66	3/8	9/16 - 18
SC936-68	3/8	3/4 - 16
SC936-88	1/2	3/4 - 16
SC936-810	1/2	7/8 - 14



**90° Elbow
S.A.E. 37°
Female Flare (Swivel)**

PART No.	Hose I.D.	Tube
SC939-44	1/4	1/4
SC939-46	1/4	3/8
SC939-64	3/8	1/4
SC939-66	3/8	3/8
SC939-68	3/8	1/2
SC939-88	1/2	1/2
SC939-810	1/2	5/8
SC939-1010	5/8	5/8
SC939-1212	3/4	3/4
SC939-1616	1	1
SC939-2020	1-1/4	1-1/4
SC939-2424	1-1/2	1-1/2



**90° Elbow
(Long Style)
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC939L-44	1/4	1/4
SC939L-46	1/4	3/8
SC939L-66	3/8	3/8
SC939L-88	1/2	1/2
SC939L-810	1/2	5/8
SC939L-1212	3/4	3/4
SC939L-1616	1	1



**90° Elbow
Metric
(Light) Female
(Swivel)**

PART No.	Hose I.D.	Tube	Metric
SC939LM-4-14	1/4	10 MM	M16X1.5
SC939LM-6-16	3/8	10 MM	M16X1.5
SC939LM-6-18	3/8	12 MM	M18X1.5
SC939LM-8-22	1/2	15 MM	M22X1.5
SC939LM-16-36	1	30 MM	M36X2.0



**90° Elbow
S.A.E. 45°
Inverted Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC931-44	1/4	1/4
SC931-66	3/8	3/8



**90° Elbow
Female O-Ring
Face Seal
(Swivel)**

PART No.	Hose I.D.	ORFS
SC959-44	1/4	9/16 - 18
SC959-46	1/4	11/16 - 16
SC959-66	3/8	11/16 - 16
SC959-68	3/8	13/16 - 16
SC959-88	1/2	13/16 - 16
SC959-810	1/2	1 - 14
SC959-1010	5/8	1 - 14
SC959-1212	3/4	1-3/16 - 12
SC959-1616	1	1-7/16 - 12



**90° Elbow
British Standard Pipe
Parallel Female
(Swivel) (BSPP)**

PART No.	Hose I.D.	Pipe
SC939BSP-44	1/4	1/4 - 19
SC939BSP-66	3/8	3/8 - 19
SC939BSP-88	1/2	1/2 - 14
SC939BSP-1212	3/4	3/4 - 14
SC939BSP-1616	1	1 - 11



**45° Elbow
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC940-44	1/4	1/4
SC940-46	1/4	3/8
SC940-66	3/8	3/8
SC940-68	3/8	1/2
SC940-88	1/2	1/2
SC940-810	1/2	5/8
SC940-1010	5/8	5/8
SC940-1212	3/4	3/4
SC940-1616	1	1



**45° ELBOW
British Standard
Pipe Parallel
Female
(Swivel) (BSPP)**

PART No.	Hose I.D.	Pipe
SC940BSP-44	1/4	1/4 - 19
SC940BSP-66	3/8	3/8 - 19
SC940BSP-88	1/2	1/2 - 14
SC940BSP-1212	3/4	3/4 - 14
SC940BSP-1616	1	1 - 11



**45° Elbow
Metric
(Light) Female
(Swivel)**

PART No.	Hose I.D.	Tube	Metric
SC940LM-4-14	1/4	10 MM	M16X1.5
SC940LM-6-18	3/8	12 MM	M18X1.5
SC940LM-8-22	1/2	15 MM	M22X1.5



**45° Elbow
Female O-Ring
Face Seal (Swivel)**

PART No.	Hose I.D.	ORFS
SC950-44	1/4	9/16 - 18
SC950-46	1/4	11/16 - 16
SC950-66	3/8	11/16 - 16
SC950-68	3/8	13/16 - 16
SC950-88	1/2	13/16 - 16
SC950-810	1/2	1 - 14
SC950-1010	5/8	1 - 14
SC950-1212	3/4	1-3/16 - 12
SC950-1616	1	1-7/16 - 12

STEEL ONE PIECE CRIMP HOSE ENDS

(COMPRESSION STYLE)



USE WITH S.A.E. 100R1-AT, 100R2-AT, T1SN, T2SN, 100R3, 100R4, AND 100R16 HOSE

ITEMS SHOWN ARE INTERCHANGEABLE WITH WEATHERHEAD "U" SERIES COUPLINGS.
(THEY ARE FAIRVIEW EQUIVALENTS AND ARE NOT WEATHERHEAD ORIGINAL PRODUCT.)



Male Pipe

PART No.	Hose I.D.	Pipe
SC625-4A	1/4	1/8
SC625-4B	1/4	1/4
SC625-4C	1/4	3/8
SC625-4D	1/4	1/2
SC625-6B	3/8	1/4
SC625-6C	3/8	3/8
SC625-6D	3/8	1/2
SC625-8C	1/2	3/8
SC625-8D	1/2	1/2
SC625-8E	1/2	3/4
SC625-10D	5/8	1/2
SC625-10E	5/8	3/4
SC625-12D	3/4	1/2
SC625-12E	3/4	3/4
SC625-12H	3/4	1
SC625-16E	1	3/4
SC625-16H	1	1
SC625-20J	1-1/4	1-1/4



**Male Pipe
(Working Swivel)**

PART No.	Hose I.D.	Pipe
SC625SW-4B	1/4	1/4
SC625SW-6B	3/8	1/4
SC625SW-6C	3/8	3/8
SC625SW-6D	3/8	1/2
SC625SW-8D	1/2	1/2
SC625SW-12E	3/4	3/4
SC625SW-16H	1	1



Female Pipe

PART No.	Hose I.D.	Pipe
SC626-4A	1/4	1/8
SC626-4B	1/4	1/4
SC626-6B	3/8	1/4
SC626-6C	3/8	3/8
SC626-8D	1/2	1/2



**S.A.E. 37°
Male Flare**

PART No.	Hose I.D.	Pipe
SC637-44	1/4	1/4
SC637-45	1/4	5/16
SC637-46	1/4	3/8
SC637-66	3/8	3/8
SC637-68	3/8	1/2
SC637-610	3/8	5/8
SC637-88	1/2	1/2
SC637-810	1/2	5/8
SC637-812	1/2	3/4
SC637-108	5/8	1/2
SC637-1010	5/8	5/8
SC637-1012	5/8	3/4
SC637-1212	3/4	3/4
SC637-1216	3/4	1
SC637-1616	1	1



**Female
N.P.S.M. Pipe
(Swivel)**

PART No.	Hose I.D.	Pipe
SC626SW-4B	1/4	1/4
SC626SW-6C	3/8	3/8
SC626SW-6D	3/8	1/2
SC626SW-8D	1/2	1/2
SC626SW-12E	3/4	3/4
SC626SW-16H	1	1



**S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC638-44	1/4	1/4
SC638-45	1/4	5/16
SC638-46	1/4	3/8
SC638-64	3/8	1/4
SC638-66	3/8	3/8
SC638-68	3/8	1/2
SC638-610	3/8	5/8
SC638-86	1/2	3/8
SC638-88	1/2	1/2
SC638-810	1/2	5/8
SC638-812	1/2	3/4
SC638-1010	5/8	5/8
SC638-1012	5/8	3/4
SC638-1210	3/4	5/8
SC638-1212	3/4	3/4
SC638-1214	3/4	7/8
SC638-1216	3/4	1
SC638-1616	1	1
SC638-2020	1-1/4	1-1/4



**S.A.E. 45°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC628-66	3/8	3/8
SC628-1212	3/4	3/4



**S.A.E. 45°
Inverted Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC635-44	1/4	1/4
SC635-65	3/8	5/16
SC635-66	3/8	3/8
SC635-88	1/2	1/2



**Male
O-Ring
Boss**

PART No.	Hose I.D.	O-Ring
SC643-66	3/8	9/16 - 18
SC643-68	3/8	3/4 - 16
SC643-610	3/8	7/8 - 14
SC643-88	1/2	3/4 - 16
SC643-810	1/2	7/8 - 14
SC643-1212	3/4	1-1/16 - 12



**Male
O-Ring Boss
(Swivel)**

PART No.	Hose I.D.	O-Ring
SC643SW-68	3/8	3/4 - 16
SC643SW-88	1/2	3/4 - 16
SC643SW-810	1/2	7/8 - 14



**Male
O-Ring Face
Seal**

PART No.	Hose I.D.	ORFS
SC653-66	3/8	11/16 - 16
SC653-68	3/8	13/16 - 16
SC653-88	1/2	13/16 - 16
SC653-810	1/2	1 - 14



**Female O-Ring
Face Seal
(Swivel)**

PART No.	Hose I.D.	ORFS
SC658-44	1/4	9/16 - 18
SC658-46	1/4	11/16 - 16
SC658-66	3/8	11/16 - 16
SC658-68	3/8	13/16 - 16
SC658-88	1/2	13/16 - 16
SC658-810	1/2	1 - 14
SC658-1010	5/8	1 - 14
SC658-1212	3/4	1-3/16 - 12
SC658-1616	1	1-7/16 - 12

STEEL ONE PIECE CRIMP HOSE ENDS

(COMPRESSION STYLE)

USE WITH S.A.E. 100R1-AT, 100R2-AT, T1SN, T2SN, 100R3, 100R4, AND 100R16 HOSE

ITEMS SHOWN ARE INTERCHANGEABLE WITH WEATHERHEAD "U" SERIES COUPLINGS.
(THEY ARE FAIRVIEW EQUIVALENTS AND ARE NOT WEATHERHEAD ORIGINAL PRODUCT.)



**Tube Repair
(Flareless)**

PART No.	Hose I.D.	Tube
SC667-44	1/4	1/4
SC667-65	3/8	5/16
SC667-66	3/8	3/8
SC667-88	1/2	1/2
SC667-810	1/2	5/8
SC667-1212	3/4	3/4



Hose Splicer

PART No.	Hose I.D.
SC629-44	1/4
SC629-66	3/8
SC629-88	1/2
SC629-1212	3/4
SC629-1616	1



**British Standard
Pipe Parallel
Female
(Swivel) (BSPP)**

PART No.	Hose I.D.	Pipe
SCK631BSP-66	3/8	3/8 - 19
SCK631BSP-88	1/2	1/2 - 14



**90° Elbow
Male Pipe
(Working Swivel)**

PART No.	Hose I.D.	Pipe
SC616SW-4B	1/4	1/4
SC616SW-6C	3/8	3/8
SC616SW-8D	1/2	1/2



**90° Elbow
Male O-Ring
Boss
(Working Swivel)**

PART No.	Hose I.D.	O-Ring
SC636-66	3/8	9/16 - 18
SC636-68	3/8	3/4 - 16
SC636-610	3/8	7/8 - 14
SC636-88	1/2	3/4 - 16
SC636-810	1/2	7/8 - 14



**90° Elbow
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC639-44	1/4	1/4
SC639-46	1/4	3/8
SC639-66	3/8	3/8
SC639-68	3/8	1/2
SC639-88	1/2	1/2
SC639-810	1/2	5/8
SC639-1010	5/8	5/8
SC639-1212	3/4	3/4
SC639-1616	1	1



**90° Elbow
(Long Style)
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC639L-44	1/4	1/4
SC639L-66	3/8	3/8
SC639L-88	1/2	1/2
SC639L-1212	3/4	3/4



**90° Elbow
S.A.E. 45°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC641-66	3/8	3/8



**90° Elbow
S.A.E. 45°
Inverted
Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC631-44	1/4	1/4
SC631-66	3/8	3/8
SC631-88	1/2	1/2



**90° Elbow
British Standard
Parallel Pipe
Female
(Swivel) (BSPP)**

PART No.	Hose I.D.	BSPP
SCK639BSP-66	3/8	3/8 - 19
SCK639BSP-88	1/2	1/2 - 14



**90° Elbow
Female O-Ring
Face Seal
(Swivel)**

PART No.	Hose	ORFS
SC659-44	1/4	9/16 - 18
SC659-46	1/4	11/16 - 16
SC659-66	3/8	11/16 - 16
SC659-68	3/8	13/16 - 16
SC659-88	1/2	13/16 - 16
SC659-810	1/2	1 - 14
SC659-1010	5/8	1 - 14
SC659-1212	3/4	1-3/16 - 12
SC659-1616	1	1-7/16 - 12



**45° Elbow
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC640-44	1/4	1/4
SC640-66	3/8	3/8
SC640-68	3/8	1/2
SC640-88	1/2	1/2
SC640-810	1/2	5/8
SC640-1212	3/4	3/4
SC640-1616	1	1



**45° Elbow
S.A.E. 45°
Inverted Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC632-44	1/4	1/4
SC632-66	3/8	3/8



**45° Elbow
Female O-Ring
Face Seal
(Swivel)**

PART No.	Hose I.D.	ORFS
SC650-44	1/4	9/16 - 18
SC650-66	3/8	11/16 - 16
SC650-88	1/2	13/16 - 16
SC650-810	1/2	1 - 14

STEEL ONE PIECE CRIMP HOSE ENDS

(BITE-TO-THE-WIRE)



FOR USE WITH S.A.E. 100R12 HOSE

ITEMS SHOWN ARE INTERCHANGEABLE WITH PARKER "71" SERIES COUPLINGS.
(THEY ARE FAIRVIEW EQUIVALENTS AND ARE NOT PARKER ORIGINAL PRODUCT.)

HOSE ENDS



Male Pipe

PART No.	Hose I.D.	Pipe
SCT925MS-6D	3/8	1/2
SCT925MS-8D	1/2	1/2
SCT925MS-12E	3/4	3/4
SCT925MS-16H	1	1
SCT925MS-20J	1-1/4	1-1/4
SCT925MS-24K	1-1/2	1-1/2
SCT925MS-32M	2	2



**S.A.E. 37°
Male Flare**

PART No.	Hose I.D.	Tube
SCT937MS-68	3/8	1/2
SCT937MS-88	1/2	1/2
SCT937MS-810	1/2	5/8
SCT937MS-1212	3/4	3/4
SCT937MS-1616	1	1
SCT937MS-2020	1-1/4	1-1/4



**S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SCT938MS-88	1/2	1/2
SCT938MS-810	1/2	5/8
SCT938MS-1212	3/4	3/4
SCT938MS-1216	3/4	1
SCT938MS-1616	1	1
SCT938MS-2020	1-1/4	1-1/4
SCT938MS-2424	1-1/2	1-1/2



**Female O-Ring
Face Seal
(Swivel)**

PART No.	Hose I.D.	ORFS
SCT958MS-88	1/2	13/16 - 16
SCT958MS-810	1/2	1 - 14
SCT958MS-1212	3/4	1-3/16 - 12
SCT958MS-1616	1	1-7/16 - 12
SCT958MS-2020	1-1/4	1-11/16 - 12



**Split Flange
Code 61**

PART No.	Hose I.D.	Flange
SCT900MS-1212	3/4	3/4
SCT900MS-1616	1	1
SCT900MS-2020	1-1/4	1-1/4

Code 62 Available SCT900MS62 in series.



**45° Elbow S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SCT940MS-68	3/8	1/2
SCT940MS-88	1/2	1/2
SCT940MS-810	1/2	5/8
SCT940MS-1212	3/4	3/4
SCT940MS-1216	3/4	1
SCT940MS-1616	1	1
SCT940MS-2020	1-1/4	1-1/4
SCT940MS-2424	1-1/2	1-1/2



**45° Elbow BSP
Parallel Female
60° Cone (Swivel)**

PART No.	Hose I.D.	Thread
SCT940MSBSP-66	3/8	3/8 -19
SCT940MSBSP-88	1/2	1/2 -14
SCT940MSBSP-1212	3/4	3/4 -14
SCT940MSBSP-1616	1	1 -11
SCT940MSBSP-2020	1-1/4	1-1/4 -11



**45° Elbow
Metric (Light)
Female (Swivel)**

PART No.	Hose I.D.	Thread
SCT940MSLM-6-20	3/8	LM20x1.5
SCT940MSLM-8-24	1/2	LM24x1.5
SCT940MSLM-12-36	3/4	LM36x2.0
SCT940MSLM-16-42	1	LM42x2.0



**45° Elbow
Split Flange
Code 61**

PART No.	Hose I.D.	Flange
SCT945MS-1616	1	1
SCT945MS-2020	1-1/4	1-1/4

Code 62 Available SCT945MS62 in series.



**45° Elbow
Female O-Ring
Face Seal
(Swivel)**

PART No.	Hose I.D.	ORFS
SCT950MS-88	1/2	13/16 - 16
SCT950MS-1212	3/4	1-3/16 - 12
SCT950MS-1616	1	1-7/16 - 12



**90° Elbow
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SCT939MS-68	3/8	1/2
SCT939MS-88	1/2	1/2
SCT939MS-810	1/2	5/8
SCT939MS-1212	3/4	3/4
SCT939MS-1616	1	1
SCT939MS-2020	1-1/4	1-1/4
SCT939MS-2424	1-1/2	1-1/2



**90° Elbow BSP
Parallel Female
60° Cone
(Swivel)**

PART No.	Hose I.D.	Thread
SCT939MSBSP-66	3/8	3/8 -19
SCT939MSBSP-88	1/2	1/2 -14
SCT939MSBSP-1212	3/4	3/4 -14
SCT939MSBSP-1616	1	1 -11
SCT939MSBSP-2020	1-1/4	1-1/4 -11
SCT939MSBSP-2424	1-1/2	1-1/2 -11



**90° Elbow
Metric (Light)
Female (Swivel)**

PART No.	Hose I.D.	ORFS
SCT939MSLM-6-20	3/8	LM20x1.5
SCT939MSLM-8-24	1/2	LM24x1.5
SCT939MSLM-12-36	3/4	LM36x2.0
SCT939MSLM-16-42	1	LM42x2.0



**90° Elbow
Female O-Ring
Face Seal
(Swivel)**

PART No.	Hose I.D.	ORFS
SCT959MS-68	3/8	13/16 - 16
SCT959MS-88	1/2	13/16 - 16
SCT959MS-810	1/2	1 - 14
SCT959MS-1212	3/4	1-3/16 - 12
SCT959MS-1616	1	1-7/16 - 12



**90° Elbow
Split Flange
Code 61**

PART No.	Hose I.D.	Flange
SCT990MS-1212	3/4	3/4
SCT990MS-1216	3/4	1
SCT990MS-1616	1	1
SCT990MS-1620	1	1-1/4
SCT990MS-2020	1-1/4	1-1/4

Code 62 Available SCT990MS62 in series.



**British Standard
Pipe Parallel
Female 60° Cone
(Swivel)**

PART No.	Hose I.D.	Thread
SCT931MSBSP-66	3/8	3/8 -19
SCT931MSBSP-88	1/2	1/2 -14
SCT931MSBSP-1212	3/4	3/4 -14
SCT931MSBSP-1616	1	1 -11
SCT931MSBSP-2020	1-1/4	1-1/4 -11
SCT931MSBSP-2424	1-1/2	1-1/2 -11
SCT931MSBSP-3232	2	2 -11



**Metric (Light)
Female (Swivel)**

PART No.	Hose I.D.	Thread
SCT931MSLM-6-20	3/8	LM20x1.5
SCT931MSLM-8-24	1/2	LM24x1.5
SCT931MSLM-12-36	3/4	LM36x2.0
SCT931MSLM-16-36	1	LM36x2.0

HYDRAULIC CRIMP INSTRUCTIONS

1.



1. Cut hose to length.

Using a cut-off saw or cut-off wheel, cut the hose square to the desired length. Clean hose with air pressure to remove dust particles.


2.



2. Mark insertion depth.

Find the insertion depth by measuring the distance from the end of the ferrule to the shoulder of the ferrule. Using a ruler or by holding the hose next to the ferrule, mark a line on the hose indicating the insertion depth.

3.

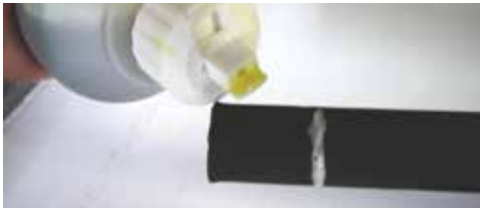

3. Lubricate hose with hose assembly lubricant.

Place a small amount of lubricant on the outer and inner tube portion of the hose. Only use approved hose assembly lubricant. Other non-approved lubricants or oil products may not be compatible with hose material.

4.



4. Insert fitting into hose.

Push the fitting into the hose until the insertion depth mark lines up with the end of the ferrule.

5.



5. Insert Hose into crimping machine.

When crimping Fairview's SC600 Series, align the dots on the ferrule with the top of the dies. (figure 1)

When crimping Fairview's SC500, SC900 and SCT900MS Series, align the top shoulder of the ferrule with the top of the dies and crimp the entire ferrule. (figure 2)

6.



6. Check Crimp Diameter.

After crimping verify crimp diameter is within specifications using calipers. Place caliper on the lower or smooth portion of the ferrule. Do not place calipers on any raised ridges on the ferrule. Measure the top, middle and bottom of the ferrule to ensure crimp diameter is correct and uniform.

All hydraulic assemblies should be pressure tested prior to use.

STEEL HOSE ENDS

LUBE HOSE ENDS FOR USE WITH S.A.E. 100R7 HOSE



Male Pipe

PART No.	Hose I.D.	Pipe
SC725-2A	1/8	1/8
SC725-3A	3/16	1/8
SC725-4B	1/4	1/4



**Male Pipe
(Swivel)**

PART No.	Hose I.D.	Pipe
SC725SW-2A	1/8	1/8



**S.A.E.
Female
Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC738-24	1/8	1/4
SC738-34	3/16	1/4
SC738-44	1/4	1/4
SC738-46	1/4	3/8

STEEL REUSABLE ENDS



**S.A.E.
Female
Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SR738-24	1/8	1/4



**Male Pipe
(Swivel)**

PART No.	Hose I.D.	Pipe
SR725SW-2A	1/8	1/8

CRIMP SPECIFICATIONS FOR PERMANENTLY ATTACHED HOSE ENDS

All hydraulic assemblies should be pressure tested prior to use.

NOTE: Fairview's Accutek® 100R7 hose ends are not to be swaged.

PART No.	Description	Dash Size	Hose I.D.	Crimp DIA. SC700 Series
HR7-2	S.A.E. 100R7	-2	1/8	0.3650
HR7-3	S.A.E. 100R7	-3	3/16	0.5100
HR7-4	S.A.E. 100R7	-4	1/4	0.5550

IMPORTANT: This reference chart is provided by Fairview Ltd. for convenience only. The information contained herein cannot be guaranteed because conditions of use are beyond our control, such as variances in hose outside diameters. This document should not be substituted for the judgement of a qualified professional. Assemblies should be tested prior to installation. The user of this information assumes all risk associated with its use.

STEEL HOSE INSERTS



**Hose Insert
to Male Pipe**

PART No.	Hose I.D.	Pipe
S1125-10C	5/8	3/8
S1125-10D	5/8	1/2
S1125-12E	3/4	3/4



**Hose Insert
to Male O-Ring**

PART No.	Hose I.D.	O-Ring
SO1125-6	3/8	9/16 - 18
SO1125-12	3/4	1-1/16 - 12
SO1125-16	1	1-5/16 - 12
SO1125-1612	1	1-1/16 - 12
SO1125-20	1-1/4	1-5/8 - 12



**90° Elbow
Hose Insert
to Male Pipe**

PART No.	Hose I.D.	Pipe
S1139-10D	5/8	1/2
S1139-12E	3/4	3/4
S1139-16H	1	1



**45° Elbow
Hose Insert
to Male O-Ring**

PART No.	Hose I.D.	O-Ring
SO1140-16	1	1-5/16 - 12



**45° Elbow
Hose Insert
to Male Pipe**

PART No.	Hose I.D.	Pipe
S1140-10D	5/8	1/2
S1140-12E	3/4	3/4



**90° Elbow
Hose Insert
to Male O-Ring**

PART No.	Hose I.D.	O-Ring
SO1139-4	1/4	7/16 - 20
SO1139-6	3/8	9/16 - 18
SO1139-8	1/2	3/4 - 16
SO1139-16	1	1-5/16 - 12
SO1139-1612	1	1-1/16 - 12

STEEL REUSABLE HOSE ENDS

FOR USE WITH: S.A.E. 100R1-AT



**Male
Pipe**



**S.A.E. 37°
Female
Flare
(Swivel)**

PART No.	Hose I.D.	Pipe
SRT125-4B	1/4	1/4
SRT125-6C	3/8	3/8
SRT125-8D	1/2	1/2

PART No.	Hose I.D.	Tube
SRT138-44 *	1/4	1/4
SRT138-66 *	3/8	3/8
SRT138-88 *	1/2	1/2

* Item is available in stainless steel.
Change prefix to "SS" (eg. SSRT238-44)

FOR USE WITH: S.A.E. 100R2-AT



**Male
Pipe**



**S.A.E. 37°
Female
Flare
(Swivel)**


PART No.	Hose I.D.	Pipe
SRT225-4B	1/4	1/4
SRT225-6C	3/8	3/8
SRT225-8D	1/2	1/2

PART No.	Hose I.D.	Tube
SRT238-44 *	1/4	1/4
SRT238-66 *	3/8	3/8
SRT238-88 *	1/2	1/2
SRT238-1212 *	3/4	3/4

* Item is available in stainless steel.
Change prefix to "SS" (eg. SSRT238-44)

ASSEMBLY INSTRUCTIONS

FOR NON-SKIVE S.A.E. 100R1, 100R2 & 100R5 STEEL REUSABLE HOSE ENDS




STEP 1

Using a fine-toothed saw or cut-off wheel, cut the hose square to the desired length. Clean hose with air pressure to remove dust particles.




STEP 2

Dip the end of the hose into a lubricant. Use a light viscosity oil (S.A.E. 10 or 20)




STEP 3

Turn the hose counterclockwise into the socket until the hose bottoms.



STEP 4

Dip the nipple end into a lubricant. Refer to step 2. (Light weight oil S.A.E. 10 or 20).



STEP 5

Turn the stem clockwise into the hose and socket until the stem hex shoulders against the ferrule.

CAUTION: Larger diameter hose is subject to "Neck Down" during cut-off operations. This condition does not allow the nipple to be pushed into the hose. When this happens, that portion of the hose I.D. must be chamfered with a sharp knife, just enough to allow the nipple to be pushed into the hose. Be sure to remove the cut-off rubber from the assembly.

IMPORTANT: Back the hose off at least 1/2 turn, check to be sure that there is a gap of 1/32" to 1/16" between the hose end and the shoulder on the inside of the socket. Failure to provide this gap may cause cracking of the socket.

ONE PIECE CRIMP ENDS FOR PTFE HOSE FOR USE WITH S.A.E. 100R14 SMOOTH BORE PTFE HOSE ALL WETTED PARTS ARE BRASS.



Male Pipe



**S.A.E. 37°
Female
Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SCT425-4A	1/4	1/8
SCT425-4B	1/4	1/4
SCT425-6C	3/8	3/8
SCT425-8D	1/2	1/2
SCT425-10D	5/8	1/2
SCT425-12E	3/4	3/4

PART No.	Nominal Hose I.D.	Tube
SCT438-44	1/4	1/4
SCT438-66	3/8	3/8
SCT438-88	1/2	1/2
SCT438-1010	5/8	5/8
SCT438-1212	3/4	3/4

REUSABLE END FITTINGS FOR PTFE HOSE



**FOR USE WITH S.A.E. 100R14 SMOOTH BORE PTFE HOSE
ALL WETTED PARTS ARE BRASS**



Male Pipe

PART No.	Nominal Hose I.D.	Pipe
SR425-4A	1/4	1/8
SR425-4B	1/4	1/4
SR425-6B	3/8	1/4
SR425-6C	3/8	3/8
SR425-8D	1/2	1/2
SR425-10D	5/8	1/2
SR425-12E	3/4	3/4



**Female Swivel
37° S.A.E.
Flare**

PART No.	Nominal Hose I.D.	Tube
SR438-44	1/4	1/4
SR438-55	5/16	5/16
SR438-66	3/8	3/8
SR438-88	1/2	1/2
SR438-1010	5/8	5/8
SR438-1212	3/4	3/4



**Replacement
Sleeve**

PART No.	Nominal Hose I.D.
SR4S-4	1/4
SR4S-6	3/8
SR4S-8	1/2
SR4S-10	5/8
SR4S-12	3/4



**Female Swivel
45° S.A.E.
Flare**

PART No.	Nominal Hose I.D.	Tube
SR428-44	1/4	1/4
SR428-55	5/16	5/16
SR428-66	3/8	3/8
SR428-88	1/2	1/2
SR428-1010	5/8	5/8
SR428-1212	3/4	3/4




**D.O.T.
Air Brake
Compression**

PART No.	Nominal Hose I.D.	Tube
SR468-1010	5/8	5/8


**STAINLESS STEEL AVAILABLE
UPON REQUEST (SSR4 Series •)**

PTFE REUSABLE FITTINGS ASSEMBLY INSTRUCTIONS




STEP 1

Wrap masking tape around hose at desired length and cut square with fine-tooth hack saw. Trim any loose wires and slip two shells on back to back, placing them about 3 From each end of hose.




STEP 4

Lubricate stem and shell threads. Push hose onto stem with twisting motion until hose seats against stem chamfer. Push shell forward and hand start threading.




STEP 2

Use a flat surface to push the sleeve over the tube underneath the wire until the tube stock butts against the inside shoulder of the sleeve.



STEP 5

Wrench tighten stem until clearance with shell is 1/32" or less. Clean, inspect and test.



STEP 3

Mount stem hex in vise. Work the hose bore over the stem to size tube.

STEEL ONE PIECE CRIMP HOSE ENDS

FOR USE WITH S.A.E. 100R5, S.A.E. J1402 HOSE

ITEMS SHOWN ARE INTERCHANGEABLE WITH WEATHERHEAD "069E" SERIES COUPLINGS.
(THEY ARE FAIRVIEW EQUIVALENTS AND ARE NOT WEATHERHEAD ORIGINAL PRODUCT.)



Male Pipe

PART No.	Nominal Hose I.D.	Pipe
SCW525-4B	1/4	1/4
SCW525-6B	3/8	1/4
SCW525-6C	3/8	3/8
SCW525-8C	1/2	3/8
SCW525-8D	1/2	1/2
SCW525-10D	5/8	1/2
SCW525-12E	3/4	3/4
SCW525-16H	1	1
SCW525-20J	1-1/4	1-1/4
SCW525-32M	2	2



**S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SCW538-44	1/4	1/4
SCW538-66	3/8	3/8
SCW538-88	1/2	1/2
SCW538-1010	5/8	5/8
SCW538-1212	3/4	3/4
SCW538-1616	1	1
SCW538-2020	1-1/4	1-1/4
SCW538-3232	2	2



**90° Elbow
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SCW539-44	1/4	1/4
SCW539-66	3/8	3/8
SCW539-88	1/2	1/2
SCW539-1212	3/4	3/4
SCW539-1616	1	1



**S.A.E. 45°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SCW528-66	3/8	3/8
SCW528-1212	3/4	3/4



**45° Elbow
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SCW540-1212	3/4	3/4
SCW540-1616	1	1



**90° Elbow
S.A.E. 45°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SCW541-66	3/8	3/8

**CONTACT US
FOR CUSTOM MADE HYDRAULIC HOSE ASSEMBLIES
OR TO DISCUSS OUR HOSE CRIMPER PROGRAMS**



STEEL REUSABLE HOSE ENDS

FOR USE WITH S.A.E. 100R5, S.A.E. J1402 HOSE



Male Pipe

PART No.	Nominal Hose I.D.	Pipe
SR525-4A	1/4	1/8
SR525-4B	1/4	1/4
SR525-5B	5/16	1/4
SR525-6B	3/8	1/4
SR525-6C	3/8	3/8
SR525-8C	1/2	3/8
SR525-8D	1/2	1/2
SR525-10D	5/8	1/2
SR525-12E	3/4	3/4
SR525-16H	1	1
SR525-20J	1-1/4	1-1/4
SR525-24K	1-1/2	1-1/2
SR525-32M	2	2



**S.A.E. 45°
Male Flare**

PART No.	Nominal Hose I.D.	Tube
SR527-44	1/4	1/4
SR527-66	3/8	3/8
SR527-1010	5/8	5/8
SR527-1212	3/4	3/4



**S.A.E. 37°
Male Flare**

PART No.	Nominal Hose I.D.	Tube
SR537-44	1/4	1/4
SR537-66	3/8	3/8
SR537-88	1/2	1/2
SR537-1010	5/8	5/8
SR537-1212	3/4	3/4
SR537-1616	1	1



**S.A.E. 45°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SR528-44	1/4	1/4
SR528-55	5/16	5/16
SR528-66	3/8	3/8
SR528-88	1/2	1/2
SR528-1010	5/8	5/8
SR528-1212	3/4	3/4



**S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SR538-44	1/4	1/4
SR538-55	5/16	5/16
SR538-66	3/8	3/8
SR538-88	1/2	1/2
SR538-1010	5/8	5/8
SR538-1212	3/4	3/4
SR538-1616	1	1
SR538-2020	1-1/4	1-1/4
SR538-2424	1-1/2	1-1/2
SR538-3232	2	2



**S.A.E. 45°
Inverted
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SR535-66	3/8	3/8



**90° Elbow
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SR539-44	1/4	1/4
SR539-55	5/16	5/16
SR539-66	3/8	3/8
SR539-88	1/2	1/2
SR539-1010	5/8	5/8
SR539-1212	3/4	3/4
SR539-1616	1	1
SR539-2020	1-1/4	1-1/4



**90° Elbow
S.A.E. 45°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SR541-44	1/4	1/4
SR541-66	3/8	3/8
SR541-1212	3/4	3/4



**45° Elbow
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SR540-44	1/4	1/4
SR540-66	3/8	3/8
SR540-88	1/2	1/2
SR540-1010	5/8	5/8
SR540-1212	3/4	3/4
SR540-1616	1	1

PERMANENTLY ATTACHED HOSE ENDS

**FOR SAE 100R7, 100R8 AND 100R18 THERMOPLASTIC HOSE
NOT FOR USE ON REDUCED OD S.A.E. 100R7**

HOSE ENDS



Male Pipe

PART No.	Hose I.D.	Pipe
SCTP25-2A	1/8	1/8
SCTP25-3A	3/16	1/8
SCTP25-3B	3/16	1/4
SCTP25-4A	1/4	1/8
SCTP25-4B	1/4	1/4
SCTP25-4C	1/4	3/8
SCTP25-5B	5/16	1/4
SCTP25-6C	3/8	3/8
SCTP25-8D	1/2	1/2
SCTP25-12E	3/4	3/4
SCTP25-16H	1	1



**Male Pipe
(Working Swivel)**

PART No.	Hose I.D.	Pipe
SCTP25SW-4B	1/4	1/4
SCTP25SW-6C	3/8	3/8
SCTP25SW-8D	1/2	1/2

**All hydraulic assemblies should
be pressure tested prior to use.**



**Female
NPSM Pipe
(Swivel)**

PART No.	Hose I.D.	Pipe
SCTP26SW-3B	3/16	1/4
SCTP26SW-4B	1/4	1/4
SCTP26SW-6B	3/8	3/8



**J.I.C. 37°
Male Flare**

PART No.	Hose I.D.	Tube
SCTP37-66	3/8	3/8



**S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SCTP38-24	1/8	1/4
SCTP38-34	3/16	1/4
SCTP38-44	1/4	1/4
SCTP38-45	1/4	5/16
SCTP38-46	1/4	3/8
SCTP38-66	3/8	3/8
SCTP38-68	3/8	1/2
SCTP38-88	1/2	1/2
SCTP38-1212	3/4	3/4



**90° Elbow
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SCTP39-34	3/16	1/4
SCTP39-45	1/4	5/16
SCTP39-66	3/8	3/8
SCTP39-88	1/2	1/2



**45° Elbow
J.I.C. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SCTP40-66	3/8	3/8



**Female O-Ring
Face Seal
(Swivel)**

PART No.	Hose I.D.	ORFS
SCTP58-66	3/8	11/16 - 16

CRIMP SPECIFICATIONS FOR PERMANENTLY ATTACHED HOSE ENDS (FOR USE WITH ALL HR7, HR8 & HR18 HOSE TYPES)

Dash Size	Inside Diameter (IN.)	Crimp Outside Diameter (IN.)
-2	1/8	0.365
-3	3/16	0.500
-4	1/4	0.555
-5	5/16	0.630
-6	3/8	0.675
-8	1/2	0.830
-12	3/4	1.080
-16	1	1.340

**All hydraulic assemblies should
be pressure tested prior to use.**

IMPORTANT: This reference chart is provided by Fairview Ltd. for convenience only. The information contained herein cannot be guaranteed because conditions of use are beyond our control, such as variances in hose outside diameters. This document should not be substituted for the judgement of a qualified professional. Assemblies should be tested prior to installation. The user of this information assumes all risk associated with its use.

FITTINGS

BRASS - STEEL - BLACK IRON

AIR BRAKE FITTINGS (D.O.T.) FOR COPPER.....	72
AIR BRAKE FITTINGS (D.O.T.) FOR TUBE	71
AIR BRAKE FITTINGS (D.O.T.) PUSH-TO-CONNECT (BRASS).....	74-75
AIR BRAKE FITTINGS (D.O.T.) PUSH-TO-CONNECT (COMPOSITE)	73
AIR BRAKE SERVICE KITS.....	68-69
AIR SHIFT TRANSMISSION FITTINGS & KITS	85
GREASE FITTINGS	86
GREASE FITTING ASSORTMENT KITS.....	86
HYDRAULIC ADAPTERS - 37° J.I.C. FLARE.....	89-90
HYDRAULIC ADAPTERS - 37° J.I.C. FLARE BULKHEAD	91
HYDRAULIC ADAPTERS - 37° J.I.C. FLARE SWIVEL	88
HYDRAULIC ADAPTERS - FLARELESS.....	96
HYDRAULIC ADAPTERS - NPSM PIPE SWIVEL	100
HYDRAULIC ADAPTERS - O-RING BOSS	93-94
HYDRAULIC ADAPTERS - O-RING BOSS TO NPSM	99
HYDRAULIC ADAPTERS - O-RING FACE SEAL.....	95-96
HYDRAULIC ADAPTERS - STEEL PIPE.....	97-99
HYDRAULIC CAP AND PLUG KITS	87
HYDRAULIC FLANGE ADAPTERS AND KITS.....	92
HYDRAULIC O-RING KIT	87
PIPE FITTINGS (BLACK IRON).....	80-82
PIPE FITTINGS (BRASS)	76-79
S.A.E. 45° FLARE (BRASS)	82-84
TOWING AIR COUPLER KIT - HEAVY DUTY	70



PART No. ABFR-KIT-2-PC
(AIR BRAKE SERVICE KIT W/ PUSH-TO-CONNECT)

Designed for use in the field or shop, this kit includes Fairview's Nylon DOT Push-to-Connect Fittings and a large selection of items to complete most general repairs. Double sided carry case, with handle.

Push-To-Connect; Tube Repair Kit Selection:

PART No.	Description	Qty.
103-A	Coupling 1/8 FPT	2
103-B	Coupling 1/4 FPT	2
103-C	Coupling 3/8 FPT	2
103-D	Coupling 1/2 FPT	1
110-BA	Pipe Bushing 1/4 to 1/8	3
110-CB	Pipe Bushing 3/8 to 1/4	2
110-DC	Pipe Bushing 1/2 to 3/8	2
121-B	Plug Hex 1/4 MPT	3
121-C	Plug Hex 3/8 MPT	2
121-D	Plug Hex 1/2 MPT	2
121-M8	Thread Sealant Tape	2
122-B	Hex Nipple 1/4 MPT	3
122-C	Hex Nipple 3/8 MPT	2
122-D	Hex Nipple 1/2 MPT	2
CPC1462-4	Nylon PTC DOT Union 1/4	2
CPC1462-6	Nylon PTC DOT Union 3/8	2
CPC1462-8	Nylon PTC DOT Union 1/2	2
CPC1462-10	Nylon PTC DOT Union 5/8	1
CPC1468-4A	Nylon PTC DOT Adapter 1/4 to 1/8 MPT	2
CPC1468-4B	Nylon PTC DOT Adapter 1/4 to 1/4 MPT	2
CPC1468-6B	Nylon PTC DOT Adapter 3/8 to 1/4 MPT	2
CPC1468-6C	Nylon PTC DOT Adapter 3/8 to 3/8 MPT	2
CPC1469SW-4A	Nylon PTC DOT Elbow 1/4 to 1/8 MPT	2
CPC1469SW-4B	Nylon PTC DOT Elbow 1/4 to 1/4 MPT	2
CPC1469SW-6B	Nylon PTC DOT Elbow 3/8 to 1/4 MPT	2
CPC1469SW-6C	Nylon PTC DOT Elbow 3/8 to 3/8 MPT	2
CPC1469SW-8C	Nylon PTC DOT Elbow 1/2 to 3/8 MPT	2



Kit Dimensions
Height: 12.0 In.
Width: 14.0 In.
Depth: 4.0 In.

PART No.	Description	Qty.
42-4	Union 1/4 M.SAE	2
42-6	Union 3/8 M.SAE	2
42-8	Union 1/2 M.SAE	2
48-4A	Adptr 1/4 M.SAE to 1/8 MPT	2
48-4B	Adptr 1/4 M.SAE to 1/4 MPT	2
48-6B	Adptr 3/8 M.SAE to 1/4 MPT	2
48-6C	Adptr 3/8 M.SAE to 3/8 MPT	2
48-8C	Adptr 1/2 M.SAE to 3/8 MPT	2
48-8D	Adptr 1/2 M.SAE to 1/2 MPT	2
ABFR-BOX-2	2 Sided Case	1

FITTINGS

FAIRVIEW VALVE,
HOSE AND FITTING CUSTOM KITS.
ASK US ABOUT PREASSEMBLING YOUR
COMPONENTS, SO YOU CAN RECEIVE THEM
READY TO INSTALL.



AIR BRAKE SERVICE KITS

Fairview

PART No. ABFR-KIT-1 (AIR BRAKE SERVICE KIT - SELECTION 1)

Designed for use in the field or shop, this kit includes a selection of items to complete many general repairs. Single sided carry case, with handle.

D.O.T. Air Brake Fittings; Service Kit Selection:

PART No.	Description	Qty.	PART No.	Description	Qty.
121-M8	Thread Sealant Tape	1	1468-8C	Connector Tube-MP 1/2-3/8	1
1460-4	DOT Sleeve 1/4	5	1469-4B	Elbow Tube-MP 1/4-1/4	2
1460-6	DOT Sleeve 3/8	5	1469-6B	Elbow Tube-MP 3/8-1/4	2
1460-8	DOT Sleeve 1/2	5	1481-4	Air Brake Insert 1/4	5
1461-4	DOT Nut 1/4	2	1481-6	Air Brake Insert 3/8	5
1461-6	DOT Nut 3/8	2	1490-6	Air Brake Sleeve 3/8	6
1461-8	DOT Nut 1/2	2	1491-6	Air Brake Nut 3/8	4
1462-4	DOT Union 1/4	2	1494-6	Nut with Spring Guard 3/8	2
1462-6	DOT Union 3/8	2	1495B-C	Brass Terminal Bolt 3/8	1
1462-8	DOT Union 1/2	1	B1492-6C	Hose End Body 3/8	4
1468-4A	DOT Adapter 1/4 to 1/8 MPT	2	B1492-6S	Hose Splicer Body 3/8	1
1468-4B	DOT Adapter 1/4 to 1/4 MPT	2	ABFR-BOX-1	1 Sided Case	
1468-6B	Connector Tube-MP 3/8-1/4	2			



Kit Dimensions
Height: 14.5 In.
Width: 15.5 In.
Depth: 2.5 In.



PART No. ABFR-KIT-2 (AIR BRAKE SERVICE KIT - SELECTION 2)

Designed for use in the field or shop, this kit includes a large selection of items to complete most general repairs in a double sided carry case, with handle.

D.O.T. Air Brake & Pipe; Service Kit Selection:

PART No.	Description	Qty.	PART No.	Description	Qty.
103-A	Coupling 1/8 FPT	2	1461-10	DOT Nut 5/8	2
103-B	Coupling 1/4 FPT	2	1462-6	DOT Union 3/8	2
103-C	Coupling 3/8 FPT	2	1462-8	DOT Union 1/2	2
103-D	Coupling 1/2 FPT	1	1462-10	DOT Union 5/8	1
110-BA	Pipe Bushing 1/4 to 1/8	3	1468-4A	DOT Adapter 1/4 to 1/8 MPT	2
110-CB	Pipe Bushing 3/8 to 1/4	2	1468-4B	DOT Adapter 1/4 to 1/4 MPT	2
110-DC	Pipe Bushing 1/2 to 3/8	2	1468-6B	DOT Adapter 3/8 to 1/4 MPT	2
121-B	Plug Hex 1/4 MPT	3	1468-6C	DOT Adapter 3/8 to 3/8 MPT	2
121-C	Plug Hex 3/8 MPT	2	1468-8C	DOT Adapter 1/2 to 3/8 MPT	2
121-D	Plug Hex 1/2 MPT	2	1469-4A	DOT Elbow 1/4 to 1/8 MPT	2
121-M8	Thread Sealant Tape	2	1469-4B	DOT Elbow 1/4 to 1/4 MPT	2
122-B	Hex Nipple 1/4 MPT	3	1469-6B	DOT Elbow 3/8 to 1/4 MPT	2
1-C	Hex Nipple 3/8 MPT	2	1469-6C	DOT Elbow 3/8 to 3/8 MPT	2
122-D	Hex Nipple 1/2 MPT	2	1469-8C	DOT Elbow 1/2 to 3/8 MPT	2
1460-4	DOT Sleeve 1/4	3	1481-4	DOT Tube Insert 1/4	3
1460-6	DOT Sleeve 3/8	3	1481-6	DOT Tube Insert 3/8	3
1460-8	DOT Sleeve 1/2	3	1481-8	DOT Tube Insert 1/2	3
1460-10	DOT Sleeve 5/8	2	1481-10	DOT Tube Insert 5/8	3
1461-4	DOT Nut 1/4	3	X115-B	Pipe Street Elbow 1/4	2
1461-6	DOT Nut 3/8	3	X115-C	Pipe Street Elbow 3/8	2
1461-8	DOT Nut 1/2	3	ABFR-BOX-2	2 Sided Case	1



Kit Dimensions
Height: 12.0 In.
Width: 14.0 In.
Depth: 4.0 In.



PART No. ABFR-KIT-1-PC

(AIR BRAKE TUBE REPAIR KIT-PUSH-TO-CONNECT FITTINGS)

This kit includes a selection of DOT push-to-connect fittings and tube to complete many temporary air brake tube repairs in the field or shop. Single sided carry case, with handle.

Push-to-Connect; Tube Repair Kit Selection:

PART No.	Description	Qty.	PART No.	Description	Qty.
1485-4-CUT	Air Brake Tube 1/4	24 In.	PC1468-6C	Brass PTC DOT Adapter 3/8 to 3/8 MPT	2
1485-6-CUT	Air Brake Tube 3/8	24 In.	PC1468-8C	Brass PTC DOT Adapter 1/2 to 3/8 MPT	1
1485-8-CUT	Air Brake Tube 1/2	24 In.	PC1469-4A	Elbow Tube-MP 1/4-1/8	2
PC1462-4	Brass PTC DOT Union 1/4	2	PC1469-6B	Elbow Tube-MP 3/8-3/8	2
PC1462-6	Brass PTC DOT Union 3/8	2	PC1469-8C	Elbow Tube-MP 1/2-3/8	1
PC1462-8	Brass PTC DOT Union 1/2	2	TK-1	Thumb Knife	1
PC1468-4A	Brass PTC DOT Adapter 1/4 to 1/8 MPT	2	ABFR-BOX-1	1 Sided Case	1
PC1468-6B	Brass PTC DOT Adapter 1/4 to 1/4 MPT	2			



No Tool Required
Push-to-Connect Fittings
Kit Dimensions
Height: 14.5 In.
Width: 15.5 In.
Depth: 2.5 In.



Fairview Heavy Duty Towing Air Coupler Kit

An indispensable kit for heavy-duty towing, the HDAT-KIT-1 provides many ways to quickly connect air to a towed vehicle in different situations and most types of common truck makes and models. Kit includes the following useful assemblies:

PACCAR Air Coupler Assembly

The (PAC-KIT-1) assembly will connect to the fitting located on the outside frame rail near the driver's side wheel well on most Peterbilt and Kenworth chassis.

International Air Coupler Assembly

(INT-KIT-1) assembly connects to most International medium-duty trucks, including the MV and 4300 models. Also found on some Ford F-650 trucks. Connect to the air tank fitting.

134 Air Coupler Assembly

(AC134-KIT-1) will supply air to Mack, Volvo and some Freightliner vehicles. Connects to the fitting behind the air compressor on the air supply line. Use with included adapter ADP-9235-1204 (12X1.5mm X 1/4 FPT) where required.

1/2" Air Supply Line

(ASL-KIT-8B) Universal air coupler assembly can be used to apply air to the towed vehicle by removing the disabled vehicle's main air supply line from any quick-connect push fitting you can access. Simply push this coupler into a push fitting in place of the one removed and connect it to your truck.

Air Dryer Connector Assembly

(ADC-KIT-1) assembly will work on most common air brake towed vehicles. Remove the air supply line from the towed vehicle's air dryer and add this assembly in its place to supply the air system from your wrecker. Use with included adapter (S3749-10C) 90° JIC -10 fitting x 3/8 Male Pipe where required.

FITTINGS



PART No.:
HDAT-KIT-1

The Fairview tow kit also includes:

- (GHE) Emergency side air brake system gladhand connection
- (GHU) Universal air brake system gladhand connection
- (S3749-10C) Compressor Fitting 90° JIC -10 fitting x 3/8 Male Pipe
- (PCDOT69-6B) "ProStar Fitting" 3/8 Push-in Tube x 1/4 Male Pipe elbow
- (ADP-9235-1204) Volvo / Mac metric adapter - 12X1.5mm X 1/4 FPT
- Misc. brass pipe adapters (120-DC) 1/2 FPT X 3/8 MPT; (122-C) 3/8 MPT X 3/8 MPT; (122-D) 1/2 MPT X 1/2 MPT
- (121-M8) Thread sealant tape for leak-free pipe fitting connections
- (BVT3120-C) 3/8 MPT X 3/8 FPT Ball valve for air line shut-off.
- (BVT3120-D) 1/2 MPT X 1/2 FPT Ball valve for air line shut-off.

BRASS D.O.T. AIR BRAKE FITTINGS

(COMPLETE WITH FIXED INSERTS, FOR D.O.T. AIR BRAKE TUBE)



Insert

PART No.	For Tube I.D.
1481-2	.078
1481-4	.170
1481-5	.232
1481-6	.250
1481-8	.375
1481-10	.440
1481-12	.566



Sleeve

PART No.	Tube
1460-4	1/4
1460-6	3/8
1460-8	1/2
1460-10	5/8
1460-12	3/4



Nut

PART No.	Tube
1461-4	1/4
1461-6	3/8
1461-8	1/2
1461-10	5/8
1461-12	3/4



Connector Tube to Male Pipe

PART No.	Tube	Pipe
1468-4A	1/4	1/8
1468-4B	1/4	1/4
1468-4C	1/4	3/8
1468-4D	1/4	1/2
1468-6A	3/8	1/8
1468-6B	3/8	1/4
1468-6C	3/8	3/8
1468-6D	3/8	1/2
1468-8B	1/2	1/4
1468-8C	1/2	3/8
1468-8D	1/2	1/2
1468-8E	1/2	3/4
1468-10C	5/8	3/8
1468-10D	5/8	1/2
1468-10E	5/8	3/4
1468-12D	3/4	1/2
1468-12E	3/4	3/4



Connector Tube to Female Pipe

PART No.	Tube	Pipe
1466-4A	1/4	1/8
1466-4B	1/4	1/4
1466-4C	1/4	3/8
1466-6A	3/8	1/8
1466-6B	3/8	1/4
1466-6C	3/8	3/8
1466-8C	1/2	3/8
1466-8D	1/2	1/2
1466-10C	5/8	3/8
1466-10D	5/8	1/2
1466-12D	3/4	1/2
1466-12E	3/4	3/4



Union Coupling

PART No.	Tube
1462-4	1/4
1462-6	3/8
1462-8	1/2
1462-10	5/8
1462-12	3/4



45° Elbow Tube to Male Pipe

PART No.	Tube	Pipe
1474-4A	1/4	1/8
1474-4B	1/4	1/4
1474-6B	3/8	1/4
1474-6C	3/8	3/8
1474-6D	3/8	1/2
1474-8B	1/2	1/4
1474-8C	1/2	3/8
1474-8D	1/2	1/2
1474-10D	5/8	1/2



90° Elbow Tube to Tube

PART No.	Tube
1465-4	1/4
1465-6	3/8
1465-8	1/2
1465-10	5/8
1465-12	3/4




90° Elbow Tube to Male Pipe

PART No.	Tube	Pipe
1469-4A	1/4	1/8
1469-4B	1/4	1/4
1469-4C	1/4	3/8
1469-4D	1/4	1/2
1469-6A	3/8	1/8
1469-6B	3/8	1/4
1469-6C	3/8	3/8
1469-6D	3/8	1/2
1469-8B	1/2	1/4
1469-8C	1/2	3/8
1469-8D	1/2	1/2
1469-10C	5/8	3/8
1469-10D	5/8	1/2
1469-10E	5/8	3/4
1469-12D	3/4	1/2
1469-12E	3/4	3/4



90° Elbow Tube to Female Pipe

PART No.	Tube	Pipe
1470-4A	1/4	1/8
1470-4B	1/4	1/4
1470-6A	3/8	1/8
1470-6B	3/8	1/4
1470-6C	3/8	3/8
1470-8C	1/2	3/8
1470-8D	1/2	1/2
1470-10D	5/8	1/2
1470-12D	3/4	1/2



Tee Tube Three Ends

PART No.	Tube
1464-4	1/4
1464-6	3/8
1464-8	1/2
1464-10	5/8
1464-12	3/4

PART No.	1	2	3
1464R-64	3/8	3/8	1/4
1464R-86	1/2	1/2	3/8



Tee Ends Tube to Male Pipe Center Tube

PART No.	Tube	Pipe
1471-4A	1/4	1/8
1471-4B	1/4	1/4
1471-6B	3/8	1/4
1471-6C	3/8	3/8
1471-8C	1/2	3/8
1471-8D	1/2	1/2
1471-10D	5/8	1/2
1471-12D	3/4	1/2



Tee Ends Tube Center Male Pipe

PART No.	Tube	Pipe
1472-4A	1/4	1/8
1472-4B	1/4	1/4
1472-6A	3/8	1/8
1472-6B	3/8	1/4
1472-6C	3/8	3/8
1472-8B	1/2	1/4
1472-8C	1/2	3/8
1472-8D	1/2	1/2
1472-10D	5/8	1/2
1472-12D	3/4	1/2
1472-12E	3/4	3/4



Tee Female to Male Pipe Center Tube

PART No.	Tube	Pipe
1476-4A	1/4	1/8
1476-6B	3/8	1/4



Bulkhead Union (With Lock Washer)

PART No.	Tube
1477-4	1/4
1477-6	3/8
1477-8	1/2
1477-10	5/8



Tee Ends Tube to Center Female Pipe

PART No.	Tube	Pipe
1478-6B	3/8	1/4

BRASS D.O.T. AIR BRAKE FITTINGS

(FOR COPPER TUBE)



Sleeve

PART No.	Tube
1160-4	1/4
1160-6	3/8
1160-8	1/2
1160-10	5/8



Nut

PART No.	Tube
1161-4	1/4
1161-6	3/8
1161-8	1/2
1161-10	5/8
1161-12	3/4



**Union
Coupling**

PART No.	Tube
1162-4	1/4
1162-6	3/8
1162-8	1/2



**Connector
Tube to
Male Pipe**

PART No.	Tube	Pipe
1168-4A	1/4	1/8
1168-4B	1/4	1/4
1168-6B	3/8	1/4
1168-6C	3/8	3/8
1168-8C	1/2	3/8
1168-8D	1/2	1/2
1168-10D	5/8	1/2
1168-12E	3/4	3/4



**45° Elbow
Tube to
Male Pipe**

PART No.	Tube	Pipe
1174-6B	3/8	1/4
1174-6C	3/8	3/8



**90° ELBOW
Tube to
Male Pipe**

PART No.	Tube	Pipe
1169-4A	1/4	1/8
1169-4B	1/4	1/4
1169-6B	3/8	1/4
1169-6C	3/8	3/8
1169-8C	1/2	3/8



**90° Elbow
Tube to
Female Pipe**

PART No.	Tube	Pipe
1170-4A	1/4	1/8



**Tee
Tube
Three Ends**

PART No.	Tube
1164-4	1/4
1164-6	3/8



**Tee
Ends Tube
to Male Pipe
Center Tube**

PART No.	Tube	Pipe
1171-4B	1/4	1/4



**Tee
Ends Tube
to Male Pipe
Center Tube**

PART No.	Tube	Pipe
1172-6B	3/8	1/4


BRASS D.O.T. AIR BRAKE FITTINGS

(WITH FIXED INSERTS, FOR D.O.T. AIR BRAKE TUBE)

BRASS D.O.T. AIR BRAKE FITTINGS ASSEMBLY INSTRUCTIONS

1. Cut tube squarely
2. Slide nut and then sleeve onto tube
3. Insert tube fitting until it bottoms on seat
4. Hand tighten and mark body
5. Full clockwise wrench turns as per chart

Tube Size	Additional Full Turns from Hand Tight
1/4"	3
3/8", 1/2" and 5/8"	4
3/4"	3-1/2

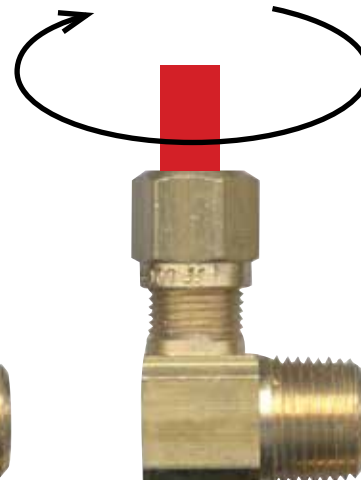

COMPOSITE AIR BRAKE FITTINGS

(FOR D.O.T. AIR BRAKE TUBE 1485)

Fairview

FITTINGS

This product meets and exceeds the performance requirement of FMVSS 106 & SAE J844.
Low Temp Buna O-Ring (-52° to +100° C) - Brass sleeves, grippers and tube supports / inserts DOT markings (FF DOT)
- Red Loctite Male Pipe Thread Sealant



**Union
Coupling**

PART No.	PTC DOT
CPC1462-5/32	5/32
CPC1462-4X5/32	1/4 to 5/32
CPC1462-4	1/4
CPC1462-6	3/8
CPC1462-8	1/2
CPC1462-86	1/2 to 3/8
CPC1462-10	5/8



**Connector
Tube to
Male Pipe**

PART No.	PTC DOT	Pipe
CPC1468-5/32A	5/32	1/8
CPC1468-4A	1/4	1/8
CPC1468-4B	1/4	1/4
CPC1468-4C	1/4	3/8
CPC1468-6A	3/8	1/8
CPC1468-6B	3/8	1/4
CPC1468-6C	3/8	3/8
CPC1468-6D	3/8	1/2
CPC1468-8B	1/2	1/4
CPC1468-8C	1/2	3/8
CPC1468-8D	1/2	1/2
CPC1468-10D	5/8	1/2
CPC1468-12D	3/4	1/2
CPC1468-12E	3/4	3/4



**90° Elbow
Tube to
Tube**

PART No.	PTC DOT
CPC1465-4	1/4
CPC1465-6	3/8
CPC1465-8	1/2



**90° Elbow
Tube to
Swivel
Male Pipe**

PART No.	PTC DOT	Pipe
CPC1469SW-5/32A	5/32	1/8
CPC1469SW-4A	1/4	1/8
CPC1469SW-4B	1/4	1/4
CPC1469SW-4C	1/4	3/8
CPC1469SW-6A	3/8	1/8
CPC1469SW-6B	3/8	1/4
CPC1469SW-6C	3/8	3/8
CPC1469SW-6D	3/8	1/2
CPC1469SW-8B	1/2	1/4
CPC1469SW-8C	1/2	3/8
CPC1469SW-8D	1/2	1/2
CPC1469SW-10C	5/8	3/8
CPC1469SW-10D	5/8	1/2



**90° Elbow
Tube to
Swivel
Female Pipe**

PART No.	PTC DOT	Pipe
CPC1470SW-4A	1/4	1/8
CPC1470SW-4B	1/4	1/4
CPC1470SW-6B	3/8	1/4
CPC1470SW-6C	3/8	3/8



**45° Elbow
Tube to
Swivel
Male Pipe**

PART No.	PTC DOT	Pipe
CPC1474SW-4A	1/4	1/8
CPC1474SW-4B	1/4	1/4
CPC1474SW-6B	3/8	1/4
CPC1474SW-6C	3/8	3/8
CPC1474SW-6D	3/8	1/2
CPC1474SW-8B	1/2	1/4
CPC1474SW-8C	1/2	3/8
CPC1474SW-8D	1/2	1/2
CPC1474SW-10C	5/8	3/8
CPC1474SW-10D	5/8	1/2



**Tee
Tube
Three Ends**

PART No.	PTC DOT
CPC1464-4	1/4
CPC1464-6	3/8
CPC1464-8	1/2



**Y
Tube
Three Ends**

PART No.	PTC DOT
CPC1464Y-4	1/4
CPC1464Y-6	3/8
CPC1464YR-46	1/4 to 1/2
CPC1464YR-64	3/8 to 1/4



**Tee
Ends Tube
Center
Swivel
Male Pipe**

PART No.	PTC DOT	Pipe
CPC1472SW-4A	1/4	1/8
CPC1472SW-4B	1/4	1/4
CPC1472SW-6A	3/8	1/8
CPC1472SW-6B	3/8	1/4
CPC1472SW-6C	3/8	3/8
CPC1472SW-6D	3/8	1/2
CPC1472SW-8C	1/2	3/8
CPC1472SW-8D	1/2	1/2



**Y
Ends Tube
Center
Swivel
Male Pipe**

PART No.	PTC DOT	Pipe
CPC1472YSW-4A	1/4	1/8
CPC1472YSW-4B	1/4	1/4
CPC1472YSW-6B	3/8	1/4



**Tee
Ends Tube
to Swivel
Male Pipe
Center Tube**

PART No.	PTC DOT	Pipe
CPC1471SW-4A	1/4	1/8
CPC1471SW-4B	1/4	1/4
CPC1471SW-6B	3/8	1/4
CPC1471SW-6C	3/8	3/8
CPC1471SW-6D	3/8	1/2
CPC1471SW-8C	1/2	3/8

D.O.T. RECOGNIZED FOR ALL AIR BRAKE APPLICATIONS EXCEPT THOSE FOR USE BETWEEN FRAME AND AXLE OR BETWEEN TOWED AND TOWING VEHICLES.



**Union
Coupling**

PART No.	Tube
PC1462-5/32	5/32
PC1462-4	1/4
PC1462-6	3/8
PC1462-8	1/2
PC1462-10	5/8
PC1462-12	3/4



**Connector
Tube to
Female Pipe**

PART No.	Tube	Pipe
PC1466-4A	1/4	1/8
PC1466-4B	1/4	1/4
PC1466-6B	3/8	1/4
PC1466-6C	3/8	3/8
PC1466-8C	1/2	3/8
PC1466-8D	1/2	1/2



**Connector
Tube to
Male Pipe**

PART No.	Tube	Pipe
PC1468-3A	3/16	1/8
PC1468-3B	3/16	1/4
PC1468-5/32X1	5/32	1/16
PC1468-5/32A	5/32	1/8
PC1468-4A	1/4	1/8
PC1468-4B	1/4	1/4
PC1468-4C	1/4	3/8
PC1468-6A	3/8	1/8
PC1468-6B	3/8	1/4
PC1468L-6B	3/8	Long 1/4
PC1468-6C	3/8	3/8
PC1468-6D	3/8	1/2
PC1468-8B	1/2	1/4
PC1468-8C	1/2	3/8
PC1468-8D	1/2	1/2
PC1468-10C	5/8	3/8
PC1468-10D	5/8	1/2
PC1468-12D	3/4	1/2
PC1468-12E	3/4	3/4



**Bulkhead
Union**

PART No.	Tube
PC1477-4	1/4
PC1477-6	3/8
PC1477-8	1/2
PC1477-10	5/8



*3/8 Only

**Bulkhead
Union
Tube to
Female Pipe**

PART No.	Tube	Pipe
PC1486-4B	1/4	1/4
PC1468L-6B	3/8	*With Washer 3/8
PC1468-6C	1/2	3/8



**Bulkhead
Union
Tube to
Male Pipe**

PART No.	Tube	Pipe
PC1483-6D	3/8	1/2
PC1483-8D	1/2	1/2



**90° Elbow
Tube to
Tube**

PART No.	Tube
PC1465-4	1/4
PC1465-6	3/8
PC1465-8	1/2



**90° Elbow
Tube to
Female Pipe**

PART No.	Tube	Pipe
PC1470-4A	1/4	1/8
PC1470-4B	1/4	1/4
PC1470-6B	3/8	1/4
PC1470-6C	3/8	3/8
PC1470-8D	1/2	1/2



**90° Elbow
Tube to
Male Pipe**

PART No.	Tube	Pipe
PC1469-3A	3/16	1/8
PC1469-5/32A	5/32	1/8
PC1469-4A	1/4	1/8
PC1469-4B	1/4	1/4
PC1469-4C	1/4	3/8
PC1469-6A	3/8	1/8
PC1469-6B	3/8	1/4
PC1469-6C	3/8	3/8
PC1469-6D	3/8	1/2
PC1469-8B	1/2	1/4
PC1469-8C	1/2	3/8
PC1469-8D	1/2	1/2
PC1469-10C	5/8	3/8
PC1469-10D	5/8	1/2
PC1469-12D	3/4	1/2
PC1469-12E	3/4	3/4



**90° Elbow
Tube to
Male Pipe
Swivel**

PART No.	Tube	Pipe
PC1469SW-4A	1/4	1/8
PC1469SW-4B	1/4	1/4
PC1469SW-4C	1/4	3/8
PC1469SW-6A	3/8	1/8
PC1469SW-6B	3/8	1/4
PC1469SW-6C	3/8	3/8
PC1469SW-6D	3/8	1/2
PC1469SW-8B	1/2	1/4
PC1469SW-8C	1/2	3/8
PC1469SW-8D	1/2	1/2
PC1469SW-10C	5/8	3/8
PC1469SW-10D	5/8	1/2
PC1469SW-12D	3/4	1/2
PC1469SW-12E	3/4	3/4



**45° Elbow
Tube to
Male Pipe**

PART No.	Tube	Pipe
PC1474-4A	1/4	1/8
PC1474-4B	1/4	1/4
PC1474-6A	3/8	1/8
PC1474-6B	3/8	1/4
PC1474-6C	3/8	3/8
PC1474-8B	1/2	1/4
PC1474-8C	1/2	3/8
PC1474-8D	1/2	1/2
PC1474-10C	5/8	3/8
PC1474-10D	5/8	1/2
PC1474-12D	3/4	1/2
PC1474-12E	3/4	3/4



**45° Elbow
Tube to
Male Pipe
Swivel**

PART No.	Tube	Pipe
PC1474SW-4A	1/4	1/8
PC1474SW-4B	1/4	1/4
PC1474SW-6A	3/8	1/8
PC1474SW-6B	3/8	1/4
PC1474SW-6C	3/8	3/8
PC1474SW-6D	3/8	1/2
PC1474SW-8B	1/2	1/4
PC1474SW-8C	1/2	3/8
PC1474SW-8D	1/2	1/2
PC1474SW-10C	5/8	3/8
PC1474SW-10D	5/8	1/2
PC1474SW-12E	3/4	3/4



**Union Tee
Tube
Each End**

PART No.	Tube
PC1464-4	1/4
PC1464-6	3/8
PC1464R-64	3/8 to 1/4
PC1464-8	1/2
PC1464-10	5/8
PC1464-12	3/4

PUSH-TO-CONNECT D.O.T. AIR BRAKE FITTINGS

(FOR D.O.T. AIR BRAKE TUBE 1485)

Fairview

D.O.T. RECOGNIZED FOR ALL AIR BRAKE APPLICATIONS EXCEPT THOSE FOR USE BETWEEN FRAME AND AXLE OR BETWEEN TOWED AND TOWING VEHICLES.



**Tee
Ends Tube
and Male Pipe
Center Tube**

PART No.	Tube	Pipe
PC1471-4A	1/4	1/8
PC1471-4B	1/4	1/4
PC1471-6B	3/8	1/4
PC1471-6C	3/8	3/8
PC1471-8C	1/2	3/8



**Tee
Ends Tube
and
Male Pipe Swivel
Center Tube**

PART No.	Tube	Pipe
PC1471SW-4A	1/4	1/8
PC1471SW-4B	1/4	1/4
PC1471SW-6B	3/8	1/4
PC1471SW-6C	3/8	3/8
PC1471SW-8C	1/2	3/8
PC1471SW-8D	1/2	1/



**Tee
Ends Tube
Center Male Pipe**

PART No.	Tube	Pipe
PC1472-4A	1/4	1/8
PC1472-4B	1/4	1/4
PC1472-6A	3/8	1/8
PC1472-6B	3/8	1/4
PC1472-6C	3/8	3/8
PC1472-8B	1/2	1/4
PC1472-8C	1/2	3/8



**Tee
Ends Tube
Center Male
Pipe Swivel**

PART No.	Tube	Pipe
PC1472SW-4A	1/4	1/8
PC1472SW-4B	1/4	1/4
PC1472SW-6B	3/8	1/4
PC1472SW-6C	3/8	3/8
PC1472SW-8B	1/2	1/4
PC1472SW-8C	1/2	3/8
PC1472SW-8D	1/2	1/2



**Tee
Ends Tube
Center
Female Pipe**

PART No.	Tube	Pipe
PC1478-4A	1/4	1/8
PC1478-4B	1/4	1/4
PC1478-6B	3/8	1/4



**Tee
Ends Tube
Center Female
Pipe Swivel**

PART No.	Tube	Pipe
PC1478SW-4A	1/4	1/8
PC1478SW-6B	3/8	1/4



Tube Insert

PART No.	Tube
PC1400-4	1/4
PC1400-6	3/8
PC1400-8	1/2

IMPERIAL TUBE TO METRIC THREAD



**Connector
Tube to
Metric Thread**

PART No.	Tube Size	Thread Size
PCDOT68MM-4-10	1/4	M10 X 1.0
PCDOT68MM-4-12	1/4	M12 X 1.5
PCDOT68MM-4-16	1/4	M16 X 1.5
PCDOT68MM-6-12	3/8	M12 X 1.5



**90° Elbow
Tube to
Metric Thread**

PART No.	Tube Size	Thread Size
PCDOT69SWMM-4-12	1/4	M12 X 1.5
PCDOT69SWMM-4-22	1/4	M22 X 1.5
PCDOT69SWMM-6-16	3/8	M16 X 1.5
PCDOT69SWMM-8-22	1/2	M22 X 1.5
PCDOT69SWMM-10-22	5/8	M22 X 1.5
PCDOT69SWMM-12-22	3/4	M22 X 1.5

BRASS PUSH-TO-CONNECT FITTINGS ASSEMBLY INSTRUCTIONS



TO CONNECT TUBE:

Cut tube as squarely as possible. Insert tube end into fitting, slide the I.D. of the tube over the tube support until friction is felt as tube slides past the O-ring. Using a slight twisting motion while inserting the tube is often helpful. After this initial friction is felt, continue to push in the tube until it bottoms firmly against the internal tube support.

Temperature Range
-40°C to 107°C
(-40°F to 225°F)

**PUSH-TO-CONNECT
FITTINGS FEATURE
A LABOR SAVING
FULL FLOW DESIGN
THAT REQUIRES NO
TOOLS.**



TO DISCONNECT TUBE:

With thumb and forefinger, hold down the top of the insert against the fitting body and then, with the other hand, pull out the tube. No tools are needed.



Hex Nipple

PART No.	Length (IN)	Pipe
122-A		1/8
122-B		1/4
122L-B *	1-3/8	1/4
122-C		3/8
122-D		1/2
122L-D *	1-3/4	1/2
122-E		3/4
122-H		1

* LONG PATTERN

Lead Free PART No.	Pipe
LF-122-A	1/8
LF-122-B	1/4
LF-122-C	3/8
LF-122-D	1/2
LF-122-E	3/4
LF-122-H	1

PART No.	Pipe	Reducing	Pipe
122-BA	1/4	to	1/8
122-CA	3/8	to	1/8
122-CB	3/8	to	1/4
122-DB	1/2	to	1/4
122-DC	1/2	to	3/8
122-ED	3/4	to	1/2

Lead Free PART No.	Pipe	Reducing	Pipe
LF-122-BA	1/4	to	1/8
LF-122-CB	3/8	to	1/4
LF-122-DB	1/2	to	1/4
LF-122-DC	1/2	to	3/8
LF-122-ED	3/4	to	1/2



Close Nipple

PART No.	Pipe
112-A	1/8
112-B	1/4
112-C	3/8
112-D	1/2
112-E	3/4
112-H	1
112-J	1-1/4
112-K	1-1/2
112-M	2
112-N	2-1/2
112-P	3

Lead Free PART No.	Pipe
LF-103-A	1/8
LF-103-B	1/4
LF-103-C	3/8
LF-103-D	1/2
LF-103-E	3/4



Close Nipple (Red Brass)

Lead Free PART No.	Pipe
112RED-D	1/2
112RED-E	3/4



Long Nipple

PART No.	Pipe	Length (IN)
1/8NPT		
113-A1-1/2	1/8	1-1/2
113-A2	1/8	2
113-A2-1/2	1/8	2-1/2
113-A3	1/8	3
113-A3-1/2	1/8	3-1/2

Lead Free

PART No.	Pipe	Length (IN)
LF-113-A1-1/2	1/8	1-1/2
LF-113-A2	1/8	2

1/4NPT		
113-B1-1/2	1/4	1-1/2
113-B2	1/4	2
113-B2-1/2	1/4	2-1/2
113-B3	1/4	3
113-B3-1/2	1/4	3-1/2
113-B4	1/4	4
113-B4-1/2	1/4	4-1/2
113-B5	1/4	5
113-B5-1/2	1/4	5-1/2
113-B6	1/4	6

Lead Free

PART No.	Pipe	Length (IN)
LF-113-B1-1/2	1/4	1-1/2
LF-113-B2	1/4	2
LF-113-B2-1/2	1/4	2-1/2
LF-113-B3	1/4	3

3/8NPT		
113-C1-1/2	3/8	1-1/2
113-C2	3/8	2
113-C2-1/2	3/8	2-1/2
113-C3	3/8	3
113-C3-1/2	3/8	3-1/2
113-C4	3/8	4
113-C4-1/2	3/8	4-1/2
113-C5	3/8	5
113-C6	3/8	6

Lead Free

PART No.	Pipe	Length (IN)
LF-113-C1-1/2	3/8	1-1/2
LF-113-C2	3/8	2
LF-113-C2-1/2	3/8	2-1/2
LF-113-C3	3/8	3

1/2NPT		
113-D1-1/2	1/2	1-1/2
113-D2	1/2	2
113-D2-1/2	1/2	2-1/2
113-D3	1/2	3
113-D3-1/2	1/2	3-1/2
113-D4	1/2	4
113-D4-1/2	1/2	4-1/2
113-D5	1/2	5
113-D5-1/2	1/2	5-1/2
113-D6	1/2	6

Lead Free

PART No.	Pipe	Length (IN)
LF-113-D1-1/2	1/2	1-1/2
LF-113-D2	1/2	2
LF-113-D2-1/2	1/2	2-1/2
LF-113-D3	1/2	3
LF-113-D3-1/2	1/2	3-1/2
LF-113-D4	1/2	4

3/8NPT		
113-D1-1/2	3/4	2
113-D2	3/4	2-1/2
113-D2-1/2	3/4	3
113-D3	3/4	3-1/2
113-D3-1/2	3/4	4
113-D4	3/4	4-1/2
113-D4-1/2	3/4	5
113-D5	3/4	5-1/2
113-D5-1/2	3/4	6

Lead Free

PART No.	Pipe	Length (IN)
LF-113-E2	3/4	2
LF-113-E2-1/2	3/4	2-1/2
LF-113-E3	3/4	3



Long Nipple

PART No.	Pipe	Length (IN)
113-H2	1	2
113-H2-1/2	1	2-1/2
113-H3	1	3
113-H3-1/2	1	3-1/2
113-H4	1	4
113-H6	1	6

1-1/4NPT

113-J2	1-1/4	2
113-J2-1/2	1-1/4	2-1/2
113-J3	1-1/4	3
113-J3-1/2	1-1/4	3-1/2
113-J4	1-1/4	4
113-J5	1-1/4	5
113-J6	1-1/4	6

1-1/2NPT

113-K2	1-1/2	2
113-K3	1-1/2	3
113-K3-1/2	1-1/2	3-1/2
113-K4	1-1/2	4
113-K6	1-1/2	6

2NPT

113-M2-1/2	2	2-1/2
113-M3	2	3
113-M3-1/2	2	3-1/2
113-M4	2	4
113-M5	2	5
113-M6	2	6



Long Nipple (Red Brass)

Lead Free

PART No.	Pipe	Length (IN)
113RED-D1-1/2	1/2	1-1/2
113RED-D2-1/2	1/2	2-1/2
113RED-D3	1/2	3
113RED-D4	1/2	4

3/4NPT

113RED-E1-1/2	3/4	1-1/2
113RED-E2	3/4	2
113RED-E2-1/2	3/4	2-1/2
113RED-E3	3/4	3
113RED-E4	3/4	4



Coupling

PART No.	Pipe
103-A	1/8
103-B	1/4
103-C	3/8
103-D	1/2
103-E	3/4

Lead Free

PART No.	Pipe
LF-103-A	1/8
LF-103-B	1/4
LF-103-C	3/8
LF-103-D	1/2
LF-103-E	3/4

Coupling (Cast Bronze)

PART No.	Pipe
103CA-D	1/2
103CA-E	3/4
103-H	1
103-J	1-1/4
103-K	1-1/2
103-M	2
103-N	2-1/2

BRASS PIPE FITTINGS

Fairview



Reducing Coupling

PART No.	Pipe		Pipe
119-BA	1/4	to	1/8
119-CA	3/8	to	1/8
119-CB	3/8	to	1/4
119-DA	1/2	to	1/8
119-DB	1/2	to	1/4
119-DC	1/2	to	3/8
119-ED	3/4	to	1/2

Lead Free

PART No.

LF-119-BA	1/4	to	1/8
LF-119-CB	3/8	to	1/4
LF-119-ED	3/4	to	1/2



**Reducing Coupling
(Cast Bronze)**

PART No.	Pipe		Pipe
119-EB	3/4	to	1/4
119-EC	3/4	to	3/8
119-HD	1	to	1/2
119-HE	1	to	3/4
119-JE	1-1/4	to	3/4
119-JH	1-1/4	to	1
119-KH	1-1/2	to	1
119-KJ	1-1/2	to	1-1/4
119-MK	2	to	1-1/2



Union Coupling

PART No.	Pipe
104-A	1/8
104-B	1/4
104-C	3/8
104-D	1/2
104-E	3/4

Lead Free

PART No.

LF-104-D	1/2
----------	-----



**Union Coupling
(Cast Bronze)**

PART No.	Pipe
104-H	1
104-J	1-1/4
104-K	1-1/2
104-M	2



Adapter

PART No.	Female Pipe		Male Pipe
120-AA	1/8	to	1/8
120-BB	1/4	to	1/4
120-CC	3/8	to	3/8
120-DD	1/2	to	1/2

Lead Free

PART No.

LF-120-BB	1/4	to	1/4
LF-120-DD	1/2	to	1/2



**Adapter
(Continued)**

PART No.	Female Pipe		Male Pipe
120-A-1	1/8	to	1/16
120-BA	1/4	to	1/8
120-CA	3/8	to	1/8
120-CB	3/8	to	1/4
120-DB	1/2	to	1/4
120-DC	1/2	to	3/8
120-EC	3/4	to	3/8
120-ED	3/4	to	1/2

Lead Free

PART No.

LF-120-BA	1/4	to	1/8
LF-120-CB	3/8	to	1/4
LF-120-DB	1/2	to	1/4
LF-120-ED	3/4	to	1/2



Bushing

PART No.	Female Pipe		Male Pipe
110-BA	1/4	to	1/8
110-CA	3/8	to	1/8
110-CB	3/8	to	1/4
110-DA	1/2	to	1/8
110-DB	1/2	to	1/4
110-DC	1/2	to	3/8
110-EA	3/4	to	1/8
110-EB	3/4	to	1/4
110-EC	3/4	to	3/8
110-ED	3/4	to	1/2
110-HB	1	to	1/4
110-HC	1	to	3/8
110-HD	1	to	1/2
110-HE	1	to	3/4

Lead Free

PART No.

LF-110-BA	1/4	to	1/8
LF-110-CA	3/8	to	1/8
LF-110-CB	3/8	to	1/4
LF-110-DA	1/2	to	1/8
LF-110-DB	1/2	to	1/4
LF-110-DC	1/2	to	3/8
LF-110-EB	3/4	to	1/4
LF-110-EC	3/4	to	3/8
LF-110-ED	3/4	to	1/2
LF-110-HB	1	to	1/4
LF-110-HD	1	to	1/2
LF-110-HE	1	to	3/4



**Bushing
(Cast Bronze)**

PART No.	Female Pipe		Male Pipe
110CA-ED	3/4	to	1/2
110CA-HC	1	to	3/8
110CA-HD	1	to	1/2
110CA-HE	1	to	3/4
110-JD	1-1/4	to	1/2
110-JE	1-1/4	to	3/4
110-JH	1-1/4	to	1
110-KD	1-1/2	to	1/2
110-KE	1-1/2	to	3/4
110-KH	1-1/2	to	1
110-KJ	1-1/2	to	1-1/4
110-ME	2	to	3/4
110-MH	2	to	1
110-MJ	2	to	1-1/4
110-MK	2	to	1-1/2
110-NM	2-1/2	to	2
110-PM	3	to	2
110-PN	3	to	2-1/2



Lock Nut

PART No.	Pipe
111-A	1/8
111-B	1/4
111-C	3/8
111-D	1/2
111-E	3/4



**Lock Nut
(Cast Bronze)**

PART No.	Pipe
111-H	1



Plug Square Head

PART No.	Pipe
109-A	1/8
109-B	1/4
109-C	3/8
109-D	1/2
109-E	3/4

Lead Free

PART No.

LF-109-A	1/8
LF-109-E	3/4



**Plug Square Head
(Cast Bronze)**

PART No.	Pipe
109-H	1
109-J	1-1/4
109-K	1-1/2
109-M	2
109-N	2-1/2



Plug Slotted

PART No.	Pipe
117-A	1/8
117-B	1/4
117-C	3/8



Plug Hex Countersunk

PART No.	Pipe
118-A	1/8
118-B	1/4
118-C	3/8
118-D	1/2
118-E	3/4

Lead Free

PART No.

LF-118-A	1/8
LF-118-B	1/4



**Plug
Hex Head**

PART No.	Pipe
121-1	Cored 1/16
121-A	Cored 1/8
121-B	Cored 1/4
121-C	Cored 3/8
121-D	Cored 1/2
121-E	Cored 3/4
121-H	Cored 1

Lead Free

PART No.	Pipe
LF-121-A	Cored 1/8
LF-121-B	Cored 1/4



PART No.	Pipe
121S-A	Solid 1/16
121S-B	Solid 1/8
121S-C	Solid 1/4
121S-D	Solid 3/8
121S-E	Solid 1/2

Lead Free

PART No.	Pipe
LF-121S-B	Solid 1/4
LF-121S-C	Solid 3/8
LF-121S-D	Solid 1/2
LF-121S-E	Solid 3/4



Cap

PART No.	Pipe
108-A	1/8
108-B	1/4
108-C	3/8
108-D	1/2
108-E	3/4

Lead Free

PART No.	Pipe
LF-108-B	1/4
LF-108-C	3/8
LF-108-D	1/2



**Cap
(Cast Bronze)**

PART No.	Pipe
108CA-D	1/2
108CA-E	3/4
108-H	1
108-J	1-1/4
108-K	1-1/2
108-M	2



**Forged
90° Elbow**

PART No.	Pipe
99-A	1/8
99-B	1/4
99-C	3/8
99-D	1/2

Lead Free

PART No.	Pipe
LF-99-C	3/8

PART No.	Pipe	Pipe
99-BA	1/4 to	1/8
99-CB	3/8 to	1/4
99-DC	1/2 to	3/8



**Extruded
90° Street
Elbow**

PART No.	Pipe
X115-A	1/8
X115-B	1/4
X115-C	3/8
X115-D	1/2
X115-E	3/4

PART No.	Female Pipe	Male Pipe
X115-BA	1/4 to	1/8
X115-DC	1/2 to	3/8



**Forged
90° Street
Elbow**

PART No.	Pipe
116-A	1/8
116-B	1/4
116-C	3/8
116-D	1/2
116-E	3/4

Lead Free

PART No.	Pipe
LF-116-A	1/8
LF-116-B	1/4
LF-116-C	3/8
LF-116-D	1/2

PART No.	Female Pipe	Male Pipe
116-AB	1/8 to	1/4
116-BA	1/4 to	1/8
116-CB	3/8 to	1/4
116-CD	3/8 to	1/2
116-DC	1/2 to	3/8

Lead Free

PART No.	Pipe
LF-116-BA	1/2 to 3/8



**90° Street
Elbow
(Cast Bronze)**

PART No.	Pipe
116CA-D	1/2
116CA-E	3/4
116-H	1
116-J	1-1/4
116-K	1-1/2
116-M	2
116-N	2-1/2
116-P	3



**Forged
90° Street
Elbow
(Heavy Pattern)**

PART No.	Pipe
116H-B	1/4
116H-C	3/8



**Forged
90° Elbow**

PART No.	Pipe
116CA-D	1/2
116CA-E	3/4
116-H	1
116-J	1-1/4
116-K	1-1/2



**Forged
90° Elbow**

PART No.	Pipe	Pipe
100-BA	1/4 to	1/8
100-CB	3/8 to	1/4
100-DC	1/2 to	3/8

Lead Free

PART No.	Pipe
LF-100-B	1/4
LF-100-C	3/8
LF-100-D	1/2
LF-100-E	3/4



**90° Elbow
(Cast Bronze)**

PART No.	Pipe
100CA-D	1/2
100CA-E	3/4
100-H	1
100-J	1-1/4
100-K	1-1/2
100-M	2
100-N	2-1/2
100-P	3

PART No.	Pipe	Pipe
100-ED	3/4 to	1/2
100-HE	1 to	3/4



**Extruded
90° Elbow**

PART No.	Pipe
X100-A	1/8
X100-B	1/4
X100-C	3/8
X100-D	1/2



**Forged
45° Street
Elbow**

PART No.	Pipe
124-A	1/8
124-B	1/4
124-C	3/8

Lead Free

PART No.	Pipe
LF-124-B	1/4
LF-124-C	3/8



**45° Street
Elbow
(Cast Bronze)**

PART No.	Pipe
124-D	1/2
124-E	3/4
124-H	1



**Extruded
45° Street
Elbow**

PART No.	Pipe
X124-A	1/8
X124-B	1/4
X124-C	3/8
X124-D	1/2
X124-E	3/4



45° Elbow
(Cast Bronze)

PART No.	Pipe
105-B	1/4
105-C	3/8
105-D	1/2
105-E	3/4
105-H	1
105-J	1-1/4
105-K	1-1/2
105-M	2



Extruded 45° Elbow

PART No.	Pipe
X105-A	1/8
X105-B	1/4



Forged Cross

PART No.	Pipe
102-A	1/8
102-B	1/4
102-C	3/8
102-D	1/2

Lead Free

PART No.	Pipe
LF-102-B	1/4
LF-102-C	3/8
LF-102-D	1/2



Cross
(Cast Bronze)

PART No.	Pipe
102-E	3/4
102-H	1



Extruded Cross

PART No.	Pipe
X102-A	1/8
X102-B	1/4
X102-C	3/8
X102-D	1/2



Forged Male Branch Tee

PART No.	Pipe
106-A	1/8
106-B	1/4
106-C	3/8
106-D	1/2



Extruded Male Branch Tee

PART No.	Pipe
X106-A	1/8
X106-B	1/4
X106-C	3/8



Forged Male Tee

PART No.	Pipe
101M-A	1/8
101M-B	1/4
101M-C	3/8
101M-D	1/2
101M-E	3/4



Forged Street Tee

PART No.	Pipe
107-A	1/8
107-B	1/4
107-C	3/8
107-D	1/2
107-E	3/4

Lead Free

PART No.	Pipe
LF-107-B	1/4
LF-107-C	3/8



Extruded Street Tee

PART No.	Pipe
X107-A	1/8
X107-B	1/4
X107-C	3/8
X107-D	1/2
X107-E	3/4



Forged Tee

PART No.	Pipe
101-A	1/8
101-B	1/4
101-C	3/8
101-D	1/2
101-E	3/4

Lead Free

PART No.	Pipe
LF-101-A	1/8
LF-101-B	1/4
LF-101-C	3/8
LF-101-D	1/2




Tee
(Cast Bronze)

PART No.	Pipe
101CA-C	3/8
101CA-D	1/2
101CA-E	3/4
101-H	1
101-J	1-1/4
101-K	1-1/2
101-M	2



Extruded Tee

PART No.	Pipe
X101-A	1/8
X101-B	1/4
X101-C	3/8
X101-D	1/2



Reducing Forged Tee

PART No.	Reducing		
	1	2	3
101-BA	1/4	1/4	1/8
101-CB	3/8	3/8	1/4
101-DC	1/2	1/2	3/8
101-ED	3/4	3/4	1/2



Reducing Tee
(Cast Bronze)

PART No.	Reducing		
	1	2	3
101-DB	1/2	1/2	1/4
101-EDE	3/4	1/2	3/4
101-HDH	1	1/2	1
101-HE	1	1	3/4
101-JDJ	1-1/4	1/2	1-1/4
101-JE	1-1/4	1-1/4	3/4
101-KDK	1-1/2	1/2	1-1/2



“Y” Block

PART No.	Female Pipe	Male Pipe
678-YB	1/4	1/4



“Y” Splitter

PART No.	Female Pipe	Male Pipe
202-B	1/4	1/4



**Close
Nipple**

PART No.	Pipe
BI-112-A	1/8
BI-112-B	1/4
BI-112-C	3/8
BI-112-D	1/2
BI-112-E	3/4
BI-112-H	1
BI-112-J	1-1/4
BI-112-K	1-1/2
BI-112-M	2
BI-112-N	2-1/2
BI-112-P	3
BI-112-S	4



**Long
Nipple**

PART No.	Pipe	Length (IN.)
BI-113-A1-1/2	1/8	1-1/2
BI-113-A2	1/8	2
BI-113-A2-1/2	1/8	2-1/2
BI-113-A3	1/8	3
BI-113-A3-1/2	1/8	3-1/2
BI-113-A4	1/8	4
BI-113-A4-1/2	1/8	4-1/2
BI-113-A5	1/8	5
BI-113-A5-1/2	1/8	5-1/2
BI-113-A6	1/8	6

1/4 NPT		
BI-113-B1-1/2	1/4	1-1/2
BI-113-B2	1/4	2
BI-113-B2-1/2	1/4	2-1/2
BI-113-B3	1/4	3
BI-113-B3-1/2	1/4	3-1/2
BI-113-B4	1/4	4
BI-113-B4-1/2	1/4	4-1/2
BI-113-B5	1/4	5
BI-113-B5-1/2	1/4	5-1/2
BI-113-B6	1/4	6
BI-113-B8	1/4	8

3/8 NPT		
BI-113-C1-1/2	3/8	1-1/2
BI-113-C2	3/8	2
BI-113-C2-1/2	3/8	2-1/2
BI-113-C3	3/8	3
BI-113-C3-1/2	3/8	3-1/2
BI-113-C4	3/8	4
BI-113-C4-1/2	3/8	4-1/2
BI-113-C5	3/8	5
BI-113-C5-1/2	3/8	5-1/2
BI-113-C6	3/8	6

1/2 NPT		
BI-113-D1-1/2	1/2	1-1/2
BI-113-D2	1/2	2
BI-113-D2-1/2	1/2	2-1/2
BI-113-D3	1/2	3
BI-113-D3-1/2	1/2	3-1/2
BI-113-D4	1/2	4
BI-113-D4-1/2	1/2	4-1/2
BI-113-D5	1/2	5
BI-113-D5-1/2	1/2	5-1/2
BI-113-D6	1/2	6
BI-113-D7	1/2	7
BI-113-D8	1/2	8



**Long
Nipple**

PART No.	Pipe	Length (IN.)
BI-113-E1-1/2	3/4	1-1/2
BI-113-E2	3/4	2
BI-113-E2-1/2	3/4	2-1/2
BI-113-E3	3/4	3
BI-113-E3-1/2	3/4	3-1/2
BI-113-E4	3/4	4
BI-113-E4-1/2	3/4	4-1/2
BI-113-E5	3/4	5
BI-113-E5-1/2	3/4	5-1/2
BI-113-E6	3/4	6
BI-113-E8	3/4	8
BI-113-E10	3/4	10
BI-113-E12	3/4	12

1 NPT		
BI-113-H2	1	2
BI-113-H2-1/2	1	2-1/2
BI-113-H3	1	3
BI-113-H3-1/2	1	3-1/2
BI-113-H4	1	4
BI-113-H4-1/2	1	4-1/2
BI-113-H5	1	5
BI-113-H5-1/2	1	5-1/2
BI-113-H6	1	6
BI-113-H8	1	8
BI-113-H12	1	12

1-1/4 NPT		
BI-113-J2	1-1/4	2
BI-113-J2-1/2	1-1/4	2-1/2
BI-113-J3	1-1/4	3
BI-113-J3-1/2	1-1/4	3-1/2
BI-113-J4	1-1/4	4
BI-113-J4-1/2	1-1/4	4-1/2
BI-113-J5	1-1/4	5
BI-113-J5-1/2	1-1/4	5-1/2
BI-113-J6	1-1/4	6

1-1/2 NPT		
BI-113-K2	1-1/2	2
BI-113-K2-1/2	1-1/2	2-1/2
BI-113-K3	1-1/2	3
BI-113-K3-1/2	1-1/2	3-1/2
BI-113-K4	1-1/2	4
BI-113-K4-1/2	1-1/2	4-1/2
BI-113-K5	1-1/2	5
BI-113-K5-1/2	1-1/2	5-1/2
BI-113-K6	1-1/2	6

2 NPT		
BI-113-M2-1/2	2	2-1/2
BI-113-M3	2	3
BI-113-M3-1/2	2	3-1/2
BI-113-M4	2	4
BI-113-M4-1/2	2	4-1/2
BI-113-M5	2	5
BI-113-M5-1/2	2	5-1/2
BI-113-M6	2	6

2-1/2 NPT		
BI-113-N3	2-1/2	3
BI-113-N3-1/2	2-1/2	3-1/2
BI-113-N4	2-1/2	4
BI-113-N5	2-1/2	5
BI-113-N6	2-1/2	6

3 NPT		
BI-113-P3	3	3
BI-113-P4	3	4
BI-113-P5	3	5
BI-113-P6	3	6

4 NPT		
BI-113-S4	4	4
BI-113-S5	4	5
BI-113-S6	4	6

SCHEDULE 80:

Replace prefix BI- with BI80-
for schedule 80 (300LB.)



Coupling

PART No.	Pipe
BI-103-A	1/8
BI-103-B	1/4
BI-103-C	3/8
BI-103-D	1/2
BI-103-E	3/4
BI-103-H	1
BI-103-J	1-1/4
BI-103-K	1-1/2
BI-103-M	2
BI-103-N	2-1/2
BI-103-P	3
BI-103-S	4



**Reducing
Coupling**

PART No.	Pipe
BI-119-BA	1/4 to 1/8
BI-119-CA	3/8 to 1/8
BI-119-CB	3/8 to 1/4
BI-119-DA	1/2 to 1/8
BI-119-DB	1/2 to 1/4
BI-119-DC	1/2 to 3/8
BI-119-EB	3/4 to 1/4
BI-119-EC	3/4 to 3/8
BI-119-ED	3/4 to 1/2
BI-119-HB	1 to 1/4
BI-119-HC	1 to 3/8
BI-119-HD	1 to 1/2
BI-119-HE	1 to 3/4
BI-119-JD	1-1/4 to 1/2
BI-119-JE	1-1/4 to 3/4
BI-119-JH	1-1/4 to 1
BI-119-KD	1-1/2 to 1/2
BI-119-KE	1-1/2 to 3/4
BI-119-KH	1-1/2 to 1
BI-119-KJ	1-1/2 to 1-1/4
BI-119-MD	2 to 1/2
BI-119-ME	2 to 3/4
BI-119-MH	2 to 1
BI-119-MJ	2 to 1-1/4
BI-119-MK	2 to 1-1/2
BI-119-NK	2-1/2 to 1-1/2
BI-119-NM	2-1/2 to 2
BI-119-PM	3 to 2
BI-119-PN	3 to 2-1/2
BI-119-SP	4 to 3

BLACK IRON PIPE FITTINGS

SCHEDULE 40 (150 LBS.)

Fairview



Union

PART No.	Pipe
BI-104-A	1/8
BI-104-B	1/4
BI-104-C	3/8
BI-104-D	1/2
BI-104-E	3/4
BI-104-H	1
BI-104-J	1-1/4
BI-104-K	1-1/2
BI-104-M	2
BI-104-N	2-1/2
BI-104-P	3
BI-104-S	4



Bushing

Steel merchant see BI-110MC

PART No.	Pipe
BI-110-BA	1/4 to 1/8
BI-110-CA	3/8 to 1/8
BI-110-CB	3/8 to 1/4
BI-110-DA	1/2 to 1/8
BI-110-DB	1/2 to 1/4
BI-110-DC	1/2 to 3/8
BI-110-EA	3/4 to 1/8
BI-110-EB	3/4 to 1/4
BI-110-EC	3/4 to 3/8
BI-110-ED	3/4 to 1/2
BI-110-HB	1 to 1/4
BI-110-HC	1 to 3/8
BI-110-HD	1 to 1/2
BI-110-HE	1 to 3/4
BI-110-JC	1-1/4 to 3/8
BI-110-JD	1-1/4 to 1/2
BI-110-JE	1-1/4 to 3/4
BI-110-JH	1-1/4 to 1
BI-110-KD	1-1/2 to 1/2
BI-110-KE	1-1/2 to 3/4
BI-110-KH	1-1/2 to 1
BI-110-KJ	1-1/2 to 1-1/4
BI-110-MD	2 to 1/2
BI-110-ME	2 to 3/4
BI-110-MH	2 to 1
BI-110-MJ	2 to 1-1/4
BI-110-MK	2 to 1-1/2
BI-110-NH	2-1/2 to 1
BI-110-NJ	2-1/2 to 1-1/4
BI-110-NK	2-1/2 to 1-1/2
BI-110-NM	2-1/2 to 2
BI-110-PM	3 to 2
BI-110-PN	3 to 2-1/2
BI-110-SM	4 to 2
BI-110-SN	4 to 2-1/2
BI-110-SP	4 to 3



Lock Nut

PART No.	Pipe
BI-111-B	1/4
BI-111-C	3/8
BI-111-D	1/2
BI-111-E	3/4



**Plug
(Square Head)**

Steel merchant see BI-109MC

PART No.	Pipe
BI-109-A	1/8
BI-109-B	1/4
BI-109-C	3/8
BI-109-D	1/2
BI-109-E	3/4
BI-109-H	1
BI-109-J	1-1/4
BI-109-K	1-1/2
BI-109-M	2
BI-109-N	2-1/2
BI-109-P	3
BI-109-S	4



90° Elbow

PART No.	Pipe
BI-100-A	1/8
BI-100-B	1/4
BI-100-C	3/8
BI-100-D	1/2
BI-100-E	3/4
BI-100-H	1
BI-100-J	1-1/4
BI-100-K	1-1/2
BI-100-M	2
BI-100-N	2-1/2
BI-100-P	3
BI-100-S	4



**Reducing
90° Elbow**

PART No.	Pipe
BI-100-CB	3/8 to 1/4
BI-100-DB	1/2 to 1/4
BI-100-DC	1/2 to 3/8
BI-100-EC	3/4 to 3/8
BI-100-ED	3/4 to 1/2
BI-100-HD	1 to 1/2
BI-100-HE	1 to 3/4
BI-100-JD	1-1/4 to 1/2
BI-100-JE	1-1/4 to 3/4
BI-100-JH	1-1/4 to 1
BI-100-KH	1-1/2 to 1
BI-100-KJ	1-1/2 to 1-1/4
BI-100-MH	2 to 1
BI-100-MJ	2 to 1-1/4
BI-100-MK	2 to 1-1/2

SCHEDULE 80:
Replace prefix BI- with BI80-
for schedule 80 (300LB.)



45° Elbow

PART No.	Pipe
BI-105-A	1/8
BI-105-B	1/4
BI-105-C	3/8
BI-105-D	1/2
BI-105-E	3/4
BI-105-H	1
BI-105-J	1-1/4
BI-105-K	1-1/2
BI-105-M	2
BI-105-N	2-1/2
BI-105-P	3
BI-105-S	4



**90° Street
Elbow**

PART No.	Pipe
BI-116-A	1/8
BI-116-B	1/4
BI-116-C	3/8
BI-116-D	1/2
BI-116-E	3/4
BI-116-H	1
BI-116-J	1-1/4
BI-116-K	1-1/2
BI-116-M	2
BI-116-N	2-1/2
BI-116-P	3
BI-116-S	4



**45° Street
Elbow**

PART No.	Pipe
BI-124-A	1/8
BI-124-B	1/4
BI-124-C	3/8
BI-124-D	1/2
BI-124-E	3/4
BI-124-H	1
BI-124-J	1-1/4
BI-124-K	1-1/2
BI-124-M	2




Tee

PART No.	Pipe
BI-101-A	1/8
BI-101-B	1/4
BI-101-C	3/8
BI-101-D	1/2
BI-101-E	3/4
BI-101-H	1
BI-101-J	1-1/4
BI-101-K	1-1/2
BI-101-M	2
BI-101-N	2-1/2
BI-101-P	3
BI-101-S	4



Reducing Tee

PART No.	Pipe Size		
	1	2	3
BI-101-DB	1/2	1/2	1/4
BI-101-DC	1/2	1/2	3/8
BI-101-EB	3/4	3/4	1/4
BI-101-EBE	3/4	1/4	3/4
BI-101-ED	3/4	3/4	1/2
BI-101-EDD	3/4	1/2	1/2
BI-101-EDE	3/4	1/2	3/4
BI-101-EH	3/4	3/4	1
BI-101-HB	1	1	1/4
BI-101-HBH	1	1/4	1
BI-101-HD	1	1	1/2
BI-101-HDD	1	1/2	1/2
BI-101-HDH	1	1/2	1
BI-101-HE	1	1	3/4
BI-101-HED	1	3/4	1/2
BI-101-HEE	1	3/4	3/4
BI-101-HEH	1	3/4	1
BI-101-JDJ	1-1/4	1/2	1-1/4



Reducing Tee (Cont.)

PART No.	Pipe Size		
	1	2	3
BI-101-JE	1-1/4	1-1/4	3/4
BI-101-JEE	1-1/4	3/4	3/4
BI-101-JH	1-1/4	1-1/4	1
BI-101-KD	1-1/2	1-1/2	1/2
BI-101-KDK	1-1/2	1/2	1-1/2
BI-101-KE	1-1/2	1-1/2	3/4
BI-101-KH	1-1/2	1-1/2	1
BI-101-KJ	1-1/2	1-1/2	1-1/4
BI-101-MD	2	2	1/2
BI-101-ME	2	2	3/4
BI-101-MH	2	2	1
BI-101-MHH	2	1	1
BI-101-MHM	2	1	2
BI-101-MJ	2	2	1-1/4
BI-101-MK	2	2	1-1/2
BI-101-NK	2-1/2	2-1/2	1-1/2



Cap

PART No.	Pipe
BI-108-A	1/8
BI-108-B	1/4
BI-108-C	3/8
BI-108-D	1/2
BI-108-E	3/4
BI-108-H	1
BI-108-J	1-1/4
BI-108-K	1-1/2
BI-108-M	2
BI-108-N	2-1/2
BI-108-P	3
BI-108-S	4



SCHEDULE 80:

Replace prefix BI- with BI80-
for schedule 80 (300LB.)



Cross

PART No.	Pipe
BI-102-C	3/8
BI-102-D	1/2
BI-102-E	3/4
BI-102-H	1
BI-102-J	1-1/4
BI-102-K	1-1/2
BI-102-M	2



Flange

PART No.	Pipe
BI-114-B	1/4
BI-114-C	3/8
BI-114-D	1/2
BI-114-E	3/4
BI-114-H	1
BI-114-J	1-1/4
BI-114-K	1-1/2
BI-114-M	2
BI-114-N	2-1/2

**NOTE: For Thread Sealants
See Tools Section**

BRASS S.A.E. 45° FLARE



Forged Nut Long Standard Type

PART No.	Tube
39-4	1/4
39-6	3/8
39-8	1/2
39-10	5/8
39-12	3/4



Forged Nut Short Standard Type

PART No.	Hiex Size	Tube
40-3	1/2	3/16
40-4	5/8	1/4
40-5	11/16	5/16
40-6	13/16	3/8
40-8	15/16	1/2
40-10	1-1/16	5/8
40-12	1-5/16	3/4
40-14	1-39/64	7/8

PART No.	Reducing		
40R-64	13/16	3/8	to 1/4
40R-86	15/16	1/2	to 3/8
40R-108	1-1/16	5/8	to 1/2

Lead Free		
PART No.		
LF-40-12	1-5/16	3/4



Milled Nut Short Type

PART No.	Length	Tube
41S-3	5/8	3/16
41S-4	3/4	1/4
41S-5	7/8	5/16
41S-6	1	3/8
41S-8	1-1/8	1/2

Lead Free		
PART No.		
LF-41S-4	3/4	1/4
LF-41S-6	7/8	3/8

PART No.	Forged Nut	
FO41S-6	1	3/8
FO41S-8	1-1/8	1/2
FO41S-10	1-5/16	5/8
FO41S-12	1-1/2	3/4

Note:

Fairview 40 series flare nuts are hot forged and marked C37700 in accordance with CAN/CSA-B149 gas installation code requirements.



**Milled Nut
Long Type**

PART No.	Length	Tube
41-3	13/16	3/16
41-4	15/16	1/4
41-5	1-1/8	5/16
41-6	1-5/16	3/8
41-8	1-5/8	1/2
41-10	1-7/8	5/8
41-12	2-3/16	3/4

NOTE: For reducing size use 40R series.



**Bulkhead
Union
Tube to Tube**

PART No.	Tube Description
31-6	3/8 includes L.N.
31-8	1/2 includes L.N.

NOTE: Locknuts supplied in steel.



**Tube Coupling
Female Flare
to Female Flare**

PART No.	Tube
32-4	1/4
32-6	3/8



**Tube Coupling
Swivel Flare
(Forged Nuts)**

PART No.	Tube
34-4	1/4
34-5	5/16
34-6	3/8
34-8	1/2
34-10	5/8
34-12	3/4

PART No.	Reducing		
34R-64	3/8	to	1/4
34R-86	1/2	to	3/8



**Tube Coupling
Female Flare
to Male Flare**

PART No.	Female Tube	Male Tube
35-46	1/4	3/8
35-64	3/8	1/4
35-68	3/8	1/2
35-84	1/2	1/4
35-86	1/2	3/8
35-810	1/2	5/8
35-108	5/8	1/2



**Union Coupling
Tube to Tube**

PART No.	Tube	
42-2	1/8	
42-3	3/16	
42-4	1/4	
42-5	5/16	
42-6	3/8	
42-8	1/2	
42-10	5/8	
42-12	3/4	

PART No.	Reducing		
42R-64	3/8	to	1/4
42R-65	3/8	to	5/16
42R-84	1/2	to	1/4
42R-86	1/2	to	3/8
42R-106	5/8	to	3/8
42R-108	5/8	to	1/2
42R-128	3/4	to	1/2



**Connector
Female Flare
to Female Pipe**

PART No.	Tube	Pipe
30-6B	3/8	1/4



**Connector
Female Flare
to Male Pipe**

PART No.	Tube	Pipe
33-4A	1/4	1/8
33-4B	1/4	1/4
33-6B	3/8	1/4
33-6C	3/8	3/8
33-8C	1/2	3/8
33-8D	1/2	1/2



**Connector
Tube to
Female Pipe**

PART No.	Tube	Pipe
46-3A	3/16	1/8
46-4A	1/4	1/8
46-4B	1/4	1/4
46-4C	1/4	3/8
46-4D	1/4	1/2
46-5A	5/16	1/8
46-5B	5/16	1/4
46-6A	3/8	1/8
46-6B	3/8	1/4
46-6C	3/8	3/8
46-6D	3/8	1/2
46-6E	3/8	3/4
46-8B	1/2	1/4
46-8C	1/2	3/8
46-8D	1/2	1/2
46-8E	1/2	3/4
46-10D	5/8	1/2
46-10E	5/8	3/4
46-12D	3/4	1/2
46-12E	3/4	3/4

Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.



**Connector
Tube to
Male Pipe**

PART No.	Tube	Pipe
48-2A	1/8	1/8
48-3A	3/16	1/8
48-4A	1/4	1/8
48-4B	1/4	1/4
48-4C	1/4	3/8
48-4D	1/4	1/2
48-5A	5/16	1/8
48-5B	5/16	1/4
48-5C	5/16	3/8
48-6A	3/8	1/8
48-6B	3/8	1/4
48-6C	3/8	3/8
48-6D	3/8	1/2
48-6E	3/8	3/4
48-8B	1/2	1/4
48-8C	1/2	3/8
48-8D	1/2	1/2
48-8E	1/2	3/4
48-10C	5/8	3/8
48-10D	5/8	1/2
48-10E	5/8	3/4
48-12D	3/4	1/2
48-12E	3/4	3/4
48-14E	7/8	3/4
48-16E	1	3/4
48-16H	1	1

Lead Free

PART No.	Tube	Pipe
LF-48-4A	1/4	1/8
LF-48-4B	1/4	1/4
LF-48-6B	3/8	1/4
LF-48-6C	3/8	3/8
LF-48-8C	1/2	3/8
LF-48-8D	1/2	1/2
LF-48-12E	3/4	3/4



**90° Elbow
Tube to
Swivel Female Flare**

PART No.	Tube
47-44	1/4
47-66	3/8



**90° Elbow
Tube to
Male Pipe**

PART No.	Tube	Pipe
50-4A	1/4	1/8
50-4B	1/4	1/4
50-6A	3/8	1/8
50-6B	3/8	1/4
50-6C	3/8	3/8
50-6D	3/8	1/2
50-6E	3/8	3/4
50-8B	1/2	1/4
50-8C	1/2	3/8
50-8D	1/2	1/2
50-8E	1/2	3/4
50-10C	5/8	3/8
50-10D	5/8	1/2
50-10E	5/8	3/4
50-12D	3/4	1/2
50-12E	3/4	3/4



**90° Elbow
Tube to
Male Pipe**

PART No.	Tube	Pipe
49-2A	1/8	1/8
49-3A	3/16	1/8
49-4A	1/4	1/8
49-4B	1/4	1/4
49-4C	1/4	3/8
49-4D	1/4	1/2
49-5A	5/16	1/8
49-5B	5/16	1/4
49-5C	5/16	3/8
49-6A	3/8	1/8
49-6B	3/8	1/4
49-6C	3/8	3/8
49-6D	3/8	1/2
49-6E	3/8	3/4
49-8B	1/2	1/4
49-8C	1/2	3/8
49-8D	1/2	1/2
49-8E	1/2	3/4
49-10C	5/8	3/8
49-10D	5/8	1/2
49-10E	5/8	3/4
49-12D	3/4	1/2
49-12E	3/4	3/4
49-12H	3/4	1
49-16H	1	1

Lead Free

PART No.	Tube	Pipe
LF-49-4A	1/4	1/8
LF-49-4B	1/4	1/4
LF-49-6B	3/8	1/4
LF-49-6C	3/8	3/8
LF-49-8C	1/2	3/8
LF-49-8D	1/2	1/2
LF-49-12E	3/4	3/4



**90° Elbow
Tube to Tube**

PART No.	Tube
55-4	1/4
55-5	5/16
55-6	3/8
55-8	1/2
55-10	5/8
55-12	3/4

PART No.	Reducing
55R-64	3/8 to 1/4
55R-84	1/2 to 1/4
55R-86	1/2 to 3/8
55R-108	5/8 to 1/2



**45° Elbow
Tube to
Male Pipe**

PART No.	Tube	Pipe
54-4A	1/4	1/8
54-4B	1/4	1/4
54-4C	1/4	3/8
54-5A	5/16	1/8
54-5B	5/16	1/4
54-6B	3/8	1/4
54-6C	3/8	3/8
54-6D	3/8	1/2
54-8C	1/2	3/8
54-8D	1/2	1/2
54-10D	5/8	1/2
54-12D	3/4	1/2
54-12E	3/4	3/4



**Tee
Tube to
Female Pipe**

PART No.	Tube	Pipe
36-4B	1/4	1/4
36-6B	3/8	1/4
36-6C	3/8	3/8
36-6D	3/8	1/2
36-8C	1/2	3/8
36-8D	1/2	1/2



**Tee
Ends Male
& Female Pipe
Center Tube**

PART No.	Tube	Pipe
53-4A	1/4	1/8



**Tee Ends Tube
& Male Pipe
Center Tube**

PART No.	Tube	Pipe
51-4A	1/4	1/8
51-4B	1/4	1/4
51-6B	3/8	1/4
51-6C	3/8	3/8
51-6D	3/8	1/2
51-8C	1/2	3/8
51-8D	1/2	1/2
51-10D	5/8	1/2



**Tee
Tube
Three Ends**


PART No.	Tube
44-2	1/8
44-3	3/16
44-4	1/4
44-5	5/16
44-6	3/8
44-8	1/2
44-10	5/8
44-12	3/4



**Tee
Tube
Three Ends**


PART No.	1	2	3
44R-64	3/8	3/8	1/4
44R-68	3/8	3/8	1/2
44R-84	1/2	1/2	1/4
44R-86	1/2	1/2	3/8
44R-866	1/2	3/8	3/8
44R-868	1/2	3/8	1/2
44R-810	1/2	1/2	5/8
44R-106	5/8	5/8	3/8
44R-108	5/8	5/8	1/2
44R-1088	5/8	1/2	1/2

Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.



**Tee Ends Tube
Center
Male Pipe**

PART No.	Tube	Pipe
45-4A	1/4	1/8
45-4B	1/4	1/4
45-6B	3/8	1/4
45-6C	3/8	3/8
45-6D	3/8	1/2
45-8B	1/2	1/4
45-8C	1/2	3/8
45-8D	1/2	1/2
45-10D	5/8	1/2
45-12D	3/4	1/2
45-12E	3/4	3/4



**Cross Tube
Four Ends**

PART No.	Tube
52-6	3/8
52-8	1/2



Sealing Cap Nut

PART No.	Tube
56-4	1/4
56HP-4 Heavy Pattern	1/4
56-5	5/16
56-6	3/8
56-8	1/2
56-10	5/8
56-12	3/4



Sealing Plug

PART No.	Tube
58-4	1/4
58-5	5/16
58-6	3/8
58-8	1/2
58-10	5/8
58-12	3/4



**Copper Flare
Gasket**

PART No.	Tube
59-4	1/4
59-6	3/8
59-8	1/2
59-10	5/8
59-12	3/4

Note:

Fairview 40 series flare nuts are hot forged and marked C37700 in accordance with CAN/CSA-B149 gas installation code requirements.

BRASS AIR SHIFT TRANSMISSION FITTINGS



Sleeve

PART No.	Tube	Fuller No.
860-2	1/8	83001
860-2-1/2	5/32	83002



**Union
Coupling**

PART No.	Tube	Fuller No.
862-2	1/8	84101
862-2-1/2	5/32	84102



**90° Elbow
Tube to
Male Pipe**

PART No.	Tube	Pipe	Fuller No.
869-2A	1/8	1/8	85002
869-2-1/2A	5/32	1/8	85001



Nut

PART No.	Tube	Fuller No.
861-2	1/8	83501
861-2-1/2	5/32	83502



**Connector
Tube to
Male Pipe**

PART No.	Tube	Pipe	Fuller No.
868-2-1	1/8	1/16	84001
868-2A	1/8	1/8	84002
868-2-1/2-1	5/32	1/16	83003
868-2-1/2A	5/32	1/8	N/A

TO ASSEMBLE:

1. PLACE NUT AND SLEEVE OVER TUBE
2. PUSH TUBE INTO FITTING AS FAR AS POSSIBLE
3. FINGER TIGHTEN NUT
4. COMPLETE SEAL WITH WRENCH ONE FULL TURN

AIR SHIFT TRANSMISSION KITS

Fairview's air shift transmission kit has a selection of fittings in a light weight compact kit.



**Split Sleeve
Compression Fittings**

PART No. ASTM-KIT

Kit Components:

PART No.	Description	QTY:
862-2	Union, 1/8 Tube	3
862-2-1/2	Union, 5/32 Tube	3
868-2-1	Connector, 1/8 Tube 1/16 Pipe	3
868-2-1/2-1	Connector, 5/32 Tube 1/16 Pipe	3
868-2-1/2A	Connector, 5/32 Tube 1/8 Pipe	3
868-2A	Connector, 1/8 Tube 1/8 Pipe	3
869-2-1/2A	Elbow, 5/32 Tube 1/8 Pipe	3
869-2A	Elbow, 1/8 Tube 1/8 Pipe	3

Kit Dimensions
Height: 3.50 In.
Width: 6.25 In.
Depth: 1.25 In.

Fairview's push-to-connect air shift transmission kit has a selection of fittings in a light weight compact kit.



**Push-to-Connect
Fittings**

PART No. ASTM-KIT-PC

Kit Components:

PART No.	Description	QTY:
PC62-2	Union, 1/8 Tube	3
PC62-2-1/2	Union, 5/32 Tube	3
PC68-2X1	Connector, 1/8 Tube 1/16 Pipe	3
PC68-2-1/2-1	Connector, 5/32 Tube 1/16 Pipe	3
PC68-2-1/2A	Connector, 5/32 Tube 1/8 Pipe	3
PC68-2A	Connector, 1/8 Tube 1/8 Pipe	3
PC69-2-1/2A	Elbow, 5/32 Tube 1/8 Pipe	3
PC69-2A	Elbow, 1/8 Tube 1/8 Pipe	3

Kit Dimensions
Height: 3.50 In.
Width: 6.25 In.
Depth: 1.25 In.



See Hose Section for J1402 D.O.T. Air Shift Transmission Assemblies

STEEL GREASE FITTINGS


Straight

PART No.	Thread Size	Overall Length (IN.)
GN-607	1/8 x 27	1.25
GN-610	1/8 x 27	0.62
GN-627	1/4 x 18	0.80
GN-641	1/4 x 28	0.54
GN-652	1/4 x 28	0.67
GN-680	1/4 x 28	0.93


Straight Metric

PART No.	Thread Size	Overall Length (mm)
GNM-301	10mm x 1	15.2
GNM-601	6mm x 1	13.5
GNM-901	8mm x 1	15.0


Grease Whip Coupler

4-Jaw steel coupler for use with rubber or nylon grease whip hose assemblies.

PART No.	Pipe
GWC-A	1/8
GWC-AP	Retail Packaged


45° Angle

PART No.	Thread Size	Overall Length (IN.)
GN-637	1/4 x 28	0.88
GN-688	1/8 x 27	0.98


45° Angle Metric

PART No.	Thread Size	Overall Length (mm)
GNM-045	6mm x 1	22.6
GNM-345	10mm x 1	23.5
GNM-445	8mm x 1	22.6


65° Angle

PART No.	Thread Size	Overall Length (IN.)
GN-612	1/8 X 27	0.88
GN-629	1/4 X 18	0.96

Grease fittings are available in retail carded packaging, 10 per bag. Suffix PART No. with P10 - (10 Pcs.) Example: GN607P10


90° Angle

PART No.	Thread Size	Overall Length (IN.)
GN-613	1/8 X 27	0.82
GN-911	1/4 X 28	0.69


90° Angle Metric

PART No.	Thread Size	Overall Length (mm)
GNM-090	6mm x 1	18.0
GNM-390	10mm x 1	19.0
GNM-490	8mm x 1	18.0


Drive Fit

PART No.	Thread Size	Overall Length (IN.)
GN-608	5/16	0.58
GN-728	3/16	0.50
GN-743	1/4	0.50

GREASE FITTING ASSORTMENT KITS

Fairview's grease fitting kits provide the most popular grease nipple fittings all in one place when you need them. This light weight compact kit is ideal for any shop.

PART No. GN-100-KIT: 100 STANDARD GREASE FITTINGS IN 6 POPULAR SIZES. KIT CONTAINS:

PART No.	Description
GN-100-KIT	Standard
GNM-100-KIT	Metric



PART No.	Quantity	Style	Thread Size	Overall Length (IN.)
GN-610	20	Straight	1/8 x 27	0.62
GN-613	4	90°	1/8 X 27	0.82
GN-637	6	45°	1/4 x 28	0.88
GN-641	60	Straight	1/4 x 28	0.54
GN-688	4	45°	1/8 x 27	0.98
GN-911	6	90°	1/4 X 28	0.69

PART No. GNM-100-KIT: 100 METRIC GREASE FITTINGS IN 6 POPULAR SIZES. KIT CONTAINS:

PART No.	Quantity	Style	Thread Size	Overall Length (mm)
GNM-045	10	45°	6mm x 1	22.6
GNM-090	10	90°	6mm x 1	18.0
GNM-301	10	Straight	10mm x 1	15.2
GNM-445	10	45°	8mm x 1	22.6
GNM-601	40	Straight	6mm x 1	13.5
GNM-901	20	Straight	8mm x 1	15.0

GREASE FITTING KIT

PART No. GN-100-KIT

Kit Dimensions:

Height: 3.50 In.

Width: 6.25 In.

Depth: 1.25 In.



HYDRAULIC KITS



HYDRAULIC O-RING KIT

Part No. ORHYD-3639SF-306

ORB, ORFS AND SPLIT FLANGE O-RINGS

Ideal for use with hydraulic fluids as well as propane, butane, petroleum oil, mineral oil, diesel fuel, fuel oils, vegetable oils and greases.

Temperature: -40°C to 121°C (-40°F to 250°F)

Durometer: 90 Shore A

Color: Black



PART No.	Description	Qty.
S3931R-4	ORFS O-Ring;9/16-18	20
S3931R-6	ORFS O-Ring;11/16-16	20
S3931R-8	ORFS O-Ring;13/16-12	20
S3931R-10	ORFS O-Ring;1-14	20
S3931R-12	ORFS O-Ring 1-3/16-12	20
S3931R-16	ORFS O-Ring;1-7/16-12	20
S3631R-3	ORB O-Ring;3/16	20
S3631R-4	ORB O-Ring;1/4	20
S3631R-5	ORB O-Ring;5/16	20
S3631R-6	ORB O-Ring;3/8	20

PART No.	Description	Qty.
S3631R-8	ORB O-Ring;1/2	20
S3631R-10	ORB O-Ring;5/8	20
S3631R-12	ORB O-Ring;3/4	20
S3631R-14	ORB O-Ring;7/8	10
SFO-12	Split Flange O-Ring;3/4	10
SFO-16	Split Flange O-Ring;1	10
SFO-20	Split Flange O-Ring;1-1/4	10
SFO-24	Split Flange O-Ring;1-1/2	6
FKBOX-1	Fitting Case 1 Sided Small	1

HYDRAULIC CAP AND PLUG KITS

Fairview's 3 new kits contain a wide variety of Steel Caps and Plugs for JIC, NPT, ORB and ORFS connections. For use in high pressure applications such as agriculture, mining and industrial, Fairview's steel, hydraulic caps and plugs are ideal for year round applications or sealing hydraulic systems while completing repairs. Size legend included on inner case lid.



Kit Dimensions

Height: 2 In.

Width: 12.5 In.

Depth: 9.5 In.

PART No. SAPIPCP-KIT-63

PART No. SAORCP-KIT-74

PART No.	Description	Qty.
S3618-2	Steel Plug;5/16-24 ORB	10
S3618-4	Steel Plug;7/16-20 ORB	10
S3618-6	Steel Plug;9/16-18 ORB	10
S3618-8	Steel Plug;3/4-16 ORB	4
S3618-10	Steel Plug;7/8-14 ORB	4
S3618-12	Steel Plug;1-1/16-20 ORB	2
S3618-16	Steel Plug;1-5/16-12 ORB	2
S3958-4	Steel Plug;9/16-18 MORFS	10
S3958-6	Steel Plug;11/16-16 MORFS	10
S3958-8	Steel Plug;13/16-16 MORFS	4
S3958-10	Steel Plug;1-1/4 MORFS	4
S3958-12	Steel Plug;1-3/16-12 MORFS	2
S3958-16	Steel Plug;1-7/16-12 MORFS	2
FKBOX-1	Fitting Case 1 Sided Small	1

PART No.	Description	Qty.
S1008-A	Steel Cap;1/8FPT	2
S1008-B	Steel Cap;1/4FPT	4
S1008-C	Steel Cap;3/8FPT	4
S1008-D	Steel Cap;1/2FPT	4
S1008-E	Steel Cap;3/4FPT	4
S1008-H	Steel Cap;1" FPT	1
S1018-A	Steel Plug Sunk Hex;1/8MPT	5
S1018-B	Steel Plug Sunk Hex;1/4MPT	5
S1018-C	Steel Plug Sunk Hex;3/8MPT	5
S1018-D	Steel Plug Sunk Hex;1/2MPT	5
S1018-E	Steel Plug Sunk Hex;3/4MPT	5
S1018-H	Steel Plug Sunk Hex;1MPT	2
S1021-B	Steel Plug Hex Head;1/4MPT	5
S1021-C	Steel Plug Hex Head;3/8MPT	5
S1021-D	Steel Plug Hex Head;1/2MPT	5
S1021-E	Steel Plug Hex Head;3/4MPT	2
FKBOX-1	Fitting Case 1 Sided Small	1

PART No. SAJICCP-KIT-66

PART No.	Description	Qty.
S3756-10	Steel Cap;5/8 FJIC	3
S3756-12	Steel Cap;3/4 FJIC	2
S3756-14	Steel Cap;7/8 FJIC	2
S3756-16	Steel Cap;1 FJIC	2
S3756-4	Steel Cap;1/4 FJIC	10
S3756-6	Steel Cap;3/8 FJIC	10
S3756-8	Steel Cap;1/2 FJIC	4
S3758-10	Steel Plug;5/8 MJIC	3
S3758-12	Steel Plug;3/4 MJIC	2
S3758-14	Steel Plug;7/8 MJIC	2
S3758-16	Steel Plug;1 MJIC	2
S3758-4	Steel Plug;1/4 MJIC	10
S3758-6	Steel Plug;3/8 MJIC	10
S3758-8	Steel Plug;1/2 MJIC	4
FKBOX-1	Fitting Case 1 Sided Small	1



**Connector
Female 37°
Swivel to
Male Pipe**

PART No.	Swivel	Pipe
S3520-4A	1/4	1/8
S3520-4B	1/4	1/4
S3520-6B	3/8	1/4
S3520-6C	3/8	3/8
S3520-8C	1/2	3/8
S3520-8D	1/2	1/2
S3520-10D	5/8	1/2
S3520-10E	5/8	3/4
S3520-12D	3/4	1/2
S3520-12E	3/4	3/4
S3520-16E	1	3/4
S3520-16H	1	1
S3520-20J	1-1/4	1-1/4



**Connector
Female 37°
Swivel to
Male O-Ring**

PART No.	Swivel	O-Ring
S3522-4	1/4	7/16 - 20
S3522-6	3/8	9/16 - 18
S3522-8	1/2	3/4 - 16
S3522-10	5/8	7/8 - 14
S3522-12	3/4	1-1/16 - 12
S3522-16	1	1-5/16 - 12
S3522-810	1/2	7/8-14



**Connector
Female 37°
Swivel to
Female Pipe**

PART No.	Swivel	Pipe
S3526-4A	1/4	1/8
S3526-4B	1/4	1/4
S3526-6B	3/8	1/4
S3526-6C	3/8	3/8
S3526-8C	1/2	3/8
S3526-8D	1/2	1/2
S3526-10D	5/8	1/2
S3526-12E	3/4	3/4
S3526-16H	1	1
S3526-20J	1-1/4	1-1/4



**Union
Female 37°
Swivel**

PART No.	Swivel
S3542-4	1/4
S3542-6	3/8
S3542-8	1/2
S3542-12	3/4
S3542-16	1



**Connector
Female 37°
Swivel to
Male JIC**

PART No.	Swivel	Tube
S3548-4	1/4	1/4
S3548-6	3/8	3/8
S3548-8	1/2	1/2
S3548-10	5/8	5/8
S3548-12	3/4	3/4
S3548-16	1	1



**90° Elbow
Female 37°
Swivel to
Male Pipe**

PART No.	Swivel	Pipe
S3516-4A	1/4	1/8
S3516-4B	1/4	1/4
S3516-6B	3/8	1/4
S3516-6C	3/8	3/8
S3516-8C	1/2	3/8
S3516-8D	1/2	1/2
S3516-10D	5/8	1/2
S3516-12E	3/4	3/4
S3516-16H	1	1



**90° Elbow
Female 37°
Swivel to
Male O-Ring**

PART No.	Swivel	O-Ring
S3599-6	3/8	9/16 - 18
S3599-8	1/2	3/4 - 16
S3599-10	5/8	7/8 - 14
S3599-12	3/4	1-1/16 - 12



**90° Elbow
Female 37°
Swivel to
Male JIC**

PART No.	Swivel	Tube
S3549-4	1/4	1/4
S3549-6	3/8	3/8
S3549-68	3/8	1/2
S3549-8	1/2	1/2
S3549-86	1/2	3/8
S3549-810	1/2	5/8
S3549-10	5/8	5/8
S3549-12	3/4	3/4
S3549-16	1	1
S3549-20	1-1/4	1-1/4
S3549-24	1-1/2	1-1/2



**90° Bent Tube
Elbow
Female 37°
Swivel to
Male JIC**

PART No.	Swivel	Tube	Drop Length
S3549BT-4	1/4	1/4	0.68
S3549BT-8	1/2	1/2	1.09
S3549BT-10	5/8	5/8	1.23
S3549BT-12	3/4	3/4	1.83
S3549BT-16	1	1	2.14



**90° Bent Tube
Elbow
(Long Style)
Female 37°
Swivel to
Male JIC**

PART No.	Swivel	Tube	Drop Length
S3549LBT-6	3/8	3/8	2.66
S3549LBT-8	1/2	1/2	2.44
S3549LBT-12	3/4	3/4	3.73
S3549LBT-16	1	1	4.33



**45° Elbow
Female 37°
Swivel to
Male JIC**

PART No.	Swivel	Tube
S3554-4	1/4	1/4
S3554-6	3/8	3/8
S3554-8	1/2	1/2
S3554-10	5/8	5/8
S3554-12	3/4	3/4
S3554-16	1	1
S3554-20	1-1/4	1-1/4
S3554-24	1-1/2	1-1/2



**Tee
Male JIC to
Male JIC to
Female 37°
Swivel**

PART No.	Swivel	Tube
S3545-4	1/4	1/4
S3545-6	3/8	3/8
S3545-8	1/2	1/2
S3545-10	5/8	5/8
S3545-12	3/4	3/4
S3545-16	1	1
S3545-20	1-1/4	1-1/4



**Tee
Male JIC to
Female 37°
Swivel to
Male JIC**

PART No.	Swivel	Tube
S3551-4	1/4	1/4
S3551-6	3/8	3/8
S3551-8	1/2	1/2
S3551-10	5/8	5/8
S3551-12	3/4	3/4
S3551-16	1	1
S3551-20	1-1/4	1-1/4

STEEL 37° J.I.C. FLARE ADAPTERS



Sleeve

PART No.	Tube
S3721-4	1/4
S3721-6	3/8
S3721-8	1/2
S3721-10	5/8
S3721-12	3/4
S3721-16	1
S3721-20	1-1/4



Sleeve Nut

PART No.	Tube
S3720-4	1/4
S3720-6	3/8
S3720-8	1/2
S3720-10	5/8
S3720-12	3/4
S3720-16	1
S3720-20	1-1/4



**Reducer
Female JIC
to Male JIC
(One Piece Type)**

PART No.	Female Tube	Male Tube
S3735-46	1/4	3/8
S3735-64	3/8	1/4
S3735-68	3/8	1/2
S3735-84	1/2	1/4
S3735-86	1/2	3/8
S3735-810	1/2	5/8
S3735-812	1/2	3/4
S3735-106	5/8	3/8
S3735-108	5/8	1/2
S3735-1012	5/8	3/4
S3735-124	3/4	1/4
S3735-126	3/4	3/8
S3735-128	3/4	1/2
S3735-1210	3/4	5/8
S3735-1216	3/4	1
S3735-164	1	1/4
S3735-166	1	3/8
S3735-168	1	1/2
S3735-1610	1	5/8
S3735-1612	1	3/4
S3735-1620	1	1-1/4
S3735-2012	1-1/4	3/4
S3735-2016	1-1/4	1
S3735-2416	1-1/2	1
S3735-2420	1-1/2	1-1/4
S3735-3224	2	1-1/2



**Union
Male JIC to
Male JIC**

PART No.	Tube	Tube
S3742-4	1/4	1/4
S3742-5	5/16	5/16
S3742-6	3/8	3/8
S3742-64	3/8	1/4
S3742-8	1/2	1/2
S3742-86	1/2	3/8
S3742-10	5/8	5/8
S3742-108	5/8	1/2
S3742-12	3/4	3/4
S3742-128	3/4	1/2
S3742-1210	3/4	5/8
S3742-16	1	1
S3742-1612	1	3/4
S3742-20	1-1/4	1-1/4
S3742-2016	1-1/4	1
S3742-24	1-1/2	1-1/2



**Connector
Male JIC to
Female Pipe**

PART No.	Tube	Pipe
S3746-4A	1/4	1/8
S3746-4B	1/4	1/4
S3746-6B	3/8	1/4
S3746-6C	3/8	3/8
S3746-6D	3/8	1/2
S3746-8B	1/2	1/4
S3746-8C	1/2	3/8
S3746-8D	1/2	1/2
S3746-10D	5/8	1/2
S3746-10E	5/8	3/4
S3746-12D	3/4	1/2
S3746-12E	3/4	3/4
S3746-16H	1	1
S3746-20J	1-1/4	1-1/4
S3746-24K	1-1/2	1-1/2
S3746-32M	2	2



**Connector
37° Tube to
British Standard
Pipe Parallel
Male**

PART No.	Tube	BSPP
S3748BSPP-44	1/4	1/4
S3748BSPP-66	3/8	3/8
S3748BSPP-88	1/2	1/2



**Connector
Male JIC to
Male Pipe**

PART No.	Tube	Pipe
S3748-2A	1/8	1/8
S3748-3A	3/16	1/8
S3748-4A	1/4	1/8
S3748-4B	1/4	1/4
S3748-4C	1/4	3/8
S3748-4D	1/4	1/2
S3748-5B	5/16	1/4
S3748-6A	3/8	1/8
S3748-6B	3/8	1/4
S3748-6C	3/8	3/8
S3748-6D	3/8	1/2
S3748-6E	3/8	3/4
S3748-8B	1/2	1/4
S3748-8C	1/2	3/8
S3748-8D	1/2	1/2
S3748-8E	1/2	3/4
S3748-8H	1/2	1
S3748-10C	5/8	3/8
S3748-10D	5/8	1/2
S3748-10E	5/8	3/4
S3748-12D	3/4	1/2
S3748-12E	3/4	3/4
S3748-12H	3/4	1
S3748-16D	1	1/2
S3748-16E	1	3/4
S3748-16H	1	1
S3748-16J	1	1-1/4
S3748-20H	1-1/4	1
S3748-20J	1-1/4	1-1/4
S3748-20K	1-1/4	1-1/2
S3748-24J	1-1/2	1-1/4
S3748-24K	1-1/2	1-1/2
S3748-32K	2	1-1/2
S3748-32M	2	2



**Male JIC
Plug**

PART No.	Tube
S3758-3	3/16
S3758-4	1/4
S3758-5	5/16
S3758-6	3/8
S3758-8	1/2
S3758-10	5/8
S3758-12	3/4
S3758-14	7/8
S3758-16	1
S3758-20	1-1/4
S3758-24	1-1/2
S3758-32	2



Cap Nut


PART No.	Tube
S3756-4	1/4
S3756-5	5/16
S3756-6	3/8
S3756-8	1/2
S3756-10	5/8
S3756-12	3/4
S3756-14	7/8
S3756-16	1
S3756-20	1-1/4
S3756-24	1-1/2
S3756-32	2

STEEL 37° J.I.C. FLARE ADAPTERS



**90° Elbow
Male JIC to
Male Pipe**

PART No.	Tube	Pipe
S3749-2A	1/8	1/8
S3749-4A	1/4	1/8
S3749-4B	1/4	1/4
S3749-4C	1/4	3/8
S3749-6A	3/8	1/8
S3749-6B	3/8	1/4
S3749-6C	3/8	3/8
S3749-6D	3/8	1/2
S3749-6E	3/8	3/4
S3749-8B	1/2	1/4
S3749-8C	1/2	3/8
S3749-8D	1/2	1/2
S3749-8E	1/2	3/4
S3749-8H	1/2	1
S3749-10C	5/8	3/8
S3749-10D	5/8	1/2
S3749-10E	5/8	3/4
S3749-12D	3/4	1/2
S3749-12E	3/4	3/4
S3749-12H	3/4	1
S3749-16E	1	3/4
S3749-16H	1	1
S3749-16J	1	1-1/4
S3749-20H	1-1/4	1
S3749-20J	1-1/4	1-1/4
S3749-20K	1-1/4	1-1/2
S3749-24K	1-1/2	1-1/2
S3749-32M	2	2



**90° Elbow
(Long Style)
Male JIC to
Male Pipe**

PART No.	Tube	Pipe
S3749L-4A	1/4	1/8
S3749L-4B	1/4	1/4
S3749L-6B	3/8	1/4
S3749L-8D	1/2	1/2



**90° Elbow
(Extra
Long Style)
Male JIC to
Male Pipe**

PART No.	Tube	Pipe
S3749EL-4A	1/4	1/8
S3749EL-4B	1/4	1/4



**90° Elbow
(Extra-Extra
Long Style)
Male JIC to
Male Pipe**

PART No.	Tube	Pipe
S3749EEL-4A	1/4	1/8



**45° Elbow
Male JIC to
Male Pipe**

PART No.	Tube	Pipe
S3754-4A	1/4	1/8
S3754-4B	1/4	1/4
S3754-6B	3/8	1/4
S3754-6C	3/8	3/8
S3754-6D	3/8	1/2
S3754-8C	1/2	3/8
S3754-8D	1/2	1/2
S3754-8E	1/2	3/4
S3754-10C	5/8	3/8
S3754-10D	5/8	1/2
S3754-12D	3/4	1/2
S3754-12E	3/4	3/4
S3754-12H	3/4	1
S3754-16E	1	3/4
S3754-16H	1	1
S3754-20J	1-1/4	1-1/4
S3754-24K	1-1/2	1-1/2
S3754-32M	2	2



**90° Elbow
Male JIC to
Female Pipe**

PART No.	Tube	Pipe
S3750-4A	1/4	1/8
S3750-4B	1/4	1/4
S3750-6B	3/8	1/4
S3750-6C	3/8	3/8
S3750-8C	1/2	3/8
S3750-8D	1/2	1/2
S3750-10D	5/8	1/2
S3750-12E	3/4	3/4
S3750-16H	1	1



**90° Elbow
Male JIC to
Male JIC**

PART No.	Tube	Tube
S3755-4	1/4	1/4
S3755-6	3/8	3/8
S3755-8	1/2	1/2
S3755-10	5/8	5/8
S3755-12	3/4	3/4
S3755-16	1	1
S3755-20	1-1/4	1-1/4



**Tee
Male JIC
All Ends**

PART No.	Tube	Tube
S3744-4	1/4	1/4
S3744-6	3/8	3/8
S3744-8	1/2	1/2
S3744-10	5/8	5/8
S3744-12	3/4	3/4
S3744-16	1	1



**Tee
Male JIC to
Male Pipe to
Tube**

PART No.	Tube	Pipe
S3751-4B	1/4	1/4
S3751-6B	3/8	1/4
S3751-6C	3/8	3/8
S3751-6D	3/8	1/2
S3751-8C	1/2	3/8
S3751-8D	1/2	1/2
S3751-8E	1/2	3/4
S3751-12E	3/4	3/4
S3751-16H	1	1



**Tee
Male JIC to
Male JIC to
Female Pipe**

PART No.	Tube	Pipe
S3736-6B	3/8	1/4
S3736-8C	1/2	3/8
S3736-8D	1/2	1/2
S3736-12E	3/4	3/4



**Tee
Male JIC to
Male JIC to
Male Pipe**

PART No.	Tube	Pipe
S3745-4B	1/4	1/4
S3745-6B	3/8	1/4
S3745-6C	3/8	3/8
S3745-8C	1/2	3/8
S3745-8D	1/2	1/2
S3745-12E	3/4	3/4
S3745-16H	1	1

STEEL 37° J.I.C. FLARE BULKHEAD ADAPTERS



**Bulkhead Union
Male JIC to
Male JIC**

PART No.	Tube
S3842-4	1/4
S3842-6	3/8
S3842-8	1/2
S3842-10	5/8
S3842-12	3/4
S3842-16	1
S3842-20	1-1/4



**45° Bulkhead Elbow
Male JIC to
Male JIC**

PART No.	Tube
S3854-6	3/8
S3854-8	1/2
S3854-12	3/4
S3854-16	1



**Bulkhead Connector
Male JIC to
Pipe**

PART No.	Tube	Pipe
S3848-4B	1/4	1/4
S3848-6B	3/8	1/4
S3848-6C	3/8	3/8
S3848-8D	1/2	1/2
S3848-10D	5/8	1/2
S3848-12E	3/4	3/4
S3848-16H	1	1
S3848-20J	1-1/4	1-1/4



**90° Bulkhead Elbow
Male JIC to
Male JIC**

PART No.	Tube
S3855-4	1/4
S3855-6	3/8
S3855-8	1/2
S3855-12	3/4
S3855-16	1



Bulkhead Locknut

PART No.	Tube
S3831N-4	1/4
S3831N-6	3/8
S3831N-8	1/2
S3831N-12	3/4
S3831N-16	1



**Bulkhead Tee
Male JIC
All Ends**

PART No.	Tube
S3845-4	1/4
S3845-6	3/8
S3845-8	1/2
S3845-12	3/4



**Bulkhead Connector
Male JIC to
Female Pipe**

PART No.	Tube	Pipe
S3846-4A	1/4	1/8
S3846-4B	1/4	1/4
S3846-6C	3/8	3/8
S3846-8D	1/2	1/2
S3846-12E	3/4	3/4
S3846-16H	1	1

**NOTE:
BULKHEADS COME COMPLETE
WITH LOCKNUTS**

CONTACT US FOR CUSTOM MADE HYDRAULIC HOSE ASSEMBLIES



FLANGE ADAPTERS AND KITS

(CODE 61 MAXIMUM WORKING PRESSURE 3000 PSI)



PART No.	Tube	Split Flange
S3700BT-1212	3/4	3/4
S3700BT-1216	3/4	1
S3700BT-1616	1	1



** Includes Bolts, Lock Washers and O-Ring.

PART No.	Flange Size	Head Size
SFK61-12	3/4	1.50
SFK61-16	1	1.75
SFK61-20	1-1/4	2.00
SFK61-24	1-1/2	2.38
SFK61-32	2	2.81



PART No.	Tube	Split Flange
S3790BT-1212	3/4	3/4
S3790BT-1216	3/4	1
S3790BT-1616	1	1
S3790BT-1620	1	1-1/4
S3790BT-2424	1-1/2	1-1/2
S3790BT-2432	1-1/2	2



** Includes Bolts, Lock Washers and O-Ring.

PART No.	Pipe	Pad Size
SFPK2661-16H	1	1
SFPK2661-20J	1-1/4	1-1/4
SFPK2661-24K	1-1/2	1-1/2
SFPK2661-32M	2	2



PART No.	Tube	Split Flange
S3740BT-812	1/2	3/4
S3740BT-1212	3/4	3/4
S3740BT-1616	1	1



PART No.	Flange Size	Dia.
SFO-12	3/4	.984
SFO-16	1	1.296
SFO-20	1-1/4	1.484
SFO-24	1-1/2	1.859
SFO-32	2	2.234

(CODE 62 MAXIMUM WORKING PRESSURE 6000 PSI)



PART No.	Tube	Split Flange
S3700BT62-1212	3/4	3/4
S3700BT62-1616	1	1



** Includes Bolts, Lock Washers and O-Ring.

PART No.	Flange Size	Head Size
SFK62-12	3/4	1.63
SFK62-16	1	1.88
SFK62-20	1-1/4	2.12



PART No.	Tube	Split Flange
S3790BT62-1212	3/4	3/4
S3790BT62-1616	1	1
S3790BT62-1620	1	1-1/4
S3790BT62-2020	1-1/4	1-1/4



PART No.	Flange Size	Dia.
SFO-12	3/4	.984
SFO-16	1	1.296
SFO-20	1-1/4	1.484
SFO-24	1-1/2	1.859
SFO-32	2	2.234

STEEL S.A.E. O-RING BOSS ADAPTERS

(BUNA-N O-RING STANDARD)



**Connector
Male O-Ring to
Female Pipe**

PART No.	O-Ring	Pipe
S3620-4A	7/16 - 20	1/8
S3620-4B	7/16 - 20	1/4
S3620-5A	1/2 - 20	1/8
S3620-5B	1/2 - 20	1/4
S3620-6B	9/16 - 18	1/4
S3620-6C	9/16 - 18	3/8
S3620-6D	9/16 - 18	1/2
S3620-8C	3/4 - 16	3/8
S3620-8D	3/4 - 16	1/2
S3620-10C	7/8 - 14	3/8
S3620-10D	7/8 - 14	1/2
S3620-10E	7/8 - 14	3/4
S3620-12D	1-1/16 - 12	1/2
S3620-12E	1-1/16 - 12	3/4
S3620-16E	1-5/16 - 12	3/4
S3620-16H	1-5/16 - 12	1
S3620-20J	1-5/8 - 12	1-1/4



**Connector
Male O-Ring to
Male Pipe**

PART No.	O-Ring	Pipe
S3622-4B	7/16 - 20	1/4
S3622-6B	9/16 - 18	1/4
S3622-6C	9/16 - 18	3/8
S3622-6D	9/16 - 18	1/2
S3622-8B	3/4 - 16	1/4
S3622-8C	3/4 - 16	3/8
S3622-8D	3/4 - 16	1/2
S3622-10D	7/8 - 14	1/2
S3622-12D	1-1/16 - 12	1/2
S3622-12E	1-1/16 - 12	3/4
S3622-16H	1-5/16 - 12	1
S3622-20J	1-5/8 - 12	1-1/4



**Connector
Female O-Ring
to Male Pipe**

PART No.	O-Ring	Pipe
S3622F-4B	7/16 - 20	1/4
S3622F-6B	9/16 - 18	1/4
S3622F-6C	9/16 - 18	3/8
S3622F-8D	3/4 - 16	1/2
S3622F-10D	7/8 - 14	1/2
S3622F-12E	1-1/16 - 12	3/4



**Connector
Male O-Ring to
Female O-Ring**

PART No.	Male	Female
S3623-4	7/16 - 20	7/16 - 20
S3623-6	9/16 - 18	9/16 - 18
S3623-6A	9/16 - 18	7/16 - 20
S3623-6B	9/16 - 18	3/4 - 16
S3623-8	3/4 - 16	3/4 - 16
S3623-8A	3/4 - 16	7/16 - 20
S3623-8B	3/4 - 16	9/16 - 18
S3623-810	3/4 - 16	7/8 - 14
S3623-106	7/8 - 14	9/16 - 18
S3623-108	7/8 - 14	3/4 - 16
S3623-1012	7/8 - 14	1-1/16 - 12
S3623-12	1-1/16 - 12	1-1/16 - 12
S3623-128	1-1/16 - 12	3/4 - 16
S3623-1210	1-1/16 - 12	7/8 - 14
S3623-1612	1-5/16 - 12	1-1/16 - 12
S3623-2016	1-5/8 - 12	1-5/16 - 12



**Connector
Male JIC to
Male O-Ring**

PART No.	Male	Female
S3648-4	1/4	7/16 - 20
S3648-45	1/4	1/2 - 20
S3648-46	1/4	9/16 - 18
S3648-48	1/4	3/4 - 16
S3648-410	1/4	7/8 - 14
S3648-6	3/8	9/16 - 18
S3648-6A	3/8	7/16 - 20
S3648-65	3/8	1/2 - 20
S3648-68	3/8	3/4 - 16
S3648-610	3/8	7/8 - 14
S3648-612	3/8	1-1/16 - 12
S3648-8	1/2	3/4 - 16
S3648-8A	1/2	7/16 - 20
S3648-86	1/2	9/16 - 18
S3648-810	1/2	7/8 - 14
S3648-812	1/2	1-1/16 - 12
S3648-816	1/2	1-5/16 - 12
S3648-10	5/8	7/8 - 14
S3648-108	5/8	3/4 - 16
S3648-1012	5/8	1-1/16 - 12
S3648-12	3/4	1-1/16 - 12
S3648-128	3/4	3/4 - 16
S3648-1210	3/4	7/8 - 14
S3648-1216	3/4	1-5/16 - 12
S3648-1220	3/4	1-5/8 - 12
S3648-16	1	1-5/16 - 12
S3648-1610	1	7/8 - 14
S3648-1612	1	1-1/16 - 12
S3648-1620	1	1-5/8 - 12
S3648-1624	1	1-7/8 - 12
S3648-20	1-1/4	1-5/8 - 12
S3648-2016	1-1/4	1-5/16 - 12
S3648-2024	1-1/4	1-7/8 - 12
S3648-24	1-1/2	1-7/8 - 12
S3648-2420	1-1/2	1-5/8 - 12



**Union
Male O-Ring to
Male O-Ring**

PART No.	O-Ring
S3642-6	9/16 - 18
S3642-8	3/4 - 16
S3642-12	1-1/16 - 12
S3642-16	1-5/16 - 12
S3642-20	1-5/8 - 12



**Plug
O-Ring
Counter Sunk
Hex**

PART No.	O-Ring
S3618-2	5/16 - 24
S3618-4	7/16 - 20
S3618-5	1/2 - 20
S3618-6	9/16 - 18
S3618-8	3/4 - 16
S3618-10	7/8 - 14
S3618-12	1-1/16 - 12
S3618-16	1-5/16 - 12



**Plug
O-Ring
Hex Head**

PART No.	O-Ring
S3621-4	7/16 - 20
S3621-5	1/2 - 20
S3621-6	9/16 - 18
S3621-8	3/4 - 16
S3621-10	7/8 - 14
S3621-12	1-1/16 - 12
S3621-14	1-3/16 - 12
S3621-16	1-5/16 - 12
S3621-20	1-5/8 - 12
S3621-24	1-7/8 - 12
S3621-32	2-1/2 - 12



**90° Elbow
Male O-Ring to
Female Pipe**

PART No.	O-Ring	Pipe
S3616-6B	9/16 - 18	1/4
S3616-8C	3/4 - 16	3/8
S3616-8D	3/4 - 16	1/2
S3616-10D	7/8 - 14	1/2
S3616-12E	1-1/16 - 12	3/4
S3616-16H	1-5/16 - 12	1
S3616-20J	1-5/8 - 12	1-1/4



**90° Elbow
Male JIC to
Male O-Ring**

PART No.	Tube	O-Ring
S3649-4	1/4	7/16 - 20
S3649-45	1/4	1/2 - 20
S3649-46	1/4	9/16 - 18
S3649-48	1/4	3/4 - 16
S3649-6	3/8	9/16 - 18
S3649-64	3/8	7/16 - 20
S3649-65	3/8	1/2 - 20
S3649-68	3/8	3/4 - 16
S3649-610	3/8	7/8 - 14
S3649-8	1/2	3/4 - 16
S3649-86	1/2	9/16 - 18
S3649-810	1/2	7/8 - 14
S3649-812	1/2	1-1/16 - 12
S3649-10	5/8	7/8 - 14
S3649-108	5/8	3/4 - 16
S3649-1012	5/8	1-1/16 - 12
S3649-12	3/4	1-1/16 - 12
S3649-128	3/4	3/4 - 16
S3649-1210	3/4	7/8 - 14
S3649-1216	3/4	1-5/16 - 12
S3649-1220	3/4	1-5/8 - 12
S3649-16	1	1-5/16 - 12
S3649-1612	1	1-1/16 - 12
S3649-1620	1	1-5/8 - 12
S3649-20	1-1/4	1-5/8 - 12
S3649-2016	1-1/4	1-5/16 - 12
S3649-2024	1-1/4	1-7/8 - 12
S3649-24	1-1/2	1-7/8 - 12



**90° Elbow
(Extra Long Style)
Male JIC to
Male O-Ring**

PART No.	Tube	O-Ring
S3649EL-6	3/8	9/16 - 18
S3649EL-8	1/2	3/4 - 16



**90° Elbow
Male O-Ring to
Male O-Ring**

PART No.	O-Ring
S3655-6	9/16 - 18



**90° Elbow
Male O-Ring to
Male Pipe**

PART No.	O-Ring	Pipe
S3699-6B	9/16 - 18	1/4
S3699-8C	3/4 - 16	3/8
S3699-8D	3/4 - 16	1/2
S3699-10D	7/8 - 14	1/2
S3699-12E	1-1/16 - 12	3/4
S3699-16H	1-5/16 - 12	1



**45° Elbow
Male JIC to
Male O-Ring**

PART No.	Tube	O-Ring
S3654-4	1/4	7/16 - 20
S3654-6	3/8	9/16 - 18
S3654-68	3/8	3/4 - 16
S3654-610	3/8	7/4 - 14
S3654-8	1/2	3/4 - 16
S3654-86	1/2	9/16 - 18
S3654-810	1/2	7/8 - 14
S3654-10	5/8	7/8 - 14
S3654-108	5/8	3/4 - 16
S3654-12	3/4	1-1/16 - 12
S3654-1210	3/4	7/8 - 14
S3654-1216	3/4	1-5/16 - 12
S3654-16	1	1-5/16 - 12
S3654-1612	1	1-1/16 - 12
S3654-1620	1	1-5/8 - 12
S3654-20	1-1/4	1-5/8 - 12



**Tee
Male JIC to
Male JIC to
Male O-Ring**

PART No.	Tube	O-Ring
S3645-4	1/4	7/16 - 20
S3645-6	3/8	9/16 - 18
S3645-8	1/2	3/4 - 16
S3645-86	1/2	9/16 - 18
S3645-810	1/2	7/8 - 14
S3645-10	5/8	7/8 - 14
S3645-12	3/4	1-1/16 - 12
S3645-16	1	1-5/16 - 12



**Tee
Male JIC to
Male O-Ring to
Male JIC**

PART No.	Tube	O-Ring
S3651-4	1/4	7/16 - 20
S3651-6	3/8	9/16 - 18
S3651-8	1/2	3/4 - 16
S3651-810	1/2	7/8 - 14
S3651-10	5/8	7/8 - 14
S3651-12	3/4	1-1/16 - 12
S3651-16	1	1-5/16 - 12
S3651-20	1-1/4	1-5/8 - 12



**Buna-N
O-Ring**

PART No.	O-Ring	Dia.
S3631R-2	1/8	.239
S3631R-3	3/16	.301
S3631R-4	1/4	.351
S3631R-5	5/16	.414
S3631R-6	3/8	.468
S3631R-8	1/2	.644
S3631R-10	5/8	.755
S3631R-12	3/4	.924
S3631R-14	7/8	1.048
S3631R-16	1	1.171
S3631R-20	1-1/4	1.475
S3631R-24	1-1/2	1.720
S3631R-32	2	2.234

STEEL O-RING FACE SEAL ADAPTERS

(BUNA-N O-RING STANDARD)



**Connector
Female O-Ring
Face Seal to
Male O-Ring
Face Seal**

PART No.	Female ORFS	Male ORFS
S3935-86	13/16 - 16	11/16 - 16
S3935-1012	1 - 14	1-3/16 - 12
S3935-126	1-3/16 - 12	11/16 - 16
S3935-128	1-3/16 - 12	13/16 - 16
S3935-1210	1-3/16 - 12	1 - 14
S3935-1612	1-7/16 - 12	1-3/16 - 12



**Union
O-Ring
Face Seal**

PART No.	ORFS
S3942-6	11/16 - 16
S3942-8	13/16 - 16
S3942-10	1 - 14
S3942-12	1-3/16 - 12
S3942-16	1-7/16 - 12



**Connector
O-Ring Face
Seal to Male Pipe**

PART No.	ORFS	Pipe
S3948-4A	9/16 - 18	1/8
S3948-6B	11/16 - 16	1/4
S3948-6C	11/16 - 16	3/8
S3948-8D	13/16 - 16	1/2
S3948-10D	1 - 14	1/2
S3948-12E	1-3/16 - 12	3/4
S3948-16H	1-7/16 - 12	1



**Connector
O-Ring Face Seal
to Male
O-Ring Boss**

PART No.	ORFS	O-Ring
S3968-4	9/16 - 18	7/16 - 20
S3968-46	9/16 - 18	9/16 - 18
S3968-6	11/16 - 16	9/16 - 18
S3968-68	11/16 - 16	3/4 - 16
S3968-610	11/16 - 16	7/8 - 14
S3968-8	13/16 - 16	3/4 - 16
S3968-86	13/16 - 16	9/16 - 18
S3968-810	13/16 - 16	7/8 - 14
S3968-10	1 - 14	7/8 - 14
S3968-12	1-3/16 - 12	1-1/16 - 12
S3968-1216	1-3/16 - 12	1-5/16 - 12
S3968-16	1-7/16 - 12	1-5/16 - 12
S3968-1612	1-7/16 - 12	1-1/16 - 12
S3968-20	1-11/16 - 12	1-5/8 - 12
S3968-2016	1-11/16 - 12	1-5/16 - 12



**Connector
O-Ring Face
Seal to
Male JIC**

PART No.	ORFS	Tube
S3937-4	9/16 - 18	1/4
S3937-6	11/16 - 16	3/8
S3937-8	13/16 - 16	1/2
S3937-10	1 - 14	5/8
S3937-12	1-3/16 - 12	3/4
S3937-16	1-7/16 - 12	1



**Connector
Female
O-Ring Face
Seal to
Male JIC**

PART No.	Female ORFS	Tube
S3937F-4	9/16 - 18	1/4
S3937F-6	11/16 - 16	3/8
S3937F-8	13/16 - 16	1/2
S3937F-10	1 - 14	5/8
S3937F-12	1-3/16 - 12	3/4
S3937F-16	1-7/16 - 12	1



**Plug
O-Ring Face
Seal**

PART No.	ORFS
S3958-4	9/16 - 18
S3958-6	11/16 - 16
S3958-8	13/16 - 16
S3958-10	1 - 14
S3958-12	1-3/16 - 12
S3958-16	1-7/16 - 12
S3958-20	1-11/16 - 12
S3958-24	2 - 12



**Cap
O-Ring Face
Seal**

PART No.	ORFS
S3956-4	9/16 - 18
S3956-6	11/16 - 16
S3956-8	13/16 - 16
S3956-10	1 - 14
S3956-12	1-3/16 - 12
S3956-16	1-7/16 - 12
S3956-20	1-11/16 - 12
S3956-24	2 - 12



**Bulkhead
Union
O-Ring
Face Seal**

PART No.	ORFS
S3942BH-4	9/16 - 18
S3942BH-6	11/16 - 16



**90° Elbow
Male O-Ring
Face Seal to
Female O-Ring
Face Seal**

PART No.	Male ORFS	Female ORFS
S3947-4	9/16 - 18	9/16 - 18
S3947-6	11/16 - 16	11/16 - 16
S3947-8	13/16 - 16	13/16 - 16
S3947-10	1 - 14	1 - 14
S3947-12	1-3/16 - 12	1-3/16 - 12
S3947-16	1-7/16 - 12	1-7/16 - 12
S3947-20	1-11/16 - 12	1-11/16 - 12



**Tee
Male to Female
To Male O-Ring
Face Seal**

PART No.	Male ORFS	Female ORFS
S3951F-4	9/16 - 18	9/16 - 18
S3951F-6	11/16 - 16	11/16 - 16
S3951F-8	13/16 - 16	13/16 - 16
S3951F-10	1 - 14	1 - 14
S3951F-12	1-3/16 - 12	1-3/16 - 12
S3951F-16	1-7/16 - 12	1-7/16 - 12



**45° Elbow
O-Ring Face
Seal to Male
O-Ring Boss**

PART No.	ORFS	O-Ring
S3974-4	9/16 - 18	7/16 - 20
S3974-6	11/16 - 16	9/16 - 18
S3974-8	13/16 - 16	3/4 - 16
S3974-10	1 - 14	7/8 - 14



**90° Elbow
Male O-Ring Face
Seal to Male
O-Ring Boss**

PART No.	Male ORFS	Female O-Ring
S3969-4	9/16 - 18	7/16 - 20
S3969-46	9/16 - 18	9/16 - 18
S3969-6	11/16 - 16	9/16 - 18
S3969-68	11/16 - 16	3/4 - 16
S3969-8	13/16 - 16	3/4 - 16
S3969-86	13/16 - 16	9/16 - 18
S3969-810	13/16 - 16	7/8 - 14
S3969-812	13/16 - 16	1-1/16 - 12
S3969-10	1 - 14	7/8 - 14
S3969-108	1 - 14	3/4 - 16
S3969-12	1-3/16 - 12	1-1/16 - 12
S3969-1210	1-3/16 - 12	7/8 - 14
S3969-16	1-7/16 - 12	1-5/16 - 12
S3969-20	1-11/16 - 12	1-5/8 - 12

STEEL O-RING FACE SEAL ADAPTERS

(BUNA-N O-RING STANDARD)

Steel O-Ring Face Seal Fittings (ORFS):

Steel O-ring face seal adapter fittings use a straight thread and have a machined groove in the face of the male fitting to accept an O-ring (of either Buna N or Viton material). This O-ring is compressed against the flat face of the female fitting for a leak proof connection.



Face Seal O-Ring

PART No.	ORFS	DIA.
S3931R-4	9/16 - 18	.301
S3931R-6	11/16 - 16	.364
S3931R-8	13/16 - 16	.489
S3931R-10	1 - 14	.614
S3931R-12	1-3/16 - 12	.739
S3931R-16	1-7/16 - 12	.926
S3931R-20	1-11/16 - 12	1.176



Lock Nut

PART No.	ORFS
S3931N-4	9/16 - 18
S3931N-6	11/16 - 16
S3931N-8	13/16 - 16
S3931N-10	1 - 14
S3931N-12	1-3/16 - 12
S3931N-16	1-7/16 - 12

STEEL FLARELESS ADAPTERS



Tube Sleeve

PART No.	Tube
S6760-4	1/4
S6760-6	3/8
S6760-8	1/2
S6760-10	5/8
S6760-12	3/4
S6760-16	1



Connector Tube to Female Pipe

PART No.	Tube	Pipe
S6766-4A	1/4	1/8
S6766-4B	1/4	1/4
S6766-6B	3/8	1/4
S6766-6C	3/8	3/8
S6766-8C	1/2	3/8
S6766-10D	5/8	1/2
S6766-12E	3/4	3/4
S6766-16H	1	1



90° Elbow Tube to Tube

PART No.	Tube
S6765-4	1/4
S6765-6	3/8
S6765-8	1/2



Tube Nut

PART No.	Tube
S6761-4	1/4
S6761-6	3/8
S6761-8	1/2
S6761-10	5/8
S6761-12	3/4
S6761-16	1



90° Elbow Tube to Male Pipe

PART No.	Tube	Pipe
S6769-4A	1/4	1/8
S6769-4B	1/4	1/4
S6769-6B	3/8	1/4
S6769-6C	3/8	3/8
S6769-8C	1/2	3/8
S6769-8D	1/2	1/2
S6769-10D	5/8	1/2
S6769-12E	3/4	3/4



Union Tube to Tube

PART No.	Tube
S6762-3	3/16
S6762-4	1/4
S6762-6	3/8
S6762-8	1/2
S6762-10	5/8
S6762-12	3/4
S6762-16	1



Connector Tube to Male Pipe

PART No.	Tube	Pipe
S6768-4A	1/4	1/8
S6768-4B	1/4	1/4
S6768-6B	3/8	1/4
S6768-6C	3/8	3/8
S6768-8C	1/2	3/8
S6768-8D	1/2	1/2
S6768-10D	5/8	1/2
S6768-12D	3/4	1/2
S6768-12E	3/4	3/4
S6768-16H	1	1



Tee Tube

PART No.	Tube
S6764-4	1/4
S6764-6	3/8
S6764-8	1/2
S6764-10	5/8

STEEL S.A.E. PIPE ADAPTERS



**Coupling
Female
Both Ends**

PART No.	Pipe	Pipe
S1003-A	1/8	1/8
S1003-B	1/4	1/4
S1003-BA	1/4	1/8
S1003-C	3/8	3/8
S1003-CB	3/8	1/4
S1003-D	1/2	1/2
S1003-DB	1/2	1/4
S1003-DC	1/2	3/8
S1003-E	3/4	3/4
S1003-ED	3/4	1/2
S1003-H	1	1
S1003-HD	1	1/2
S1003-HE	1	3/4
S1003-J	1-1/4	1-1/4
S1003-K	1-1/2	1-1/2
S1003-M	2	2



**Bushing
Male to
Female**

PART No.	Male Pipe	Female Pipe
S1010-BA	1/4	1/8
S1010-CA	3/8	1/8
S1010-CB	3/8	1/4
S1010-DA	1/2	1/8
S1010-DB	1/2	1/4
S1010-DC	1/2	3/8
S1010-EB	3/4	1/4
S1010-EC	3/4	3/8
S1010-ED	3/4	1/2
S1010-HB	1	1/4
S1010-HC	1	3/8
S1010-HD	1	1/2
S1010-HE	1	3/4
S1010-JD	1-1/4	1/2
S1010-JE	1-1/4	3/4
S1010-JH	1-1/4	1
S1010-KD	1-1/2	1/2
S1010-KE	1-1/2	3/4
S1010-KH	1-1/2	1
S1010-KJ	1-1/2	1-1/4
S1010-ME	2	3/4
S1010-MH	2	1
S1010-MJ	2	1-1/4
S1010-MK	2	1-1/2



**Reducer
Female to
Male**

PART No.	Female Pipe	Male Pipe
S1020-AA	1/8	1/8
S1020-BA	1/4	1/8
S1020-BB	1/4	1/4
S1020-BC	1/4	3/8
S1020-CA	3/8	1/8
S1020-CB	3/8	1/4
S1020-CC	3/8	3/8
S1020-CD	3/8	1/2
S1020-DA	1/2	1/8
S1020-DB	1/2	1/4



**Reducer
Female to Male
(Continued)**

PART No.	Female Pipe	Male Pipe
S1020-DC	1/2	3/8
S1020-DD	1/2	1/2
S1020-DE	1/2	3/4
S1020-EB	3/4	1/4
S1020-EC	3/4	3/8
S1020-ED	3/4	1/2
S1020-EE	3/4	3/4
S1020-HD	1	1/2
S1020-HE	1	3/4
S1020-HH	1	1
S1020-JH	1-1/4	1
S1020-KJ	1-1/2	1-1/4



**Hex Nipple
Male Both
Ends**

PART No.	Pipe	Pipe
S1022-A	1/8	1/8
S1022-B	1/4	1/4
S1022-BA	1/4	1/8
S1022-C	3/8	3/8
S1022-CA	3/8	1/8
S1022-CB	3/8	1/4
S1022-D	1/2	1/2
S1022-DB	1/2	1/4
S1022-DC	1/2	3/8
S1022-E	3/4	3/4
S1022-EC	3/4	3/8
S1022-ED	3/4	1/2
S1022-H	1	1
S1022-HD	1	1/2
S1022-HE	1	3/4
S1022-J	1-1/4	1-1/4
S1022-JH	1-1/4	1
S1022-K	1-1/2	1-1/2
S1022-KJ	1-1/2	1-1/4
S1022-M	2	2



**Plug
Square
Head**

PART No.	Pipe
S1009-A	1/8
S1009-B	1/4
S1009-C	3/8
S1009-D	1/2
S1009-E	3/4
S1009-H	1
S1009-K	1-1/2



**Plug
Countersunk
Hex**

PART No.	Pipe
S1018-A	1/8
S1018-B	1/4
S1018-C	3/8
S1018-D	1/2
S1018-E	3/4
S1018-H	1
S1018-J	1-1/4
S1018-K	1-1/2
S1018-M	2



**Cap
Female**

PART No.	Pipe
S1008-A	1/8
S1008-B	1/4
S1008-C	3/8
S1008-D	1/2
S1008-E	3/4



**Plug
Hex Head**

PART No.	Pipe
S1021-A	1/8
S1021-B	1/4
S1021-C	3/8
S1021-D	1/2
S1021-E	3/4
S1021-H	1
S1021-J	1-1/4
S1021-K	1-1/2
S1021-M	2



Short Nipple

PART No.	Pipe	Length
S1012-A	1/8	3/4
S1012-B	1/4	7/8
S1012-C	3/8	1
S1012-D	1/2	1-1/8
S1012-E	3/4	1-3/8
S1012-H	1	1-1/2



**Long
Nipple**

PART No.	Pipe	Length
S1013-B1-1/2	1/4	1-1/2
S1013-B2	1/4	2
S1013-B2-1/2	1/4	2-1/2
S1013-B3	1/4	3
S1013-C2	3/8	2
S1013-C3	3/8	3
S1013-C4	3/8	4
S1013-D1-1/2	1/2	1-1/2
S1013-D2	1/2	2
S1013-D3	1/2	3
S1013-D4	1/2	4
S1013-E3	3/4	3
S1013-E4	3/4	4

STEEL S.A.E. PIPE ADAPTERS



**90° Elbow
Female to
Female**

PART No.	Pipe	Pipe
S1000-A	1/8	1/8
S1000-B	1/4	1/4
S1000-C	3/8	3/8
S1000-CB	3/8	1/4
S1000-D	1/2	1/2
S1000-DC	1/2	3/8
S1000-E	3/4	3/4
S1000-ED	3/4	1/2
S1000-H	1	1
S1000-J	1-1/4	1-1/4
S1000-K	1-1/2	1-1/2
S1000-M	2	2



**90° Elbow
Male to
Female**

PART No.	Male Pipe	Female Pipe
S1016-A	1/8	1/8
S1016-AB	1/8	1/4
S1016-B	1/4	1/4
S1016-BC	1/4	3/8
S1016-C	3/8	3/8
S1016-CB	3/8	1/4
S1016-CD	3/8	1/2
S1016-D	1/2	1/2
S1016-DC	1/2	3/8
S1016-DE	1/2	3/4
S1016-E	3/4	3/4
S1016-ED	3/4	1/2
S1016-H	1	1
S1016-J	1-1/4	1-1/4
S1016-K	1-1/2	1-1/2
S1016-M	2	2



**90° Elbow
Female to
Male Swivel**

PART No.	Female Pipe	Male Pipe
S1016SW-B	1/4	1/4
S1016SW-C	3/8	3/8
S1016SW-D	1/2	1/2



**90° Elbow
Male to
Male**

PART No.	Pipe	Pipe
S1099-A	1/8	1/8
S1099-B	1/4	1/4
S1099-C	3/8	3/8
S1099-CB	3/8	1/4
S1099-D	1/2	1/2
S1099-DC	1/2	3/8
S1099-E	3/4	3/4
S1099-ED	3/4	1/2
S1099-H	1	1
S1099-J	1-1/4	1-1/4
S1099-K	1-1/2	1-1/2



**90° Elbow
Male to
Male Swivel**

PART No.	Pipe	Pipe
S1099SW-B	1/4	1/4



**45° Elbow
Female to
Female**

PART No.	Pipe
S1005-B	1/4
S1005-C	3/8
S1005-D	1/2
S1005-E	3/4
S1005-H	1



**45° Elbow
Male to
Male**

PART No.	Pipe
S1005M-B	1/4
S1005M-C	3/8
S1005M-D	1/2
S1005M-E	3/4
S1005M-H	1
S1005M-J	1-1/4



**45° Elbow
Male to
Female**

PART No.	Male Pipe	Female Pipe
S1024-A	1/8	1/8
S1024-B	1/4	1/4
S1024-C	3/8	3/8
S1024-D	1/2	1/2
S1024-E	3/4	3/4
S1024-H	1	1
S1024-J	1-1/4	1-1/4



**Tee
Female
All Ends**

PART No.	Pipe
S1001-A	1/8
S1001-B	1/4
S1001-C	3/8
S1001-D	1/2
S1001-E	3/4
S1001-H	1
S1001-J	1-1/4
S1001-K	1-1/2



**Tee
Male to Female
to Male**

PART No.	Female Pipe	Male Pipe
S1004-B	1/4	1/4
S1004-C	3/8	3/8
S1004-D	1/2	1/2
S1004-E	3/4	3/4
S1004-H	1	1



**Tee
Male
All Ends**

PART No.	Pipe
S1001M-C	3/8
S1001M-D	1/2
S1001M-E	3/4



**Tee
Female to Female
to Male**

PART No.	Female Pipe	Male Pipe
S1006-A	1/8	1/8
S1006-B	1/4	1/4
S1006-C	3/8	3/8
S1006-D	1/2	1/2
S1006-E	3/4	3/4
S1006-H	1	1



**Tee
Male to Male
to Female**

PART No.	Male Pipe	Female Pipe
S1006M-B	1/4	1/4
S1006M-C	3/8	3/8
S1006M-D	1/2	1/2
S1006M-E	3/4	3/4
S1006M-H	1	1



**Tee
Female to Male
to Female**


PART No.	Female Pipe	Male Pipe
S1007-A	1/8	1/8
S1007-B	1/4	1/4
S1007-C	3/8	3/8
S1007-D	1/2	1/2
S1007-E	3/4	3/4
S1007-H	1	1
S1007-J	1-1/4	1-1/4
S1007-K	1-1/2	1-1/2



**Cross
Female All
Ends**

PART No.	Pipe
S1002-B	1/4
S1002-C	3/8
S1002-D	1/2
S1002-E	3/4
S1002-H	1

STEEL MERCHANT PIPE FITTINGS (Weldable)

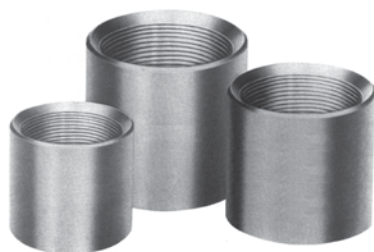

Coupling

PART No.	Pipe
BI-103MC-A	1/8
BI-103MC-B	1/4
BI-103MC-C	3/8
BI-103MC-D	1/2
BI-103MC-E	3/4
BI-103MC-H	1
BI-103MC-J	1-1/4
BI-103MC-K	1-1/2
BI-103MC-M	2
BI-103MC-N	2-1/2
BI-103MC-P	3
BI-103MC-S	4



**Coupling
(Half Height)**

PART No.	Pipe
BI-103HMC-A	1/8
BI-103HMC-B	1/4
BI-103HMC-C	3/8
BI-103HMC-D	1/2
BI-103HMC-E	3/4
BI-103HMC-H	1
BI-103HMC-J	1-1/4
BI-103HMC-K	1-1/2
BI-103HMC-M	2



Bushing

PART No.	Pipe
BI-110MC-CB	3/8 to 1/4
BI-110MC-DB	1/2 to 1/4
BI-110MC-DC	1/2 to 3/8
BI-110MC-ED	3/4 to 1/2



**Plug
(Square Head)**

PART No.	Pipe
BI-109MC-A	1/8
BI-109MC-B	1/4
BI-109MC-C	3/8
BI-109MC-D	1/2
BI-109MC-E	3/4
BI-109MC-H	1

O-RING BOSS TO NPSM (BUNA-N O-RING STANDARD)



**Connector
Male O-Ring to
NPSM Swivel**

PART No.	O-Ring	Swivel
SO1120-4B	7/16 - 20	1/4
SO1120-6B	9/16 - 18	1/4
SO1120-6C	9/16 - 18	3/8
SO1120-6D	9/16 - 18	1/2
SO1120-8B	3/4 - 16	1/4
SO1120-8C	3/4 - 16	3/8
SO1120-8D	3/4 - 16	1/2
SO1120-8E	3/4 - 16	3/4
SO1120-10C	7/8 - 14	3/8
SO1120-10D	7/8 - 14	1/2
SO1120-10E	7/8 - 14	3/4
SO1120-12D	1-1/16 - 12	1/2
SO1120-12E	1-1/16 - 12	3/4
SO1120-16E	1-5/16 - 12	3/4
SO1120-16H	1-5/16 - 12	1



**90° Elbow
Male O-Ring to
NPSM Swivel**

PART No.	O-Ring	Swivel
SO1116-4B	7/16 - 20	1/4
SO1116-6B	9/16 - 18	1/4
SO1116-6C	9/16 - 18	3/8
SO1116-6D	9/16 - 18	1/2
SO1116-8C	3/4 - 16	3/8
SO1116-8D	3/4 - 16	1/2
SO1116-8E	3/4 - 16	3/4
SO1116-10C	7/8 - 14	3/8
SO1116-10D	7/8 - 14	1/2
SO1116-10E	7/8 - 14	3/4
SO1116-12D	1-1/16 - 12	1/2
SO1116-12E	1-1/16 - 12	3/4
SO1116-16E	1-5/16 - 12	3/4
SO1116-16H	1-5/16 - 12	1
SO1116-20J	1-5/8 - 12	1-1/4



**45° Elbow
Male O-Ring to
NPSM Swivel**

PART No.	O-Ring	Swivel
SO1124-4B	7/16 - 20	1/4
SO1124-6B	9/16 - 18	1/4
SO1124-6C	9/16 - 18	3/8
SO1124-8C	3/4 - 16	3/8
SO1124-8D	3/4 - 16	1/2
SO1124-10D	7/8 - 14	1/2
SO1124-10E	7/8 - 14	3/4
SO1124-12D	1-1/16 - 12	1/2
SO1124-12E	1-1/16 - 12	3/4
SO1124-16H	1-5/16 - 12	1



**Connector
Female Pipe to
NPSM Swivel**

PART No.	Pipe	Swivel
S1103-AA	1/8	1/8
S1103-BB	1/4	1/4
S1103-BC	1/4	3/8
S1103-CB	3/8	1/4
S1103-CC	3/8	3/8
S1103-CD	3/8	1/2
S1103-DC	1/2	3/8
S1103-DD	1/2	1/2
S1103-EE	3/4	3/4
S1103-HE	1	3/4
S1103-HH	1	1
S1103-JJ	1-1/4	1-1/4
S1103-KK	1-1/2	1-1/2
S1103-MM	2	2



**Connector
Male Pipe to
NPSM Swivel**

PART No.	Pipe	Swivel
S1120-AA	1/8	1/8
S1120-AB	1/8	1/4
S1120-BA	1/4	1/8
S1120-BB	1/4	1/4
S1120-BC	1/4	3/8
S1120-CB	3/8	1/4
S1120-CC	3/8	3/8
S1120-CC.000*	3/8	3/8
S1120-CD	3/8	1/2
S1120-DB	1/2	1/4
S1120-DC	1/2	3/8
S1120-DD	1/2	1/2
S1120-DD.000*	1/2	1/2
S1120-DE	1/2	3/4
S1120-ED	3/4	1/2
S1120-EE	3/4	3/4
S1120-EH	3/4	1
S1120-HE	1	3/4
S1120-HH	1	1
S1120-HJ	1	1-1/4
S1120-JH	1-1/4	1
S1120-JJ	1-1/4	1-1/4
S1120-KJ	1-1/2	1-1/4
S1120-KK	1-1/2	1-1/2
S1120-MM	2	2



**90° Elbow
Female Pipe to
NPSM Swivel**

PART No.	Pipe	Swivel
S1100-AA	1/8	1/8
S1100-BB	1/4	1/4
S1100-CC	3/8	3/8
S1100-DD	1/2	1/2
S1100-EE	3/4	3/4
S1100-HH	1	1



**90° Elbow
Male Pipe to
NPSM Swivel**

PART No.	Pipe	Swivel
S1116-AA	1/8	1/8
S1116-AB	1/8	1/4
S1116-BB	1/4	1/4
S1116-BC	1/4	3/8
S1116-CB	3/8	1/4
S1116-CC	3/8	3/8
S1116-CD	3/8	1/2
S1116-DC	1/2	3/8
S1116-DD	1/2	1/2
S1116-DE	1/2	3/4
S1116-ED	3/4	1/2
S1116-EE	3/4	3/4
S1116-EH	3/4	1
S1116-HE	1	3/4
S1116-HH	1	1
S1116-JH	1-1/4	1
S1116-JJ	1-1/4	1-1/4
S1116-KK	1-1/2	1-1/2
S1116-MM	2	2

*** WHEN ORDERING
RESTRICTED FLOW
ADAPTERS, SUFFIX
PART NUMBER WITH
REQUIRED RESTRICTION
HOLE SIZE
(Ex: S1120-DD.062)**



**45° Elbow
Male Pipe to
NPSM Swivel**

PART No.	Pipe	Swivel
S1124-AA	1/8	1/8
S1124-BB	1/4	1/4
S1124-CC	3/8	3/8
S1124-CD	3/8	1/2
S1124-DC	1/2	3/8
S1124-DD	1/2	1/2
S1124-EE	3/4	3/4
S1124-HE	1	3/4
S1124-HH	1	1
S1124-JJ	1-1/4	1-1/4
S1124-KK	1-1/2	1-1/2



**45° Elbow
Female Pipe to
NPSM Swivel**

PART No.	Pipe	Swivel
S1105-CC	3/8	3/8
S1105-DD	1/2	1/2
S1105-EE	3/4	3/4
S1105-HH	1	1



**Tee
NPSM Swivel to
NPSM Swivel to
Female Pipe**

PART No.	Pipe	Swivel
S1101-BB	1/4	1/4
S1101-CC	3/8	3/8
S1101-DD	1/2	1/2



**Tee
NPSM Swivel to
NPSM Swivel to
Male Pipe**

PART No.	Pipe	Swivel
S1106-BB	1/4	1/4
S1106-CC	3/8	3/8
S1106-DD	1/2	1/2
S1106-EE	3/4	3/4



**Tee
NPSM Swivel
All Ends**

PART No.	Swivel
S1111-B	1/4
S1111-C	3/8
S1111-D	1/2
S1111-E	3/4

QUICK DISCONNECTS

HYDRAULIC - PNEUMATIC

AGRICULTURAL INTERCHANGE (PIONEER 4000)	104
ARO210 / ARO310 PNEUMATIC INTERCHANGE	111
AUTOMOTIVE INTERCHANGE (TRU-FLATE).....	111
HIGH PRESSURE THREAD-TO-CONNECT (PARKER 3000).....	107
HYDRAULIC (ISO A) INTERCHANGE	106
HYDRAULIC (ISO B) INTERCHANGE	105
HYDRAULIC FLUSH FACE (ISO 16028 HTMA).....	107
HYDRAULIC QUICK DISCONNECT CROSSOVER LISTING.....	102
INDUSTRIAL INTERCHANGE - AUTOMATIC	110
INDUSTRIAL INTERCHANGE - MANUAL	109
LINCOLN INTERCHANGE	112
MINIATURE HIGH CAPACITY AIR.....	112
PNEUMATIC QUICK DISCONNECT CROSSOVER.....	108
SNOW PLOW Q.D.	104
SWING COUPLINGS	113
UNIVERSAL PNEUMATIC INTERCHANGE	112
WATER / PRESSURE WASH COUPLINGS	114
WING COUPLINGS & ACCESSORIES - HEAVY DUTY.....	103





HYDRAULIC QUICK DISCONNECT CROSSOVER LISTING

QUICK
DISCONNECTS

BODY	FAIRVIEW No.	AEROQUIP	FOSTER	PARKER	SAFEWAY	FASTER	PIONEER
1/2	QD-AGC8-8F				S45-4		
1/2	QD-AGN8-8F				S71-4		
1/4	QD-AGC4-4F	FD42-1001-4-4		4050-2P	S25A-2P		4050-2P
3/8	QD-AGC6-6F			4250-3P	S45-3P		4250-3P
3/4	QD-AGC12-12F			4150-5	S25F-6	NSP-34-NPT-F	4150-5
1	QD-AGC16-16F			4050-6P	S25-8P	NV-1-NPT-F	4050-6P
1/4	QD-AGN4-4F	FD42-1002-4-4		4010-2P	S41-2P		4010-2P
3/8	QD-AGN6-6F			4010-3	S41-3P		4010-3
1/2	QD-AGN8-8F			8010-4	S71-4	2NS-12-NPT-M	8010-4
3/4	QD-AGN12-12F			4110-5	S21F-6	NSP-34-NPT-M	4110-5
1	QD-AGN16-16F			4010-6P	S21-8P	NV-1-NPT-M	4010-6P
1/4	QD-ISOAC4-4F	5601-4-4S		6601-4-4	S565-2	ANV 14 NPT F	
3/8	QD-ISOAC6-6F	5601-6-6S		6601-6-6	S565-3	ANV 38 NPT F	4050-3
1/2	QD-ISOAC8-8F	5601-8-10S		6601-8-10	S565-4	ANV 12 NPT F	4050-4
3/4	QD-ISOAC12-12F	5601-12-12S		6601-12-12	S565-6	ANV 34 NPT F	
1	QD-ISOAC16-16F	5601-16-16S		6601-16-16	S565-8	ANV 1 NPT F	
1/4	QD-ISOAN4-4F	5602-4-4S		6602-4-4	S561-2	ANV 14 NPT M	
3/8	QD-ISOAN6-6F	5602-6-6S		6602-6-6	S561-3	ANV 38 NPT M	
1/2	QD-ISOAN8-8F	5602-8-10S		6602-8-10	S561-4	ANV 12 NPT M	8010-4
3/4	QD-ISOAN12-12F	5602-12-12S		6602-12-12	S561-6	ANV 34 NPT M	
1	QD-ISOAN16-16F	5602-16-16S		6602-16-16	S561-8	ANV 1 NPT M	
1/4	QD-ISOBC4-4F	FD45-1003-4-4	H2S	H2-62	S105-2	HNV-14-NPT-F	
3/8	QD-ISOBC6-6F	FD45-1003-6-6	H3S	H3-62	S105-3	HNV-38-NPT-F	
1/2	QD-ISOBC8-8F	FD45-1003-8-10	H4S	H4-62	S105-4	HNV-12-NPT-F	
3/4	QD-ISOBC12-12F	FD45-1003-12-12	H6S	H6-62	S105-6	HNV-34-NPT-F	
1	QD-ISOBC16-16F	FD45-1003-16-16	H8S	H8-62	S105-8	HNV-1-NPT-F	
1/4	QD-ISOBN4-4F	FD45-1002-4-4	K2S	H2-63 & HDH2-63	S101-2	HNV-14-NPT-M	
3/8	QD-ISOBN6-6F	FD45-1002-6-6	K3S	H3-63 & HDH3-63	S101-3	HNV-38-NPT-M	
1/2	QD-ISOBN8-8F	FD45-1002-8-10	K4S	H4-63 & HDH4-63	S101-4	HNV-12-NPT-M	
3/4	QD-ISOBN12-12F	FD45-1002-12-12	K6S	H6-63 & HDH6-63	S101-6	HNV-34-NPT-M	
1	QD-ISOBN16-16F	FD45-1002-16-16	K8S	H8-63 & HDH8-63	S101-8	HNV-1-NPT-M	
1/4	QD-TCC4-4M			3050-2	S35-2P	PVVM1/14-NPT-M	3050-2
3/8	QD-TCC6-6M			3050-3	S35-3P	PVVM1/38-NPT-M	3050-3
1/4	QD-TCN4-4F			3010-2	S31-2P	PVVM-14-NPT-F	3010-2
3/8	QD-TCN6-6F			3010-3	S31-3P	PVVM-38-NPT-F	3010-3
1/4	QD-BISOBC4-4F	FD45-1101-4-4	H2B	BH2-60	BS105-2	HNV-14-NPT-F5	
3/8	QD-BISOBC6-6F	FD45-1101-6-6	H3B	BH3-60	BS105-3	HNV-38-NPT-F5	
1/2	QD-BISOBC8-8F	FD45-1101-8-10	H4B	BH4-60	BS105-4	HNV-12-NPT-F5	
3/4	QD-BISOBC12-12F	FD45-1101-12-12	H6B	BH6-60	BS105-6	HNV-34-NPT-F5	
1	QD-BISOBC16-16F	FD45-1101-16-16	H8B	BH8-60	BS105-8	HNV-1-NPT-F5	
1/4	QD-BISOBN4-4F	FD45-1086-4-4	K2B	BH2-61	BS101-2	HNV-14-NPT-M5	
3/8	QD-BISOBN6-6F	FD45-1086-6-6	K3B	BH3-61	BS101-3	HNV-38-NPT-M5	
1/2	QD-BISOBN8-8F	FD45-1086-8-10	K4B	BH4-61	BS101-4	HNV-12-NPT-M5	
3/4	QD-BISOBN12-12F	FD45-1086-12-12	K6B	BH6-61	BS101-6	HNV-34-NPT-M5	
1	QD-BISOBN16-16F	FD45-1086-16-16	K8B	BH8-61	BS101-8	HNV-1-NPT-M5	
3/4	QD-BTTWC12-12F	5100-S5-12B		6125-12			
1	QD-BTTWC16-16F	5100-S5-16B		6125-16		FB16/1 NPT F5	
1-1/4	QD-BTTWC20-20F	5100-S5-20B		6125-20			
1-1/2	QD-BTTWC24-24F	5100-S5-24B		6125-24			
3/4	QD-BTTWN12-12F	5100-S2-12B		6105-12			
1	QD-BTTWN16-16F	5100-S2-16B		6105-16		FB16/1 NPT M5	
1-1/4	QD-BTTWN20-20F	5100-S2-20B		6105-20			
1-1/2	QD-BTTWN24-24F	5100-S2-24B		6105-24			
1/4	QD-HTMAC4-4F	FD89-1001-04-04			FFE495-2	2FFI14 NPT F	
3/8	QD-HTMAC6-6F	FD89-1001-06-06		FF-371-6FP	FFE495-3	2FFI38 NPT F	
3/8	QD-HTMAC6-8F	FD89-1001-08-06		FF-371-8FP	FFE495-3-8	2FFI38-1/2 NPT F	
1/2	QD-HTMAC8-8F	FD89-1001-08-08			FFE495-8	2FFI12 NPT F	
1/2	QD-HTMAC8-12F	FD89-1001-12-08			FFE495-8-3/4	2FFI12-34 NPT F	
3/4	QD-HTMAC12-12F	FD89-1001-12-12			FFE495-6	2FFI34 NPT F	
1	QD-HTMAC16-16F	FD89-1001-16-16			FFE495-8	2FFI1 NPT F	
1/4	QD-HTMAN4-4F	FD89-1002-04-04			FFE491-2	2FFI14 NPT M	
3/8	QD-HTMAN6-6F	FD89-1002-06-06		FF-372-6FP	FFE491-3	2FFI38 NPT M	
3/8	QD-HTMAN6-8F	FD89-1002-08-06		FF-372-8FP	FFE491-3-8	2FFI38-1/2 NPT M	
1/2	QD-HTMAN8-8F	FD89-1002-08-08			FFE491-8	2FFI12 NPT M	
1/2	QD-HTMAN8-12F	FD89-1002-12-08			FFE491-8-3/4	2FFI12-34 NPT M	
3/4	QD-HTMAN12-12F	FD89-1002-12-12			FFE491-6	2FFI34 NPT M	
1	QD-HTMAN16-16F	FD89-1002-16-16			FFE491-8	2FFI1 NPT M	

HEAVY DUTY WING SERIES INTERCHANGE



- Interchangeable with Aeroquip 5100 series and Parker 6100 series
- Heavy duty wing nut or hex nut for easy connection
- Thread-To-Connect
- Dry-Break feature minimizes air inclusion and contamination of systems
- Up to 3,000 PSI connected and disconnected
- Ideal for use on hydraulic dump trucks, coal trucks, sand and salt spreaders and oil well equipment

Operating Size	Pressure (PSI)	Air Inclusion CC. Max.	Spillage CC. Max.
3/4	3,000	.34	.26
1	3,000	.50	.35
1-1/4	2,750	.68	.70
1-1/2	2,750	.60	.94

VALVED COUPLER - BRASS

PART No.	Body Size	Female Pipe
QD-BTTWC12-12F	3/4	3/4
QD-BTTWC16-16F	1	1
QD-BTTWC20-20F	1-1/4	1-1/4
QD-BTTWC24-24F	1-1/2	1-1/2

VALVED NIPPLE - BRASS

PART No.	Body Size	Female Pipe
QD-BTTWN12-12F	3/4	3/4
QD-BTTWN16-16F	1	1
QD-BTTWN20-20F	1-1/4	1-1/4
QD-BTTWN24-24F	1-1/2	1-1/2



HEAVY DUTY WING INTERCHANGE (BTTW) ACCESSORIES



Brass Dust Cap



Brass Dust Plug

PART No.	Size
QD-BTTWDC-12	3/4
QD-BTTWDC-16	1
QD-BTTWDC-20	1-1/4
QD-BTTWDC-24	1-1/2

PART No.	Size
QD-BTTWDP-12	3/4
QD-BTTWDP-16	1
QD-BTTWDP-20	1-1/4
QD-BTTWDP-24	1-1/2

AGRICULTURAL (PIONEER 4000) INTERCHANGE



STEEL



QD-AGC8-DMB

- Interchangeable with Pioneer 4000 series, Safeway S20 and S40 series
- High strength steel construction
- Superior "Poppet" style valves
- Nitrile NBR seals with PTFE back-up ring
- Typical applications include agricultural equipment, gravel trucks and dump trucks



	COUPLER SET MAXIMUM WORKING PRESSURE (PSI)				
	1/4	3/8	1/2	3/4	1
STEEL	5,000	4,350	3,600	3,600	3,300

VALVED COUPLER - STEEL

PART No.	Body Size	Female Pipe	Sleeve Style
QD-AGC4-4F	1/4 Coupler	1/4	One Way
QD-AGC6-6F	3/8 Coupler	3/8	One Way
QD-AGC8-8F	1/2 Coupler	1/2	Two Way
QD-AGC8-DMB	1/2 Coupler	(Double Mounting Bracket)	
QD-AGC12-12F	3/4 Coupler	3/4	One Way
QD-AGC16-16F	1 Coupler	1	One Way

VALVED NIPPLE - STEEL

PART No.	Body Size	Female Pipe
QD-AGN4-4F	1/4 Nipple	1/4
QD-AGN6-6F	3/8 Nipple	3/8
QD-AGN8-8F	1/2 Nipple	1/2
QD-AGN12-12F	3/4 Nipple	3/4
QD-AGN16-16F	1 Nipple	1

SNOW PLOW QUICK DISCONNECT



STEEL



This high quality economical coupler is at the center of every snow plow replacement parts package.

- High strength steel construction
- Coupler set maximum working pressure is 4,000 P.S.I.

Also ask us about...

- 1/4" S.A.E. 100R7 hose assemblies in various lengths and configurations
- Steel hydraulic adapters and brass adapters to meet all your fitting needs

VALVED COUPLER - STEEL

PART No.	Description	Body Size	Female Pipe
QD-SP90	Snow Plow Set	1/4	1/4

SERIES B ISO 7241-1 INDUSTRIAL INTERCHANGE



STEEL



BRASS

- High flow characteristics and pressure ratings superior to Parker 60 series
- Industry interchangeability with other manufacturer's ISO "B" couplers and nipples
- Poppet style double shut-off
- Nitrile NBR seals with PTFE back-up ring
- Proven ball lock mechanism
- 4 : 1 safety factor (Min. Burst = W.P. X 4)
- Ideal for use with hydraulic and other fluids in both stationary and mobile industrial applications



**COUPLER SET
MAXIMUM WORKING PRESSURE (PSI)**

	1/4	3/8	1/2	3/4	1
STEEL	5000	4,350	4,000	2,600	2,175
BRASS	3500	3,500	3,500	2,500	1,500
STAINLESS	5500	3,750	3,750	3,000	3,000

VALVED COUPLER - STEEL

PART No.	Body Size	Female Pipe
QD-ISOBC4-4F	1/4	1/4
QD-ISOBC6-6F	3/8	3/8
QD-ISOBC8-8F	1/2	1/2
QD-ISOBC12-12F	3/4	3/4
QD-ISOBC16-16F	1	1

VALVED NIPPLE - STEEL

PART No.	Body Size	Female Pipe
QD-ISOBN4-4F	1/4	1/4
QD-ISOBN6-6F	3/8	3/8
QD-ISOBN8-8F	1/2	1/2
QD-ISOBN12-12F	3/4	3/4
QD-ISOBN16-16F	1	1

VALVED COUPLER - BRASS

PART No.	Body Size	Female Pipe
QD-BISOBC4-4F	1/4	1/4
QD-BISOBC6-6F	3/8	3/8
QD-BISOBC8-8F	1/2	1/2
QD-BISOBC12-12F	3/4	3/4
QD-BISOBC16-16F	1	1

VALVED NIPPLE - BRASS

PART No.	Body Size	Female Pipe
QD-BISOBN4-4F	1/4	1/4
QD-BISOBN6-6F	3/8	3/8
QD-BISOBN8-8F	1/2	1/2
QD-BISOBN12-12F	3/4	3/4
QD-BISOBN16-16F	1	1

VALVED COUPLER - STAINLESS (303)

PART No.	Body Size	Female Pipe
QD-SISOBC4-4F	1/4	1/4
QD-SISOBC6-6F	3/8	3/8

VALVED NIPPLE - STAINLESS (303)

PART No.	Body Size	Female Pipe
QD-SISOBN4-4F	1/4	1/4
QD-SISOBN6-6F	3/8	3/8



**DUST
PLUG**

Size	Dust Plug	Dust Cap
1/4	QD-PDP-9	QD-PDC-11
3/8	---	QD-PDC-14
1/2	QD-PDP-16	---
3/4	QD-PDP-20	QD-PDC-21
1	QD-PDP-24	---



**DUST
CAP**

SERIES A ISO 7241-1 INTERCHANGE



STEEL



- Interchangeable with Parker 6600 series, Aeroquip 5600 Series, Safeway S56 Series and other manufacturer's couplers and nipples built in accordance to I.S.O. 7241-1 Series "A"
- 4 : 1 Safety factor (Min. Burst = W.P. X 4)
- High strength steel construction
- Proven ball lock mechanism
- Nitrile NBR seals with PTFE back-up ring
- For use with hydraulic fluids in mobile and stationary applications
- Temperature Range: -40°C to +121°C (-40°F to +250°F)

COUPLER SET MAXIMUM WORKING PRESSURE (PSI)

	1/4	3/8	1/2	3/4	1
STEEL	5,000	4,600	4,000	4,000	4,000

VALVED COUPLER - STEEL

PART No.	Body Size	Female Pipe
QD-ISOAC4-4F	1/4	1/4
QD-ISOAC6-6F	3/8	3/8
QD-ISOAC8-8F	1/2	1/2
QD-ISOAC12-12F	3/4	3/4
QD-ISOAC16-16F	1	1

VALVED NIPPLE - STEEL

PART No.	Body Size	Female Pipe
QD-ISOAN4-4F	1/4	1/4
QD-ISOAN6-6F	3/8	3/8
QD-ISOAN8-8F	1/2	1/2
QD-ISOAN12-12F	3/4	3/4
QD-ISOAN16-16F	1	1



DUST
PLUG

Size	Dust Plug	Dust Cap
3/8	QD-PDP-11	QD-PDC-13
1/2	QD-PDP-14	QD-PDC-15
3/4	QD-PDP-19	QD-PDC-20
1	QD-PDP-23	QD-PDC-24



DUST
CAP

ISO 16028 HTMA FLUSH FACE



- Interchange with Aeroquip FD89/FD49 and Parker FE, FF size 3/8
- Up to 4,000 PSI operation pressures
- Superior flow and low pressure drop
- Sleeve lock feature
- Exceeds ANSI/NFPA T3.20.15-1990 (R 2016)

COUPLER SET MAXIMUM WORKING PRESSURE (PSI)

	1/4	3/8	1/2	3/4	1
STEEL	4,285	4,285	3,571	3,571	3,571

VALVED COUPLER - STEEL

PART No.	Body Size	Female Pipe
QD-HTMAC4-4F	1/4	1/4
QD-HTMAC6-6F	3/8	3/8
QD-HTMAC6-8F	3/8	1/2
QD-HTMAC8-8F	1/2	1/2
QD-HTMAC8-12F	1/2	3/4
QD-HTMAC12-12F	3/4	3/4
QD-HTMAC16-16F	1	1

Note: Available with Female S.A.E. thread suffix with -EF

VALVED NIPPLE - STEEL

PART No.	Body Size	Female Pipe
QD-HTMAN4-4F	1/4	1/4
QD-HTMAN6-6F	3/8	3/8
QD-HTMAN6-8F	3/8	1/2
QD-HTMAN8-8F	1/2	1/2
QD-HTMAN8-12F	1/2	3/4
QD-HTMAN12-12F	3/4	3/4
QD-HTMAN16-16F	1	1

Note: Available with Female S.A.E. thread suffix with -EF

HIGH PRESSURE / THREAD TO CONNECT (PARKER 3000) INTERCHANGE



STEEL

- Interconnect with Parker 3000 series, Faster PVV series and other screw to connect couplings used in the hydraulic tool and rescue equipment markets.
- Zero leakage and higher flow rates than commonly used metal to metal sealing.
- High strength steel construction with heavy duty clear zinc plating for excellent corrosion resistance

VALVED COUPLER - STEEL

PART No.	Body Size	Pipe	Working Pressure (PSI)
QD-TCC4-4M	1/4 Coupler	1/4 NPT	10,000
QD-TCC6-6F	3/8 Coupler	3/8 FPT	10,000
QD-TCC6-6M	3/8 Coupler	3/8 NPT	10,000

VALVED NIPPLE - STEEL

PART No.	Body Size	Pipe	Working Pressure (PSI)
QD-TCN4-4F	1/4 Nipple	1/4 FPT	10,000
QD-TCN6-6F	3/8 Nipple	3/8 FPT	10,000

PNEUMATIC QUICK DISCONNECT CROSSOVER

ACCLTEK INDUSTRIAL INTERCHANGE

SIZE	THREAD	Fairview PART No.	AMFLO	PARKER	DIXON	FOSTER	TOP-RING	MILTON	SCHRADER BRIDGEPORT	TRUFLATE
1/4	1/4 FPT	QD-INDMC4-4F	C20	B23	DC20	3003	20.842	715	5142-12	13-234
1/4	3/8 FPT	QD-INDMC4-6F	C20-23	B23E	DC2023	3203	20.862	718	5263-12	13-254
3/8	1/4 FPT	QD-INDMC6-4F	C26-22	25C	DC2622	4004	21.842	1833		
3/8	3/8 FPT	QD-INDMC6-6F	C26	25	DC26	4204	21.862	1835	3541	13-536
3/8	1/2 FPT	QD-INDMC6-8F	C26-24	25F	DC2624	4404	21.882			13-556
1/2	1/2 FPT	QD-INDMC8-8F	C10	17	DC10	5205	22.882	1815		
1/4	1/4 NPT	QD-INDMC4-4M	C21	B22	DC21	3103	20.942	716	5141-12	13-224
1/4	3/8 NPT	QD-INDMC4-6M	C21-03	B22E	DC-2103	3303	20.962	719	5140-12	13-244
3/8	1/4 NPT	QD-INDMC6-4M	C25-02	24C	DC2502	4104	21.942			
3/8	3/8 NPT	QD-INDMC6-6M	C25	24	DC25	4304	21.962	1836		13-526
3/8	1/2 NPT	QD-INDMC6-8M	C25-04	24F	DC2504	4504	21.982			13-546
1/2	1/2 NPT	QD-INDMC8-8M	C9	16	DC9	5305	22.982	1816		
1/4	1/4 Hbarb	QD-INDMC4-4H	C20-42	B20-3B	DC2042	3603	20.542	717	171	
1/4	3/8 Hbarb	QD-INDMC4-6H	C20-44	B20-5B	DC2044	3703	20.562	717-6		
3/8	3/8 Hbarb	QD-INDMC6-6H	C26-44	24-5B	DC2644	4804	21.562	1836-6		
3/8	1/2 Hbarb	QD-INDMC6-8H	C26-45	24-6B	DC2645	4904	21.582			
1/4	1/4 FPT	QD-INDN4-4F	CP20	H3C	DCP20	11-3	20.142	728	5139-11	12-234
1/4	3/8 FPT	QD-INDN4-6F	CP20-23	H3C-E	DCP2023	15-3	20.162	732	5263-11	12-236
3/8	1/4 FPT	QD-INDN6-4F	CP26-22	H1E	DCP2622	41-4	21.142	1840		
3/8	3/8 FPT	QD-INDN6-6F	CP26	H3E	DCP26	43-4	21.162	1838	3543	12-536
3/8	1/2 FPT	QD-INDN6-8F	CP26-24	H3E-F	DCP2624	45-4	21.182			
1/2	1/2 FPT	QD-INDN8-8F	CP18	H3F	DCP18	55-5	22.182	1858		12-762
1/4	1/4 NPT	QD-INDN4-4M	CP21	H2C	DCP21	10-3	20.242	727	5138-11	12-224
1/4	3/8 NPT	QD-INDN4-6M	CP21-03	H2C-E	DCP2103	14-3	20.262	733	5263-11	12-226
3/8	1/4 NPT	QD-INDN6-4M	CP25-02	H0E	DCP2502	40-4	21.242	1839		
3/8	3/8 NPT	QD-INDN6-6M	CP25	H2E	DCP25	42-4	21.262	1837	3542	12-526
3/8	1/2 NPT	QD-INDN6-8M	CP25-04	H2E-F	DCP2504	44-4	21.282			
1/2	1/2 NPT	QD-INDN8-8M	CP17	H2F	DCP9	54-5	22.282	1857		12-752
1/4	1/4 Hbarb	QD-INDN4-4H	CP21-42	H8C	DCP2142	16-3	20.342	736	5223-11	
1/4	3/8 Hbarb	QD-INDN4-6H	CP21-44	H9C	DCP2144	17-3	20.362	736-6		
3/8	3/8 Hbarb	QD-INDN6-6H	CP25-44	H5E	DCP2544	48-4	21.362	1837-6		
3/8	1/2 Hbarb	QD-INDN6-8H	CP25-45	H6E	DCP2545	49-4	21.382			

ARO 210 INTERCHANGE

SIZE	THREAD	Fairview PART No.	AMFLO	PARKER	DIXON	FOSTER	TOP-RING	MILTON	SCHRADER BRIDGEPORT	TRUFLATE
1/4	1/4 FPT	QD-AROAC4-4F	C38	B53	DC38	210-3003	23.442	775	3526	13-334
1/4	3/8 FPT	QD-AROAC4-6F	C38-23	B53E	DC3823	210-3203	23.462			
1/4	1/4 NPT	QD-AROAC4-4M	C37	B52	DC37	210-3103	23.642	776-4	3525	13-324
1/4	3/8 NPT	QD-AROAC4-6M	C37-03	B52E	DC3703	210-3303	23.662	776-6		
1/4	1/4 Hbarb	QD-AROAC4-4H	C38-42	B50-3B	DC3842	210-3603	23.742			
1/4	1/4 FPT	QD-ARON4-4F	CP38	A3C	DCP38	210-11	23.142	778	3530	12-334
1/4	1/4 NPT	QD-ARON4-4M	CP37	A2C	DCP37	210-10	23.242	777	3529	12-324
1/4	1/4 Hbarb	QD-ARON4-4H	C37-42	A8C	DCP3742	210-16	23.342	777-4		

TRU-FLATE (AUTOMOTIVE) INTERCHANGE

SIZE	THREAD	Fairview PART No.	AMFLO	PARKER	DIXON	FOSTER	TOP-RING	MILTON	SCHRADER BRIDGEPORT	TRUFLATE
1/4	1/4 FPT	QD-TFMC4-4F	C2	B13	DC2	TF3003	24.842	785	3504	13-134
3/8	3/8 FPT	QD-TFMC6-6F	C6	B15	DC6	TF4204	25.862	1805	3516	13-612
1/4	1/4 NPT	QD-TFMC4-4M	C1	B12	DC1	TF3103	24.942	786	3503	13-124
3/8	1/4 NPT	QD-TFMC6-4M	C7	14C	DC7	TF4104	25.842			13-602
3/8	3/8 NPT	QD-TFMC6-6M	C5	14	DC5	TF4304	25.962	1806	3515	13-604
1/4	1/4 FPT	QD-TFN4-4F	CP2	3C	DCP2	TF11	24.142	784	3507	12-134
3/8	3/8 FPT	QD-TFN6-6F	CP6	3E	DCP6	TF43	25.162	1808	3518	12-612
1/4	1/4 NPT	QD-TFN4-4M	CP1	2C	DCP1	TF10	24.242	783	3506	12-124
3/8	1/4 NPT	QD-TFN6-4M	CP7	0E	DCP7	TF40	25.242	1809	3519	12-602
3/8	3/8 NPT	QD-TFN6-6M	CP5	2E	DCP5	TF42	25.262	1807	3517	12-604

LINCOLN INTERCHANGE

SIZE	THREAD	Fairview PART No.	AMFLO	PARKER	DIXON	FOSTER	TOP-RING	MILTON	SCHRADER BRIDGEPORT	TRUFLATE
1/4	1/4 FPT	QD-LINMC4-4F	C28	B73	DC28	LN3003		790	3528	13-434
1/4	1/4 NPT	QD-LINMC4-4M	C27	B72	DC27	LN3103				
1/4	1/4 FPT	QD-LINN4-4F	CP28	L3C	DCP28	LN10		792	3532	12-434
1/4	1/4 NPT	QD-LINN4-4M	CP27	L2C	DCP27	LN11		791	3531	12-424

INDUSTRIAL INTERCHANGE - MANUAL



The industrial interchange design is considered the industry standard.
The nipple can be easily identified by its short pilot and flat bottomed ball groove.
Operating pressure: 300 P.S.I. (21 BAR)

Styles may vary
depending on size



Industrial Interchange
Standard nose length



COUPLERS

PART No.	Body Size	Pipe
QD-INDMC4-4F	1/4	1/4 FPT
QD-INDMC4-6F	1/4	3/8 FPT
QD-INDMC6-4F	3/8	1/4 FPT
QD-INDMC6-6F	3/8	3/8 FPT
QD-INDMC6-8F	3/8	1/2 FPT
QD-INDMC8-8F	1/2	1/2 FPT

PART No.	Body Size	Pipe
QD-INDMC4-4M	1/4	1/4 MPT
QD-INDMC4-6M	1/4	3/8 MPT
QD-INDMC6-4M	3/8	1/4 MPT
QD-INDMC6-6M	3/8	3/8 MPT
QD-INDMC6-8M	3/8	1/2 MPT
QD-INDMC8-6M	1/2	3/8 MPT
QD-INDMC8-8M	1/2	1/2 MPT

PART No.	Body Size	Hose Barb
QD-INDMC4-4H	1/4	1/4
QD-INDMC4-6H	1/4	3/8
QD-INDMC6-6H	3/8	3/8
QD-INDMC6-8H	3/8	1/2
QD-INDMC8-8H	1/2	1/2

NIPPLES

PART No.	Body Size	Female Pipe
QD-INDN4-4F	1/4	1/4 FPT
QD-INDN4-6F	1/4	3/8 FPT
QD-INDN6-4F	3/8	1/4 FPT
QD-INDN6-6F	3/8	3/8 FPT
QD-INDN6-8F	3/8	1/2 FPT
QD-INDN8-6F	1/2	3/8 FPT
QD-INDN8-8F	1/2	1/2 FPT

PART No.	Body Size	Female Pipe
QD-INDN4-4M	1/4	1/4 MPT
QD-INDN4-6M	1/4	3/8 MPT
QD-INDN6-4M	3/8	1/4 MPT
QD-INDN6-6M	3/8	3/8 MPT
QD-INDN6-8M	3/8	1/2 MPT
QD-INDN8-6M	1/2	3/8 MPT
QD-INDN8-8M	1/2	1/2 MPT

PART No.	Body Size	Hose Barb
QD-INDN4-4H	1/4	1/4
QD-INDN4-6H	1/4	3/8
QD-INDN6-6H	3/8	3/8
QD-INDN6-8H	3/8	1/2
QD-INDN8-6H	1/2	3/8

FAIRVIEW CARRIES A WIDE SELECTION OF PNEUMATIC PRODUCTS



INDUSTRIAL INTERCHANGE - AUTOMATIC



Interchangeable with QD-INDM series featured on previous page, Fairview's QD-INDA series industrial interchange features a push-to-connect style Automatic Coupler for easy one handed installations.
Operating pressure: 300 P.S.I. (21 BAR)

Styles may vary



Industrial Interchange
Standard nose length



COUPLERS

PART No.	Body Size	Pipe
QD-INDAC4-4F	1/4	1/4 FPT
QD-INDAC4-6F	1/4	3/8 FPT
QD-INDAC6-4F	3/8	1/4 FPT
QD-INDAC6-6F	3/8	3/8 FPT
QD-INDAC6-8F	3/8	1/2 FPT
QD-INDAC8-8F	1/2	1/2 FPT

PART No.	Body Size	Pipe
QD-INDAC4-4M	1/4	1/4 MPT
QD-INDAC4-6M	1/4	3/8 MPT
QD-INDAC6-6M	3/8	3/8 MPT

PART No.	Body Size	Hose Barb
QD-INDAC4-4H	1/4	1/4
QD-INDAC4-6H	1/4	3/8
QD-INDAC6-6H	3/8	3/8
QD-INDAC8-6H	1/2	1/2

NIPPLES

PART No.	Body Size	Female Pipe
QD-INDN4-4F	1/4	1/4 FPT
QD-INDN4-6F	1/4	3/8 FPT
QD-INDN6-4F	3/8	1/4 FPT
QD-INDN6-6F	3/8	3/8 FPT
QD-INDN6-8F	3/8	1/2 FPT
QD-INDN8-8F	1/2	1/2 FPT

PART No.	Body Size	Female Pipe
QD-INDN4-4M	1/4	1/4 MPT
QD-INDN4-6M	1/4	3/8 MPT
QD-INDN6-4M	3/8	1/4 MPT
QD-INDN6-6M	3/8	3/8 MPT
QD-INDN6-8M	3/8	1/2 MPT
QD-INDN8-6M	1/2	3/8 MPT
QD-INDN8-8M	1/2	1/2 MPT

PART No.	Body Size	Hose Barb
QD-INDN4-4H	1/4	1/4
QD-INDN4-6H	1/4	3/8
QD-INDN6-6H	3/8	3/8
QD-INDN6-8H	3/8	1/2
QD-INDN8-6H	1/2	3/8

FAIRVIEW CARRIES A WIDE SELECTION OF PNEUMATIC PRODUCTS



ARO210 / ARO310 INTERCHANGE SERIES - AUTOMATIC



COUPLERS



Identified by its slightly longer nose than industrial style

NIPPLES

Fairview's QD-ARO series is a pin-type push-to-connect coupler designed for one way shut-off operation. It is interchangeable with ARO-210 / ARO-310 style couplers available from various manufacturers.

See Pneumatic Quick Disconnect Crossover - Page 108

Operating pressure: 250 P.S.I. (17 BAR)



PART No.	Body Size	Pipe
QD-AROAC4-4F	1/4	1/4 FPT
QD-AROAC4-6F	1/4	3/8 FPT
QD-AROAC6-6F	3/8	3/8 FPT

PART No.	Body Size	Pipe
QD-AROAC4-4M	1/4	1/4 MPT
QD-AROAC4-6M	1/4	3/8 MPT
QD-AROAC6-6M	3/8	3/8 MPT

PART No.	Body Size	Hose Barb
QD-AROAC4-4H	1/4	1/4
QD-AROAC4-6H	1/4	3/8

PART No.	Body Size	Female Pipe
QD-ARON4-4F	1/4	1/4 FPT
QD-ARON6-6F	3/8	3/8 FPT

PART No.	Body Size	Female Pipe
QD-ARON4-4M	1/4	1/4 MPT
QD-ARON4-6M	1/4	1/4 MPT
QD-ARON6-6M	3/8	3/8 MPT

PART No.	Body Size	Hose Barb
QD-ARON4-4H	1/4	1/4

TRU-FLATE INTERCHANGE (AUTOMOTIVE STANDARD)



COUPLERS



Identified by its very short nose

Fairview's automotive standard series interchanges with Tru-Flate design as well as automotive standards produced by most manufacturers. The nipple can be easily identified by its extremely short pilot.

See Pneumatic Quick Disconnect Crossover - Page 108

Operating pressure: 300 P.S.I. (21 BAR)



PART No.	Body Size	Material	Pipe
QD-TFMC4-4F	1/4	Brass	1/4 FPT
QD-TFMC6-4F	3/8	Steel	1/4 FPT
QD-TFMC6-6F	3/8	Steel	3/8 FPT
QD-TFMC8-8F	1/2	Steel	1/2 FPT

PART No.	Body Size	Material	Pipe
QD-TFMC4-4M	1/4	Brass	1/4 MPT
QD-TFMC6-4M	3/8	Steel	1/4 MPT
QD-TFMC6-6M	3/8	Steel	3/8 MPT

PART No.	Body Size	Material	Pipe
QD-TFN4-4F	1/4	Brass	1/4 FPT
QD-TFN6-4F	3/8	Steel	1/4 FPT
QD-TFN6-6F	3/8	Steel	3/8 FPT
QD-TFN8-8F	1/2	Steel	1/2 FPT

PART No.	Body Size	Material	Pipe
QD-TFN4-4M	1/4	Brass	1/4 MPT
QD-TFN6-4M	3/8	Steel	1/4 MPT
QD-TFN6-6M	3/8	Steel	3/8 MPT

PART No.	Body Size	Material	Pipe
QD-STFN4-4F	1/4	Steel	1/4 FPT
QD-STFN4-4M	1/4	Steel	1/4 MPT

LINCOLN INTERCHANGE COUPLING - MANUAL



Fairview's Lincoln series interchange is a manual style connection easily identified by its long pilot and short ball groove. It interchanges with Lincoln style couplings available from other manufacturers.

See Pneumatic Quick Disconnect Crossover

Operating pressure: 300 P.S.I. (21 BAR)

Identified by its very long nose

COUPLERS

PART No.	Body Size	Pipe
QD-LINMC4-4F	1/4	1/4 FPT
QD-LINMC4-4M	1/4	1/4 MPT

NIPPLES

PART No.	Body Size	Female Pipe
QD-LINN4-4F	1/4	1/4 FPT
QD-LINN4-4M	1/4	1/4 MPT

MINIATURE HIGH CAPACITY SERIES - AUTOMATIC



- One-handed operation
- High flow-low pressure drop
- Large range of connections
- Brass construction

Ideally suited for medical, dental equipment, small air tools, robotics, laboratories, air conditioning systems, plant feeding, training aids, auto emission testing, cooling lines, photo processing and breathing apparatus.

Maximum pressure rating: 1,000 psi

Working pressure: 0-230 psi

Vacuum: Over 12" Mercury

Temperature range: -40°C to +121°C (-40°F to +250°F)

COUPLERS

PART No.	Body Size	Pipe
QD-MINIAC2-2F	1/8	1/8 FPT
QD-MINIAC2-4F	1/8	1/4 FPT
QD-MINIAC2-2M	1/8	1/8 MPT
QD-MINIAC2-4M	1/8	1/4 MPT

NIPPLES

PART No.	Body Size	Pipe
QD-MININ2-2F	1/8	1/8 FPT
QD-MININ2-4F	1/8	1/4 FPT
QD-MININ2-2M	1/8	1/8 MPT
QD-MININ2-4M	1/8	1/4 MPT

UNIVERSAL INTERCHANGE COUPLING - AUTOMATIC



Fairview's Universal series is a push-to-connect style coupler capable of accepting ARO 210, Industrial and Tru-Flate Interchanges.

Operating pressure: 300 P.S.I. (21 BAR)



COUPLERS

PART No.	Body Size	Pipe
QD-UNIAC4-4F	1/4	1/4 FPT
QD-UNIAC4-6F	1/4	3/8 FPT
QD-UNIAC4-4M	1/4	1/4 MPT
QD-UNIAC4-6M	1/4	3/8 MPT

COUPLERS

PART No.	Body Size	Hose Barb
QD-UNIAC4-4H	1/4	1/4
QD-UNIAC4-6H	1/4	3/8

INDUSTRIAL INTERCHANGE SWING COUPLINGS - MANUAL



COUPLERS

Industrial interchange swing coupling offers full flow, safety exhaust, locking feature, and connect and disconnect under pressure.
Operating pressure: 360 P.S.I. (25 BAR)



Industrial Interchange
Standard nose length

For use with standard QD-INDN Series Industrial Interchange Nipples

PART No.	Body Size	Pipe
QD-SCINDMC4-4F	1/4	1/4 FPT
QD-SCINDMC4-6F	1/4	3/8 FPT
QD-SCINDMC6-4F	3/8	1/4 FPT
QD-SCINDMC6-6F	3/8	3/8 FPT
QD-SCINDMC6-8F	3/8	1/2 FPT
QD-SCINDMC8-8F	1/2	1/2 FPT

COUPLERS

PART No.	Body Size	Pipe
QD-SCINDMC4-4M	1/4	1/4 MPT
QD-SCINDMC6-6M	3/8	3/8 MPT
QD-SCINDMC8-8M	1/2	1/2 MPT
PART No.	Body Size	Hose Barb
QD-SCINDMC4-4H	1/4	1/4
QD-SCINDMC4-6H	1/4	3/8
QD-SCINDMC6-6H	3/8	3/8

ARO210 INTERCHANGE SWING COUPLINGS



COUPLERS

ARO210 Swing couplings offers full flow, safety exhaust, locking feature, and connect and disconnect under pressure. It is interchangeable with ARO210 style available from various manufacturers.

Operating Pressure: 360 P.S.I. (25 BAR)



Identified by its slightly longer nose than industrial style

For use with standard QD-ARON Series ARO210 Interchange Nipples

PART No.	Body Size	Pipe
QD-SCAROMC4-4F	1/4	1/4 FPT
QD-SCAROMC4-6F	1/4	3/8 FPT
QD-SCAROMC4-4M	1/4	1/4 MPT
QD-SCAROMC4-6M	1/4	3/8 MPT

COUPLERS

PART No.	Body Size	Hose Barb
QD-SCAROMC4-4H	1/4	1/4
QD-SCAROMC4-6H	1/4	3/8

CEJN INTERCHANGE SWING COUPLING



SWING COUPLERS

PART No.	Body Size	Pipe
QD-SCCEJNC4-6F	1/4	3/8 FPT

NIPPLES

PART No.	Body Size	Pipe
QD-CEJNN4-4M	1/4	1/4 MPT

CEJN interchange Swing couplings offer full flow, safety exhaust, locking feature, and connect and disconnect under pressure.

Operating Pressure: 360 P.S.I. (25 BAR)

STRAIGHT THROUGH PRESSURE WASH Q.D.'S



- Smooth bore permits free flow.
- Ideal for high pressure water applications (pressure washers)
- Temperature: Hot water +93°C (+200°F) with EPR O-Ring

COUPLER SET PRESSURE RATINGS (PSI)

	1/4	3/8	1/2
BRASS	4,000	4,000	2,200
STEEL	4,000	4,000	2,700
STAINLESS STEEL	4,000	4,000	3,000

STRAIGHT THROUGH COUPLER - BRASS

PART No.	Body Size	Female Pipe
QD-BSTC4-4F	1/4	1/4
QD-BSTC6-6F	3/8	3/8
QD-BSTC8-8F	1/2	1/2

PART No.	Body Size	Male Pipe
QD-BSTC4-4M	1/4	1/4
QD-BSTC6-6M	3/8	3/8
QD-BSTC8-8M	1/2	1/2

STRAIGHT THROUGH COUPLER - STAINLESS STEEL

PART No.	Body Size	Female Pipe
QD-SSTC4-4F	1/4	1/4
QD-SSTC6-6F	3/8	3/8
QD-SSTC8-8F	1/2	1/2

PART No.	Body Size	Male Pipe
QD-SSTC4-4M	1/4	1/4
QD-SSTC6-6M	3/8	3/8

STRAIGHT THROUGH NIPPLE - BRASS

PART No.	Body Size	Female Pipe
QD-BSTN4-4F	1/4	1/4
QD-BSTN6-6F	3/8	3/8
QD-BSTN8-8F	1/2	1/2

STRAIGHT THROUGH NIPPLE - BRASS

PART No.	Body Size	Male Pipe
QD-BSTN4-4M	1/4	1/4
QD-BSTN6-6M	3/8	3/8
QD-BSTN8-8M	1/2	1/2

STRAIGHT THROUGH NIPPLE - STEEL

PART No.	Body Size	Female Pipe
QD-STN4-4F	1/4	1/4
QD-STN6-6F	3/8	3/8
QD-STN8-8F	1/2	1/2

PART No.	Body Size	Male Pipe
QD-STN4-4M	1/4	1/4
QD-STN6-6M	3/8	3/8
QD-STN8-8M	1/2	1/2

STRAIGHT THROUGH NIPPLE - STAINLESS STEEL

PART No.	Body Size	Female Pipe
QD-SSTN4-4F	1/4	1/4
QD-SSTN6-6F	3/8	3/8
QD-SSTN8-8F	1/2	1/2

PART No.	Body Size	Male Pipe
QD-SSTN4-4M	1/4	1/4
QD-SSTN6-6M	3/8	3/8
QD-SSTN8-8M	1/2	1/2

PRESSURE WASH HOSE ADAPTERS



PART No.	Pipe Size
QD-KARCHER-6F	3/8 FPT X M22 X 1.5
QD-KARCHER-6M	3/8 NPT X M22 X 1.5



PART No.	Pipe Size
QD-KARN-6F	3/8 FPT X M22 X 1.5
QD-KARN-6M	3/8 NPT X M22 X 1.5



PART No.	Pipe Size
B1120-BB-3000	1/4 MPT x 1/4 NPSM
B1120-CC-3000	3/8 MPT x 3/8 NPSM

• USED TO ADAPT STANDARD PRESSURE WASH HOSES TO KARCHER STYLE EQUIPMENT • ABOVE PRESSURE WASH COUPLINGS COME WITH EPR O-RING GOOD FOR HOT WATER UP TO 200°F • PRESSURE RATING: 4000 PSI

3000 PSI BRASS SWIVEL: DESIGNED FOR USE WITH PRESSURE WASH ASSEMBLIES

BRASS WATER HOSE (GARDEN HOSE) QUICK DISCONNECTS



PART No.	Description
QD-WHCF	Quick Disconnect Coupler X Water Hose Thread
QD-WHVC	Valved QD Coupler X Water Hose Thread



PART No.	Description
QD-WHNM	Quick Disconnect Nipple X Water Hose Thread

VALVES & SHUT-OFF COCKS

BRASS - STEEL - STAINLESS

AIR CHUCKS AND TANK VALVES	131
AIR CONTROL PRESSURE REGULATORS.....	132
AIR VENTS AND MUFFLERS.....	130
BALL VALVES (BRASS).....	116-117
BALL VALVES (STEEL).....	119-121
BALL VALVES (STAINLESS STEEL)	119-121
BALL VALVES - MINIATURE	118
BALL VALVES - SAFETY EXHAUST	117
CHECK VALVES.....	125
DRAIN COCKS AND VALVES.....	124
GLADHANDS (S.A.E.- J318) & ACCESSORIES	126-128
SHUT-OFF COCKS.....	123
UTILITY VALVES.....	122
PRESSURE PROTECTION VALVE	131
SOLENOID VALVES	132



FORGED BRASS BALL VALVE - FULL PORT

Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.



Pipe
Female
to Female

PART No.	Pipe	W.O.G	W.S.P
BV2103-A	1/8	600	150
BV2103-B	1/4	600	150
BV2103-C	3/8	600	150
BV2103-D	1/2	600	150
BV2103-E	3/4	600	150
BV2103-H	1	600	150
BV2103-J	1-1/4	600	150
BV2103-K	1-1/2	600	150
BV2103-M	2	600	150
BV2103-N	2-1/2	400	150
BV2103-P	3	400	150



Pipe
Female
to Female

With
Locking Handle

PART No.	Pipe	W.O.G	W.S.P
BV2103-B-LH	1/4	600	150
BV2103-C-LH	3/8	600	150
BV2103-D-LH	1/2	600	150
BV2103-E-LH	3/4	600	150
BV2103-H-LH	1	600	150
BV2103-J-LH	1-1/4	600	150
BV2103-K-LH	1-1/2	600	150
BV2103-M-LH	2	600	150



Pipe
Female
to Female

**Stainless Steel
Handles Available**

PART No.	Type K Size	W.O.G
BVC4103-10 *	1/2	600
BVC4103-14 *	3/4	600
BVC4103-18 *	1	600
BVC4103-22	1-1/4	600
BVC4103-26	1-1/2	600
BVC4103-34	2	600

*C.S.A. Certified to 200 PSI for use
with Fuel Oil

**SOLDERING TEMP.
NOT TO EXCEED 400° F.**



Pipe
Female
to Female

PART No.	Pipe	W.O.G
BV4103-B	1/4	600
BV4103-C	3/8	600
BV4103-D	1/2	600
BV4103-E	3/4	600
BV4103-H	1	600
BV4103-J	1-1/4	600
BV4103-K	1-1/2	600
BV4103-M	2	600
BV4103-N	2-1/2	400
BV4103-P	3	400
BV4103-S	4	400



With
Stainless Handle

Pipe
Female
to Female

PART No.	Pipe	W.O.G
BV4103-B-SSH	1/4	600
BV4103-C-SSH	3/8	600
BV4103-D-SSH	1/2	600
BV4103-E-SSH	3/4	600
BV4103-H-SSH	1	600
BV4103-J-SSH	1-1/4	600
BV4103-K-SSH	1-1/2	600
BV4103-M-SSH	2	600
BV4103-N-SSH	2-1/2	400
BV4103-P-SSH	3	400
BV4103-S-SSH	4	400




Pipe
Female
to Female

Lead Free

PART No.	Pipe	W.O.G
LF-BV4103-B	1/4	600
LF-BV4103-C	3/8	600
LF-BV4103-D	1/2	600
LF-BV4103-E	3/4	600
LF-BV4103-H	1	600
LF-BV4103-J	1-1/4	600
LF-BV4103-K	1-1/2	600
LF-BV4103-M	2	600

SAFETY EXHAUST BALL VALVE



Pipe
Female
to Female



Pipe
Female
to Female

With Locking Handle

PART No.	Pipe
BVSE2103-B	1/4
BVSE2103-C	3/8
BVSE2103-D	1/2
BVSE2103-E	3/4

PART No.	Pipe
BVSE2103-B-LH	1/4
BVSE2103-C-LH	3/8
BVSE2103-D-LH	1/2
BVSE2103-E-LH	3/4

THESE VALVES ARE DESIGNED TO EXHAUST DOWNSTREAM AIR IN THE CLOSED POSITION.

BRASS 3 PORT BALL VALVES



Pipe Female Ends
3 Port 2-Way

PART No.	Pipe	W.O.G
BV2101-B	1/4	600
BV2101-C	3/8	600
BV2101-D	1/2	600
BV2101-E	3/4	600
BV2101-H	1	600
BV2101-J	1-1/4	600
BV2101-K	1-1/2	400
BV2101-M	2	400

VALVES &
SHUT-OFF
COCKS

FORGED BRASS 3 PORT BALL VALVE



Pipe Female Ends
3 Port 2-Way

PART No.	Pipe
BV2101T-B	1/4
BV2101T-C	3/8
BV2101T-D	1/2

PRESSURE RATING:
Bottom Port as inlet 500 P.S.I.
Side Port as inlet 100 P.S.I.

MINIATURE BALL VALVES



Pipe
Female
to Female

- Up to 600 P.S.I. Working Pressure
- **Temperature:** -40°C to 149°C (-40°F to +300°F)
- Non-adjusting O-Ring stem seal design never needs tightening

PART No.	Pipe	W.O.G
BV3103-A	1/8	600
BV3103-B	1/4	600



Pipe
Female
to Male

- Up to 600 P.S.I. Working Pressure
- **Temperature:** -40°C to 149°C (-40°F to +300°F)
- Non-adjusting O-Ring stem seal design never needs tightening

PART No.	Pipe	W.O.G
BV3120-A	1/8	600
BV3120-B	1/4	600

CHROME PLATED BRASS BALL VALVES



Pipe
Female
to Female

- Up to 450 P.S.I. Working Pressure
- **Temperature:** -18°C to 93°C (0°F to +200°F)
- Buna-N O-Ring stem seal

PART No.	Pipe	W.O.G
BVT3103-A	1/8	450
BVT3103-B	1/4	450
BVT3103-C	3/8	450
BVT3103-D	1/2	450



Pipe
Female
to Male

- Up to 450 P.S.I. working pressure
- **Temperature:** -18°C to 93°C (0°F to +200°F)
- Buna-N O-Ring stem seal

PART No.	Pipe	W.O.G
BVT3120-A	1/8	450
BVT3120-B	1/4	450
BVT3120-C	3/8	450
BVT3120-D	1/2	450

CARBON AND STAINLESS STEEL BALL VALVES



1 - PIECE DESIGN, STANDARD PORT


CARBON STEEL



Pipe
Female
to Female

PART No.	Pipe	W.O.G
BVCS2103-B	1/4	2000
BVCS2103-C	3/8	2000
BVCS2103-D	1/2	2000
BVCS2103-E	3/4	2000
BVCS2103-H	1	2000
BVCS2103-J	1-1/4	2000
BVCS2103-K	1-1/2	2000
BVCS2103-M	2	2000

316 STAINLESS STEEL

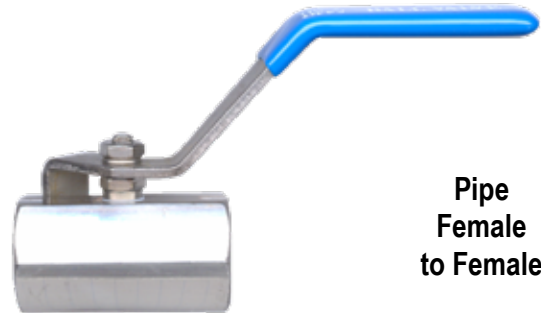

Pipe
Female
to Female

PART No.	Pipe	W.O.G
BVSS2103-B	1/4	2000
BVSS2103-C	3/8	2000
BVSS2103-D	1/2	2000
BVSS2103-E	3/4	2000
BVSS2103-H	1	2000
BVSS2103-J	1-1/4	2000
BVSS2103-K	1-1/2	2000
BVSS2103-M	2	2000

2 - PIECE DESIGN, FULL PORT 316 STAINLESS STEEL



Pipe Female Ends
3 Port 2-Way

PART No.	Pipe	W.O.G
BVSS2003-B-1000	1/4	1000
BVSS2003-C-1000	3/8	1000
BVSS2003-D-1000	1/2	1000
BVSS2003-E-1000	3/4	1000
BVSS2003-H-1000	1	1000
BVSS2003-J-1000	1-1/4	1000
BVSS2003-K-1000	1-1/2	1000
BVSS2003-M-1000	2	1000

CARBON AND STAINLESS STEEL BALL VALVES

2 - PIECE DESIGN, FULL PORT CARBON STEEL



Pipe
Female
to Female

PART No.	Pipe	W.O.G
BVCS2203-B	1/4	2000
BVCS2203-C	3/8	2000
BVCS2203-D	1/2	2000
BVCS2203-E	3/4	2000
BVCS2203-H	1	2000
BVCS2203-J	1-1/4	1500
BVCS2203-K	1-1/2	1500

2 - PIECE DESIGN, MEDIUM PRESSURE, FULL PORT CARBON STEEL



Pipe
Female
to Female

PART No.	Pipe	W.O.G
BVCS2303-B	1/4	3000
BVCS2303-C	3/8	3000
BVCS2303-D	1/2	3000
BVCS2303-E	3/4	3000
BVCS2303-H	1	3000

2 - PIECE DESIGN, FULL PORT 316 STAINLESS STEEL



Pipe
Female
to Female

PART No.	Pipe	W.O.G
BVSS2203-B	1/4	2000
BVSS2203-C	3/8	2000
BVSS2203-D	1/2	2000
BVSS2203-E	3/4	2000
BVSS2203-H	1	2000
BVSS2203-J	1-1/4	1500
BVSS2203-K	1-1/2	1500
BVSS2203-M	2	1500

CARBON AND STAINLESS STEEL BALL VALVES



3 - PIECE DESIGN, HIGH PRESURE

HIGH PRESSURE CARBON STEEL



Pipe Female to Female

PART No.	Female Pipe	W.O.G	Port Style
BVCS2403-B	1/4	7250	Full
BVCS2403-C	3/8	7250	Full
BVCS2403-D	1/2	7250	Full
BVCS2403-E	3/4	5075	Full
BVCS2403-H	1	5075	Full
BVCS2403-J	1-1/4	5075	Standard
BVCS2403-K	1-1/2	5075	Standard
BVCS2403-M	2	5075	Standard

ORB PORTS CARBON STEEL



Female ORB to Female ORB

PART No.	Female O-Ring	W.O.G	Port Style
BVCS2434-6	9/16 - 18	7250	Full
BVCS2434-8	3/4 - 16	7250	Full
BVCS2434-12	1-1/16 - 12	5075	Full
BVCS2434-16	1-5/16 - 12	5075	Full

FULL PORT 316 STAINLESS STEEL



Pipe Female to Female

PART No.	Pipe	W.O.G
BVSS2403-B	1/4	7250
BVSS2403-C	3/8	7250
BVSS2403-D	1/2	7250
BVSS2403-E	3/4	5075
BVSS2403-H	1	5075

GATE VALVES



Female Pipe

PART No.	Pipe	W.O.G
217-B	1/4	200
217-C	3/8	200
217-D	1/2	200
217-E	3/4	200
217-H	1	200
217-J	1-1/4	200
217-K	1-1/2	200
217-M	2	200
217-N	2-1/2	200
217-P	3	200
217-S	4	200

ANGLE VALVES



Flare to Male Pipe Forged Body

PART No.	Tube	Pipe	P.S.I.
1049-6B	3/8	1/4	200
1049-6C	3/8	3/8	200
1049-6D	3/8	1/2	200
1049-8C	1/2	3/8	200
1049-10D	5/8	1/2	200



Hose to Male Pipe Forged Body

PART No.	Hose I.D.	Pipe	P.S.I.
1139-6C	3/8	3/8	200
1139-8C	1/2	3/8	200
1139-10C	5/8	3/8	200
1139-10D	5/8	1/2	200
1139-12C	3/4	3/8	200
1139-12D	3/4	1/2	200



Hose to Male Pipe Forged Body Heater Valve

PART No.	Hose I.D.	Pipe	P.S.I.
HV1139-10C	5/8	3/8	200



Male Pipe to Female Pipe Forged Body

PART No.	Male Pipe	Female Pipe	P.S.I.
1115-CC	3/8	3/8	200
1115-DC	1/2	3/8	200



Flare to Male Pipe Forged Body

PART No.	Tube	Pipe	P.S.I.
1054-6D	3/8	1/2	200
1054-6E	3/8	3/4	200

SELECTOR VALVES WITH CLICK



Three Way Shut-Off (With Mounting Bracket) Flow Either of Two Side Ports to Center Port. All Ports Female Pipe

PART No.	Pipe	Stem Length	P.S.I.
2101-B	1/4	1-3/8"	30
2101-C	3/8	1-3/8"	30

Operating Temperature:
-40°C to +82°C (-40°F to +180°F)



Four Way Shut-Off (With Mounting Bracket) Flow Either of Three Side Ports to Bottom Port. All Ports Female Pipe

PART No.	Pipe	Stem Length	P.S.I.
2102-B	1/4	1-3/8"	30
2102-BL	1/4	2-7/8"	30
2102-C	3/8	1-3/8"	30

Operating Temperature:
-40°C to +82°C (-40°F to +180°F)

C.S.A. CERTIFIED WATER THREAD VALVES (Also known as Sediment Faucets)



Water Hose to Male Pipe

PART No.	Pipe.
224-D *	1/2
224-E	3/4

* I.D. OF MALE PIPE WILL ACCOMMODATE
1/2 TYPE K COPPER TUBE FOR SOLDERING
CSA Certified to 200 PSI for use with Fuel Oil.
Temperature: -40°C to +65°C (-40°F to +149°F)



Water Hose to Male Pipe

PART No.	Pipe.
225-D *	1/2

* I.D. OF MALE PIPE WILL ACCOMMODATE
1/2 TYPE K COPPER TUBE FOR SOLDERING
CSA Certified to 200 PSI for use with Fuel Oil.
Temperature: -40°C to +65°C (-40°F to +149°F)

BRASS SPRING BOTTOM SHUT-OFF COCKS (Not Recommended for use with Liquids)



**Flare
Tube to Tube**

PART No.	Tube	P.S.I.
2042-6	3/8	30

Temperature: -40°C to +121°C (-40°F to +250°F)



**Pipe
Female to Female**

PART No.	Pipe	P.S.I.
2103-A	1/8	30
2103-B	1/4	30
2103-C	3/8	30

Temperature: -40°C to +121°C (-40°F to +250°F)



**Compression
Shut Off Union
Spring Bottom**

PART No.	Tube	P.S.I.
2062-4	1/4	30
2062-6	3/8	30


Temperature: -40°C to +121°C (-40°F to +250°F)



**Pipe
Female to Male**

PART No.	Pipe	P.S.I.
2120-A	1/8	30
2120-B	1/4	30
2120-C	3/8	30

Temperature: -40°C to +121°C (-40°F to +250°F)



**Compression
Tube to Male Pipe**

PART No.	Tube	Pipe	P.S.I.
2068-4B	1/4	1/4	30

Temperature: -40°C to +121°C (-40°F to +250°F)



**Pipe
Male to Male**

PART No.	Pipe	P.S.I.
2122-B	1/4	30
2122-C	3/8	30

Temperature: -40°C to +121°C (-40°F to +250°F)

BRASS CLOSED BOTTOM SHUT-OFF COCKS



**Pipe
Female to Female**

PART No.	Pipe	P.S.I.
5103-B	1/4	30
5103-C	3/8	30

Temperature: -40°C to +121°C (-40°F to +250°F)



**Pipe
Female to Male**

PART No.	Pipe	P.S.I.
5120-A	1/8	30
5120-B	1/4	30
5120-C	3/8	30

Temperature: -40°C to +121°C (-40°F to +250°F)

BACK SEATING TYPE



**Back Seating Type
with Extension Outlet**

PART No.	Pipe	Working Pressure (P.S.I.)
239-B	1/4	Designed for Constant Pressure Use Between 20 and 150 PSI



Back Seating Type

PART No.	Pipe	Working Pressure (P.S.I.)
240-A	1/8	Designed for Constant Pressure Use Between 15 and 150 PSI
240-B	1/4	
240-C	3/8	
240-D	1/2	

GROUND KEY-PLUG TYPE



**Ground Key
Plug Type
Lever Handle**

PART No.	Pipe	Working Pressure (P.S.I.)
241-A	1/8	30
241-B	1/4	30
241-C	3/8	30
241-D	1/2	30



**Ground Key
Plug Type
Lever Handle
(Heavy Pattern)**

PART No.	Pipe	Working Pressure (P.S.I.)
241HP-B	1/4	150



**Heavy Duty
Ground Key
Plug Type
Tee Handle**

PART No.	Pipe	Working Pressure (P.S.I.)
T241-B	1/4	150

NEEDLE SEAT TYPE



**Needle Seat
One Piece
Plug
and Handle**

PART No.	Pipe	Working Pressure (P.S.I.)
242-A	1/8	200
242-B	1/4	200
242-C	3/8	200



**Needle
Seat**

PART No.	Pipe	Working Pressure (P.S.I.)
243-A	1/8	Designed for Constant Pressure Use Between 15 and 150 PSI
243-B	1/4	
243-C	3/8	



**90° Elbow
Shut-Off
with
Spout**


PART No.	Hose I.D.	Pipe	Working Pressure (P.S.I.)
245-A	1/4	1/8	50
245-B	3/8	1/4	50

**LIMITED STOCK OF SOME DISCONTINUED ITEMS IS STILL AVAILABLE.
ASK YOUR LOCAL FAIRVIEW LOCATION.**

CHECK VALVES

Fairview

CARBON STEEL



**Coupling Style
Check Valve**

This check valve design is safe, compact, suitable to any hydraulic application using non-corrosive liquids. Also available with SAE threads, or with 65 PSI crack pressure.

PART No.	Female Pipe	Working P.S.I.	CRACK P.S.I.
SCV1003-A	1/8	5000	5 PSI
SCV1003-B	1/4	5000	5 PSI
SCV1003-C	3/8	5000	5 PSI
SCV1003-D	1/2	4000	5 PSI
SCV1003-E	3/4	4000	5 PSI

BRASS LOW PRESSURE CHECK



**Coupling Style
Check Valve**

250 P.S.I. non-shock cold water. Forged brass construction for greater strength. May be installed horizontally or vertically. Less than 1 P.S.I. cracking pressure.

(This valve is intended for use with air and water only)

PART No.	Female Pipe	MAX P.S.I.
103CV-C	3/8	250
103CV-D	1/2	250
103CV-E	3/4	250
103CV-H	1	250
103CV-J	1-1/4	250
103CV-K	1-1/2	250

Temperature: -29°C to +38°C (-20°F to +100°F)

BRASS HIGH PRESSURE



**Coupling Style
Check Valve**

3000 P.S.I. Positive check valve. Stainless steel poppet and spring, viton seal - Less than 1 P.S.I. cracking pressure. Maxi-Flow Check Valves used in applications where back flow is not permitted. Can be used in air or fluid applications (This valve is intended for use with air and water only). Install valve so that flow is in the direction of the arrow on the part.

PART No.	Female Pipe	MAX P.S.I.
103CV-B-3000	1/4	3000
103CV-C-3000	3/8	3000

BRONZE VALVE



**Female Pipe
Hex Head**

PART No.	Female Pipe	W.S.P.	C.W.P.
293-C	3/8	150	300
293-D	1/2	150	300
293-E	3/4	150	300
293-H	1	150	300
293-J	1-1/4	150	300
293-K	1-1/2	150	300

ALLOWS FLOW IN ONE DIRECTION ONLY

STEEL ONE WAY VALVE



**Female to Male
Check Valve**

Precision engineered and manufactured to provide optimum performance for each specified application. Steel construction for years of dependable operation. Less than 1 P.S.I. cracking pressure.

PART No.	Pipe	MAX P.S.I.
CV1-B	1/4	135
CV1-C	3/8	135
CV1-D	1/2	135

ALLOWS FLOW IN ONE DIRECTION ONLY

BRASS Y CHECK VALVE



**"Y" Valve
Female Pipe
Hex Head**

PART No.	Female Pipe	W.S.P.	C.W.P.
298-D	1/2	125	200
298-E	3/4	125	200
298-H	1	125	200
298-J	1-1/4	125	200
298-K	1-1/2	125	200
298-M	2	125	200

ALLOWS FLOW IN ONE DIRECTION ONLY

VALVES &
SHUT-OFF
COCKS

GH SERIES (Standard Style)



Standard Gladhands

PART No.	Pipe Size	Type	Color Code
GHS	1/2 FPT	Service	Blue
GHE	1/2 FPT	Emergency	Red
GHU	1/2 FPT	Universal	Plain

Standard Gladhands with Screen Seals

PART No.	Pipe Size	Type	Color Code
GHS-SC	1/2 FPT	Service	Blue
GHE-SC	1/2 FPT.	Emergency	Red
GHU-SC	1/2 FPT	Universal	Plain

Standard Gladhands with Umbrella Seals

PART No.	Pipe Size	Type	Color Code
GHS-2	1/2 FPT	Service	Blue
GHE-2	1/2 FPT.	Emergency	Red
GHU-2	1/2 FPT	Universal	Plain

GHM SERIES (Rear & Bottom Mounting)




(Plug & Gasket Included)

PART No.	Pipe Size	Type	Color Code
GHM-E	3/8 FPT	Emergency	Red
GHM-S	3/8 FPT	Service	Blue

GHM Series with Screen Seal

PART No.	Pipe Size	Type	Color Code
GHM-E-SC	3/8 FPT	Emergency	Red
GHM-S-SC	3/8 FPT	Service	Blue

REPLACEMENT SEALS

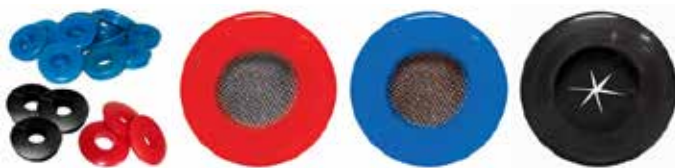

GH-SEAL
STANDARD

WITH SCREEN

UMBRELLA
SEAL

PART No.	Description	Color Code
GH-SEAL	Rubber	Black
GH-SEAL-2	Rubber Umbrella Seal	Black
GHE-SEAL	Polyurethane	Red
GHE-SEAL-SC	Polyurethane with Screen	Red
GHS-SEAL	Polyurethane	Blue
GHS-SEAL-SC	Polyurethane with Screen	Blue
GH-CONE-SC	Cone Screen Filter	Metallic
GHSFB-SEAL-SC	Polyurethane Screen for Fastbrake	Blue
GHU-SEAL	Polyurethane	Black
GHU-SEAL-SC	Polyurethane with Screen	Black

SWING AWAY GLADHANDS



ROTATES A FULL 180°

(Coupled With Pacifier)

PART No.	Pipe Size	Type	Color Code
GHU-SW	3/8 FPT	Swing Away	-
GHE-SW	3/8 FPT	Swing Away	Red
GHS-SW	3/8 FPT	Swing Away	Blue

CAST IRON GLADHANDS



PART No.	Pipe Size	Type	Color Code
GHCA-S	1/2 FPT	Service	Blue
GHCA-E	1/2 FPT	Emergency	Red
GHCA-U	1/2 FPT	Universal	Plain

**FAIRVIEW FASTBRAKE
GLADHANDS**
 (Interchangeable with Phillips QWIK-E)


PART No.	Pipe Size	Type	Color Code
GHSFB	1/2 FPT	Service	Blue
GHSFB-SC	1/2 FPT	Service Screened	Blue
GHSFB-RK		Repair Kit	

**FAIRVIEW FASTBRAKE
MOUNTING GLADHANDS**
 (Interchangeable with Phillips QWIK-E)


PART No.	Pipe Size	Type	Color Code
GHM-SFB	1/2 FPT	Service	Blue
GHM-SFB-SC	1/2 FPT	Service Screened	Blue
GHSFB-RK		Repair Kit	

**CORROSION RESISTANT
GLADHANDS**


PART No.	Pipe Size	Type	Color Code
GHS-CR	1/2 FPT	Service	Blue
GHE-CR	1/2 FPT	Emergency	Red

**CORROSION RESISTANT
MOUNTING GLADHANDS**


PART No.	Pipe Size	Type	Color Code
GHM-S-CR	1/2 FPT	Service	Blue
GHM-E-CR	1/2 FPT	Emergency	Red

GHV (Valved Series)



GHV Series



GHV Series with Bulkhead

PART No.	Bottom Pipe Size	Back Pipe Size	Type	Color Code
GHV-E	3/8 FPT	1/4 FPT	Emergency	Red
GHV-S	3/8 FPT	----	Service	Blue
Bulkhead PART No.	Female Pipe Size	Male Pipe Size	Type	Color Code
GHV-E-BH	3/8	3/4	Emergency	Red
GHV-S-BH	3/8	3/4	Service	Blue

GLADHAND DUMMIES



PART No.	Description
GH-DUMMY	c/w 26" Security Cable

GLADHAND GRIPS



Description
Gladhand Grip Handles
with Thread Sealant.
Sold Only in sets.
(Red and Blue)

PART No.	Pipe Size
GH-GRIP	1/2



Description
Knurled Solid Aluminum
Gladhand Grip Handles
With Thread Sealant.
Sold Only in sets.
(Red and Blue)

PART No.	Pipe Size
GH-GRIP-ALUM	1/2

GLADHAND HOLDERS



GH-BRACKET HAB3-GHH-2 HAB3-GHH-3

PART No.	Description
GH-BRACKET	Zinc Plated Gladhand Holder
HAB3-GHH-2	One Plug and Two Gladhand Holder
HAB3-GHH-3	Two Plug and Two Gladhand Holder

BREATHER VENTS



Low profile breather vents used on single acting cylinders or valves with, Pipe thread or O-Ring Boss thread, to prevent dirt and foreign particles from entering ports open to the atmosphere. Also used for vacuum relief in pressure equalization of gear boxes, crank cases, storage tanks or reservoirs.

PART No.	Pipe
BBV-A	1/8
BBV-B	1/4
BBV-C	3/8
BBV-D	1/2

Male Pipe Thread

Maximum Operating Pressure: 300 P.S.I.

Operating Temperature: +2°C to +149°C (+35°F to +300°F)

Sintered Bronze (40 micron)



PART No.	ORB
BBV-ORB-6	9/16 - 18
BBV-ORB-8	3/4 - 16

O-Ring Boss Thread

Maximum Operating Pressure: 300 P.S.I.

Operating Temperature: +2°C to +149°C (+35°F to +300°F)

Sintered Bronze (40 micron)

BRASS AIR VENTS



Brass Air Vent

Set screw has 10/32 national fine thread.

PART No.	Pipe
WH-705	1/8

Maximum Operating Pressure: 150 P.S.I.

Operating Temperature: +2°C to +149°C (+35°F to +300°F)

EXHAUST MUFFLERS



Exhaust mufflers utilize porous sintered bronze filter element secured to nickel plated pipe fittings. Used to diffuse air and muffle noise from the exhaust ports of air valves, air cylinders and air tools to an acceptable level within OSHA noise requirement. Also used as filters for gasoline, oil and air exhaust and intake.

PART No.	Pipe
BEM-A	1/8
BEM-B	1/4
BEM-C	3/8
BEM-D	1/2
BEM-E	3/4

Male Pipe Thread

Maximum Operating Pressure: 300 P.S.I.

Operating Temperature: +2°C to +149°C (+35°F to +300°F)

Sintered bronze (40 micron)

Available in unplated brass on request (suffix part no. with -BRASS)

Available in stainless steel on request (change prefix from BEM to BSSEM)



Adjusting Screw

Speed control mufflers provide an infinite variation of control of air flow at an acceptable sound level on exhaust ports of air valves with complete safety. The speed of an operating cylinder or air tool maybe increased or decreased by adjusting the screw. Final position is then locked in place by the lock nut. Objectionable exhaust air noise is eliminated by the surrounding sleeve of sintered bronze.

PART No.	Pipe
BSCM-A	1/8
BSCM-B	1/4
BSCM-C	3/8
BSCM-D	1/2

Male Pipe

Maximum Operating Pressure: 300 P.S.I.

Operating Temperature: +2°C to +149°C (+35°F to +300°F)

Sintered bronze (40 micron)

AIR CHUCKS



Fairview's industrial grade brass ball chucks and dual foot filler valve with 1/4 Female NPT thread are ideally suited for use on live air lines supplying compressed air.

PART No.	Description
BC-B	Ball Chuck
BC-B-LH	Ball Chuck (Locking handle) **
BC-B-DF	Dual Foot (6" Overall Length)

BRASS TANK VALVES

Air Tank Valve



Fairview's industrial grade brass air tank valve with Male NPT thread for use on compressed air systems.

PART No.	Pipe	Description
BTV-A	1/8"	Complete with Cap
BTV-B	1/4"	Complete with Cap

AIR TANK DRAIN VALVE




Air Tank Drain Valve With Pull Cable

Fairview's industrial grade brass air tank drain valve with Male NPT thread for use on compressed air systems. Empties your tank with just a pull.

PART No.	Pipe	Description
14DV-60B	1/4"	60" Cable

PRESSURE PROTECTION VALVE

PPV Series

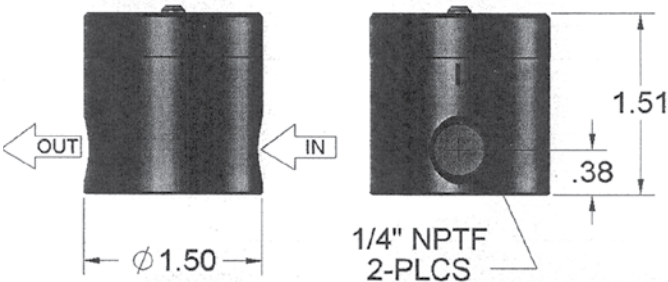

- Material: Black anodized aluminum
- Diaphragm: Low-temp Buna
- Temp Rating: -40°C to 82°C (-40°F to +180°F)
- Max Pressure: 200 PSI max. supply
- Pressure to open Adjustable 45-95 psi,
- Pressure to close Adjustable 40-90 psi.
- Downstream check, (optional)
- stainless steel adjustment screw.



PART No.	Thread "A"	Thread "B"	Closing Pressure (P.S.I.)	Opening Pressure (P.S.I.)
PPV90PC-60/65-6C	1/4 NPTF	1/4 NPTF	60	65

AIR SHIFT SOLENOIDS

Note: Must Be Mounted In Upright Position.



FEATURES:

- 2 Ports - 1/4 Female NPT
- 1 Vent
- 0 - 120 P.S.I.
- 12 Volt D.C.
- Electrically Actuated

PART No.

SV-120B12V

Description

Normally Closed

3 WAY DIRECTIONAL CONTROL



FEATURES:

- 3 Ports - 1/4 Female NPT
- 0 - 100 P.S.I.
- 12 Volt D.C.
- Electrically Actuated

PART No.

SV-100B12V3O

Description

Normally Open

AIR CONTROL PRESSURE REGULATORS



FEATURES:

- Inlet-outlet - 1/4 NPT
- Gauge ports - 1/8 NPT
- Max. flow range 51 to 75 cfm
- Adjustment range - Regulators 0 - 140 PSI
- Max. inlet pressure 250 PSIG
- Relieving type
- Standard knob

PART No.

R16-02-000

Description

Regulator 3.5" in height



FEATURES:

- Inlet-outlet - 3/8 NPT
- Gauge ports - 1/8 NPT
- Max. flow range 101 to 200 cfm
- Adjustment range - Regulators 0 - 140 PSI
- Max. inlet pressure 250 PSIG
- Relieving type
- Standard knob

PART No.

R16-03-000

Description

Regulator 5.5" in height

FIFTH WHEEL SLIDER CYLINDER



FEATURES:

- Port Size: 1/4" NPT
- Shaft Size: 5/8" Diameter
- Clevis Hole: 17/32"
- Retracted Length: 12.75"
- Extended Length: 19.25"
- Operating Pressure: 100 PSI
- Max. Operating Pressure: 125 PSI

PART No.

FW-CYLINDER-1

Description

Stroke 6.5 inches

Best Practices: Pressure Gauge Installation and Maintenance

Installation




Location

Vibration and extreme ambient temperatures can affect pressure gauge accuracy. It is important to choose the right pressure gauge for the application.

Choosing Materials

Brass wetted parts are suitable for uses with air, oil, water, and other non-corrosive fluids. For corrosive fluids, stainless steel should be considered. Lead Free brass is also available on request for potable water applications.



Preparation

Be sure to use thread sealant pipe dope or PTFE tape thread sealant on male pipe thread connections. Do not apply sealant to the first 2 pipe threads.

Connection

Caution: Tightening the gauge by the dial face will severely damage the gauge. Use an open-ended wrench on the gauge stem wrench flats to tighten the gauge. Male pipe threads should be tightened a minimum of 2-1/2 turns past hand tight.




Leak Testing

Leak test all connections. For air / gas systems, use non-corrosive leak test or soapy or soapy water solution. If a leak occurs (look for bubbles), gradually tighten fitting until leak stops.


Venting the Gauge

Liquid filled gauges should be installed in an upright position to avoid the liquid from Leaking. Cut off the tip of the plug (if present) or lift the vent plug then re-seat it when the pressure gauge reflects a reading that is slightly “off-zero”. This allows the gauge to equalize to atmospheric pressure.



Operation and Maintenance

Pulsation and Vibration



Using the correct pressure gauge in areas where pulsation and vibration are constant and unavoidable can be critical in order to avoid errors in reading caused by damage to the gauge. The Equalizer[®] dry gauge is recommended for harsh environments where leakage and discoloration are also a concern.

PRESSURE GAUGES

DRY - LIQUID

DRY PRESSURE GAUGES.....	137
EQUALIZER DRY PRESSURE GAUGES.....	138-140
LIQUID FILLED PRESSURE GAUGES	134, 136
LIQUID FILLED PRESSURE GAUGES (ALL STAINLESS STEEL).....	135



LIQUID FILLED PRESSURE GAUGES

- Glycerin Liquid Gauge • #304 Stainless Steel Case • 1.5% Full Scale Accuracy
- Ambient-Process Temp: -20°C To +65°C (-4°F To + 150°F) • Meets ASME B40.100 Standards



Black Plug
Signifies Standard
Glycerin Liquid



Brown Plug
Signifies Low Temp
Silicone Liquid

NOTE: After installation lift plunger to vent gauge

“LT” Items are Low Temp -60°C To +200°C (-76°F To + 392°F)

1/4 NPT BRASS STEM MOUNT (2.5” DIAL)



PART No.	Dial Dia. (IN.)	Range (P.S.I) kPa		PART No.	Dial Dia. (IN.)	Range (P.S.I) kPa	
PG-15SG25	2.5	0-15	0-100	PG-400SG25	2.5	0-400	0-2,800
PG-30SG25	2.5	0-30	0-200	PG-600SG25	2.5	0-600	0-4,000
PG-30SG25LT	2.5	0-30	0-200	PG-1000SG25	2.5	0-1,000	0-7,000
PG-60SG25	2.5	0-60	0-400	PG-1500SG25	2.5	0-1,500	0-10,000
PG-60SG25LT	2.5	0-60	0-400	PG-2000SG25	2.5	0-2,000	0-14,000
PG-100SG25	2.5	0-100	0-700	PG-3000SG25	2.5	0-3,000	0-21,000
PG-100SG25LT	2.5	0-100	0-700	PG-5000SG25	2.5	0-5,000	0-35,000
PG-160SG25	2.5	0-160	0-1,100	PG-10000SG25	2.5	0-10,000	0-70,000
PG-160SG25LT	2.5	0-160	0-1,100				
PG-200SG25	2.5	0-200	0-1,400				
PG-300SG25	2.5	0-300	0-2,100				

1/4 NPT BRASS STEM MOUNT (4” DIAL)



PART No.	Dial Dia. (IN.)	Range (P.S.I) kPa		PART No.	Dial Dia. (IN.)	Range (P.S.I) kPa	
PG-30SG4	4	0-30	0-200	PG-400SG4	4	0-400	0-2,800
PG-60SG4	4	0-60	0-400	PG-1000SG4	4	0-1,000	0-7,000
PG-100SG4	4	0-100	0-700	PG-1500SG4	4	0-1,500	0-10,000
PG-160SG4	4	0-160	0-1,100	PG-3000SG4	4	0-3,000	0-21,000
PG-160SG4LT	4	0-160	0-1,100	PG-5000SG4	4	0-5,000	0-35,000
PG-200SG4	4	0-200	0-1,400	PG-10000SG4	4	0-10,000	0-70,000
PG-300SG4	4	0-300	0-2,100				

1/4 NPT BRASS CENTER BACK MOUNT (2.5” DIAL)



PART No.	Dial Dia. (IN.)	Range (P.S.I) kPa		PART No.	Dial Dia. (IN.)	Range (P.S.I) kPa	
G-15CG25	2.5	0-15	0-100	PG-400CG25	2.5	0-400	0-2,800
PG-30CG25	2.5	0-30	0-200	PG-600CG25	2.5	0-600	0-4,000
PG-60CG25	2.5	0-60	0-400	PG-1000CG25	2.5	0-1,000	0-7,000
PG-100CG25	2.5	0-100	0-700	PG-1500CG25	2.5	0-1,500	0-10,000
PG-100CG25LT	2.5	0-100	0-700	PG-2000CG25	2.5	0-2,000	0-14,000
PG-160CG25	2.5	0-160	0-1,100	PG-3000CG25	2.5	0-3,000	0-21,000
PG-160CG25LT	2.5	0-160	0-1,100	PG-5000CG25	2.5	0-5,000	0-35,000
PG-200CG25	2.5	0-200	0-1,400	PG-10000CG25	2.5	0-10,000	0-70,000
PG-300CG25	2.5	0-300	0-2,100				

ALL STAINLESS STEEL LIQUID FILLED PRESSURE GAUGES



- Glycerin Liquid Gauge • All Stainless Steel • 1.5% Full Scale Accuracy
- Ambient-Process Temp: -20°C To +65°C (- 4°F To + 150°F) • Meets ASME B40.100 Standards



Black Plug
Signifies Standard
Glycerin Liquid



Brown Plug
Signifies Low Temp
Silicone Liquid

NOTE: After installation lift plunger to vent gauge

“LT” Items are Low Temp -60°C To +200°C (-76°F To + 392°F)

1/4 NPT STAINLESS STEM MOUNT (2.5” DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I)	kPa
PG-30SG25SS	2.5	0-30	0-200
PG-60SG25SS	2.5	0-60	0-400
PG-100SG25SS	2.5	0-100	0-700
PG-100SG25SSLT	2.5	0-100	0-700
PG-160SG25SS	2.5	0-160	0-1,100
PG-160SG25SSLT	2.5	0-160	0-1,100
PG-200SG25SS	2.5	0-200	0-1,400
PG-300SG25SS	2.5	0-300	0-2,100



1/4 NPT STAINLESS STEM MOUNT (4” DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I)	kPa
PG-30SG4SS	4	0-30	0-200
PG-60SG4SS	4	0-60	0-400
PG-100SG4SS	4	0-100	0-700
PG-160SG4SS	4	0-160	0-1,100
PG-160SG4SSLT	4	0-160	0-1,100
PG-200SG4SS	4	0-200	0-1,400
PG-300SG4SS	4	0-300	0-2,100



1/4 NPT STAINLESS CENTER BACK MOUNT (2.5” DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I)	kPa
PG-60CG25SS	2.5	0-60	0-400
PG-100CG25SS	2.5	0-100	0-700
PG-100CG25SSLT	2.5	0-100	0-700
PG-160CG25SS	2.5	0-160	0-1,100
PG-160CG25SSLT	2.5	0-160	0-1,100
PG-200CG25SS	2.5	0-200	0-1,400
PG-300CG25SS	2.5	0-300	0-2,100



- Glycerin Liquid Gauge • #304 Stainless Steel Case • 1.5% Full Scale Accuracy
- Ambient-Process Temp: -20°C To +65°C (-4°F To + 150°F) • Meets ASME B40.100 Standards

“LT” Items are Low Temp -60°C To +200°C (-76°F To + 392°F)



Brown Plug
Signifies Low Temp
Silicone Liquid

NOTE: After installation lift plunger to vent gauge



PG-MB25
2 SCREW U-CLAMP
(For Use with Center Back
or Stem Mount Gauges)



PG-PM25
3 HOLE PANEL MOUNT
(Only for Use with Center Back
Mount Gauges)



WITH FACTORY FLANGE 1/4 NPT BRASS STEM MOUNT (2.5" DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I)	kPa
PG-30SGRF	4	0-30	0-200
PG-100SGRF	4	0-100	0-700
PG-100SGRFLT	4	0-100	0-700
PG-160SGRF	4	0-160	0-1,100

VACUUM SERVICE 1/4 NPT BRASS STEM MOUNT (2.5" DIAL)

PART No.	For Dial Dia. (IN.)	Vacuum	Range kPa
PG-30SGV25	2.5	30-0 hg	
PG-30V30SG25	2.5	30-0 hg	0-30

VACUUM SERVICE 1/4 NPT BRASS CENTER BACK MOUNT (2.5" DIAL)

PART No.	For Dial Dia. (IN.)	Vacuum	Range kPa
PG-30CGV25	2.5	30-0 hg	
PG-30V30CG25	2.5	30-0 hg	0-30

VACUUM SERVICE 1/4 NPT BRASS CENTER BACK MOUNT (2.5" DIAL)

PART No.	For Dial Dia. (IN.)	Description
PG-MB25	2.5	2 Screw U-Clamp
PG-PM25	2.5	3 Hole Panel Mount

VACUUM SERVICE 1/4 NPT BRASS CENTER BACK MOUNT (2.5" DIAL)

PART No.	For Dial Dia. (IN.)	Pre-Assembled
PG-SNUBBER *	0-10,000	(Viscous Fluids 40um)

- Brass 1/4" Female x 1/4" Male
- Protects gauges from shock
- Ambient-Process Temp: - 54°C To + 343°C (- 65°F To + 650°F)

Complete with color coded interchangeable porosity elements. Standard factory element is 40 um. Follow instructions for replacing element if required. (5 um, 10 um, 20 um, 25 um, 30 um) Suitable for Water, Air and Gasoline applications.

*Conforms to requirements of MIL-D-2940A

DRY PRESSURE GAUGES

- Dry Gauge • Steel Case • Accuracy: 3% -2% -3% • Connection: Brass • Bourdon Tube
- Ambient-Process Temp: -40°C To +60°C (-40°F To +140°F) • Meets ASME B40.100 Standards

1/8 NPT BRASS STEM MOUNT (1.5" DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I.)
PG-100SD15	1.5	0-100
PG-160SD15	1.5	0-160



1/4 NPT BRASS STEM MOUNT

PART No.	Dial Dia. (IN.)	Range (P.S.I.)
PG-15SD2	2	0-15
PG-30SD2	2	0-30
PG-60SD2	2	0-60
PG-100SD2	2	0-100
PG-160SD2	2	0-160
PG-200SD2	2	0-200
PG-300SD2	2	0-300
PG-15SD25	2.5	0-15
PG-30SD25	2.5	0-30
PG-60SD25	2.5	0-60
PG-100SD25	2.5	0-100
PG-160SD25	2.5	0-160
PG-200SD25	2.5	0-200
PG-300SD25	2.5	0-300



1/4 NPT STEM MOUNT LOW PRESSURE (INCHES W.C.)

PART No.	Dial Dia. (IN.)	W.C.	Range (OZ/in ²)
PG-35WCSD-2.5	2.5	0-35	0-20

1/8 NPT BRASS CENTER BACK MOUNT (1.5" DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I.)
PG-30CD15	1.5	0-30
PG-60CD15	1.5	0-60
PG-100CD15	1.5	0-100
PG-160CD15	1.5	0-160



- Dry Gauge • #304 Stainless Steel Case, Brass Wetted • 1.5% Full Scale Accuracy
- Ambient-Process Temp: -60°C To +93°C (-76°F To + 200°F) • Meets ASME B40.100 Standards

The QUALIZER® Pressure Gauge Series

These gauges are dry gauges that come with a dampening movement that eliminates pointer flutter caused by vibration and pulsation. This makes pressure reading much easier. No more worries of fill fluid leaking or compatibility issues with the process media. Gauges can be easily serviced without the hassle of draining and refilling the case with fluid.

- Dampens vibration and pulsation
- Eliminates leaks and discoloration
- Can be used at higher temperatures than glycerine filled gauges
- Provides ease in reading
- Reinforced lightweight design

1/4 NPT BRASS STEM MOUNT (2.5" DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I.)	kPa	PART No.	Dial Dia. (IN.)	Range (P.S.I.)	kPa
PG-15ZRSD25	2.5	0-15	0-100	PG-400ZRSD25	2.5	0-400	0-2,800
PG-30ZRSD25	2.5	0-30	0-200	PG-600ZRSD25	2.5	0-600	0-4,000
PG-60ZRSD25	2.5	0-60	0-400	PG-1000ZRSD25	2.5	0-1,000	0-7,000
PG-100ZRSD25	2.5	0-100	0-700	PG-1500ZRSD25	2.5	0-1,500	0-10,000
PG-160ZRSD25	2.5	0-160	0-1,100	PG-2000ZRSD25	2.5	0-2,000	0-14,000
PG-200ZRSD25	2.5	0-200	0-1,400	PG-3000ZRSD25	2.5	0-3,000	0-21,000
PG-300ZRSD25	2.5	0-300	0-2,100	PG-5000ZRSD25	2.5	0-5,000	0-35,000
				PG-10000ZRSD25	2.5	0-10,000	0-70,000


1/4 NPT BRASS CENTER BACK MOUNT (2.5" DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I.)	kPa	PART No.	Dial Dia. (IN.)	Range (P.S.I.)	kPa
PG-15ZRCD25	2.5	0-15	0-100	PG-400ZRCD25	2.5	0-400	0-2,800
PG-30ZRCD25	2.5	0-30	0-200	PG-600ZRCD25	2.5	0-600	0-4,000
PG-60ZRCD25	2.5	0-60	0-400	PG-1000ZRCD25	2.5	0-1,000	0-7,000
PG-100ZRCD25	2.5	0-100	0-700	PG-1500ZRCD25	2.5	0-1,500	0-10,000
PG-160ZRCD25	2.5	0-160	0-1,100	PG-2000ZRCD25	2.5	0-2,000	0-14,000
PG-200ZRCD25	2.5	0-200	0-1,400	PG-3000ZRCD25	2.5	0-3,000	0-21,000
PG-300ZRCD25	2.5	0-300	0-2,100	PG-5000ZRCD25	2.5	0-5,000	0-35,000
				PG-10000ZRCD25	2.5	0-10,000	0-70,000

1/4 NPT BRASS STEM MOUNT (4" DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I.)	kPa	PART No.	Dial Dia. (IN.)	Range (P.S.I.)	kPa
PG-15ZRS4	4	0-15	0-100	PG-400ZRS4	4	0-400	0-2,800
PG-60ZRS4	4	0-60	0-400	PG-600ZRS4	4	0-600	0-4,000
PG-100ZRS4	4	0-100	0-700	PG-1000ZRS4	4	0-1,000	0-7,000
PG-160ZRS4	4	0-160	0-1,100	PG-1500ZRS4	4	0-1,500	0-10,000
PG-200ZRS4	4	0-200	0-1,400	PG-2000ZRS4	4	0-2,000	0-14,000
PG-300ZRS4	4	0-300	0-2,100	PG-3000ZRS4	4	0-3,000	0-21,000
				PG-5000ZRS4	4	0-5,000	0-35,000
				PG-10000ZRS4	4	0-10,000	0-70,000

1/4 NPT Brass Center Back mount (4" Dial),
Panel Mount and Factory Installed Flanges also Available on Request

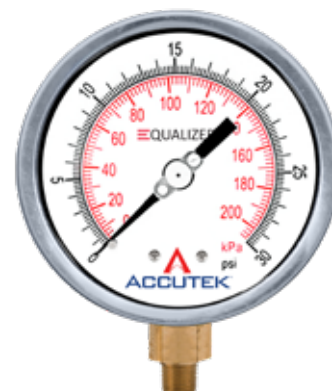

- Dry Gauge • All Stainless Steel • Accuracy: $\pm 1\%$ ANSI/ASME Grade 1A • Connection: Stainless
- Bourdon Tube • Ambient-Process Temp: -60°C To $+93^{\circ}\text{C}$ (-76°F To $+200^{\circ}\text{F}$)

1/4 NPT STEM PREMIUM ALL STAINLESS (4" DIAL)

Description & Features:

- Dampened movement minimizes effects of pulsation and vibration without liquid filling
- Restricted orifice standard on dual scale (optional on single scale)
- Stainless steel case
- 316 SS wetted parts
- Back, bottom, or panel mounted
- CRN registered

Applications:

- Ideally suited for process, chemical and petroleum industry
- Where chemical compatibility and contamination is a concern

Specifications:

Dial: 4" (100mm) white aluminum with black and red markings (2-1/2" dial available on request)

Case: AISI 304 SS (dry)

Lens: Polycarbonate

Ring: AISI 304 SS bayonet

Socket: 316 SS

Bourdon Tube: 316 SS

Movement: 304 SS, dampened

Pointer: Aluminum, anodized black, micrometer adjustable

Over-Pressure Limit: 25% for pressures up to 1,450 psi (9,998 kPa),
15% for pressures over 1,500 psi (10,342 kPa)

Socket Gasket: 2.5" (63mm): Buna N for two-piece internal socket seal

Fill Plug: Buna N

Lens Ring: Gasket Silicone rubber

Ambient/Process Temperature: -50°C to $+93^{\circ}\text{C}$
(-58°F to $+200^{\circ}\text{F}$)


Working Pressure: Maximum 75% of full scale value

Accuracy: 4" (100mm): $\pm 1\%$ ANSI/ASME Grade 1A



PART No.	Dial Dia. (IN.)	P.S.I.	Range	kPa
PG-30ZRSD4SS	4	0-30		0-200
PG-60ZRSD4SS	4	0-60		0-400
PG-100ZRSD4SS	4	0-100		0-700
PG-160ZRSD4SS	4	0-160		0-1100
PG-200ZRSD4SS	4	0-200		0-1400
PG-300ZRSD4SS	4	0-300		0-2100
PG-600ZRSD4SS	4	0-600		0-4,200
PG-1000ZRSD4SS	4	0-1,000		0-7,000
PG-1500ZRSD4SS	4	0-1,500		0-10,000
PG-2000ZRSD4SS	4	0-2,000		0-14,000
PG-3000ZRSD4SS	4	0-3,000		0-21,000
PG-5000ZRSD4SS	4	0-5,000		0-35,000
PG-10000ZRSD4SS	4	0-10,000		0-70,000
PG-15000ZRSD4SS	4	0-15,000		0-100,000

• Others available: see (-D) next page.

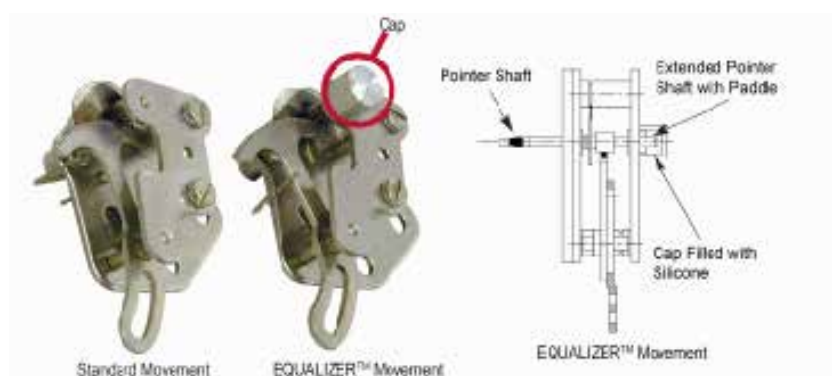

The pressure dampening mechanism of the Equalizer Gauge provides the reliability and accuracy of a liquid gauge without the risk of fogging, discoloring or cold weather gelling.

- Dry Gauge • All Stainless Steel • 1.5% Full Scale Accuracy
- Ambient-Process Temp: -60°C To +93°C (-76°F To + 200°F) • Meets ASME B40.100 Standards

1/2 NPT STEM PREMIUM ALL STAINLESS (4" DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I.)	kPa	PART No.	Dial Dia. (IN.)	Range (P.S.I.)	kPa
PG-30ZRSD4SS-D	4	0-30	0-200	PG-1000ZRSD4SS-D	4	0-1,000	0-7,000
PG-60ZRSD4SS-D	4	0-60	0-400	PG-1500ZRSD4SS-D	4	0-1,500	0-10,000
PG-100ZRSD4SS-D	4	0-100	0-700	PG-2000ZRSD4SS-D	4	0-2,000	0-14,000
PG-160ZRSD4SS-D	4	0-160	0-1,100	PG-3000ZRSD4SS-D	4	0-3,000	0-21,000
PG-200ZRSD4SS-D	4	0-200	0-1,400	PG-5000ZRSD4SS-D	4	0-5,000	0-35,000
PG-300ZRSD4SS-D	4	0-300	0-2,100	PG-10000ZRSD4SS-D	4	0-10,000	0-70,000
PG-600ZRSD4SS-D	4	0-600	0-4,200	PG-15000ZRSD4SS-D	4	0-15,000	0-100,000

1/2 NPT PREMIUM STAINLESS BACK MOUNT (4" DIAL) ALSO AVAILABLE
(SO Special order minimums apply)



1/4 NPT STEM PREMIUM ALL STAINLESS MOUNT (2.5" DIAL)

- Dry Gauge • All Stainless Steel • 1.5% Full Scale Accuracy
- Ambient-Process Temp: -50°C To +93°C (-58°F To + 200°F) • Meets ASME B40.100 Standards

PART No.	Dial Dia. (IN.)	Range (P.S.I.)	kPa	PART No.	Dial Dia. (IN.)	Range (P.S.I.)	kPa
PG-15ZRSD25SS	2.5	0-15	0-100	PG-600ZRSD25SS	2.5	0-600	0-4,000
PG-30ZRSD25SS	2.5	0-30	0-200	PG-1000ZRSD25SS	2.5	0-1,000	0-7,000
PG-60ZRSD25SS	2.5	0-60	0-400	PG-1500ZRSD25SS	2.5	0-1,500	0-10,000
PG-100ZRSD25SS	2.5	0-100	0-700	PG-2000ZRSD25SS	2.5	0-2,000	0-14,000
PG-160ZRSD25SS	2.5	0-160	0-1,100	PG-3000ZRSD25SS	2.5	0-3,000	0-21,000
PG-200ZRSD25SS	2.5	0-200	0-1,400	PG-5000ZRSD25SS	2.5	0-5,000	0-35,000
PG-300ZRSD25SS	2.5	0-300	0-2,100	PG-10000ZRSD25SS	2.5	0-10,000	0-70,000
PG-400ZRSD25SS	2.5	0-400	0-2,800	PG-15000ZRSD25SS	2.5	0-15,000	0-100,000



1/4 NPT CENTER BACK PREMIUM ALL STAINLESS (2.5" DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I.)	kPa	PART No.	Dial Dia. (IN.)	Range (P.S.I.)	kPa
PG-15ZRCD25SS	2.5	0-15	0-100	PG-400ZRCD25SS	2.5	0-400	0-2,800
PG-30ZRCD25SS	2.5	0-30	0-200	PG-600ZRCD25SS	2.5	0-600	0-4,000
PG-60ZRCD25SS	2.5	0-60	0-400	PG-1000ZRCD25SS	2.5	0-1,000	0-7,000
PG-160ZRCD25SS	2.5	0-160	0-1,100	PG-1500ZRCD25SS	2.5	0-1,500	0-10,000
PG-200ZRCD25SS	2.5	0-200	0-1,400	PG-2000ZRCD25SS	2.5	0-2,000	0-14,000
PG-300ZRCD25SS	2.5	0-300	0-2,100	PG-3000ZRCD25SS	2.5	0-3,000	0-21,000
				PG-5000ZRCD25SS	2.5	0-5,000	0-35,000
				PG-10000ZRCD25SS	2.5	0-10,000	0-70,000



CLAMPS & TUBE STRAPS

STEEL - COPPER - COPPER PLATED - STAINLESS

AIR BRAKE HOSE SUPPORT CLAMPS	147
CLAMP DISPLAY RACKS	145
EAR CLAMP KIT	146
EAR CLAMPS	146
EXTENDED TONGUE CLAMPS	142
FLEX SEAL CLAMPS	144
FUEL INJECTION HOSE CLAMPS	145
GEAR CLAMP KITS	142
GEAR CLAMPS	142
HANGER STRAP	148
POGO STICKS	147
QUICK RELEASE CLAMPS	145
T-BOLT HOSE CLAMPS	143
TENDER KITS & SPRINGS	147
TUBE STRAPS	148



STANDARD GEAR CLAMPS

HC5 SERIES



- All Stainless Steel
- S.A.E. 1/2 Inch Wide Stainless Steel Band and Housing
- S.A.E. Stainless Steel Screw

HC6 SERIES



- S.A.E. 1/2 Inch Wide Stainless Steel Band and Housing
- S.A.E. Steel Case Hardened Plated Screw

PACKAGING: 10 Piece Cartons • Sizes 116 and up are Bulk

PART No.	Range (IN.)	Range (MM.)	PART No.
HC5-4TB *	.22 - .63	6 - 16	HC6-4TB *
HC5-5TB *	.44 - .69	11 - 18	HC6-5TB *
HC5-6TB *	.31 - .88	8 - 22	HC6-6TB *
HC5-8TB *	.44 - 1.00	11 - 25	HC6-8TB *
HC5-10TB *	.50 - 1.06	13 - 27	HC6-10TB *
HC5-12TB *	.56 - 1.25	14 - 32	HC6-12TB *
HC5-16TB *	.68 - 1.50	18 - 38	HC6-16TB *
HC5-20TB *	.87 - 1.75	22 - 44	HC6-20TB *
HC5-24TB *	1.31 - 2.00	33 - 51	HC6-24TB *
HC5-28TB *	1.31 - 2.25	33 - 57	--

HC5-6	.37 - .88	10 - 22	HC6-6
HC5-8	.43 - 1.00	11 - 25	HC6-8
HC5-10	.56 - 1.06	14 - 27	HC6-10
HC5-12	.56 - 1.25	14 - 32	HC6-12
HC5-16	.68 - 1.50	17 - 38	HC6-16
HC5-20	.75 - 1.75	19 - 44	HC6-20
HC5-24	1.06 - 2.00	27 - 51	HC6-24
HC5-28	1.31 - 2.25	33 - 57	HC6-28
HC5-32	1.56 - 2.50	40 - 63	HC6-32
HC5-36	1.81 - 2.75	46 - 70	HC6-36
HC5-40	2.06 - 3.00	52 - 76	HC6-40
HC5-44	2.31 - 3.25	59 - 82	HC6-44
HC5-48	2.56 - 3.50	65 - 89	HC6-48
HC5-52	2.81 - 3.75	71 - 95	HC6-52
HC5-56	3.06 - 4.00	78 - 101	HC6-56
HC5-60	3.31 - 4.25	84 - 107	HC6-60
HC5-64	2.50 - 4.50	64 - 114	HC6-64
HC5-72	3.00 - 5.00	76 - 127	HC6-72
HC5-80	3.50 - 5.50	89 - 140	HC6-80
HC5-84	3.75 - 5.75	95 - 146	HC6-84
HC5-88	4.00 - 6.00	102 - 152	HC6-88
HC5-96	4.50 - 6.50	114 - 165	HC6-96
HC5-104	5.00 - 7.00	127 - 178	HC6-104
HC5-116	5.75 - 7.75	146 - 196	HC6-116
HC5-128	6.50 - 8.50	165 - 216	HC6-128
HC5-152	8.00 - 10.00	203 - 254	HC6-152
HC5-164	8.75 - 10.75	222 - 273	HC6-164
HC5-188	10.25 - 12.25	260 - 311	HC6-188
HC5-200	11.00 - 13.00	280 - 330	HC6-200
HC5-212	11.75 - 13.75	299 - 349	HC6-212
HC5-224	12.50 - 14.50	318 - 368	HC6-224
HC5-236	13.25 - 15.25	337 - 387	--
HC5-248	14.75 - 16.00	375 - 406	--
HC5-270	15.37 - 17.38	391 - 441	HC6-270
HC5-312	18.00 - 20.00	457 - 508	HC6-312
HC5-390	22.87 - 24.88	581 - 632	HC6-390

* DENOTES THIN BAND. TB SERIES HAS A 5/16 INCH WIDE BAND.

GEAR CLAMP KITS

Fairview Gear Clamp Kits include a variety of Extended-Tongue clamps with HC5 All Stainless (HCFK-5) or HC6 Stainless Band and Housing (HCFK-6) standard gear clamps for ranges up to 2-1/4" OD.



PART No. HCFK-5

PART No.	Pex
ETM-4	5
ETM-6	5
ET-8	5
ET-10	5
ET-12	5
ET-16	5
ET-24	2
ET-20	2
ET-28	2
HC5-4TB	5
HC5-6	5
HC5-6TB	5
HC5-8	5
HC5-8TB	5
HC5-10	5
HC5-12	5
HC5-16	5
HC5-20	2
HC5-24	2
HC5-28	2

PART No. HCFK-6

PART No.	Pex
ETM-4	5
ETM-6	5
ET-8	5
ET-10	5
ET-12	5
ET-16	5
ET-24	2
ET-20	2
ET-28	2
HC6-4TB	5
HC6-6	5
HC6-6TB	5
HC6-8	5
HC6-8TB	5
HC6-10	5
HC6-12	5
HC6-16	5
HC6-20	5
HC6-24	5
HC6-28	5

EXTENDED TONGUE CLAMPS



- S.A.E. 1/2 INCH WIDE STAINLESS STEELBAND HOUSING AND SHIELD
- S.A.E. STEEL CASE HARDENED PLATED SCREW
- Extended tongue clamps are intended for use with soft hose material such as silicone heater hose and coolant hose. The inner shield protects the hose from damage by preventing it from coming in direct contact with the notched band.
- PACKAGING: 10 Piece Cartons

PART No.	Range (IN.)	Range (MM.)
ETM-4*	.31 - .56	8 - 14
ETM-6*	.56 - .88	14 - 22
ETM-12*	.81 - 1.31	21 - 33
ET-8	.62 - .81	16 - 21
ET-10	.65 - 1.06	17 - 27
ET-12	.68 - 1.30	17 - 33
ET-16	.75 - 1.50	19 - 38
ET-20	1.37 - 1.81	35 - 46
ET-24	1.50 - 2.00	38 - 51
ET-28	1.75 - 2.25	44 - 57
ET-32	2.00 - 2.50	50 - 64
ET-36	1.81 - 2.75	46 - 70
ET-40	2.06 - 3.06	52 - 78
ET-44	2.31 - 3.25	59 - 83
ET-48	2.56 - 3.56	65 - 91
ET-52	2.81 - 3.75	71 - 95
ET-56	3.12 - 4.06	79 - 103
ET-60	3.31 - 4.25	84 - 108
ET-64	3.56 - 4.50	91 - 114

* NOTE: ETM SERIES HAS A 5/16 INCH WIDE BAND.

T-BOLT HOSE CLAMPS



**ALL
STAINLESS
STEEL**

BAND: Stainless Steel

BRIDGE: Stainless Steel

SHOE: Stainless Steel

STAINLESS STEEL BOLT, TRUNNION AND NUT

APPLICATIONS:

- Heavy Duty hose connections
- Used on filter bags, pipe, ducting and center joint irrigation equipment

PACKAGING: Bagged by 5 pcs.

PART No.	Range (IN.)	Range(MM.)
HC2-150	1.31 - 1.56	33 - 40
HC2-175	1.56 - 1.81	40 - 46
HC2-188	1.69 - 1.94	43 - 49
HC2-200	1.81 - 2.06	46 - 52
HC2-225	2.06 - 2.31	52 - 59
HC2-238	2.19 - 2.50	58 - 64
HC2-250	2.31 - 2.62	59 - 67
HC2-256	2.38 - 2.69	60 - 68
HC2-263	2.44 - 2.75	62 - 70
HC2-275	2.56 - 2.87	65 - 73
HC2-288	2.69 - 3.00	68 - 76
HC2-300	2.81 - 3.12	71 - 79
HC2-312	2.94 - 3.25	75 - 83
HC2-325	3.06 - 3.37	78 - 86
HC2-350	3.31 - 3.62	84 - 92
HC2-375	3.56 - 3.87	90 - 98
HC2-382	3.63 - 3.94	92 - 100
HC2-400	3.81 - 4.12	97 - 105
HC2-425	4.06 - 4.37	103 - 111
HC2-450	4.31 - 4.62	110 - 117
HC2-475	4.56 - 4.87	116 - 124
HC2-500	4.81 - 5.12	122 - 130
HC2-525	5.06 - 5.37	129 - 137
HC2-550	5.31 - 5.62	135 - 143
HC2-575	5.56 - 5.87	141 - 149
HC2-600	5.81 - 6.12	148 - 156
HC2-625	6.06 - 6.37	154 - 162
HC2-650	6.31 - 6.62	160 - 168
HC2-700	6.81 - 7.12	173 - 181
HC2-750	7.31 - 7.62	186 - 194
HC2-825	8.06 - 8.37	205 - 213



STANDARD

BAND: Stainless Steel

BRIDGE: Stainless Steel

PLATED STEEL BOLT, TRUNNION AND NUT

APPLICATIONS:


- Heavy Duty hose connections
- Used on filter bags, pipe, ducting and center joint irrigation equipment

PACKAGING: Bagged by 5 pcs.

PART No.	Range (IN.)	Range(MM.)
HC3-150	1.31 - 1.56	33 - 40
HC3-175	1.56 - 1.81	40 - 46
HC3-188	1.69 - 1.94	43 - 49
HC3-200	1.81 - 2.06	46 - 52
HC3-225	2.06 - 2.31	52 - 59
HC3-238	2.19 - 2.50	58 - 64
HC3-250	2.31 - 2.62	59 - 67
HC3-256	2.38 - 2.69	60 - 68
HC3-263	2.44 - 2.75	62 - 70
HC3-275	2.56 - 2.87	65 - 73
HC3-288	2.69 - 3.00	68 - 76
HC3-300	2.81 - 3.12	71 - 79
HC3-312	2.94 - 3.25	75 - 83
HC3-325	3.06 - 3.37	78 - 86
HC3-350	3.31 - 3.62	84 - 92
HC3-375	3.56 - 3.87	90 - 98
HC3-382	3.63 - 3.94	92 - 100
HC3-400	3.81 - 4.12	97 - 105
HC3-425	4.06 - 4.37	103 - 111
HC3-450	4.31 - 4.62	110 - 117
HC3-475	4.56 - 4.87	116 - 124
HC3-500	4.81 - 5.12	122 - 130
HC3-525	5.06 - 5.37	129 - 137
HC3-550	5.31 - 5.62	135 - 143
HC3-575	5.56 - 5.87	141 - 149
HC3-600	5.81 - 6.12	148 - 156
HC3-625	6.06 - 6.37	154 - 162
HC3-650	6.31 - 6.62	160 - 168
HC3-675	6.56 - 6.87	167 - 175
HC3-700	6.81 - 7.12	173 - 181
HC3-750	7.31 - 7.62	186 - 194
HC3-800	7.81 - 8.12	192 - 200

FLEX SEAL CLAMPS

FLEX SEAL (HEAVY DUTY)




BAND: Stainless Steel
BRIDGE: Stainless Steel
T-BOLT: Carbon Steel
SPRING: High Carbon Steel
FINISH: (T-BOLT): Zinc Plated and Dichromate

APPLICATIONS:

- Designed specifically for silicone hose connections in turbocharged diesel engine air intake and air charge air systems.
- Solves hose "blow-off" Failures resulting from cold flow or thermal expansions.

PACKAGING: Bagged by 5 pcs.

MINI FLEX SEAL



BAND: Stainless Steel
SLEEVE: Brass
BRIDGE: Carbon Steel
T-BOLT: Carbon Steel
SPRING: Carbon Steel
FINISH: (T-BOLT): Zinc Plated and Dichromate

APPLICATIONS:

- Wherever leakage caused by cold flow or thermal expansion is a problem.
- Designed specially for silicone and EPDM hose connections or on radiators and engine blocks/manifolds.
- Solves "blow-off" Failures common on air intake/charge-air systems of turbocharged internal combustion engines.

PACKAGING: Bagged by 5 pcs.

PART No.	Range (IN.)	Range(MM.)
HC19-225	2.06 - 2.31	52 - 59
HC19-238	2.19 - 2.50	58 - 64
HC19-250	2.31 - 2.62	59 - 67
HC19-263	2.38 - 2.69	60 - 68
HC19-270	2.44 - 2.75	62 - 70
HC19-275	2.56 - 2.87	65 - 73
HC19-288	2.69 - 3.00	68 - 76
HC19-300	2.81 - 3.12	71 - 79
HC19-312	2.94 - 3.25	75 - 83
HC19-325	3.06 - 3.37	78 - 86
HC19-350	3.31 - 3.62	84 - 92
HC19-375	3.56 - 3.87	90 - 98
HC19-382	3.63 - 3.94	92 - 100
HC19-412	3.81 - 4.12	97 - 105
HC19-425	4.06 - 4.37	103 - 111
HC19-450	4.31 - 4.62	110 - 117
HC19-475	4.56 - 4.87	116 - 124
HC19-500	4.81 - 5.12	122 - 130
HC19-525	5.06 - 5.37	129 - 137
HC19-550	5.31 - 5.61	135 - 143
HC19-575	5.56 - 5.87	141 - 149
HC19-600	5.81 - 6.12	148 - 156

PART No.	Range (IN.)	Range(MM.)
HC20-150	1.31 - 1.56	33 - 40
HC20-175	1.56 - 1.81	40 - 46
HC20-188	1.69 - 1.94	43 - 49
HC20-200	1.81 - 2.06	46 - 52
HC20-225	2.06 - 2.31	52 - 59
HC20-238	2.19 - 2.50	58 - 64
HC20-250	2.31 - 2.62	59 - 67
HC20-263	2.38 - 2.69	60 - 68
HC20-270	2.44 - 2.75	62 - 70
HC20-275	2.56 - 2.87	65 - 73
HC20-288	2.69 - 3.00	68 - 76
HC20-300	2.81 - 3.12	71 - 79
HC20-312	2.94 - 3.25	75 - 83
HC20-325	3.06 - 3.37	78 - 86
HC20-350	3.31 - 3.62	84 - 92
HC20-375	3.56 - 3.87	90 - 98
HC20-382	3.63 - 3.94	92 - 100
HC20-400	3.81 - 4.12	97 - 105
HC20-425	4.06 - 4.37	103 - 111
HC20-450	4.31 - 4.62	110 - 117
HC20-475	4.56 - 4.87	116 - 124
HC20-550	5.31 - 5.61	135 - 143

QUICK RELEASE CLAMPS



Constructed from stainless steel materials for corrosion resistance. These clamps feature a unique quick release design that allows for quick and easy installation in restricted or difficult areas. 5/16 slotted hexagon head and 1/2 wide band.

APPLICATIONS:

For applications where clamp must be opened to be applied. Used extensively in the telecommunications industry on cable enclosures where open air applications demand durability.

PACKAGING: 10 Piece Carton.

PART No.	Range (IN.)	Range(MM.)
LAS-56	1.00 - 4.00	25 - 101
LAS-72	2.00 - 5.00	51 - 127
LAS-88	2.06 - 6.00	52 - 152
LAS-96	3.50 - 6.56	89 - 166
LAS-104	1.75 - 7.00	44 - 178
LAS-128	1.75 - 8.56	44 - 218
LAS-152	2.00 - 10.00	51 - 254
LAS-188	2.06 - 12.31	52 - 313
LAS-248	1.75 - 16.00	44 - 406
LAS-312	1.88 - 20.00	48 - 508

ONE-EAR CLAMPS (With Mechanical Interlock)



Select nominal clamp size nearest to but larger than O.D. of hose or tube.

APPLICATIONS:

One-Ear clamps are intended for low pressure applications such as automotive (not fuel lines), appliances, industrial machinery, underground irrigation systems and beverage dispensing equipment.

SPECIFICATIONS:

The standard HC8 series is manufactured from 1008 carbon steel tube and then zinc plated.

PACKAGING: 25 Piece Bags.

PART No.	Range (IN.)	Range(MM.)
HC8-6	.350 - .414	8.9 - 10.5
HC8-9	.496 - .571	12.6 - 14.5
HC8-11	.549 - .669	15.1 - 17.0
HC8-12	.669 - .779	17.0 - 19.8
HC8-14	.779 - .890	19.8 - 22.6
HC8-16	.898 - 1.010	22.8 - 25.6
HC8-17	.944 - 1.067	24.0 - 27.1
HC8-20	1.122 - 1.244	28.5 - 31.6
HC8-21	1.181 - 1.303	30.0 - 33.1

CLAMP DISPLAY RACKS Rack & Clamp Packages Are Available



T-Bolt Clamp Kit: Contains a selection of common size clamps together with our HCR-18-RACK storage rack.
PART No. HC3-KIT-1

Auto Clamp Kits: Contains a selection of common size clamps together with our HCR-10-RACK storage rack.
PART No. HC6-AUTO-KIT-1

FUEL INJECTION HOSE CLAMPS



APPLICATIONS:

Clamps are intended for low pressure applications such as automotive fuel injection.

PART No.	Nominal Clamp Size (IN.)	Range (IN.)	Range (MM.)
HC21-4	1/4	.433 - .512	11 - 13
HC21-5	5/16	.512 - .591	13 - 15
HC21-6	3/8	.551 - .630	14 - 16

TWO EAR CLAMPS



GREAT HOLDING POWER: Closing the ears builds strength into the clamp which works against the pressure in the hose.

APPLICATIONS: Two Ear Clamps are ideally suited for maintenance and O.E.M. applications, rubber hose, plastic tube, plastic pipe, and coaxial cable are all readily clamped. Uses on air, fluid, gas and steam lines are unlimited.

SPECIFICATIONS: The standard HC9 series is made from 1008 steel tube. They are then zinc plated. Stainless Steel clamps are manufactured from type 304 AISI tube.

PACKAGING: 25 Piece Bags.

PART No.	Range (IN.)	Range (MM.)	Stainless Steel PART No.
HC9-2	.122 - .161	3.1 - 4.1	--
HC9-3	.118 - .197	3.0 - 5.0	--
HC9-4	.197 - .276	5.0 - 7.0	--
HC9-5	.276 - .354	7.0 - 9.0	HC9-5SS
HC9-6	.315 - .433	8.0 - 11.0	HC9-6SS
HC9-8	.433 - .512	11.0 - 13.0	HC9-8SS
HC9-9	.512 - .591	13.0 - 15.0	HC9-9SS
HC9-9-1/2	.544 - .669	15.0 - 17.0	HC9-9-1/2SS
HC9-10	.591 - .708	15.0 - 18.0	HC9-10SS
HC9-12	.669 - .787	17.0 - 20.0	HC9-12SS
HC9-13	.748 - .866	19.0 - 22.0	HC9-13SS
HC9-14	.787 - .905	20.0 - 23.0	HC9-14SS
HC9-15	.866 - .984	22.0 - 25.0	HC9-15SS
HC9-16	.905 - 1.063	23.0 - 27.0	HC9-16SS
HC9-17	.984 - 1.102	25.0 - 28.0	HC9-17SS
HC9-18	1.063 - 1.220	27.0 - 31.0	HC9-18SS
HC9-21	1.220 - 1.339	31.0 - 34.0	HC9-21SS
HC9-23	1.339 - 1.457	34.0 - 37.0	HC9-23SS
HC9-24	1.457 - 1.575	37.0 - 40.0	HC9-24SS
HC9-26	1.575 - 1.693	40.0 - 43.0	--
HC9-28	1.693 - 1.811	43.0 - 46.0	--

SELECT NOMINAL CLAMP SIZE NEAREST TO BUT LARGER THAN O.D. ON WHICH CLAMP IS TO BE USED.

TWO EAR CLAMP KIT

PART No. OE-SB80

- PLASTIC BOX
- PINCER TOOL
- 2 EAR CLAMP ASSORTMENT



KIT CONTENTS:

PART No.	Qty	PART No.	Qty	PART No.	Qty
HC9-5	15	HC9-10	15	HC9-16	12
HC9-6	15	HC9-12	12	HC9-R	1
HC9-8	15	HC9-14	12		
HC9-9	15	HC9-15	12		

STEPLESS® EAR CLAMPS

STEPLESS®:

The term "Stepless" relates to the absence of gaps or steps on the clamp's inner circumference. The unique tongue-in-groove design provides uniform compression and a 360° seal.



APPLICATIONS:

Standard Series Stepless Ear Clamps were perfected for demanding applications where lighter, thin-walled hose or tube is being used.

SPECIFICATIONS:

The standard HC10 series is made from type 304 AISI stainless steel.

PACKAGING: 25 Piece Bags.

PART No.	Range (IN.)	Range(MM.)
HC10-6	.307 - .374	7.8 - 9.5
HC10-7	.378 - .445	9.6 - 11.3
HC10-7-1/2	.398 - .465	10.1 - 11.8
HC10-8	.425 - .524	10.8 - 13.3
HC10-9	.472 - .571	12.0 - 14.5
HC10-10	.520 - .618	13.2 - 15.7
HC10-11	.571 - .669	14.5 - 16.9
HC10-11-1/2	.602 - .728	15.3 - 18.5
HC10-12	.654 - .779	16.6 - 19.8
HC10-13	.701 - .827	17.8 - 21.0
HC10-14	.764 - .890	19.4 - 22.6
HC10-17	.945 - 1.067	23.9 - 27.1
HC10-21	1.181 - 1.303	29.9 - 33.1
HC10-25	1.378 - 1.500	34.9 - 38.1

3-IN-1 & AIR BRAKE HOSE SUPPORT CLAMPS



HAB-HCU



HAB-HC2E



HAB-HCE



HAB-HANGER



HAB-SPW-HB

PART No.

Description

HAB-SPW-HB	Link & Support for 3-in-1 Airlectric Assemblies
HAB-HCU-6	"U" Hose Support For 3/8 Hose I.D.
HAB-HCU-8	"U" Hose Support For 1/2 Tube O.D.
HAB-HC2E-6	2-Bolt, Steel Reinforced Hose Support For 3/8 Hose I.D.
HAB-HCE-6	1-Bolt Hose Hose Support For 3/8 Hose I.D.
HAB-HCE-8	1-Bolt Hose Hose Support For 1/2 Hose I.D.
HAB-HANGER-6	Air Brake Hose Spacers for 3/8 I.D. Hose
HAB-HANGER-8	Air Brake Hose Spacers for 1/2 I.D. Hose
HAB-HANGER2-6	2 X Air Brake Hose Spacers for 3/8 I.D. Hose
HAB-HANGER2-8	2 X Air Brake Hose Spacers for 1/2 I.D. Hose



HAB-HANGER2

SPRINGS & TENDER KITS



(Complete Kit)

PART No.

Spring Length (IN.)

Description

HAB-SPRING-16.4-TKP	16.4	Spring, Protective Cover & Hangers
HAB-SPRING-25-TKP	25	Spring, Protective Cover & Hangers
HAB-SPRING-16.4-TKP2	16.4	DOUBLE Spring, Protective Cover & Hangers
HAB-SPRING-25-TKP2	25	DOUBLE Spring, Protective Cover & Hangers
HAB-SPRING-13	13	Spring Only
HAB-SPRING-16.4	16.4	Spring Only
HAB-SPRING-2	25	Spring Only

HEAVY DUTY POGO STICKS



PART No.

Description

HAB-POGO-40CHR	40 Inch Silver Chrome Pogo Stick
HAB-POGO-40GLD	40 Inch Gold Chromate Pogo Stick

Clamps sold seperately.

TUBE STRAPS AND HANGERS



**Rubber
Cushioned
Wrap Around
Tube Straps**
(1/4 Inch Hole)

Steel - Zinc Plated

PART No.	Tube O.D.	Band Width
TS17R-4	1/4	1/2
TS17R-5	5/16	1/2
TS17R-6	3/8	1/2
TS17R-8	1/2	1/2
TS17R-10	5/8	1/2
TS17R-12	3/4	1/2
TS17R-14	7/8	1/2
TS17R-16	1	1/2
TS17R-18	1-1/8	1/2
TS17R-20	1-1/4	1/2
TS17R-24	1-1/2	1/2
TS17R-28	1-3/4	1/2
TS17R-32	2	1/2
TS17R-38	2-3/8	1/2
TS17R-40	2-1/2	1/2
TS17R-48	3	1/2
TS17R-56	3-1/2	1/2
TS17R-64	4	1/2



**Rubber
Cushioned
Wrap Around
Tube Straps**
(1/4 Inch Hole)

Stainless Steel

PART No.	Tube O.D.	Band Width
TSS17R-4	1/4	1/2
TSS17R-6	3/8	1/2
TSS17R-8	1/2	1/2
TSS17R-10	5/8	1/2
TSS17R-12	3/4	1/2
TSS17R-16	1	1/2
TSS17R-20	1-1/4	1/2
TSS17R-24	1-1/2	1/2
TSS17R-32	2	1/2



**Rubber
Cushioned
Wrap Around
Tube Straps**
(3/8 Inch Hole)

PART No.	Tube O.D.	Band Width
TS16R-4	1/4	5/8
TS16R-5	5/16	5/8
TS16R-6	3/8	5/8
TS16R-8	1/2	5/8
TS16R-10	5/8	5/8
TS16R-12	3/4	5/8
TS16R-14	7/8	5/8
TS16R-16	1	5/8
TS16R-18	1-1/8	5/8
TS16R-20	1-1/4	5/8
TS16R-24	1-1/2	5/8
TS16R-32	2	5/8
TS16R-40	2-1/2	5/8



**One Hole
Tube Straps**

PART No.	Tube O.D.	Band Width
TS21-4	1/4	1/2
TS21-6	3/8	1/2
TS21-8	1/2	5/8
TS21-12	3/4	5/8
TS21-16	1	5/8



Hanger Strap
3/4' Wide x 1/32"
Thick

Steel - Copper Coated

PART No.	Length (FT.)
HS11-25	25



**Two Hole
Straddle
Tube Straps**

Steel - Copper Coated

PART No.	Tube O.D.	Nominal I.D.
TS14-6	3/8	1/4
TS14-8	1/2	3/8
TS14-10	5/8	1/2
TS14-14	7/8	3/4



**Two Hole
Straddle
Tube Straps**

Solid Copper

PART No.	Tube O.D.	Nominal I.D.
TS15-8	1/2	3/8



**Two Hole
Straddle
Pipe Straps**

Steel - Zinc Plated

PART No.	For Pipe Size
TS22-D	1/2
TS22-E	3/4
TS22-H	1
TS22-J	1-1/4
TS22-K	1-1/2
TS22-M	2
TS22-N	2-1/2



**"Duplex"
Double
Tube Strap**

Steel - Zinc Plated

PART No.	Pex	Tube O.D.
TS19-44	1/4	1/4
TS19-66	3/8	3/8

CABINETS, TOOLS & ACCESSORIES

CRIMP - CUT - FLARE - MEASURE - SPRAY - TEST

AIR GUNS	154
AIR TOOL SWIVEL	154
CLAMP DISPLAY RACKS	153
DISPLAY CABINETS	150-151
DISPLAY CABINET PRODUCT SUGGESTIONS	152
DISPLAY RACK	151
HOSE & TUBE CUTTERS	156
HOSE PROTECTION	157
LEAK DETECTOR FLUID	159
O-CLAMP PINCERS	156
PIPE THREAD SEALANT	159
PROPANE TORCHES	158
STOCK BOXES	153
WATER GUNS & NOZZLES	155



MODULAR DISPLAY CABINETS

Fairview's all steel, black modular display units can include up to 3 combined modules of 40 drawer and/ or 24 bin cabinets.

40 drawer cabinets include drawers and clear dividers to house up to 80 parts (expandable to 160 parts with additional dividers).

24 bin cabinets feature deep and wide compartments (5-1/4"H x 5-1/4"W x 8-1/2"D), designed to house larger parts.

All cabinet modules come complete with your choice of Fairview or Accutek cabinet headers in English or French.

Add available steel legs and shelf to securely combine 2 or 3 modular cabinet units together.

CM-40DWR Modular Drawer Cabinet Unit Comes Complete With:

- All metal construction 40 drawer compartment cabinet (PART No. CM-40DWR)
- 40 Single drawers (PART No. PD-40DWR)
- 40 Drawer dividers (PART No. PD-DIV-40DWR)
- Your selection of cabinet header plate with mounting bolts (PART No. CM-SGN-**)

CM-40DWR 40 Drawer Unit
Module Dimensions:
 Height 21 inches
 Width 34 inches
 Depth 9 inches

CM-24BIN 24 Bin Unit
Module Dimensions:
 Height 21 inches
 Width 34 inches
 Depth 9 inches

PD-40DWR Drawer
Dimensions:
 Height 3-1/2 inches
 Width 3-7/8 inches
 Depth 9 inches

PD-DIV-40DWR
 (Modular Drawer Divider)

PD-40DWR
 (Modular Drawer)

CM-CARD
 (Blank Card)

CM-SGN-A
 (Accutek Cabinet Header)

CM-SGN-F
 (Fairview Cabinet Header)

CM-40DWR
 (40 Drawer Unit)

CM-24BIN
 (24 Bin Unit)

CM-24BIN
 (24 Bin Unit)

CM-LEG
 (Cabinet Leg & Extension)

CM-SHF
 (Modular Shelf, for Use on 2 Module Units Only)



Note: Label sets are NOT INCLUDED with cabinets. For Information on our label creation app, contact your local Fairview.

Fairview
69-6D
 90 DEGREE ELBOW
 TUBE TO MALE PIPE
 3/8 TO 1/2

PEGBOARD DISPLAY RACK


DR-PEG-SGN-A
(Accutek Header)



DR-PEG-SGN-GF
(Gas-Flo Header)



DR-PEG-SGN-F
(Fairview Header)



DR-PEG-PNL
(Pegboard Panel)




DR-PEG-LEG
(Display Leg Set)

Fairview display racks can be wall mounted, stand on their own as end cap units, or be fastened together to create additional display area. The 18" x 36" all metal pegboard is built strong to display any of Fairview's many "retail ready" industrial quality products. Easy to assemble and available in Fairview black, with a choice of Fairview, Accutek or Gas-Flo display headers.

PART No.	Description
DR-PEG-LEG	Display Rack Pegboard Leg Set
DR-PEG-PNL	Display Rack Pegboard Panel
DR-HOSEHOOK	Display Rack Hose Hook
DR-PEGHOOK-10	Display Rack Short Peg Hook
DR-PEGHOOK-15	Display Rack Medium Peg Hook
DR-PEG-SGN-A	Display Rack Accutek Sign
DR-PEG-SGN-F	Display Rack Fairview Sign
DR-PEG-SGN-GF	Display Rack Gas-Flo Sign



DR-PEGHOOK-10



DR-PEGHOOK-15



DR-HOSEHOOK

Assembled Unit:	
Height	62-1/4 inches
Width	18 inches
Depth	13 inches

COMPACT FAIRVIEW FITTING CENTER

Counter / Wall Mounting Drawer Cabinet (Up to 20 Drawers) PART No. XB20-CA

This cabinet has 20 drawers, each one with the capability of dividing into 4 separate compartments. It is featured in Fairview's black and yellow colors.



Assembled Unit:	
Height	41-3/4 inches
Width	31-1/2 inches
Depth	6 inches

PD-110 Drawer Dimensions:

Height	2-1/2 inches
Width	2-3/4 inches
Depth	5-3/4 inches

PD-55 Drawer Dimensions:

Height	2-1/2 inches
Width	5-3/4 inches
Depth	5-3/4 inches



Note: Label sets are not included with cabinets. For Information on our label creation app, contact your local Fairview.



SUGGESTED PRODUCT ASSORTMENTS

Note: Product selections are based on specified industry or product groups and cabinet space availability.
Cabinets & Product Must Be Purchased Separately.

Top Truck & Trailer Items for Modular Drawer Cabinets Up to 320 drawer divisions (2 X CM-40DWR units)

Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.
101-B	113-D2	125-4B	729-12	1468-8B	1474-6C	CPC1464-4	PC1468-6D	PC1474-4A
103-A	116-B	125-5B	738-88	1468-8C	1474-6D	CPC1464-6	PC1468-8B	PC1474-4B
103-B	118-A	125-6B	862-2	1468-8D	1474-8B	CPC1468-4A	PC1468-8C	PC1474-6B
103-C	118-B	125-6C	862-2-1/2	1468-10C	1474-8C	CPC1468-4B	PC1468-8D	PC1474-6C
103-D	118-C	125-8C	868-2-1	1468-10D	1474-8D	CPC1468-6B	PC1468-10C	PC1474-8C
103-E	118-D	125-8D	868-2-1/2-1	1468-12D	1474-10D	CPC1468-6C	PC1468-10D	PC1474-10D
108-A	118-E	125-10C	868-2A	1468-12E	1481-4	CPC1468-8C	PC1469-5/32A	PC1474SW-6B
108-B	119-CB	125-10D	868-2-1/2A	1469-4A	1481-6	CPC1469SW-4A	PC1469-4A	PC1474SW-6C
108-C	120-AA	125-12D	869-2A	1469-4B	1481-8	CPC1469SW-4B	PC1469-4B	PC1474SW-8C
108-D	120-BA	125-12E	869-2-1/2A	1469-4C	1481-10	CPC1469SW-4C	PC1469-4C	PC1477-4
109-A	120-BB	126-6B	1460-4	1469-6A	1481-12	CPC1469SW-6B	PC1469-6A	X100-A
109-B	120-CA	129-4	1460-6	1469-6B	1490-6	CPC1469SW-6C	PC1469-6B	X100-B
109-C	120-CB	129-6	1460-8	1469-6C	1490-8	CPC1469SW-6D	PC1469-6C	X100-C
109-D	120-CC	129-8	1460-10	1469-6D	1491-6	CPC1469SW-8C	PC1469-6D	X100-D
109-E	120-DB	129-10	1460-12	1469-8B	1491-8	CPC1469SW-8D	PC1469-8B	X101-A
110-BA	120-DC	129-12	1461-4	1469-8C	1492-6B	CPC1471SW-6B	PC1469-8C	X101-B
110-CA	120-DD	139-6B	1461-6	1469-8D	1492-6C	GH-SEAL	PC1469-8D	X101-C
110-CB	120-EC	139-10D	1461-8	1469-10C	1492-6D	GHE-SEAL	PC1469-10D	X101-D
110-DA	120-ED	239-B	1461-10	1469-10D	1492-6S	GHS-SEAL	PC1469SW-4A	X106-B
110-DB	121-A	240-A	1461-12	1469-12D	1492-8C	PC1462-5/32	PC1469SW-4B	X106-C
110-DC	121-B	240-B	1462-4	1469-12E	1492-8D	PC1462-4	PC1469SW-4C	X107-A
110-EB	121-C	240-C	1462-6	1471-4A	1492-8S	PC1462-6	PC1469SW-6A	X107-B
110-EC	121-D	241-B	1462-8	1471-4B	1493-6B	PC1462-8	PC1469SW-6B	X107-C
110-ED	121-E	725-4B	1462-10	1471-6B	1493-6C	PC1462-10	PC1469SW-6C	X107-D
110-HE	122-A	725-6B	1462-12	1471-6C	1493-6D	PC1462-12	PC1469SW-8B	X115-A
112-A	122-B	725-6C	1464-4	1471-8C	1493-8C	PC1464-4	PC1469SW-8C	X115-B
112-B	122-BA	725-6D	1464-6	1472-4A	2120-A	PC1464-6	PC1469SW-8D	X115-C
112-C	122-C	725-8C	1464-8	1472-4B	2120-B	PC1464-8	PC1469SW-10D	X115-D
112-D	122-CB	725-8D	1465-6	1472-6A	2120-C	PC1468-5/32X1	PC1471-6B	X124-A
112-E	122-D	725-10D	1468-4A	1472-6B	4134-6C	PC1468-5/32A	PC1471SW-6B	X124-B
113-A2	122-DB	725-12D	1468-4B	1472-6C	BVT3120-C	PC1468-4A	PC1471SW-6C	X124-C
113-B1-1/2	122-DC	725-12E	1468-4C	1472-8C	BVT3120-D	PC1468-4B	PC1472-4B	X124-D
113-B2	122-E	729-4	1468-6A	1472-8D	CPC1462-4	PC1468-4C	PC1472-6B	
113-B3	122-ED	729-6	1468-6B	1474-4A	CPC1462-6	PC1468-6A	PC1472-6C	
113-C2	124-C	729-8	1468-6C	1474-4B	CPC1462-8	PC1468-6B	PC1472SW-6B	
113-C3	125-4A	729-10	1468-6D	1474-6B	CPC1462-10	PC1468-6C	PC1472SW-6C	

Top Truck & Trailer Items for Modular Bin Cabinets Up to 72 bins (3 X CM-24BIN units)

Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.
14DV-60B	1497-DB	GHS	HC19-425	QD-ISOAN16-16F	TS16R-20
121-M8	BV2101-B	HAB-HANGER-6	HC19-450	SR438-1010	TS16R-24
1139-10D	BV2101-C	HAB-HANGER-8	PG-100SG25	SR528-44	TS16R-32
1495-C	BV2101-D	HAB-HCE-8	PG-160CG25	SR528-66	TS17R-4
1495-L	BV4103-B	HAB-HCU-6	PG-160SG25	SR528-88	TS17R-6
1495-S	BV4103-C	HC19-275	QD-BTTWC12-12F	SR528-1010	TS17R-8
1495B-A	BV4103-D	HC19-288	QD-BTTWC16-16F	SR538-66	TS17R-10
1495B-C	BV4103-E	HC19-300	QD-BTTWC20-20F	TS16R-6	TS17R-12
1495B-D	BV4103-H	HC19-325	QD-BTTWN12-12F	TS16R-8	TS17R-16
1495B-L	GHE	HC19-350	QD-BTTWN16-16F	TS16R-10	TS17R-20
1495B-S	GHE	HC19-375	QD-BTTWN20-20F	TS16R-12	TS17R-24
1496-DC	GHE	HC19-412	QD-ISOAC16-16F	TS16R-16	TS17R-32

Top 1400 Series (DOT Air Brake) Items for 20 Drawer Cabinet

Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.
1460-4	1461-8	1464-4	1468-6C	1469-4C	1471-6B
1460-6	1461-10	1464-6	1468-8B	1469-6A	1472-6B
1460-8	1462-4	1468-4A	1468-8C	1469-6B	1474-6B
1460-10	1462-6	1468-4B	1468-8D	1469-6C	1474-6C
1461-4	1462-8	1468-6A	1469-4A	1469-8C	1474-8C
1461-6	1462-10	1468-6B	1469-4B	1469-8D	

Top PC1400 Series (DOT Air Brake Push-To-Connect) Items for 20 Drawer Cabinet

Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.	Fairview PART No.
PC1462-5/32	PC1464-6	PC1468-8B	PC1469-6A	PC1469SW-6B	PC1474-8C
PC1462-4	PC1468-4A	PC1468-8C	PC1469-6B	PC1469SW-6C	PC1477-4
PC1462-6	PC1468-4B	PC1468-8D	PC1469-6C	PC1469SW-8C	
PC1462-8	PC1468-6A	PC1469-5/32A	PC1469-8C	PC1471SW-6B	
PC1462-10	PC1468-6B	PC1469-4A	PC1469SW-4A	PC1472SW-6B	
PC1464-4	PC1468-6C	PC1469-4B	PC1469SW-4B	PC1474-6C	

COUNTER CLAMP DISPLAY RACKS

Fairview



PART No. HCR-10-RACK
(Rack & sign only)
Rack Size H: 13.375" W: 20" D: 7"

Accutek® Auto Clamp Kit. Containing a selection of common size clamps together with a storage rack.

PART No. HC6-AUTO-KIT-1

Contains: Standard Gear Clamps

PART No.	Quantity in Kit	Range (IN.)	Range (MM.)
HC6-4TB *	50	.22 - .63	6 - 16
HC6-6TB *	30	.31 - .88	8 - 22
HC6-8	20	.43 - 1.00	11 - 25
HC6-10	40	.56 - 1.06	14 - 27
HC6-12	20	.56 - 1.25	14 - 32
HC6-16	10	.68 - 1.50	17 - 38
HC6-20	20	.75 - 1.75	19 - 44
HC6-24	20	1.06 - 2.00	27 - 51
HC6-28	20	1.31 - 2.25	33 - 57
HCR-10-RACK	1	Storage Rack	

(Heavy Gauge Steel Wire Rack for Wall / Counter Top)

*Thin Band Gear Clamps

Accutek® T-Bolt Clamp Kit. Containing a selection of common size clamps together with a storage rack.

PART No. HC3-KIT-1

Contains: T-Bolt Style Clamps

PART No.	Quantity in Kit	Range (IN.)	Range (MM.)
HC3-150	5	1.31 - 1.56	33 - 40
HC3-175	5	1.56 - 1.81	40 - 46
HC3-188	5	1.69 - 1.94	43 - 49
HC3-200	5	1.81 - 2.06	46 - 52
HC3-225	5	2.06 - 2.31	52 - 59
HC3-238	5	2.19 - 2.50	58 - 64
HC3-250	4	2.31 - 2.62	59 - 67
HC3-275	4	2.56 - 2.87	65 - 73
HC3-288	4	2.69 - 3.00	68 - 76
HC3-300	4	2.81 - 3.12	71 - 79
HC3-325	4	3.06 - 3.37	78 - 86
HC3-350	3	3.31 - 3.62	84 - 92
HC3-375	3	3.56 - 3.87	90 - 98
HC3-400	3	3.81 - 4.12	97 - 105
HC3-425	3	4.06 - 4.37	103 - 111
HC3-450	2	4.31 - 4.62	110 - 117
HC3-475	2	4.56 - 4.87	116 - 124
HC3-500	2	4.81 - 5.12	122 - 130
HCR-18-RACK	1	Storage Rack	

(Heavy Gauge Steel Wire Rack for Wall / Counter Top)



PART No. HCR-18-RACK
(Rack & sign only)
Rack Size H: 24" W: 24" D: 7"

REINFORCED CARDBOARD STOCK BOXES



PART No. BOX-STOCK-1
Description SMALL

Non-sectional for one product storage

Dimensions: 2 3/4" W X 11" L X 4" D

- Supplied flat for easy storage (folding required)
- Label sets available



PART No. BOX-STOCK-3
Description DOUBLE

For bulk or large item storage

Dimensions: 10" W X 11" L X 4" D

- Supplied flat for easy storage; (folding required)
- Label sets available



PART No. BOX-STOCK-2
Description STANDARD

Sectional for multi-product storage

Dimensions: 5" W X 11" L X 4" D

- Supplied flat for easy storage (folding required)
- Label sets available

LEVER HANDLE TYPE WITH HOOK (O.S.H.A.)



PART No.	Female Pipe
AG411E	1/4

- Meets O.S.H.A. standards
- Plastic thumb grip
- Die cast construction
- Individually carded
- 145 P.S.I inlet

PISTOL GRIP WITH LOOP



PART No.	Female Pipe	Wand Length
AG166	1/4	4-1/4"

- Provides narrow, high velocity jet of air into blind holes as small as .200 and hard to reach areas
- Slender 4-1/4" long aluminum nozzle
- Infinitely variable output
- Spark proof
- Meets O.S.H.A.
- Sound level: 86 Db
- Brass inlet and valve
- Flow: 11 CFM
- 150 P.S.I. Inlet

LEVER HANDLE TYPE WITH HOOK (O.S.H.A.)

RUBBER TIPPED



PART No.	Female Pipe
AG410R	1/4

- Heavy-duty construction
- Provides a leak-proof seal between gun and air line
- Excellent for blowing out cavities or surfaces that could be damaged or scratched by metal tips
- Die cast construction
- Individually carded

PISTOL GRIP WITH LOOP



PART No.	Description
AG164	1/4 Pipe

- Aluminum construction for heavy duty Services - garages, machine shops and general industry
- Venturi type nozzle increases air output by 10 times
- Cone shaped air jet minimizes chip blow back
- Brass nozzle and valve
- Flow: 11 CFM
- 150 P.S.I. Inlet

360° UNIVERSAL SWIVEL



PART No.	Pipe	Air Flow Range
DS-B	1/4	Up to 33 C.F.M.

The universal swivel connects portable air tools to an air line. It improves maneuverability, minimizes operator fatigue and extends hose life.

Features:

- Swivels 360° at two pivot points allowing the air hose to drop directly to the floor while providing superb tool handling
- New lightweight, non-marking composite construction, industrial quality

**NOTE: Do Not Exceed
150 P.S.I. (10.3 Bar)**

PISTOL GRIP WATER NOZZLES



PART No.
GHN

**Removable
Thread
Protector**

Fairview's GHN industrial water nozzle is ideal for commercial and domestic water hose applications. Sprays from a fine mist to a heavy stream. **Thread protector cap included.**



PART No.
GHN7

Fairview's 7 pattern nozzle features a slim molded grip that prioritizes comfort. Integrated trigger lock allows for long watering sessions. The easy-to-read dial can be twisted in either direction to get one of the seven spray patterns ranging from a fine mist to a jet stream.



PART No.
GHN-BN

Fairview's heavy-duty nozzle features an all brass stem, nut and adjustable tip for ultimate durability. A rear trigger design with an integrated trigger lock allows for long watering sessions and the spray pattern ranges from a fine mist to a jet stream.



PART No.
GHTN-RG

For those who prioritize comfort and lightness, Fairview's metal twist nozzle provides a molded rubber grip on both the body and tip for ultimate comfort. All metal construction provides durability but keeps it light in your hand.

BRASS INDUSTRIAL WATER NOZZLES



PART No.
GHPS

Fairview's 2" brass industrial water nozzle is ideal for commercial and domestic water hose applications.



PART No.
GHTN

Fairview's heavy duty 4" all brass twist nozzle is durable and dependable while delivering a fully adjustable spray intensity. Diamond pattern ridges make it easy to grip in any condition.

*** Water Nozzle Models Change from Time to Time. May Not Be Exactly As Shown.**

MULTI-CUTTER	CSST SOFT JAW PLIERS
--------------	----------------------



ALL METAL CONSTRUCTION

PART No.	O.D. Capacity
MC-1	1-1/8
MCB-1	Replacement Blade

- P.V.C. coated handles
- Will cut soft rubber hose & plastic tube



PART No. HCCSST-RT

A handy adjustable style tool, with padded jaws, ideally suited for crimping the full range of CSST Brass Split Rings. Vinyl cushioned grips.

O-CLAMP PINCERS



Side Jaw Pincer

PART No. HC9-S



Regular Pincer

PART No. HC9-R

One of these handy tools is all that is needed to apply or remove O-Clamps. Side jaw pincer is recommended for work in confined areas, since it allows O-Clamp to be closed while holding pincer parallel to hose.

HOSE, TUBE, PIPE SIZE AND THREAD GAUGE



PART No. PIPE PG/1	Range 1/8 to 1 In.
---------------------------	---------------------------

SPIRAL HOSE GUARD WRAP



Dispenser
Carton



Designed for use with Hydraulic hose, Air Brake hose and tubing, Propane / Natural Gas hose and electrical wire bundles, Fairview's tough and flexible spiral wrap is available in lengths up to 100 Ft.

PART No.	I.D. (IN.)	Wall (IN.)	Pitch (IN.)
SPW-8BLK	0.38"	0.05"	0.4"
SPW-10BLK	0.53"	0.05"	0.5"
SPW-12BLK	0.63"	0.08"	0.6"
SPW-16BLK	0.81"	0.09"	0.8"
SPW-20BLK	1.06"	0.10"	0.9"
SPW-24BLK	1.36"	0.11"	1.0"
SPW-32BLK	1.69"	0.14"	1.2"
SPW-40BLK	2.19"	0.15"	1.2"
SPW-48BLK	2.61"	0.17"	1.7"
SPW-56BLK	3.16"	0.19"	1.8"
SPW-64BLK	3.90"	0.22"	2.0"
SPW-72BLK	4.46"	0.23"	2.2"

NYLON SLEEVE HOSE PROTECTOR



Reduces abrasions and increases hose life. Protects against UV, physical abrasion and deterioration. Meets ISO 6945 abrasion standard, MSHA approved
Color: Black

PART No.	Sleeve I.D. (IN.)	PART No.	Sleeve I.D. (IN.)
NS-10	.71	NS-28	1.85
NS-14	.90	NS-30	2.09
NS-16	1.14	NS-32	2.25
NS-20	1.25	NS-38	2.38
NS-22	1.38	NS-46	2.87
NS-26	1.57	NS-64	4.50

SPLIT LOOM



Designed to hold & protect cables, harnesses and hoses. Quick & easy to install. Slit automatically closes after installation. Black provides superior outdoor ultraviolet light protection. -40°C (-40°F) to +85°C (185°F)

PART No.	Maximum I.D. (IN.) (MM)		PART No.	Maximum I.D. (IN.) (MM)	
SPL-4BLK-CTN	.266	6.76	SPL-12BLK-CTN	.759	19.28
SPL-6BLK-CTN	.380	9.65	SPL-16BLK-CTN	1.069	27.16
SPL-8BLK-CTN	.515	13.07			

BEND PROTECTORS



Smooth finish, friction fit, bend protector reduces bending stress near hose end for longer, trouble free hose life. STYLES MAY VARY.

MATERIAL: Polyvinylchloride

TEMPERATURE: -40°C to +93°C (-40°F to +200°F)

Other sizes available upon request

POLYVINYLCHLORIDE			STEEL		
PART No.	I.D.	Length (IN.)	PART No.	I.D.	Length (IN.)
MP-BP-4	.625	5.50	MP-SBP-6	.672	5.00
MP-BP-6	.735	6.38			
MP-BP-8	.835	7.00			

SPRING GUARD - HOSE PROTECTOR



- Prevents kinking
- Reduces abrasions, increases hose life
- Covers entire length of hose

PART No.	Spring I.D. (IN.)
SG-650	.650
SG-686	.686

PROPANE TORCHES



PART No.: T95-B

CONSTRUCTION:

Cast iron head, single barber jet with flash protection, steel stem.
Neoprene hand grip and needle valve.

BTU RATING: 208,000 BTU @ 30lbs. P.S.I

LENGTH: 28 inches



PART No.: W80

CONSTRUCTION:

Cast iron head, brass valve, orifice and bushings.
1/2" Standard pipe manifold with comfort hand grip.

BTU RATING: 220,000 BTU @ 30lbs. P.S.I

LENGTH: 26 inches



28" OAL Torch



PART No.: T95-B KIT (with 15ft Assy.)

- T95-B KIT-10 (with 10 Ft. Assy.)
- T95-B KIT-20 (with 20 Ft. Assy.)
- T95-B KIT-25 (with 25 Ft. Assy.)

KIT CONTAINS:

Item	Qty.
Burner Torch (PART No. T95-B)	1
15 Ft. Type I Hose Assembly (PART No. I4C180FWFW)	1
Regulator & P.O.L. 0-30 PSI (PART No. GR-338)	1
Brass Welding Adapter (PART No. 135-LB)	1

- Hose, Adapter & Regulator Fully Assembled and Ready for Service
- Custom Configurations Available



PART No.
I4C180FWGR330POLHN
15 Ft. Assembly



26" OAL Torch



PART No.: W80-KIT

KIT CONTAINS:

Item	Qty.
Burner Torch (PART No. W80)	1
15 Ft. Type I Hose Assembly (PART No. I4C180FWFW)	1
Regulator & P.O.L. 0-30 PSI (PART No. GR-338)	1
Brass welding adapter (PART No. 135-LB)	1

- Hose, Adapter & Regulator Fully Assembled and Ready for Service
- Custom Configurations Available



PART No.
I4C180FWGR330POLHN
15 Ft. Assembly



SAFETY TIPS FOR HAND-HELD TORCHES

- 1) Never leave torches ignited and unattended.
- 2) Make sure the cylinder is securely braced or tied so that it can't fall or be knocked over.
- 3) Use only approved high-pressure hoses to connect torches to regulators.
- 4) Operate the torch at the manufacturer's recommended pressure.
- 5) Never direct the flame at, near or toward the cylinder.
- 6) Never use hand-held torches inside a building.

U.L. & U.L.C. LISTED PTFE THREAD SEALANT TAPE



The ideal sealant for pipe thread connections. It is non-toxic and will not contaminate fluids or gases. Chemically inert, it resists corrosive action of acids, alkalis and solvents. U.L. and U.L.C. listed for Natural Gas (TO 1000 P.S.I.) and Propane installations.

- **TEMPERATURE RANGE:**
-268°C to +260°C (-450°F to +500°F)

PART No.	Tape Width	Length/Roll (IN.)
121-M8UL	1/2"	236
121-M12UL	3/4"	236

PTFE THREAD SEALANT TAPE



The ideal sealant for pipe thread connections. It is non-toxic and will not contaminate fluids or gases. Chemically inert, it resists corrosive action of acids, alkalis and solvents.

- **TEMPERATURE RANGE:**
-268°C to +260°C (-450°F to +500°F)

INDUSTRIAL SEALANT TAPE

PART No.	Tape Width (IN.)	Tape Thickness	Length/Roll (IN.)
121-M8	1/2	.003	480
121-M12	3/4	.003	480
121-M16	1	.003	480

HIGH DENSITY INDUSTRIAL SEALANT TAPE

PART No.	Tape Width (IN.)	Tape Thickness	Length/Roll (IN.)
121-M8PINK	1/2	.004	540
121-M12PINK	3/4	.004	540
121-M16PINK	1	.004	540

METALLIC PTFE THREAD SEALANT



BRUSH TOP TIN



Masters Metallic Compound is a heavy duty pipe thread sealant of proven quality for use on both metal and plastic thread connections. This all-weather product: Lubricates during assembly - Never sets up hard - Can be easily disassembled even after years of service. Masters Metallic Compound is non-corrosive and prevents galling and seizing. It will not dry out or harden in the container. Available in plain and brush-top. Masters Metallic Compound effectively seals most liquids and gases against leakage up to 6900 kpa/ 1000 psi and +371°C (+700°F).

PART No.	Size	Carton QTY.
TTSM-8	8 oz. Tin	25
TTSM-32	32 oz. Tin	6

PTFE THREAD SEALANT COMPOUND



BRUSH TOP TIN



TUBE



PART No.	Size	Carton QTY.
TTS-2	2 oz. Tube	72
TTS-4	4 oz. Tin	24
TTS-8	8 oz. Tin	24
TTS-16	16 oz. Tin	12

- **TEMPERATURE RANGES:**
-45°C to +204°C (-50°F to +400°F)
- **BRUSHABLE TO:** -46°C (-50°F)
- **PRESSURE RANGES:**
Gases to 2000 P.S.I.
Liquids to 8000 P.S.I.
- **MATERIAL USE:** Brass and All Metal, ABS, PVC, CPVC, Nylon
- **NOTE: NOT SUITABLE FOR OXYGEN**



BRUSH TOP TIN



TUBE



PART No.	Size	Carton QTY.
TTSG-2	2 oz. Tube	72
TTSG-4	4 oz. Tin	24
TTSG-8	8 oz. Tin	24

- **TEMPERATURE RANGES:**
-45°C to +204°C (-50°F to +400°F)
- **BRUSHABLE TO:** -46°C (-50°F)
- **PRESSURE RANGES:**
Gases to 3000 P.S.I.
Liquids to 6000 P.S.I.
- **MATERIAL USE:** Brass and All Metal, ABS, PVC, CPVC, Nylon
- **NOTE: NOT SUITABLE FOR OXYGEN. CERTIFIED TO CSA NO. 4-90 US AND CAN/ULC-S642-M87** Metal threads only through 2" DIA. +51.7°C to -40°C (+125°F to -40°F) 125 PSIG for use with natural, propane & butane (vapor state) gases only.

GAS-FLO® LEAK DETECTION FLUID (LOW - TEMP)



Test It Before You Use It.


A low cost method of testing gas connections for leaks prior to use. Non-Corrosive. Halogen and Chloride Free. **Good for use in temperatures down to: -40°C (-40°F).**

PART No.	Description
LD-8LT	8 oz. Squirt Bottle


Meets ASME Requirements

CONVERSION CHARTS

ACTUAL OUTSIDE DIAMETERS OF PIPE THREADS

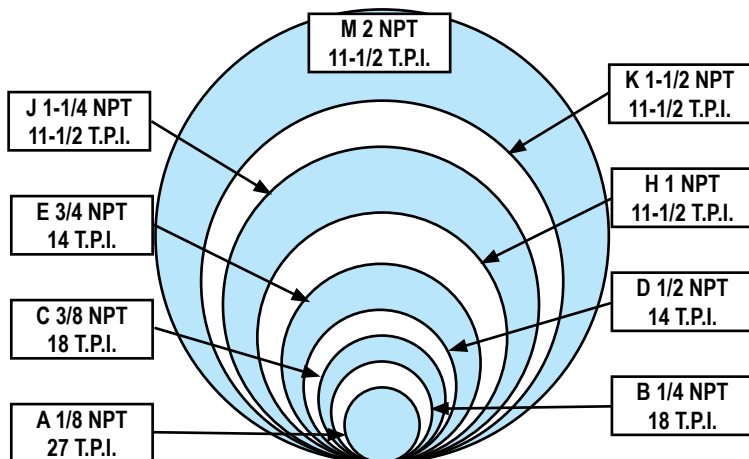

ACTUAL OUTSIDE DIAMETERS OF TUBE

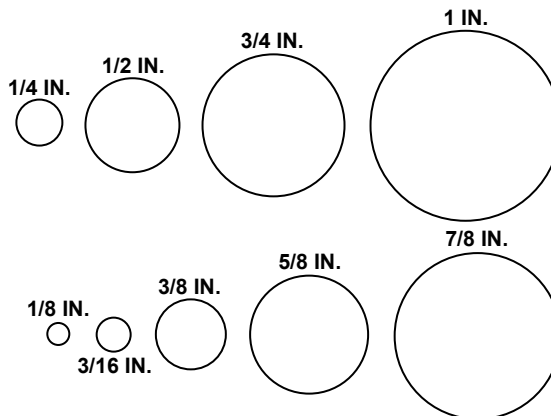

FRACTIONAL SIZE CODES

Used with all Part Numbers to designate Tube and Pipe Fractional Sizes.

Tube Size Code -- 1/16ths

1/8	3/16	1/4	5/16	3/8	7/16	1/2	5/8	3/4	7/8	1	1-1/4	1-1/2	2	2-1/2	3	4
2	3	4	5	6	7	8	10	12	14	16	20	24	32	40	48	64

Pipe Size Code

1/16	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2-1/2	3	4
1	A	B	C	D	E	H	J	K	M	N	P	S

METRIC THREAD STANDARDS

Tube Size MM	DIN Metric (Light)	DIN Metric (Heavy)
6	M12x1.5	M14x1.5
8	M14x1.5	M16x1.5
10	M16x1.5	M18x1.5
12	M18x1.5	M20x1.5
14	--	M22x1.5
15	M22x1.5	--
16	--	M24x1.5
18	M26x1.5	--
20	--	M30x2.0
22	M30x2.0	--
25	--	M36x2.0
28	M36x2.0	--
30	--	M42x2.0
35	M45x2.0	--
38	--	M52x2.0
42	M52x2.0	--

TUBE FITTING SIZE AND THREAD STANDARDS

DASH SIZE	O.D. TUBE SIZE	45° S.A.E. FLARE		37° J.I.C. FLARE		COMPRESSION		45° INVERTED FLARE		THREADED SLEEVE	
		O.D.	THREAD	O.D.	THREAD	O.D.	THREAD	O.D.	THREAD	O.D.	THREAD
-2	1/8	5/16	24	5/16	24	5/16	24	5/16	28	5/16	24
-3	3/16	3/8	24	3/8	24	3/8	24	3/8	24	3/8	24
-4	1/4	7/16	20	7/16	20	7/16	24	7/16	24	7/16	24
-5	5/16	1/2	20	1/2	20	1/2	24	1/2	20	1/2	20
-6	3/8	5/8	18	9/16	18	9/16	24	5/8	18	9/16	20
-8	1/2	3/4	16	3/4	16	5/8	24	11/16	18	5/8	18
-10	5/8	7/8	14	7/8	14	11/16	20	3/4	18	11/16	16
-12	3/4	1-1/16	14	1-1/16	12	13/16	18	7/8	18	--	--
-14	7/8	1-1/4	12	1-3/16	12	1	18	1-1/16	16	--	--
-16	1	1-3/8	12	1-5/16	12	1-1/8	18	1-3/16	16	--	--
-20	1-1/4	--	--	1-5/8	12	1-1/4	16	--	--	--	--
-24	1-1/2	--	--	1-7/8	12	--	--	--	--	--	--
-32	2	--	--	2-1/2	12	--	--	--	--	--	--

TUBE FITTING SIZE AND THREAD STANDARDS

DASH SIZE	O.D. TUBE SIZE	O-RING BOSS		FLARELESS		O-RING FACE SEAL		BRITISH PIPE TAPER		BRITISH PIPE PARALLEL	
		O.D.	THREAD	O.D.	THREAD	O.D.	THREAD	O.D.	THREAD	O.D.	THREAD
-2	1/8	5/16	24	5/16	24	--	--	--	--	--	--
-3	3/16	3/8	24	3/8	24	--	--	--	--	--	--
-4	1/4	7/16	20	7/16	20	9/16	18	1/4	19	1/4	19
-5	5/16	1/2	20	1/2	20	--	--	--	--	--	--
-6	3/8	9/16	18	9/16	18	11/16	16	3/8	19	3/8	19
-8	1/2	3/4	16	3/4	16	13/16	16	1/2	14	1/2	14
-10	5/8	7/8	14	7/8	14	1	14	5/8	14	5/8	14
-12	3/4	1-1/16	12	1-1/16	12	1-3/16	12	3/4	14	3/4	14
-14	7/8	1-3/16	12	1-3/16	12	--	--	--	--	--	--
-16	1	1-5/16	12	1-5/16	12	1-7/16	12	1	11	1	11
-20	1-1/4	1-5/8	12	1-5/8	12	1-11/16	12	--	--	--	--
-24	1-1/2	1-7/8	12	1-7/8	12	2	12	--	--	--	--
-32	2	2-1/2	12	2-1/2	12	--	--	--	--	--	--

Fairview

SERIES	PAGE	SERIES	PAGE	SERIES	PAGE	SERIES	PAGE	SERIES	PAGE	SERIES	PAGE
30	83	529	52	2101	122	CPC1472YSW	73	HR18	21	QD-STN	114
31	83	539	52	2102	122	CPC1474SW	73	HRA12	20	QD-TC	106
32	83	544	52	2103	123	CTG	46	HRA12UF	19	QD-TF	111
33	83	555	52	2120	123	CTR	46	HS11	148	QD-UNIA	112
34	83	678	79	2122	123	CV1	125	HT	23	QD-WHCF	114
35	83	725	50	2815	35	DR	151	HV1139	122	QD-WHNM	114
36	84	726	50	4120R	49	DS-B	154	I4C	158	QD-WHVCF	114
39	82	727	50	4129R	49	EC-	12	INT-KIT-1	70	R16	131
40	82	728	50	4134	48	ECC	11	JFT	44	RG4	32
41	83	729	50	5103	123	ECS	11	LAS	145	RG6	32
41S	82	731	50	5120	123	ET	142	LD	159	RG8	32
42	83	732	50	ABFR-KIT	68-69	FLB	53	LF	76-82	RGP	32
44	84	735	50	ABFR-KIT-HAB	49	FF-UA4	24	LF-41S	82	S10	97-98
45	84	736	50	AC134-KIT-1	70	FLH	30	LF-BV4103	116	S11	61,100
46	83	737	50	ADC-KIT-1	70	FLT	45	MC	156	S35	88
47	83	738	50	ADP-9235-1204	70	FW-CYLINDER-1	131	MP-BP	157	S36	93-94
48	83	739	50	AG164	154	FWSK-1	35	NS	157	S37	89-90,92
49	84	750	54	AG166	154	FO41S	82	OE-SB80	146	S38	91
50	83	751	54	AG410R	154	GH-BRACKET	128	ORHYD	87	S39	95-96
51	84	752	54	AG411E	154	GH-CONE-SC	126	PAC-KIT-1	70	S67	96
52	84	761	31	ASGK-1	35	GH-DUMMY	128	PAR6	34	SAJCCP-KIT	87
53	84	860	85	ASL-KIT-8B	69	GH-GRIP	128	PC1400	75	SAORCP-KIT	87
54	84	861	85	ASTM-KIT	85	GHCA	127	PC1462	68, 74	SAPIPCP-KIT	87
55	84	862	85	B1120	114	GHE	126-127	PC1465	74	SC6	57-58
56	84	868	85	B1492	48	GHM	126-127	PC1466	74	SC7	61
58	84	869	85	BC-B	131	GHN	155	PC1468	68, 74	SC9	55-56
59	84	962	54	BBV	130	GHPS	155	PC1469	68, 74	SCK6	58
99	78	964	54	BEM	130	GHSFB	127	PC1469SW	74	SC7A	62
99HB	52	965	54	BI-100	81	GH-SEAL	126	PC1470	74	SCT9*MS	59
100	78	966	54	BI-101	82	GHS	126-127	PC1471	75	SCTP	66
101	79	968	54	BI-102	82	GHTN	155	PC1471SW	75	SCV1003	125
102	79	969	54	BI-103	80	GHU	126	PC1472	75	SCW5	64
103	76	977	54	BI-103HMC	99	GHV	128	PC1472SW	75	SFK61	92
103CV	125	1049	122	BI-103MC	99	GI-125	53	PC1474	74	SFK62	92
104	77	1054	122	BI-104	81	GI-129	53	PC1474SW	74	SFO	92
105	79	1115	122	BI-105	81	GL4	33	PC1477	74	SFPK2661	92
106	79	1139	122	BI-108	82	GL6	33-34	PC1478	75	SG	157
107	79	1160	72	BI-109	81	GL8	33	PC1478SW	75	SO11	61,99
108	78	1161	72	BI-109MC	99	GLH	33	PC1483	74	SPL	157
109	77	1162	72	BI-110	81	GN	86	PC1483S	48	SPW	157
110	77	1164	72	BI-111	81	GN-100-KIT	86	PC1486	74	SR4	63
111	77	1168	72	BI-112	80	GNM	86	PC1495S	48	SR5	65
112	76	1169	72	BI-113	80	GNM-100-KIT	86	PCDOT*MM	75	SR7	61
113	76	1170	72	BI-114	82	GR-338	158	PD-40DWR	150	SRT1	62
116	78	1171	72	BI-116	81	BOX-STOCK	153	PD-55	151	SRT2	62
117	77	1172	72	BI-119	80	GWC	86	PD-110	151	SV	131
118	77	1174	72	BI-124	81	GWN	35	PD-DIV-40DWR	150	T1	17
119	77	1460	71	BI-125	53	GWR	35	PG-*CD	137	T1SN	16
120	77	1461	71	BI-129	53	HABA-	6-9	PG-*CG	134-136	T2	17
121	78	1462	71	BLT	46	HAB-	6-10	PG-MB25	136	T2SN	16
121-M*	159	1464	71	BSCM	129	HAB-*GGSG	13	PG-PM25	136	T95	158
121S	78	1465	71	BV2101	117	HAB3	13	PG-*SD	137	T241	124
122	76	1466	71	BV2103	116	HAB3-GHH	128	PG-*SG	134-136	TCS3	28
123	52	1468	71	BV3103	118	HAB-HANGER	147	PG-SNUBBER	136	TCS3-*KIT	29
124	78	1469	71	BV3120	118	HAB-HC	147	PG-*ZRCD	138	TK	69
125	51	1470	71	BV4103	116	HAB-NOSE BOX-1	10	PG-*ZRSDD	138-140	TS14	148
126	51	1471	71	BVC4103	116	HAB-POGO	147	PIPE PG/1	156	TS15	148
127	51	1472	71	BVCS2103	119	HAB-SPRING	147	PPV	130	TS16R	148
128	51	1474	71	BVCS2203	120	HAB-SPW-HB	147	PW*-*REEL	38	TS17R	148
129	52	1476	71	BVCS2303	120	HC2	143	PW*A	39-40	TS19	148
130	51	1477	71	BVCS2434	121	HC3	153	PW*K	40	TS21	148
131	51	1478	71	BVSE2103	117	HC3-KIT	145	QD-AG	104	TS22	148
134	51	1481	71	BVSS2003	119	HC5	142	QD-ARO	111	TSS17R	148
139	51	1485	42	BVSS2103	119	HC6	142	QD-BISOB	105	TTS	159
140	51	1486L	14	BVSS2203	120	HC6-AUTO-KIT	145	QD-BST	114	W80	158
202	79	1486LE	14	BVSS2403	121	HC8	145	QD-BTTW	103	WH-705	129
217	122	1486S	35	BTV	131	HC9	146	QD-CEJNN	113	WH*BLK	37
224	122	1490	48	BVT3103	118	HC9-R	156	QD-HTMA	107	WH*BLU	37
225	122	1491	48	BVT3120	118	HC9-S	156	QD-INDA	110	WH*YEL	37
239	124	1492	48	CHS	26	HC10	146	QD-INDM	109	WHGL	37
240	124	1493	48	CHS-*1KIT	29	HC19	144	QD-INDN	109-110	WHRV	37
241	124	1494	48	CHS45	27	HC20	144	QD-ISOA	106	X100	78
242	124	1495	48	CHS90	27	HC21	145	QD-ISOB	105	X101	79
243	124	1496	48	CHSR	28	HCCSST-RT	156	QD-MINI	112	X102	79
245	124	1497	48	CM	150	HCR-*RACK	153	QD-KAR	114	X105	79
293	125	1498	48	CPC1462	73	HDAT-KIT-1	70	QD-LIN	112	X106	79
298	125	1499	48	CPC1464	73	HH	30	QD-PDC	105-106	X107	79
325	53	14DV-60B	130	CPC1465	73	HHS	26	QD-PDP	105-106	X115	78
335	53	1925	51	CPC1468	73	HR4	18	QD-SC	113	X124	78
339	53	1936	34	CPC1469SW	73	HR5	15	QD-SISOB	105	XB20-CA	151
361	43	2042	123	CPC1470SW	73	HR7	19	QD-SP90	104		
525	52	2062	123	CPC1471SW	73	HR16LT	20	QD-SST	114		
526	52	2068	123	CPC1472SW	73	HR17LT	21	QD-STF	111		

Ask us about ... Fairview Premade, Retail Ready Low Temperature 2-Wire Hydraulic Hose Assemblies

Save time and money with our premade 2-Wire hydraulic hoses. Fairview SAE 100R16LT hose assemblies feature higher working pressures than SAE 100R2, much better flexibility and are suitable for use in extreme cold, down to -55°C (-67°F). Available from stock in Male Pipe x Male Pipe for 1/4", 3/8" and 1/2" I.D. in 2 Ft., 3 Ft., 4 Ft., 6 Ft. and 8 Ft. lengths.

Note: other configurations and lengths are available upon request.



**-55°C (-67°F)
ALL SEASON**



**ULTRA
FLEXIBLE**




**ASSEMBLED
IN CANADA**



HOSE | VALVES | FITTINGS



Ask us for ... Fairview Catalog's, Posters, Custom Brochures and More - Available on Request

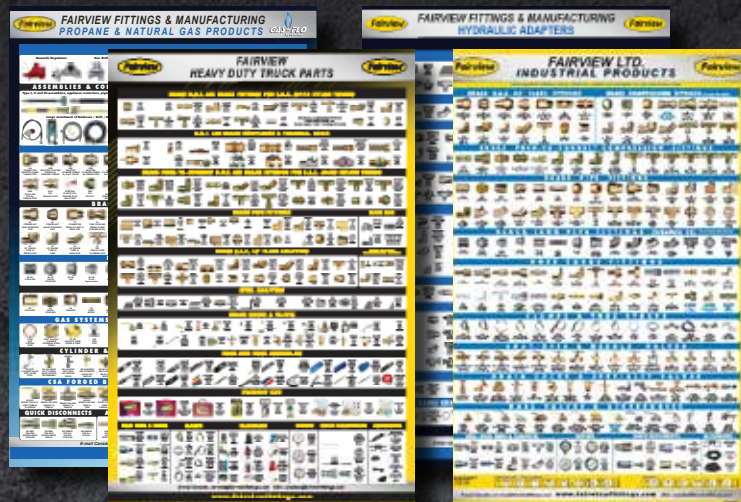

Industry Specific Catalogs

Fitting / Components Identification Charts



Custom Brochures



Installation Instructions, Operating Manuals, Specifications



HOSE | VALVES | FITTINGS

VANCOUVER

EDMONTON

SASKATOON

WINNIPEG

MISSISSAUGA

MONTREAL

MONCTON

Fairview

www.fairview.inc



Fairview Ltd.

Head Office: 1170 Invicta Drive, Unit C
Oakville, Ontario L6H 6G1
Telephone: (905) 338-0800
E-Mail: service@fairviewfittings.com



Fairview USA Inc.

Head Office: 3777 Commerce Court,
Wheatfield, New York 14120 U.S.A.
Telephone: (716) 614-0320
CONTINENTAL USA: (800) 688-4088
E-Mail: ussales@fairviewfittings.com

Warehouse Sales Locations

Canada

• 145 ENGLISH DRIVE, UNIT 4
MONCTON, NEW BRUNSWICK E1E 3X3
PHONE: (506) 857-1115
EMAIL: sales@moncton.fairviewfittings.com

• 2955 RUE LUCIEN-L'ALLIER
LAVAL, QUEBEC H7P 0A1
PHONE: (450) 978-3341
EMAIL: sales@montreal.fairviewfittings.com

• 6100 KESTREL ROAD UNIT 1
MISSISSAUGA, ONTARIO L5T 1S8
PHONE: (905) 564-7416
EMAIL: torontosales@fairviewfittings.com

• 10 - 19 RONN ROAD
CENTREPORT, MANITOBA R4B 0A3
PHONE: (204) 633-9304
EMAIL: sales@winnipeg.fairviewfittings.com

• 130-3810 ARTHUR ROSE AVENUE
SASKATOON, SASKATCHEWAN S7P 0C7
PHONE: (306) 978-1800
EMAIL: sales@saskatoon.fairviewfittings.com

• 18121 - 111 AVENUE N.W.
EDMONTON, ALBERTA T5S 2P2
PHONE: (780) 438-2177
EMAIL: sales@edmonton.fairviewfittings.com

• 11 BURBIDGE STREET, UNIT 201
COQUITLAM, B.C. V3K 7B2
PHONE: (604) 294-4427
EMAIL: vancouver@fairviewfittings.com

• EXPORT SALES
MISSISSAUGA, ONTARIO L5T 1S8
PHONE: (905) 564-7416
EMAIL: torontosales@fairviewfittings.com

USA

• 3777 COMMERCE COURT
WHEATFIELD, NEW YORK 14120
PHONE: (716) 614-0320
CONTINENTAL U.S.A.: (800) 688-4088

• 3412 COUNTY RD. 6 E, UNIT 2
ELKHART, IN 46514
PHONE: (574) 206-8884
CONTINENTAL U.S.A.: (877) 459-0700



Gas-Flo® and Accutek® are registered trademarks of Fairview Ltd.