

Fairview

**HEAVY
DUTY**

**HOSE &
ASSEMBLIES**

TUBE

**BARBS &
HOSE ENDS**

**FITTINGS &
ADAPTERS**

**QUICK
DISCONNECTS**

**COCKS &
VALVES**

**GAUGES &
ACCESSORIES**

**CLAMPS &
TUBE STRAPS**

**TOOLS &
ACCESSORIES**

**CABINETS &
DISPLAYS**

TABLE OF CONTENTS

SECTION A HOSE & ASSEMBLIES

AIR BRAKE HOSE	2
AIR BRAKE HOSE ASSEMBLIES	3-7
AIR BRAKE HOSE ASSEMBLY KITS	6
AIR HOSE & ASSEMBLIES	23
AIR SEAT GUN SPLICER KIT	24
AIR SHIFT TRANSMISSION	24
BULKHEAD AND SLIDER HOSE ASSEMBLIES	5
COOLANT HOSE - (SILICONE)	18
FIFTH WHEEL SLIDER ASSEMBLY	24
GRIP-TITE HOSE	20
GREASE WHIP	24
HEATER HOSE	17,18
HYDRAULIC HOSE	12-23
PRESSURE WASH HOSE & ASSEMBLIES	26-28
RETRACTABLE AIR BRAKE COILS	7
STAINLESS STEEL BRAIDED HOSE-SAE 100R14 (PTFE)	16
SUCTION HOSE - SAE100R4	11
MEDIUM PRESSURE HYDRAULIC 100R7 HOSE	12
MEDIUM PRESSURE HYDRAULIC 100R8 HOSE	12
TRUCK HOSE - S.A.E. 100R5	8
TURBO-CHARGER CONNECTOR	18
WET LINE KITS	11

SECTION B TUBE

AIR BRAKE TUBE D.O.T.	30
AIR SHIFT TRANSMISSION TUBE	24
BRAKE LINE ASSEMBLIES -STEEL	34
CLEAR VINYL TUBE	32
COPPER TUBE	33
POLYETHYLENE TUBE	31
POLYURETHANE (FUEL LINE) TUBE	32
STEEL TUBE (S.A.E. 527)	33

SECTION C HOSE ENDS

AIR BRAKE HOSE COUPLINGS	36
AIR BRAKE HOSE MENDER KITS	37
COMBINATION NIPPLES AND HOSE MENDERS (STEEL)	41
FERRULES (BRASS)	41
HOSE BARBS (BRASS)	39-41
HOSE BARBS-GRIP-TITE (BRASS)	38
HOSE BARBS - FUEL LINE (BRASS)	41
HOSE BARBS (NYLON)	40
HOSE INSERTS (STEEL)	49
HYDRAULIC CRIMP INSTRUCTIONS	48
PERMANENT HOSE ENDS SAE 100R7,100R8,100R18	54
REUSABLE HOSE FITTINGS (BRASS)	42
REUSABLE - SAE 100R14	51
RING - BARB FITTINGS (BRASS)	42
STEEL CRIMP ENDS - SAE 100R7	49
STEEL ONE PIECE CRIMP ENDS SAE	43-47
STEEL ONE PIECE CRIMP ENDS SAE 100R1-AT, 100R2-AT	43-46
STEEL ONE PIECE CRIMP ENDS SAE 100R5	52-53
STEEL ONE PIECE CRIMP ENDS SAE 100R12	47
STEEL ONE PIECE CRIMP ENDS SAE 100R14	50-51
STEEL ONE PIECE CRIMP ENDS SAE 100R16, 100R17	43-46
STEEL REUSABLE ENDS	49,50-51,53
STEEL REUSABLE HOSE ENDS - SAE 100R1-AT, 100R2-AT	50
STEEL REUSABLE HOSE ENDS - SAE 100R5	52-53
STEEL REUSABLE HOSE ENDS - SAE 100R7	54
TERMINAL BOLTS	36

SECTION D FITTINGS

AIR BRAKE D.O.T. (FOR NYLON TUBE)	58
AIR BRAKE D.O.T. (PUSH-TO-CONNECT)	61-62
AIR BRAKE D.O.T. (FOR COPPER TUBE)	59
AIR BRAKE SERVICE KITS	56-57
AIR SHIFT TRANSMISSION (D.O.T.)	72
FLANGE ADAPTERS AND KITS (STEEL)	78
FLARE S.A.E. 45° (BRASS)	69-71
FLARE J.I.C. 37° (STEEL)	74-77
FLARELESS (STEEL)	82
GREASE FITTINGS (SEE TOOLS SECTION FOR GUNS)	73
NPSM SWIVEL ADAPTERS (STEEL)	86
O-RING BOSS ADAPTERS (STEEL)	79
O-RING FACE SEAL ADAPTERS (STEEL)	80-82
PIPE FITTINGS (BRASS)	63-66
PIPE FITTINGS (BLACK IRON)	67-69
PIPE ADAPTERS (STEEL)	83-85

SECTION E QUICK DISCONNECTS

AGRICULTURAL INTERCHANGE (PIONEER 4000)	90
ARO210 / ARO310 INTERCHANGES	97
AUTOMOTIVE INTERCHANGE (TRU-FLATE)	97
HYDRAULIC CROSSOVER	88
HYDRAULIC FLUSH FACE (ISO 16028 HTMA)	93
HYDRAULIC (ISO A) INTERCHANGE	92
HYDRAULIC (ISO B) INTERCHANGE	91
INDUSTRIAL INTERCHANGE - AUTOMATIC	96
INDUSTRIAL INTERCHANGE - MANUAL	95
LINCOLN INTERCHANGE	98
MINIATURE HIGH CAPACITY SERIES - AUTOMATIC	98
PNEUMATIC CROSSOVER	94
PNEUMATIC INTERCHANGE (ARO210 / ARO310)	97
PRESSURE WASH COUPLINGS & ADAPTERS	100
SNOW PLOW Q.D.	90
SWING COUPLINGS	99
THREAD-TO-CONNECT HIGH PRESSURE (TCC)	92
THREAD-TO-CONNECT UNDER PRESSURE (75)	92
UNIVERSAL INTERCHANGE COUPLING - AUTOMATIC	98
WATER COUPLINGS	100
WING COUPLERS - HEAVY DUTY	89

SECTION F VALVES & COCKS

AIR CONTROL ACCESSORIES	116
AIR CONTROL PRESSURE REGULATOR	116
AIR CHUCKS	115
AIR CONTROL SOLENOIDS	116
AIR TANK DRAIN VALVE	115
AIR VENTS AND MUFFLERS	114
ANGLE VALVES	108
BALL (CARBON STEEL)	106,107
BALL (CAST BRASS)	102
BALL (FORGED BRASS - FULL PORT)	102
BALL (LEAD FREE RBASS - FULL PORT)	102
BALL (STAINLESS STEEL)	106,107
BALL (THREE WAY)	103
CHECK VALVES	111
COMPRESSION VALVES	104
DRAIN COCKS & VALVES	110
GATE VALVES	108
GLADHANDS - SAE J318	112,113
FIFTH WHEEL SLIDER CYLINDER	116
MINIATURE VALVES	104

SECTION F VALVES & COCKS (CONT.)

SAFETY EXHAUST (BRASS)	103
NEEDLE SEAT VALVES	110
PRESSURE PROTECTION VALVES	115
SELECTOR VALVES (WITH CLICK)	108
SHUT - OFF COCKS	109
SWING CHECK	111
TANK VALVE	115
UTILITY VALVES	108
WATER THREAD VALVES	108

SECTION G PRESSURE GAUGES

CENTER BACK MOUNT (DRY)	123-126
CENTER BACK MOUT (LIQUID)	120-123
EQUALIZER (DRY)	124-126
MOUNTING BRACKETS	122
SNUBBER	122
STEM MOUNT (DRY)	123-126
STEM MOUNT (LIQUID FILLED)	120-122
VACUUM SERVICE	122

SECTION H CABINETS & ACCESSORIES

AIR GUNS AND WAND	145
BEND PROTECTORS	148
CABINETS & RACKS	
BIN CABINETS (WALL/FLOOR)	139
BIN - LARGE SLIDER CABINET (FLOOR)	136
BIN & DRAWER COMBO CABINET (FLOOR)	137
CABINET PRODUCT ASSORTMENTS (KIT)	140,141
CLAMP RACK KITS	144
DRAWER CABINETS (WALL/FLOOR)	137,138
PLASTIC DRAWERS / BINS	136-138
PRESSURE GAUGE DISPLAY	142
PRODUCT STAND ALONE - GANG HOOK	142,143
WALL HOSE DISPLAY RACK	143
CRIMPERS	151,153
CUTTERS	147
HOSE TOOLS AND ACCESSORIES	147-148
LEAK DETECTION FLUID	150
MEASURING DEVICES	147
PINCERS (EAR CLAMP)	147
PROPANE TORCHES	149
ROTO-REAL	147
SPIRAL HOSE GUARD WRAP	148
SPLIT LOOM WRAP	148
SPRING GUARD, SLEEVE	148
STOCK BOXES	144
THREAD SEALANTS	150
UNIVERSAL SWIVEL	145
WATER NOZZLES	146



HOSE & ASSEMBLIES

AIR BRAKE HOSE	2
AIR BRAKE HOSE ASSEMBLIES	3-7
AIR BRAKE HOSE ASSEMBLY KITS	6
AIR HOSE & ASSEMBLIES	23
AIR SEAT GUN SPLICER KIT.....	24
AIR SHIFT TRANSMISSION.....	24
BULKHEAD AND SLIDER HOSE ASSEMBLIES	5
COOLANT HOSE - (SILICONE).....	18
FIFTH WHEEL SLIDER ASSEMBLY	24
GRIP-TITE HOSE	20
GREASE WHIP.....	24
HEATER HOSE.....	17, 18
HYDRAULIC HOSE.....	12-23
PRESSURE WASH HOSE & ASSEMBLIES.....	26-28
RETRACTABLE AIR BRAKE COILS.....	7
STAINLESS STEEL BRAIDED HOSE-SAE 100R14 (PTFE).....	16
SUCTION HOSE - SAE 100R4	11
MEDIUM PRESSURE HYDRAULIC 100R7 HOSE.....	12
MEDIUM PRESSURE HYDRAULIC 100R8 HOSE.....	12
TRUCK HOSE - S.A.E. 100R5.....	8
TURBO-CHARGER CONNECTOR.....	18
WET LINE KITS.....	11

CAUTION:

Some agents used in the curing of rubber hose may leach out over time. Trace amounts may be enough to cause problems for sensitive hands. Gloves should be worn and care taken in handling of rubber hose products.

ATTENTION:


Certains agents chimiques utilisés dans la vulcanisation des boyaux en caoutchouc peuvent filtrer avec le temps. De simples traces de ces agents peuvent affecter les peaux sensibles. Il est recommandé de porter des gants et de manipuler les boyaux avec prudence.

ADVERTENCIA:

Algunos agentes utilizados en la cura de la manguera de caucho pueden filtrarse con el tiempo. Trazas pueden ser suficiente para causar problemas para manos sensibles. Los guantes deben usarse y cuidado tomados en el manejo de los productos de la manguera de caucho.

RUBBER AIR BRAKE HOSE

S.A.E. J1402

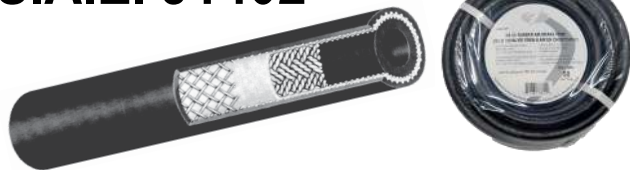

Rubber air brake hose is for use in truck and trailer air brake systems. It is certified to meet S.A.E. J1402 and D.O.T. F.M.V.S.S. 106 requirements. This air brake hose features a synthetic rubber oil-resistant tube and cover which is reinforced with synthetic cord for high performance strength.

MEETS – D.O.T. F.M.V.S.S. 106


HAB-6: MEETS TABLE AI AND TABLE AII
HAB-8: MEETS TABLE A

PART No.	Hose I.D. (IN.)	Actual O.D. (IN.)	Working Pressure (P.S.I.)	Reel/Coil Length (FT.)
HAB-4-REEL	1/4	.620	225	250
HAB-6-REEL	3/8	.750	225	250
HAB-6-50	3/8	.750	225	50
HAB-6-50P	3/8	.750	225	50
HAB-6-100	3/8	.750	225	100
HAB-6RED-REEL	3/8	.750	225	250
HAB-6BLU-REEL	3/8	.750	225	250
HAB-8-REEL	1/2	.875	225	250
HAB-8-50	1/2	.875	225	50
HAB-8-50P	1/2	.875	225	50
HAB-8-100	1/2	.875	225	100

- **TEMPERATURE:** -40°F to +212°F, -40°C to +100°C
- **PACKAGING:** Reels, 50 Ft. and 100 Ft. Coils
-50P Are Retail Packaged
- **COLOR:** Standard HAB color is Black,
Red and Blue hose is only available in -6
- **FITTINGS:** 4120RK Hose Menders (Page 370)
1490 Series Page 36
- **FACTORY ASSEMBLIES:** Page 3 - 7

ARCTIC AIR BRAKE HOSE

S.A.E. J1402

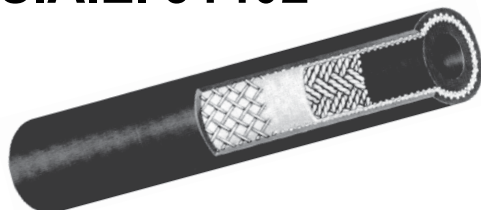

Rubber air brake hose is for use in truck and trailer air brake systems. It is certified to meet S.A.E. J1402 and D.O.T. F.M.V.S.S. 106 requirements. This air brake hose features a synthetic rubber tube and cover designed for low temperatures. It is oil-resistant and reinforced with spiral polyester cord for high performance strength.

MEETS – D.O.T. F.M.V.S.S. 106

HABA-6: MEETS TABLE AI AND TABLE AII
HABA-8: MEETS TABLE A

PART No.	Hose O.D. (IN.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)	Reel/Coil Length (FT.)
HABA-6-REEL	3/8	.750	200	250
HABA-8-REEL	1/2	.875	200	250

- **TEMPERATURE:** -65°F to +212°F, -54°C to +100°C
- **PACKAGING:** Reels
- **FITTINGS:** 1490 Series Page 36
- **FACTORY ASSEMBLIES:** Page 3 - 7

AIR BRAKE HOSE ASSEMBLY KITS



Ideal for start-up, each Fairview air brake hose assembly kit contains three of each of our most popular assemblies (45 hoses total)



HAR-15 (Rack Only)

PART No. HAB-6-KIT 3/8" I.D. Hose Assemblies				PART No. HAB-8-KIT 1/2" I.D. Hose Assemblies			
3/8 Swivel X 3/8 Rigid Male Pipe (For Swivel b/e use suffix -SW)				3/8 Swivel X 3/8 Rigid Male Pipe (For Swivel b/e use suffix -SW)			
Each kit contains 3 of each hose:				Each kit contains 3 of each hose:			
PART No.	Length (IN.)	PART No.	Length (IN.)	PART No.	Length (IN.)	PART No.	Length (IN.)
HAB-6-18C	18	HAB-6-32C	32	HAB-6-60C	60	HAB-8-20C	20
HAB-6-20C	20	HAB-6-36C	36	HAB-6-72C	72	HAB-8-24C	24
HAB-6-24C	24	HAB-6-36C-SW	36	HAB-6-108C	108	HAB-8-26C	26
HAB-6-26C	26	HAB-6-40C	40	HAR-15 (Rack)		HAB-8-28C	28
HAB-6-28C	28	HAB-6-42C	42			HAB-8-30C	30
HAB-6-30C	30	HAB-6-48C	48			HAB-8-32C	32
						HAB-8-34C	32
						HAB-8-36C	36
						HAB-8-36C-SW	36
						HAB-8-42C	42
						HAB-8-48C	48
						HAB-8-54C	54
						HAB-8-60C	60
						HAB-8-72C	72
						HAB-8-96C	96
						HAR-15 (Rack)	

CRIMPED AIR BRAKE HOSE ASSEMBLIES D.O.T.

Fairview

- D.O.T. Listed
- Many Other Common Lengths Available From Stock. Custom Lengths On Request.
- For Assemblies Requiring -65°F, -54°C Cold Weather Arctic Hose Simply Replace "HAB" Prefix With "HABA" (HABA-6-24B) • Bulk Hose Page 2 • Display Rack Page 2, 143

Length	Tolerance
Up to 36"	±1/4"
Above 36"	±1% of length

• NOTE: ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

 SWIVEL MALE PIPE	3/8 I.D. HOSE	 RIGID MALE PIPE	PART No.	Pipe Size	Hose I.D. (IN.)	Hose
			HAB-6-__B	1/4	3/8	Rubber
			HAB-6-__C	3/8	3/8	Rubber
			HABA-6-__B	1/4	3/8	Arctic Hose
			HABA-6-__C	3/8	3/8	Arctic Hose

 SWIVEL MALE PIPE	1/2 I.D. HOSE	 RIGID MALE PIPE	PART No.	Pipe Size	Hose I.D. (IN.)	Hose
			HAB-8-__C	3/8	1/2	Rubber
			HAB-8-__CD	1/2 TO 3/8	1/2	Rubber
			HABA-8-__C	3/8	1/2	Arctic Hose
			HABA-8-__CD	1/2 TO 3/8	1/2	Arctic Hose

 LIVE SWIVEL MALE PIPE		 RIGID MALE PIPE	PART No.	Pipe Size	Hose I.D. (IN.)	Hose
			HAB-6-__BLSB	1/4	3/8	Rubber
			HAB-6-__CLSC	3/8	3/8	Rubber
			HABA-6-__BLSB	1/4	3/8	Arctic Hose
			HABA-6-__CLSC	3/8	3/8	Arctic Hose

 LIVE SWIVEL MALE PIPE	1/2 I.D. HOSE	 RIGID MALE PIPE	PART No.	Pipe Size	Hose I.D. (IN.)	Hose
			HAB-8-__CLSC	3/8	1/2	Rubber
			HAB-8-__DLSC	1/2 TO 3/8	1/2	Rubber
			HABA-8-__CLSC	3/8	1/2	Arctic Hose
			HABA-8-__DLSC	1/2 TO 3/8	1/2	Arctic Hose

 3/8 FEMALE SWIVEL FLARE	3/8 I.D. HOSE	 3/8 FEMALE SWIVEL FLARE	PART No.	Flare Size	Hose I.D. (IN.)	Hose
			HAB-6-__FS	3/8	3/8	Rubber
			HABA-6-__FS	3/8	3/8	Arctic Hose

 1/2 FEMALE SWIVEL FLARE	1/2 I.D. HOSE	 1/2 FEMALE SWIVEL FLARE	PART No.	Flare Size	Hose I.D. (IN.)	Hose
			HAB-8-__FS	1/2	1/2	Rubber
			HABA-8-__FS	1/2	1/2	Arctic Hose

CAUTION: Some agents used in the curing of rubber hose may leach out over time. Trace amounts may be enough to cause problems for sensitive hands. Gloves should be worn and care taken in handling of rubber hose products.

- D.O.T. Listed
- Many Other Common Lengths Available From Stock. Custom Lengths On Request.
- For Assemblies Requiring -65°F, -54°C Cold Weather Arctic Hose Simply Replace "HAB" Prefix With "HABA" (HABA-6-24B) • Bulk Hose Page 2 • Display Rack Page 2, 143

Length	Tolerance
Up to 36"	±1/4"
Above 36"	±1% of length

• NOTE: ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.



**SWIVEL
MALE PIPE**

3/8 I.D. HOSE

**SWIVEL
MALE PIPE**

PART No.

HAB-6-__B-SW

HAB-6-__C-SW

HABA-6-__C-SW

Pipe
Size

1/4

3/8

3/8

Hose I.D.
(IN.)

1/4

3/8

3/8

Hose
Rubber
Rubber

Arctic Hose



**SWIVEL
MALE PIPE**

1/2 I.D. HOSE

**SWIVEL
MALE PIPE**

PART No.

HAB-8-__C-SW

HAB-8-__D-SW

HABA-8-__C-SW

HABA-8-__D-SW

Pipe
Size

3/8

1/2

3/8

1/2

Hose I.D.
(IN.)

1/2

1/2

1/2

1/2

Hose
Rubber
Rubber

Arctic Hose

Arctic Hose



**3/8
LIVE SWIVEL
MALE PIPE**

3/8 I.D. HOSE

**3/8
LIVE SWIVEL
MALE PIPE**

PART No.

HAB-6-__C-LSW

HABA-6-__C-LSW

Pipe
Size

3/8

3/8

Hose I.D.
(IN.)

3/8

3/8

Hose
Rubber

Arctic Hose

**LIVE SWIVEL ENDS
(Still swivels once connected)**

PART No.

HAB-8-__C-LSW

HABA-8-__C-LSW

Pipe
Size

3/8

3/8

Hose I.D.
(IN.)

1/2

1/2

Hose
Rubber

Arctic Hose



**LIVE SWIVEL
MALE PIPE**

1/2 I.D. HOSE

**LIVE SWIVEL
MALE PIPE**

PART No.

HAB-8-__D-LSW

HABA-8-__D-LSW

Pipe
Size

1/2

1/2

Hose I.D.
(IN.)

1/2

1/2

Hose
Rubber

Arctic Hose

**LIVE SWIVEL ENDS
(Still swivels once connected)**



**3/8
LIVE SWIVEL
MALE PIPE**

1/2 I.D. HOSE

**3/8
SWIVEL
MALE PIPE**

PART No.

HAB-8-__C-LSWSW

HABA-8-__C-LSWSW

Pipe
Size

3/8

3/8

Hose I.D.
(IN.)

1/2

1/2

Hose
Rubber

Arctic Hose

CAUTION: Some agents used in the curing of rubber hose may leach out over time. Trace amounts may be enough to cause problems for sensitive hands. Gloves should be worn and care taken in handling of rubber hose products.

- D.O.T. Listed
- Many Other Common Lengths Available From Stock. Custom Lengths On Request.
- For Assemblies Requiring -65°F, -54°C Cold Weather Arctic Hose Simply Replace "HAB" Prefix With "HABA" (HABA-6-24B) • Bulk Hose Page 2 • Display Rack Page 2, 143

Length	Tolerance
Up to 36"	±1/4"
Above 36"	±1% of length

BULKHEAD HOSE ASSEMBLY

		PART No.	Size	F Pipe Size	SW Pipe I.D. (IN.)	Hose. Hose
1/2 MALE BULKHEAD x 1/4 FEMALE PIPE		HAB-6-__BHLSC-SG	1/4	3/8	3/8	Rubber
3/8 I.D. HOSE WITH SPRING GUARDS (-SG)		HABA-6-__BHLSC-SG	1/4	3/8	3/8	Arctic Hose
3/8 LIVE SWIVEL MALE PIPE		• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.				
LIVE SWIVEL END (Still swivels once connected)						

SERVICEABLE SLIDER HOSE ASSEMBLY

		PART No.	Size	LSW Pipe Size	Tube I.D. (IN.)	Hose Hose
DOT AIR BRAKE TUBE		HAB-6-__SABH6-SG	3/8	3/8	3/8	Rubber
3/8 I.D. HOSE WITH SPRING GUARDS (-SG)		HAB-6-__SABH8-SG	3/8	1/2	3/8	Rubber
3/8 LIVE SWIVEL MALE PIPE		HABA-6-__SABH6-SG	3/8	3/8	3/8	Arctic Hose
LIVE SWIVEL END (Still swivels once connected)		HABA-6-__SABH8-SG	3/8	1/2	3/8	Arctic Hose
		• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.				

CONTROL LINE SLIDER HOSE ASSEMBLY

		PART No.	Size	AB Tube I.D. (IN.)	Hose Hose
DOT AIR BRAKE TUBE (7/8-20 MOUNTING THREAD)		HAB-4-__ABH6	3/8	1/4	Rubber
1/4 I.D. HOSE WITH SPRING GUARDS (-SG)		HABA-4-__ABH6	3/8	1/4	Arctic Hose
DOT AIR BRAKE TUBE		• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.			
		• SEE PAGE 24 FOR AIR SHIFT TRANSMISSION ASSEMBLIES.			

SLIDER AXLE HOSE ASSEMBLY

		PART No.	Size	AB Tube I.D. (IN.)	Hose Hose
DOT AIR BRAKE TUBE (7/8-20 MOUNTING THREAD)		HAB-6-__ABH6-SG	3/8	3/8	Rubber
1/4 I.D. HOSE WITH SPRING GUARDS (-SG)		HAB-6-__ABH8-SG	1/2	3/8	Rubber
DOT AIR BRAKE TUBE		HAB-8-__ABH8-SG	1/2	1/2	Rubber
		HABA-6-__ABH6-SG	3/8	3/8	Arctic Hose
		HABA-6-__ABH8-SG	1/2	3/8	Arctic Hose
		HABA-8-__ABH8-SG	1/2	1/2	Arctic Hose
		• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.			

CAUTION: Some agents used in the curing of rubber hose may leach out over time. Trace amounts may be enough to cause problems for sensitive hands. Gloves should be worn and care taken in handling of rubber hose products.

AIR BRAKE ASSEMBLIES D.O.T. (WITH SPRING GUARD)



3/8 I.D. HOSE

3/8 SWIVEL
MALE PIPE

1/2 RIGID
MALE PIPE

PART No.	Length (IN.)	Hose I.D. (IN.)
HAB-6-13.62CD-SG	13.62	3/8
HAB-8-13.62CD-SG	13.62	1/2

NOTE: ADDITIONAL LENGTHS AVAILABLE ON REQUEST.

AIR BRAKE ASSEMBLIES D.O.T. (GLADHAND ADAPTER)



- Greater Flexibility • Easy Attachment of Gladhand
- Cost Effective Alternative to the Swing Away Gladhand

PART No.
HAB-NOSE BOX-1

Description:

- 3/8" I.D. Hose
- 1/2 MPT Reusable End
- 1/2 MPT Crimp End
- 6" Overall Length

PART No.
HAB-NOSE BOX-2

Description:

- 3/8" I.D. Hose
- 1/2 MPT Reusable End
- 1/2 FPT Crimp End
- 6" Overall Length

ALTERNATIVE TO A SOLID SWIVEL GLADHAND.
GLADHAND SOLD SEPARATELY PAGE



3-IN-1 AIR BRAKE & ELECTRICAL LINES

Fairview's **ARLECTRIC** 3-in-1 Air Brake & Electric assembly set was developed to simplify and protect air brake and electrical lines between the tractor and the trailer. The unique live swivel hose ends and superior flexibility of the **ARLECTRIC** set promotes longer hose life, helps prevent tangling and means less time is required to make connections.

Live
Swivel
All Ends

Color coded
spring ends



Technical Specifications:

- MEETS OR EXCEEDS: S.A.E J2394, J560, J1402 D.O.T F.M.V.S.S 106 TYPE F
- TEMPERATURE: -85°F to +212°F, -65°C to +100°C
- FITTINGS: 1/2" live swivel male pipe each end



Limited
Warranty

www.fairviewfittings.com

Contact Fairview for Details....

ARLECTRIC is a registered trademark
of Fairview
Oakville, ON L6H 6G1 / Wheatfield, NY 14120




**Air Brake / Electric
Line Bundles**



- **MEETS OR EXCEEDS:** S.A.E J2394, J560, J1402 D.O.T F.M.V.S.S 106 TYPE F
- **TEMPERATURE:** -85°F to +212°F, -65°C to +100°C
- **FITTINGS:** 1/2" live swivel male pipe each end • Superior flexibility, promotes longer hose life

PART No.	3-in-1 ELECTRICAL & AIR BRAKE LINES	Length (FT.)
HAB3-ABS-12	3/8 7-Way Green ABS cable & AB lines; color coded rubber grip	12
HAB3-ABS-15	3/8 7-Way Green ABS cable & AB lines; color coded rubber grip	15
HAB3-ABS-20	3/8 7-Way Green ABS cable & AB lines; color coded rubber grip	20

TRUCK TO TRAILER RUBBER AIR BRAKE LINES

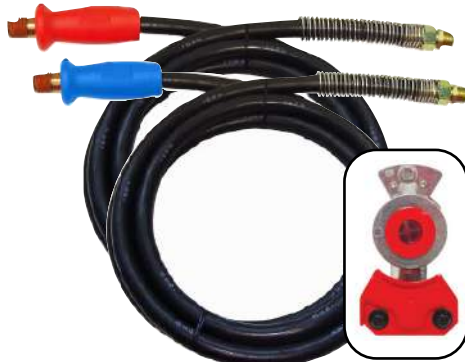

- SAE J1402 rubber air brake hose with factory crimped ends.
- Red or Blue GLAD GRIPS for easy glad hand connection, identification and hose bend protection
- Swivel fitting with spring guard for easy end installation.
- Internal live swivel at gladhand grip for added strain relief.
- Assemblies meet D.O.T F.M.V.S.S 106

PART No.	Length (FT.)	Swivel Male Pipe	Low Temp.
HABRED-15GGSG	15	1/2	-40°F, -40°C
HABBLU-15GGSG	15	1/2	-40°F, -40°C
HABRED-20GGSG	20	1/2	-40°F, -40°C
HABBLU-20GGSG	20	1/2	-40°F, -40°C

To Order
Complete
with Gladhand,
Suffix
Part No. with -GH



Featuring
Live Swivels
on Both
Ends.

Part numbers above are for ONE Assembly combined with Glad Grip & Spring Guard.


PART No.	Length (FT.)	Low Temp.
HABSPW-15GGSG	15	-40°F, -40°C
HABSPW-20GGSG	20	-40°F, -40°C



Spiral Hose
Guard Wrap
Available

Part numbers above are for TWO Assemblies combined with Spiral Hose Guard Wrap.

S.A.E. J844 RETRACTABLE AIR BRAKE COILS

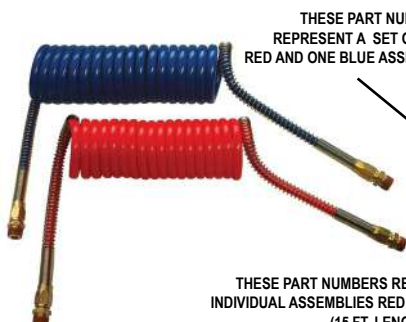

THESE PART NUMBERS
REPRESENT A SET OF ONE
RED AND ONE BLUE ASSEMBLY.

THESE PART NUMBERS REPRESENT
INDIVIDUAL ASSEMBLIES RED OR BLUE.
(15 FT. LENGTH ONLY)

- **MEETS:** S.A.E. J884D Type 3B D.O.T. F.M.V.S.S. 106
- **COLORS:** Red, Blue
- **TEMPERATURE:** -85°F to +200°F, -65°C to +93°C
- **PACKAGING:** As a Set of One Red and One Blue.
- **FITTINGS:** 1/2 Male Pipe Each End

LOW TEMPERATURE RATED

-85°F
(-65°C)

PART No.	Working Length (FT.)	Tube O.D. (IN.)	Pigtail Length (IN.)	Male Pipe Ends	Low Temp
1486L-8-15	15	1/2	12"	1/2	-85°F, -65°C
1486L-8-20	20	1/2	12"	1/2	-85°F, -65°C
1486L-8RED-15	15	1/2	12"	1/2	-85°F, -65°C
1486L-8BLU-15	15	1/2	12"	1/2	-85°F, -65°C



S.A.E. 100R5 S.A.E. J1402

MEETS D.O.T. F.M.V.S.S. - 106
ONE WIRE BRAID
TWO COTTON BRAIDS

For medium pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils, air and water. Recommended for power steering and power steering return lines, fuel filters, turbo chargers, tilt lines, lube oil lines and machine tools. Not suitable for use with phosphate esters.

- **CONSTRUCTION:** Textile inner braid with single wire braid reinforcement.
- **TUBE:** Oil and heat-resistant synthetic rubber inner tube.
- **COVER:** Textile outer braid and a cotton braided black cover.
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +212°F, -40°C to +100°C
- **PACKAGING:** For reel lengths and carton quantities see below.
- **FITTINGS:** SCW500 Crimp (Page 70)
SR500 Reusable (Page 71)

* Max. temperature recommended for air +140F, +60C

PART No.	Nominal I.D.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel Length (FT.)
HR5-4-50	1/4	3/16	.52	3,000	12,000	3.00	.16	50
HR5-4-100	1/4	3/16	.52	3,000	12,000	3.00	.16	100
HR5-4-REEL	1/4	3/16	.52	3,000	12,000	3.00	.16	250
HR5-5-100	5/16	1/4	.58	2,500	10,000	3.38	.18	100
HR5-5-REEL	5/16	1/4	.58	2,500	10,000	3.38	.18	250
HR5-6-50	3/8	5/16	.68	2,250	9,000	4.00	.22	50
HR5-6-100	3/8	5/16	.68	2,250	9,000	4.00	.22	100
HR5-6-REEL	3/8	5/16	.68	2,250	9,000	4.00	.22	250
HR5-8-50	1/2	13/32	.77	2,000	8,000	4.62	.27	50
HR5-8-100	1/2	13/32	.77	2,000	8,000	4.62	.27	100
HR5-8-REEL	1/2	13/32	.77	2,000	8,000	4.62	.27	250
HR5-10-50	5/8	1/2	.92	1,750	7,000	5.50	.34	50
HR5-10-100	5/8	1/2	.92	1,750	7,000	5.50	.34	100
HR5-10-REEL	5/8	1/2	.92	1,750	7,000	5.50	.34	250
HR5-12-50	3/4	5/8	1.08	1,500	6,000	6.50	.42	50
HR5-12-100	3/4	5/8	1.08	1,500	6,000	6.50	.42	100
HR5-12-REEL	3/4	5/8	1.08	1,500	6,000	6.50	.42	250
HR5-16-50	1	7/8	1.24	800	3,200	7.38	.44	50
HR5-16-100	1	7/8	1.24	800	3,200	7.38	.44	100
HR5-16-REEL	1	7/8	1.24	800	3,200	7.38	.44	250
HR5-20-CTN	1-1/4	1-1/8	1.50	625	2,500	9.00	.52	100
HR5-24-CTN	1-1/2	1-3/8	1.75	500	2,000	10.50	.62	100
HR5-32-CTN	2	1-13/16	2.22	350	1,400	13.25	.93	100

MEDIUM PRESSURE HOSE



Meets or Exceeds S.A.E. 100R1 TYPE AT EN853 1SN

ONE WIRE BRAID (NON SKIVE)
COVER IS NOT REMOVED

For medium to high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils and water. Not suitable for use with phosphate esters.

- **CONSTRUCTION:** One ply of steel wire braid.
- **TUBE:** Oil and heat-resistant synthetic rubber inner tube.
- **COVER:** Oil, weather and flame-resistant synthetic rubber cover.
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +250°F, -40°C to +121°C
- **PACKAGING:** For reel lengths and carton quantities see below.
- **FITTINGS:** SC600 Compression (Page 45 - 46)
SC900 Bite-To-The-Wire (Page 44,47)
SRT100 Reusable (Page 50)
- **LOW TEMPERATURE:** -67°F to +200°F, -55°C to +93°C Available
change prefix to T1SNLT-. Minimum runs may apply.

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel Lengths (FT.)
T1SN-4-REEL	1/4	.531	3,260	13,000	4.00	.17	328
T1SN-6-REEL	3/8	.687	2,610	10,400	5.00	.26	328
T1SN-8-REEL	1/2	.812	2,320	9,300	7.00	.31	328
T1SN-12-REEL	3/4	1.093	1,520	6,100	9.50	.47	164
T1SN-16-REEL	1	1.409	1,280	5,075	11.80	.61	164

HIGH PRESSURE HOSE



Meets or Exceeds S.A.E. 100R2 TYPE AT EN853 2SN

TWO WIRE BRAID

For high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils and water. Not suitable for use with phosphate esters.

- **CONSTRUCTION:** Two plies of steel wire braid.
- **TUBE:** Oil and heat-resistant synthetic rubber inner tube.
- **COVER:** Oil, weather and flame-resistant synthetic rubber cover.
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +250°F, -40°C to +121°C
- **PACKAGING:** For reel lengths and carton quantities see below.
- **FITTINGS:** SC600 Compression (Page 45 - 46)
SC900 Bite-To-The-Wire (Page 44,47)
SRT200 Reusable (Page 50)
- **LOW TEMPERATURE:** -67°F to +200°F, -55°C to +93°C Available
change prefix to T2SNLT-. Minimum runs may apply.

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel Lengths (FT.)
T2SN-4-REEL	1/4	.593	5,800	23,200	4.00	.26	328
T2SN-6-REEL	3/8	.750	4,785	19,100	5.00	.38	328
T2SN-8-REEL	1/2	.875	3,990	16,000	7.00	.48	328
T2SN-12-REEL	3/4	1.187	3,120	12,500	9.50	.61	164
T2SN-16-REEL	1	1.500	2,390	9,500	12.00	.95	164

MEDIUM PRESSURE HOSE (SMOOTH COVER)

**S.A.E. 100R1 TYPE AT
EN853 1SN**
ONE WIRE BRAID

For medium to high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils and water. Not suitable for use with phosphate esters.

- **CONSTRUCTION:** One ply of steel wire braid.
- **TUBE:** Oil and heat-resistant synthetic rubber inner tube.
- **COVER:** Oil, weather and flame-resistant M.S.H.A. Approved synthetic rubber cover.
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +212°F, -40°C to +100°C
- **PACKAGING:** For reel lengths and carton quantities see below.
- **FITTINGS:** SC600 Compression (Page 45 - 46)
SC900 Bite-To-The-Wire (Page 44, 47)
SRT100 Reusable (Page 50)

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel Lengths (FT.)
T1-4-REEL	1/4	.520	3,265	13,053	3.94	.14	300
T1-6-REEL	3/8	.677	2,610	10,443	4.92	.23	300
T1-8-REEL	1/2	.803	2,320	9,282	7.09	.28	300
T1-12-REEL	3/4	1.094	1,525	6,092	9.45	.42	250

HIGH PRESSURE HOSE (SMOOTH COVER)

**S.A.E. 100R2 TYPE AT
EN853 2SN**
TWO WIRE BRAID

For high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils and water. Not suitable for use with phosphate esters.

- **CONSTRUCTION:** Two Plies of Steel Wire Braid.
- **TUBE:** Oil and heat-resistant synthetic rubber inner tube.
- **COVER:** Oil, weather and flame-resistant M.S.H.A. Approved synthetic rubber cover.
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +212°F, -40°C to +100°C
- **PACKAGING:** For reel lengths and carton quantities see below.
- **FITTINGS:** SC600 Compression (Page 45 - 46)
SC900 Bite-To-The-Wire (Page 44, 47)
SRT200 Reusable (Page 50)

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel Lengths (FT.)
T2-4-REEL	1/4	.591	5,800	23,206	3.94	.22	300
T2-5-REEL	5/16	.650	5,075	20,305	4.53	.27	300
T2-6-REEL	3/8	.748	4,800	19,145	4.92	.36	300
T2-8-REEL	1/2	.870	4,000	15,954	7.09	.42	300
T2-10-REEL	5/8	1.000	3,625	14,504	8.07	.52	250
T2-12-REEL	3/4	1.161	3,100	12,473	9.45	.64	250
T2-16-REEL	1	1.500	2,400	9,573	11.81	.95	150
T2-20-CTN	1-1/4	1.866	1,820	7,252	16.54	1.25	130

SUCTION HOSE



Meets or Exceeds Performance Characteristics S.A.E. 100R4

TWO TEXTILE SPIRAL PLIES
WITH WIRE HELIX

For hydraulic suction (29 Inch/hg) and low pressure hydraulic return lines. Will handle petroleum based hydraulic fluids, diesel fuels, water and lubricating oils. Wire helix prevents collapsing under vacuum service. Not suitable for use with phosphate esters.

- **CONSTRUCTION:** Two textile spiral plies with wire helix.
- **TUBE:** Oil and heat-resistant synthetic rubber inner tube.
- **MSHA Approved**
- **COVER:** Oil, weather and flame-resistant M.S.H.A. Approved synthetic rubber cover.
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +250°F, -40°C to +121°C
- **PACKAGING:** 50 FT. and 100 FT. Coils
- **FITTINGS:** SC600 Compression (Page 45 - 46)
(Up to 1-1/4 Size)
S1100 and SO1100 Steel Hose Inserts (Page 49)
Steel Combination Nipples and Hose Menders (Page 41)

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Vacuum Service (IN./HG)	Approx. Wgt. / Ft. (LBS.)	Coil Length (FT.)
HR4-12-100	3/4	1.160	300	1,200	4.90	29	.60	100
HR4-16-100	1	1.480	250	1,000	5.90	29	.70	100
HR4-20-100	1-1/4	1.770	200	800	7.87	29	.90	100
HR4-24-100	1-1/2	2.050	150	600	10.00	29	1.20	100
HR4-32-100	2	2.500	100	400	11.80	29	1.50	100

WET LINE KITS

A Wet Line Kit uses a hydraulic pump installed on a trailer to power anything with a hydraulic motor, such as a boom or crane, or the hydraulics on a dump truck. The Wet Line Kit is attached to the truck's PTO (Power Take Off) and transfers an engine's mechanical power to another piece of equipment.

CUSTOM KITS AVAILABLE



HYDRAULIC ADAPTERS



T-BOLT CLAMPS



HYDRAULIC ASSEMBLIES



BALL VALVES

HOSE CONNECTOR



RETURN LINES



HYDRAULIC WING Q.D. COUPLERS



MEDIUM PRESSURE HOSE



S.A.E. 100R7

Meets or Exceeds S.A.E. J517

Exceeds 100R7 Impulse Requirements

Lightweight and Flexible

For medium pressure hydraulic service in the handling of most hydraulic fluids, diesel fuels, water and lubricating oils. Not suitable for use with phosphate esters. This hose combines the best features of conventional rubber hose with the unique advantages of synthetic materials. Recommended use: Handheld grease guns.

- **CONSTRUCTION:** High tensile strength fiber reinforcement braided synthetic fiber.
- **TUBE:** Oil and heat-resistant nylon inner tube.
- **COVER:** Resistant polyurethane, pin pricked cover.
- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C
- **PACKAGING:** Reels
- **COLOR:** Black
- **FITTINGS:** SC700 (for 1/8, 3/16, and 1/4 sizes Page 49), SCTP (Page 54)

PART No.	Nominal Hose I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Weight / Ft. (LBS.)	Reel Lengths (FT.)
HR7-2-REEL	1/8	.322	3,000	12,000	.75	.03	250
HR7-3-REEL	3/16	.415	3,000	12,000	.75	.05	250
HR7-4-REEL	1/4	.496	2,750	11,000	1.50	.06	250
HR7-5-REEL	5/16	.580	2,500	10,000	1.75	.08	250
HR7-6-REEL	3/8	.650	2,250	9,000	2.00	.11	250
HR7-8-REEL	1/2	.834	2,000	8,000	3.00	.16	250
HR7-12-REEL	3/4	1.050	1,250	5,000	6.00	.22	250

HR8 HIGH PRESSURE HOSE



Meets or exceeds S.A.E. 100R8

Specifications

Extremely Durable

Highly Abrasion Resistant

FEATURES: Meets or exceeds SAE 100R8 impulse requirements, good kink resistance, lightweight; less than about half of comparable rubber wire hose. Highly abrasion resistant outer cover, the inner tube will not chip or peel in service.

TYPICAL APPLICATIONS: Ideal for use in applications where a non-conductive high pressure hydraulic hose is required; industrial hydraulic construction, material handling, agricultural equipment, hydraulic tools, lubrication lines and hydraulic lifts.

- **CONSTRUCTION:** Aramid fiber reinforcement
- **TUBE:** Seamless polyester inner tube
- **COVER:** Highly abrasion resistant polyurethane pinpricked cover
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C
- **FITTINGS:** SCTP (Page 54)

PART No.	Nominal I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt./Ft. (LBS.)	Reel Length (FT.)
HR8-4-REEL	1/4	.485	5,000	20,000	2.00	.070	250
HR8-6-REEL	3/8	.630	4,000	16,000	2.50	.100	250
HR8-8-REEL	1/2	.820	3,500	14,000	3.50	.170	250
HR8-12-REEL	3/4	1.050	2,250	9,000	4.50	.200	250

HIGH PRESSURE HOSE



S.A.E. 100R12

EN856 4SN

FOUR SPIRAL WIRE

For high pressure hydraulic service in the handling of most hydraulic fluids, diesel fuels, water and lubricating oils. Not suitable for use with phosphate esters.

- **CONSTRUCTION:**
Four spirals of high tensile steel wire.
- **TUBE:** Oil and heat-resistant synthetic rubber.
- **COVER:** MSHA approved fire-resistant, abrasion, ozone, oil and weather resistant synthetic rubber cover.
- **TEMPERATURE:** -40°F to +248°F, -40°C to +121°C
- **PACKAGING:** Coils
- **FITTINGS:** SCT900MS Bite-To-The-Wire (Page 47)
- * **S.A.E. WORKING PRESSURES SHOWN**
- **EXTRA FLEXIBLE VERSION AVAILABLE:**
Change PART No. to HRA12EF Minimum runs apply.
- **LOW TEMPERATURE:** -67°F to +200°F, -55°C to +93°C Available
Change PART No. to HRA12LT Minimum runs apply.

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	* Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Coil Lengths (FT.)
HRA12-8	1/2	.937	4,060	16,240	7.09	.504	148
HRA12-12	3/4	1.197	4,060	16,240	9.45	.726	148
HRA12-16	1	1.476	4,060	16,240	11.81	1.115	148
HRA12-20	1-1/4	1.850	3,050	12,180	16.53	1.619	148
HRA12-24	1-1/2	2.106	2,540	10,150	19.70	1.848	148

LOW TEMPERATURE HIGH PRESSURE HOSE



EXTREMELY FLEXIBLE

S.A.E. 100R16 / DIN 2SC

TWO WIRE BRAID

For hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels lubricating oils and water. Not suitable with phosphate esters.

- **CONSTRUCTION:** Two Plies of Steel Wire Braid.
- **TUBE:** Oil and Heat-Resistant Synthetic Rubber Inner Tube
- **COVER:** Oil, weather and flame-resistant M.S.H.A.
Approved synthetic rubber cover.
- **COLOUR:** Black
- **LOW TEMPERATURE:** -67°F to +260°F, -55°C to +127°C
- **PACKAGING:** For Reel Lengths see below.
- **FITTINGS:** SC900 Bite-To-The-Wire (Page 44, 47)

Fairview recommends the use of Bite-To-The-Wire fittings only for our Low Temperature 100R16 hose.

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel Lengths (FT.)
HR16LT-4-REEL	1/4	.53	6,500	26,000	2.00	.20 lbs.	328
HR16LT-6-REEL	3/8	.69	5,300	21,200	2.50	.30 lbs.	328
HR16LT-8-REEL	1/2	.81	4,500	18,000	3.50	.39 lbs.	328
HR16LT-10-REEL	5/8	.93	4,000	16,000	4.00	.46 lbs.	250
HR16LT-12-REEL	3/4	1.10	3,500	14,000	4.75	.59 lbs.	164
HR16LT-16-REEL	1	1.42	3,000	12,000	6.00	.85 lbs.	164

LOW TEMPERATURE MEDIUM PRESSURE HOSE



S.A.E. 100R17



For Low Temperature medium to high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels lubricating oils and water. Not suitable with phosphate esters.

- **CONSTRUCTION:** One braid of high tensile steel wire reinforcement for 1/4" ID through to 1/2" ID hose. • Two braids of high tensile steel wire reinforcement for 3/4" ID through to 1" ID hose.
- **TUBE:** Oil and heat resistant synthetic rubber inner tube
- **COVER:** Oil, weather and flame-resistant synthetic rubber cover.
- **COLOUR:** Black
- **LOW TEMPERATURE:** -67°F to +212°F, -55°C to +100°C
- **PACKAGING:** For reel lengths see below.
- **FITTINGS:** SC900 Bite-To-The-Wire (Page 44, 47)

Fairview recommends the use of Bite-To-The-Wire fittings only for our low temperature 100R17 hose.

PART No.	Actual I.D. (IN.)	Nominal Hose O.D. (IN.)	Maximum Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt. / Ft. (LBS.)	Reel Lengths (FT.)
HR17LT-4-REEL	1/4	.480	.500	3,000	12,000	2.00	.12	328
HR17LT-6-REEL	3/8	.610	.630	3,000	12,000	2.50	.18	328
HR17LT-8-REEL	1/2	.750	.770	3,000	12,000	3.50	.25	328
HR17LT-12-REEL	3/4	1.090	1.114	3,000	12,000	4.72	.58	164
HR17LT-16-REEL	1	1.420	1.441	3,000	12,000	5.90	.86	164

HR18 CONSTANT PRESSURE HOSE



S.A.E. 100R18


Meets or Exceeds S.A.E. J517 Specifications

FEATURES: Exceeds 100R18 Impulse requirements • Lightweight and Flexible • Ideal for general hydraulic service.

TYPICAL APPLICATIONS: General purpose high pressure hydraulic applications • industrial Hydraulic • Construction • Material Handling • Agricultural Equipment • Hydraulic Tools • Lubrication Lines and Man Lifts

- **CONSTRUCTION:** Braided synthetic fiber reinforcement
- **TUBE:** Seamless polyester inner tube
- **COVER:** Abrasion resistant polyurethane cover
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C, Petroleum-based hydraulic fluids
- **TEMPERATURE:** -40°F to +140°F, -40°C to +60°C, with water-based or fire resistant fluids
- **FITTINGS:** SCTP (Page 54)

PART No.	Nominal Hose I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)	Approx. Wgt./Ft. (LBS.)	Reel Length (FT.)
HR18-4-REEL	1/4	.496	3,000	12,000	1.50	.064	250
HR18-6-REEL	3/8	.650	3,000	12,000	2.00	.110	250
HR18-8-REEL	1/2	.834	3,000	12,000	3.00	.160	250

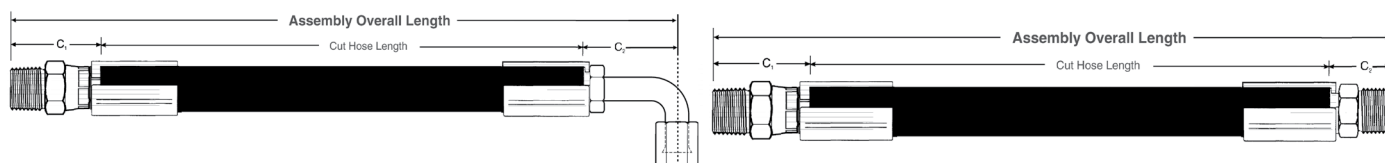

Length Tolerances for Hydraulic Hose Assemblies and Specified Hose Lengths.


Length	Tolerance
0 to and including 36"	±1/4"
Above 36"	±1% of length measured to the nearest 1/8 of an inch.

ASSEMBLY OVERALL LENGTH

The overall length of the assembly is measured in Inches including hose ends. Example: 2' = 24.00
10' = 120.0
100' = 1200.

④ Must fill all 5 spaces in the Overall Length Code

SAMPLE HOSE ASSEMBLY PART NUMBER

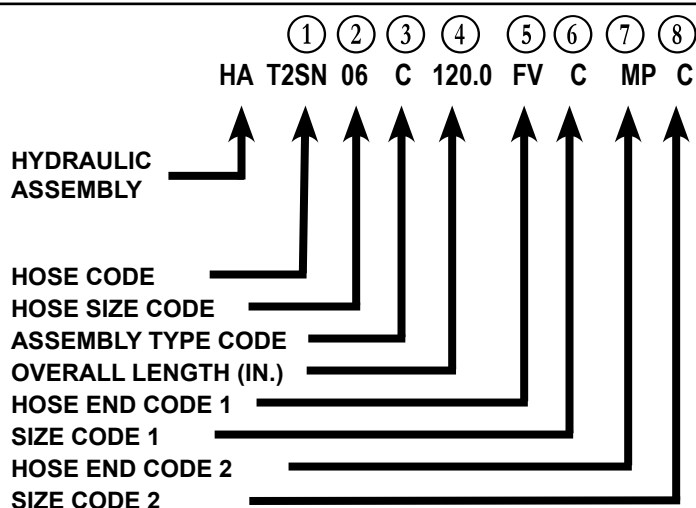

⑤ ⑦ HOSE END FITTING CODES

CODE	DESCRIPTION
B9	Female British Parallel 90° Elbow
BF	Female BSPP Swivel Female Cone
BM	Female BSPP Swivel Male Cone
FH	Female Heavy Metric
H9	Female Heavy Metric 90° Metric
JS	Female JIS 30° Flare
KM	Female Komatsu 30° Flare
FL	Female Light Metric
L9	Female Light Metric 90° Elbow
FV	Female NPSM Swivel
RS	Female O-Ring Face Seal
R5	Female O-Ring Face Seal 45° Elbow
R9	Female O-Ring Face Seal 90° Elbow
FP	Female Pipe
FJ	Female Swivel 37° S.A.E.
J5	Female Swivel 37° S.A.E. 45° Elbow
J9	Female Swivel 37° S.A.E. 90° Elbow
JL	Female Swivel 37° S.A.E. 90° Elbow (Long)
FS	Female Swivel 45° S.A.E.
S5	Female Swivel 45° S.A.E. 45° Elbow
S9	Female Swivel 45° S.A.E. 90° Elbow

① HOSE CODES

CODE	DESCRIPTION
T1SN	S.A.E. 100R1 ACCUTEK
T1XX	S.A.E. 100R1 KOMAN
T2SN	S.A.E. 100R2 ACCUTEK
T2XX	S.A.E. 100R2 KOMAN
HR4X	S.A.E. 100R4
HR5X	S.A.E. 100R5
HR7X	S.A.E. 100R7
R7NC	100R7 Non-Conductive
HR8X	S.A.E. 100R8
R8NC	100R8 Non-Conductive
HR12	S.A.E. 100R12
HR16	S.A.E. 100R16
HR17	S.A.E. 100R17
R16L	100R16 Low Temp.
R17L	100R17 Low Temp.
HR18	S.A.E. 100R18

② ⑥ ⑧ SIZE CODES

HOSE SIZE	TUBE	SIZE CODE
02	1/8"	A
03	3/16"	F
04	1/4"	B
05	5/16"	G
06	3/8"	C
08	1/2"	D
10	5/8"	I
12	3/4"	E
16	1"	H
20	1-1/4"	J
24	1-1/2"	K
32	2"	M

③ ASSEMBLY TYPE CODES

CODE	TYPE
C	Crimp Ends
R	Reusable Ends
T	Twin-Line Hose

C5	Flange code 61 45° Elbow
C9	Flange code 61 90° Elbow
C1	Flange code 61 Straight
D5	Flange code 62 45° Elbow
D9	Flange code 62 90° Elbow
D2	Flange code 62 Straight

TR Flareless Tube Repair

GT Grease Tap

MJ	Male 37° S.A.E.
MS	Male 45° S.A.E.
BP	Male British Parallel
BT	Male British Tapered
MH	Male Heavy Metric
MI	Male Inverted Flare
I5	Male Inverted Flare 45° Elbow
I9	Male Inverted Flare 90° Elbow
ML	Male Light Metric
MO	Male O-Ring
O5	Male O-Ring Boss 45° Elbow
O9	Male O-Ring Boss 90° Elbow
RM	Male O-Ring Face Seal
SO	Male O-Ring Boss Swivel
MP	Male Pipe
SP	Male Pipe Swivel
P9	Male Pipe Swivel 90° Elbow
ST	Stand Pipe

PTFE (MEDIUM PRESSURE SMOOTH BORE)



• TYPICAL USES INCLUDE
 Pneumatic, hot oil lines, compressor discharge, gases, steering lines, brake lines, high pressure hydraulic lines.

PTFE hose can solve almost all “problem” applications. It is suitable for use with steam, solvents, fuels, hydraulic fluids, most chemicals and acids. Vibration absorption, extra long shelf life, high temperature and pressure ranges, make PTFE hose the most versatile hose in the industry today.

- **Meets S.A.E. 100R14**
- **CONSTRUCTION:** Braided Outer Cover
- **TUBE:** PTFE Inner Tube
- **COVER:** Stainless Steel (TYPE 304)
- **TEMPERATURE:** -65°F to + 450°F, -54°C to +232°C
- **PACKAGING:** Bulk Coils - Random Lengths
- **FITTINGS:** SCT400 One Piece Crimp (Page 50)
 SR400 Reusable End (Page 51)

PART No.	Nominal I.D.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)	Min. Bend Radius (IN.)
HT-4	1/4	3/16	.30	3,000	12,000	1.50
HT-5	5/16	1/4	.38	3,000	12,000	2.00
HT-6	3/8	5/16	.44	2,500	10,000	3.50
HT-8	1/2	13/32	.54	2,000	8,000	4.50
HT-10	5/8	1/2	.63	1,750	7,000	5.00
HT-12	3/4	5/8	.76	1,500	6,000	6.00
HT-16	1	7/8	1.03	1,000	4,000	9.00

NOTE: WORKING PRESSURE RATED AT +70°F +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

HOW TO ORDER CUSTOM FACTORY MADE PTFE HOSE ASSEMBLIES (STAINLESS STEEL BRAIDED COVER - BRASS ENDS)



Note: When ordering elbow on assemblies please note measurements are measured from the center of elbow to opposite end of assembly.

SAMPLE HOSE ASSEMBLY PART NUMBER	HOSE END FITTING CODE	END SIZE CODE
HT 6 C 120 AC 10 ST 10	AC AIRBRAKE COMPRESSION	END TYPE CODE “C” = Crimp Ends “R” = Reusable Ends
	FJ FEMALE SWIVEL 37° (J.I.C.) FLARE	1/4” 4
	FS FEMALE SWIVEL 45° (S.A.E.) FLARE	5/16” 5
	MI MALE INVERTED FLARE SWIVEL	3/8” 6
	MP MALE PIPE	1/2” 8
	ST STRAIGHT TUBE	5/8” 10
	J5 45° ELBOW SWIVEL 37° (J.I.C.) FLARE	3/4” 12
	J9 90° ELBOW SWIVEL 37° (J.I.C.) FLARE	1” 16

PREMIUM RED RUBBER HEATER HOSE




A replacement for OE on most cars and trucks. This high quality hose is for higher temperatures. Withstands the abuse of corrosive solutions and additives. Resists weathering to provide long and trouble-free service.

- **MEETS:** Similar to S.A.E. 20R3 Class D2, S.A.E. J2387
- **COLOR:** Red
- **TEMPERATURE:** -40°F to +257°F, -40C to +125°C
- **PACKAGING:** 50 FT. Coils, Reel
- **FITTINGS:** Hose Barbs (Page 39 - 40)
- **CLAMPS:** Page 128

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Min. Burst Pressure (P.S.I.)
HHR-8-50	1/2	.806	250
HHR-10-50	5/8	.932	250
HHR-12-50	3/4	1.057	200

NOTE: WORKING PRESSURE RATED AT +70°F +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

PREMIUM RED HEAVY DUTY THERMAL HEATER HOSE

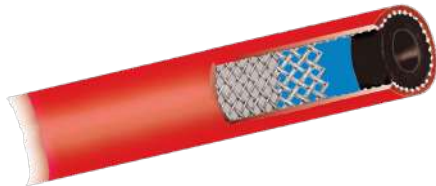


This heavy duty rubber hose with a blue insulating layer that helps to minimize heat loss. A replacement for OE on cars and trucks. Withstands the abuse of corrosive solutions and additives. Resists weathering to provide long and trouble-free service.

- **MEETS:** Similar to S.A.E. 20R3 Class D2, S.A.E. J2387
- **COLOR:** Red
- **TEMPERATURE:** -40°F to +257°F, -40C to +125°C
- **PACKAGING:** 50 FT. Coils
- **FITTINGS:** Hose Barbs (Page 39 - 40)
- **CLAMPS:** Page 128

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Min. Burst Pressure (P.S.I.)
HHP-8-50	1/2	.812	250
HHP-10-50	5/8	.937	250
HHP-12-50	3/4	1.062	200
HHP-16-50	1	1.375	175

NOTE: WORKING PRESSURE RATED AT +70°F +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

RUBBER HEATER HOSE

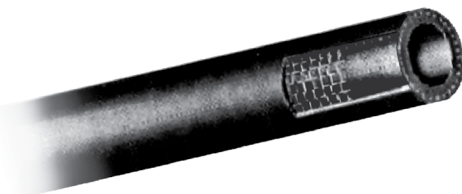

This standard hose is for normal duty service. Withstands the abuse of corrosive solutions and additives. Resists weathering to provide long and trouble-free service.

- **MEETS:** Similar to S.A.E. 20R3 Class D2
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +212°F, -40C to +100°C
- **PACKAGING:** 250 FT Reels, 50 FT. Coils
- **FITTINGS:** Hose Barbs (Page 39 - 40)
- **CLAMPS:** Page 128

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Min. Burst Pressure (P.S.I.)
HH-8-50	1/2	.806	200
HH-10-REEL	5/8	.932	140
HH-10-50	5/8	.932	140
HH-12-REEL	3/4	1.057	125
HH-12-50	3/4	1.057	125
HH-16-50	1	1.406	100

NOTE: WORKING PRESSURE RATED AT +70°F +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.



S.A.E. 20R3 CLASS A

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Min. Burst Pressure (P.S.I.)
HHS-6-50	3/8	.707	310
HHS-8-50	1/2	.875	310
HHS-10-50	5/8	1.00	300
HHS-12-50	3/4	1.125	300
HHS-14-50	7/8	1.25	200
HHS-16-50	1	1.375	250

Recommended for extra high-temp heater connections, air-pump discharge and any similar uses.

- **MEETS:** S.A.E. 20R3 Class A (Tested To J20E PART VI)
- **COLOR:** Blue
- **TEMPERATURE:** -65°F to +350°F, -54°C to +177°C
- **PACKAGING:** 50 Foot Coils
- **FITTINGS:** Hose Barbs (Page 39 - 40)
- **CLAMPS:** ET Series (Page 128)

NOTE
WORKING PRESSURE RATED
AT +70°F +21°C. ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.

TRUCK SILICONE COOLANT HOSE



S.A.E. J20 R1 CLASS A

4 Ply silicone coolant hose reinforced with polyester fabric and coated with specially compounded silicone elastomer. Ideal for extreme temperatures and various pressure ranges.

- **MEETS OR EXCEEDS:** S.A.E. J20 R1 Class A
- **COLOR:** Blue
- **TEMPERATURES:** -65°F to +350°F, -54°C to +177°C
- **PACKAGING:** 4 Foot Lengths (Eg. FOR 8 FT. ORDER 2 PCS.)
- **CLAMPS:** HC19 / HC20 (Page 130)

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)
CHS-12-4	3/4	1.14	80
CHS-14-4	7/8	1.27	80
CHS-16-4	1	1.37	75
CHS-20-4	1-1/4	1.64	65
CHS-22-4	1-3/8	1.77	65
CHS-24-4	1-1/2	1.89	60
CHS-26-4	1-5/8	2.02	60
CHS-28-4	1-3/4	2.14	55
CHS-32-4	2	2.37	50

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)
CHS-36-4	2-1/4	2.64	40
CHS-38-4	2-3/8	2.77	40
CHS-40-4	2-1/2	2.89	35
CHS-42-4	2-5/8	3.00	35
CHS-44-4	2-3/4	3.14	30
CHS-46-4	2-7/8	3.25	30
CHS-48-4	3	3.39	25
CHS-52-4	3-1/4	3.64	25
CHS-56-4	3-1/2	3.89	15
CHS-64-4	4	4.37	10

NOTE
WORKING PRESSURE RATED
AT +70°F +21°C. ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.

TRUCK SILICONE TURBO CHARGER CONNECTOR

Recommended for extra high-temp turbo charger connections. 4-PLY Silicone coated fabric with stainless steel retention rings.



TCS2



TCS3

- **COLOR:** ORANGE
- **TEMPERATURE:** -65°F TO +500° F, -54° C to +260°C
- **PACKAGING:** Per Piece
- **CLAMPS:** HC19 & HC20 (Page 130)


PART No.	Actual I.D. (IN.)	Length (IN.)	W.P. (P.S.I.)
TCS2-64-6	4	6	55
TCS2-72-6	4-1/2	6	50

PART No.	Actual I.D. (IN.)	Length (IN.)	W.P. (P.S.I.)
TCS3-48-6	3	6	60
TCS3-56-6	3-1/2	6	55
TCS3-64-6	4	6	50
TCS3-64-8	4	8	50
TCS3-72-6	4-1/2	6	45

NOTE
WORKING PRESSURE RATED
AT +70°F +21°C. ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.

GENERAL PURPOSE HOSE

Fairview

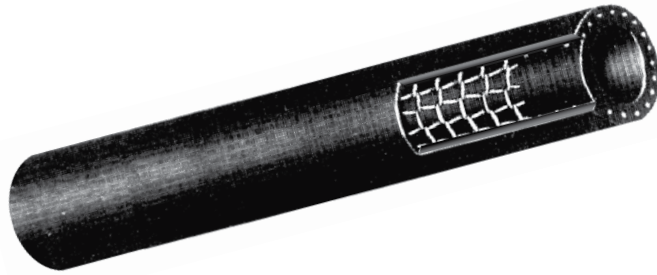

Designed to convey most fuels in cars, trucks, buses etc.
Durable cover resists deterioration from oil, grease, heat and ozone and gives long service life.

NOTE: FLH IS NOT DESIGNED FOR MARINE USE WITH ALCOHOL BLENDED FUELS.

- **MEETS:** S.A.E. 30R7
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +257°F, -40°C to +125°C
- **PACKAGING:** 250 FT Reels, 50 and 100 FT Coils
- **FITTINGS:** Hose Barbs (Page 41)
- **CLAMPS:** HC5 & HC6 (Page 128)

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Length (FT.)	Working Pressure (P.S.I.)	Min. Burst Pressure (P.S.I.)
FLH-3-25	3/16	.406	25	50	250
FLH-3-50	3/16	.406	50	50	250
FLH-3-100	3/16	.406	100	50	250
FLH-3-250	3/16	.406	250	50	250
FLH-4-25	1/4	.500	25	50	250
FLH-4-50	1/4	.500	50	50	250
FLH-4-100	1/4	.500	100	50	250
FLH-4-250	1/4	.500	250	50	250
FLH-5-25	5/16	.563	25	50	250
FLH-5-50	5/16	.563	50	50	250
FLH-5-100	5/16	.563	100	50	250
FLH-5-250	5/16	.563	250	50	250
FLH-6-25	3/8	.625	25	50	250
FLH-6-50	3/8	.625	50	50	250
FLH-6-100	3/8	.625	100	50	250
FLH-6-250	3/8	.625	250	50	250

NOTE
WORKING PRESSURE RATED AT +70°F +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

FIBER COVER GRIP-TITE HOSE (PUSH-ON)



THE SPECIAL BRAIDING PROCESS USED IN THE MANUFACTURE OF THIS HOSE PERMITS THE USE OF GRIP-TITE FITTINGS, WHICH ELIMINATES THE NEED FOR CLAMPS.

Recommended for Petroleum-based hydraulic oils, glycol anti-freeze compounds, water, engine lubricating oils and air. Lock-On hose and couplings are NOT recommended for vibration or pressure surge applications, such as permanent piping in residential or commercial buildings.

- **MEETS:** SAE 30R2, SAE 30R6 and SAE 30R7 performance requirements for fuel and B20 biodiesel fuel transfer applications up to +125°F, 51°C
- **COVER:** Fiber Covered.
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +250°F, -40°C to +121°C
For air: -40°F to +160°F, -40°C to +71°C
- **PACKAGING:** Bulk Reels.
- **FITTINGS:** 700 Series (Page 61)

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Reel Length (FT.)
760-4-REEL	1/4	1/2	300	575
760-6-REEL	3/8	5/8	300	300
760-8-REEL	1/2	3/4	300	300
760-10-REEL	5/8	29/32	300	260
760-12-REEL	3/4	1	300	225

NOTE: WORKING PRESSURE RATED AT +70°F +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

RUBBER COVER GRIP-TITE HOSE (PUSH-ON)



THE SPECIAL BRAIDING PROCESS USED IN THE MANUFACTURE OF THIS HOSE PERMITS THE USE OF GRIP-TITE FITTINGS, WHICH ELIMINATES THE NEED FOR CLAMPS.

RANDOM REEL LENGTHS FOR COLOR HOSE:

Reel lengths Maximum 725 FT., Minimum 400 FT.

(5 pieces maximum per reel with minimum 50 FT. length piece)

A lightweight, flexible, low pressure, general purpose hose with one fiber braid reinforcement. Used for conveying hydraulic oils, mineral oils, antifreeze solutions, most agricultural sprays and other diluted chemical solutions.

- **MSHA Approved (Black Only)**
- **COVER:** Rubber Covered.
- **COLORS:** Black (Standard), Blue, Green, Grey, Red
- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C
- **PACKAGING:** 50, 100 FT Coils, Bulk Reels
- **FITTINGS:** 700 Series (Page 38)

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Reel Length (FT.)
761-4-REEL	1/4	1/2	300	500
761-4GRY-REEL	1/4	1/2	300	Random
761-5-REEL	5/16	5/8	300	500
761-6-REEL	3/8	5/8	300	500
761-6BLU-REEL	3/8	5/8	300	Random
761-6GRY-REEL	3/8	5/8	300	Random

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Reel Length (FT.)
761-8-REEL	1/2	3/4	300	500
761-8GRY-REEL	1/2	3/4	300	Random
761-10-REEL	5/8	29/32	300	500
761-12-REEL	3/4	1	300	250

NOTE: WORKING PRESSURE RATED AT +70°F +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

QUALITY RUBBER HOSE



NOTE
WORKING PRESSURE RATED
AT +70°F +21°C. ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.

This quality rubber hose features EPDM cover and tube with high tensile spiral synthetic yarn reinforcement. It is best suited for applications requiring maximum flexibility or a lighter weight rubber hose.

- **CONSTRUCTION:**
- **TUBE:** EPDM (ARPM CLASS C)
- **COVER:** EPDM (ARPM CLASS C)
- **REINFORCEMENT:** Spiral synthetic yarn
- **COLORS:** Black, Green, Red, Yellow
- **TEMPERATURE:** -22°F to +167°F, -30°C to +75°C
- **PACKAGING:** Reels
- **FITTINGS:** Pages 39 - 40
- **BEND PROTECTORS:** Page 148

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Reel Length (FT.)
RGP-4BLK-REEL	1/4	.500	200	300
RGP-4RED-REEL	1/4	.500	200	300
RGP-4/2RED-REEL	1/4	.527	250	300
RGP-6RED-REEL	3/8	.669	200	300
RGP-6/2RED-REEL	3/8	.700	250	300
RGP-8BLK-REEL	1/2	.810	200	300
RGP-8RED-REEL	1/2	.810	200	300
RGP-8/2RED-REEL	1/2	.838	250	300

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Reel Length (FT.)
RGP-10BLK-REEL	5/8	.930	200	500-700
RGP-10RED-REEL	5/8	.968	200	500-700
RGP-12BLK-REEL	3/4	1.080	200	200
RGP-12RED-REEL	3/4	1.118	200	200
RGP-12/2RED-REEL	3/4	1.141	250	500-700
RGP-16RED-REEL	1	1.440	200	200
RGP-20RED-REEL	1-1/4	1.750	200	300
RGP-24RED-REEL	1-1/2	2.000	200	300

QUALITY RUBBER HOSE ASSEMBLIES

The RG Series of assemblies is constructed with RGP hose. All assemblies have factory crimped ends with either B - 1/4", C - 3/8" or D - 1/2" brass male pipe ends. Standard lengths are -25, 50, 75 or 100ft.

- **COLORS:** Black, Red
- **TEMPERATURE:** -22°F to +167°F, -30°C to +75°C
- **PACKAGING:** Individually shrink wrapped with bar coded label.
- **FITTINGS:** Machined Brass
- **Custom lengths available upon request.**

NOTE:
WORKING PRESSURE RATED
AT +70°F +21°C. ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.



1/4 I.D. HOSE 1/4 NPT ENDS

PART No.	Length (FT.)	Working Pressure (P.S.I.)
RG4RED-25B	25	200
RG4RED-50B	50	200
RG4RED-100B	100	200
RG4/2RED-25B	25	250
RG4/2RED-50B	50	250
RG4/2RED-100B	100	250

3/8 I.D. HOSE 1/4 NPT ENDS

PART No.	Length (FT.)	Working Pressure (P.S.I.)
RG6RED-25B	25	200
RG6RED-50B	50	200
RG6RED-100B	100	200
RG6/2RED-25B	25	250
RG6/2RED-50B	50	250
RG6/2RED-100B	100	250

1/2 I.D. HOSE 1/2 NPT ENDS

PART No.	Length (FT.)	Working Pressure (P.S.I.)
RG8/2RED-25D	25	250
RG8/2RED-50D	50	250
RG8/2RED-100D	100	250



Fairview's Arctic Force multi-purpose hose is more flexible than most rubber hoses even at extremely low temperatures. Its light weight and relatively high pressure rating make it ideal for pneumatic hand tool and shop air applications. ARPM Class B oil resistance.

CONSTRUCTION:

- **REINFORCEMENT:** Spiral high tensile yarn
- **COLORS:** Green, Red, Yellow
- **TEMPERATURE:** -65°F to +150°F, -54°C to +65°C
- **WORKING PRESSURE:** 300 P.S.I.
- **PACKAGING:** Loose coils or plastic core reels
- **FITTINGS:** Page 39 - 40
- **BEND PROTECTORS:** Page 148

LOW TEMP. RATED
-65°F (-54°C)

NOTE:
WORKING PRESSURE RATED
AT +70°F +21°C. ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Reel Length (FT.)
GLH-4RED-REEL	1/4	.500	300	500
GLH-4YEL-REEL	1/4	.500	300	500
GLH-6RED-REEL	3/8	.625	300	500
GLH-6YEL-REEL	3/8	.625	300	500
GLH-8GRN-COIL	1/2	.781	300	500
GLH-8RED-COIL	1/2	.781	300	500
GLH-10GRN-COIL	5/8	.906	250	500

ARCTIC FORCE RUBBER HOSE ASSEMBLIES

The Arctic Force Series of assemblies is constructed with GLH hose. All assemblies have factory crimped ends with either B - 1/4" or C - 3/8" brass male pipe ends. Bend protectors are standard on these assemblies.

- **COLORS:** Red, Yellow or Green
- **TEMPERATURE:** -65°F to +150°F, -55°C to +65°C
- **WORKING PRESSURE:** 300 P.S.I.
- **PACKAGING:** Individually shrink wrapped with bar coded label.
- **FITTINGS:** Machined Brass
- **Custom lengths available upon request.**

NOTE:
WORKING PRESSURE RATED
AT +70°F +21°C. ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.



1/4 I.D. 1/4 NPT ENDS			3/8 I.D. 1/4 NPT ENDS			3/8 I.D. 3/8 NPT ENDS			1/2 I.D. 3/8 NPT ENDS		
PART No.	Length (FT.)	Working Pressure (P.S.I.)	PART No.	Length (FT.)	Working Pressure (P.S.I.)	PART No.	Length (FT.)	Working Pressure (P.S.I.)	PART No.	Length (FT.)	Working Pressure (P.S.I.)
GL4RED-25B	25	300	GL6RED-25B	25	300	GL6RED-25C	25	300	GL8RED-25C	25	300
GL4RED-50B	50	300	GL6RED-50B	50	300	GL6RED-50C	50	300	GL8RED-50C	50	300
			GL6RED-100B	100	300	GL6RED-100C	100	300			
GL4YEL-25B	25	300	GL6YEL-25B	25	300	GL6YEL-25C	25	300			
GL4YEL-50B	50	300	GL6YEL-50B	50	300	GL6YEL-50C	50	300			
GL4YEL-100B	100	300	GL6YEL-100B	100	300	GL6YEL-100C	100	300			

AIR ASSEMBLY WITH GLADHAND

Connects directly to the Gladhand port on a truck cab. This assembly is complete with Universal Gladhand and dual foot air chuck end which allows for the easy filling of tires.

PART No.	Hose Type	Actual I.D. (IN.)	Length (FT.)	Working Pressure (P.S.I.)
GL6RED-50GHU-DF	Arctic Force	3/8	50	300
GL6YEL-50GHU-DF	Arctic Force (Low Temp)	3/8	50	300

Other lengths available.

ARCTIC FORCE
by Fairview
-65°F (-54°C)



GHU



CONTRACTORS INDUSTRIAL P.V.C. AIR HOSE ASSEMBLIES

Heavy-duty brass reusable ends and spring guard bend protectors make these light weight uniquely blended P.V.C hose assemblies ideal for pneumatic nail guns and air powered industrial tools at the job site.

- **COLOR:** Red, Blue and Yellow
- **TEMPERATURE:** -15°F to +150°F, -26°C to +66°C
- **PACKAGING:** Individually shrink wrapped with bar coded Label.
- **QUICK DISCONNECT:** QD-TFM Series (Optional)
- **Custom lengths available upon request.**

ACCUTEK

NOTE:
WORKING PRESSURE RATED AT +70°F +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.



3/8 I.D. HOSE 1/4 NPT ENDS

PART No.	Length (FT.)	Working Pressure (P.S.I.)
PAR6RED-50B-SG	50	300
PAR6RED-100B-SG	100	300
PAR6BLU-50B-SG	50	300
PAR6BLU-100B-SG	100	300

3/8 I.D. HOSE 3/8 NPT ENDS

PART No.	Length (FT.)	Working Pressure (P.S.I.)
PAR6RED-50C-SG	50	300
PAR6RED-100C-SG	100	300
PAR6BLU-100C-SG	100	300

POLYURETHANE SELF-STORING AIR HOSE ASSEMBLIES

PART No.	Actual I.D. (IN.)	Swivel Pipe	Length (FT.)	Working Pressure (P.S.I.)
1936-4-12	1/4	1/4	12	125
1936-4-15	1/4	1/4	15	125
1936-4-20	1/4	1/4	20	125
1936-4-25	1/4	1/4	25	125
1936-4-50	1/4	1/4	50	125
1936-6-12	3/8	3/8	12	125
1936-6-15	3/8	3/8	15	125
1936-6-20	3/8	3/8	20	125
1936-6-25	3/8	3/8	25	125
1936-6-50	3/8	3/8	50	125

NOTE: 1936 SERIES SUPPLIED IN ASSEMBLIES ONLY.

These polyurethane assemblies are produced using an ether based resin for better strength, flexibility and superior memory. This hose has excellent resistance to water, chemicals, oxidation, hydrolysis and ozone. It is kink resistant, light weight and mobile.

- **COLOR:** Blue
- **TEMPERATURE:** -40°F to +175°F, -40°C to +79°C
- **PACKAGING:** Individually Bagged With Header / Display Ready
- **FITTINGS:** 360° Working Male Pipe Swivels, Each End.

NOTE:
WORKING PRESSURE RATED AT +70°F +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

ACCUTEK



NYLON GREASE WHIPS



3/16" I.D. Thermoplastic, fiber reinforced hose with 1/8 steel male pipe couplings. This hose combines the best features of conventional rubber hose with the unique advantages of synthetic materials.

PART No.	Length (IN.)	Working Pressure (P.S.I.)	Burst Pressure (PSI)
GWN-3-12	12	3,000	12,000
GWN-3-18	18	3,000	12,000
GWN-3-24	24	3,000	12,000

Available packaged, suffix PART No. with the letter "P"

RUBBER GREASE WHIPS



These assemblies are manufactured from 3/16" I.D. S.A.E. 100R1 rubber hose. The one braid hose is permanently crimped with 1/8 brass male pipe couplings on both ends.

PART No.	Length (IN.)	Working Pressure (P.S.I.)	Burst Pressure (PSI)
GWR-3-12	12	3,000	12,000
GWR-3-18	18	3,000	12,000
GWR-3-24	24	3,000	12,000
GWR-3-28	28	3,000	12,000
GWR-3-36	36	3,000	12,000
GWR-3-48	48	3,000	12,000
GWR-3-54	54	3,000	12,000
GWR-3-60	60	3,000	12,000
GWR-3-72	72	3,000	12,000
GWR-3-84	84	3,000	12,000
GWR-3-96	96	3,000	12,000
GWR-3-132	132	3,000	12,000
GWR-3-144	144	3,000	12,000



Available packaged, suffix PART No. with the letter "P"

D.O.T. AIR SHIFT TRANSMISSION ASSEMBLIES



Male Pipe

LIVE SWIVEL END
(Still swivels once connected)

Male Pipe
Thread

PART No.	Swivel Pipe	Male Pipe	Hose I.D. (IN.)	Length (IN.)
2815-4-2	1/8	1/8	1/4	15
2831-4-2	1/8	1/8	1/4	31
2832-4-2	1/8	1/8	1/4	32
2834-4-2	1/8	1/8	1/4	34
2836-4-2	1/8	1/8	1/4	36

OTHER LENGTHS AVAILABLE ON REQUEST

FIFTH WHEEL SLIDER ASSEMBLY

Male Pipe
Thread



Male Pipe
Thread

- MEETS: S.A.E. J884D TYPE 3A D.O.T. F.M.V.S.S. 106
 - COLOR: Black
 - TEMPERATURE: -40°F to +200°F, -40°C to +93°C
 - FITTINGS: Brass male pipe each end.
- Complete Kit see below
Fifth Wheel Cylinder (Page 116)

PART No.	Working Length (IN.)	Tube O.D. (IN.)	Pigtail Length (IN.)	Male Pipe Ends
1486S-4-10	70	1/4	4	1/4

AIR SEAT GUN SPLICER KIT



PART No. ASGK-1

Simply splice the air seat line with the push-to-connect tee end of the assembly. This handy kit features an industrial air gun for cleaning out the cab on site.

Kit Includes:

- 70" Working Length of 1/4" O.D. S.A.E. J844-A coiled air tube.
- One brass male pipe.
- Two spring guard hose end protectors.
- Push-to-connect splicer tee.
- (No tools required)
- Chrome plated, lever handle air gun.

FIFTH WHEEL SLIDER KIT



PART No. FWSK-1

Designed for use on sliding fifth wheels, this kit includes most everything you need to complete the connections.

Kit Includes:

- 70" Working Length of 1/4" O.D. S.A.E. - J844-A coiled air tube.
- Brass male pipe each end.
- Spring guard hose end protectors.
- 90° brass adapter elbow.
- Frame mounting terminal bolt.

INDUSTRIAL WATER HOSE ASSEMBLIES

Fairview

- HEAVY BRASS MACHINED ENDS, FOR ALL ASSEMBLIES.
- OTHER LENGTHS AND END COMBINATIONS AVAILABLE UPON REQUEST.

NOTE: WORKING PRESSURE RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.



Fairview Premium Blue Assemblies

Heavy Hex Female End
By Male Water Thread
Working Pressures: 1/2" I.D. 300 P.S.I.,
5/8" and 3/4" I.D. 250 P.S.I.
Temp: -15°F to +150°F, -26°C to +66°C

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WH8BLU-25H	25	1/2	300
WH8BLU-50H	50	1/2	300
WH8BLU-100H	100	1/2	300
WH10BLU-25H	25	5/8	250
WH10BLU-50H	50	5/8	250
WH10BLU-100H	100	5/8	250
WH12BLU-25H	25	3/4	250
WH12BLU-50H	50	3/4	250
WH12BLU-100H	100	3/4	250



Quality Blue PVC Assemblies

Heavy Hex Female End
By Male Water Thread
Working Pressures: 300 P.S.I.,
Temp: -15°F to +150°F, -26°C to +66°C

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WHRV8BLU-25H	25	1/2	150
WHRV8BLU-50H	50	1/2	150
WHRV8BLU-100H	100	1/2	150



High Quality Contractor's Black Rubber

Double or Heavy Hex Female End
By Male Water Thread
Working Pressure: 1/2", 5/8" 200 P.S.I.
and 3/4" I.D. 150 P.S.I.
Temp: -22°F to +167°F, -30°C to +75°C

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WH8BLK-25H	25	1/2	200
WH8BLK-50H	50	1/2	200
WH8BLK-100H	100	1/2	200
WH10BLK-25H	25	5/8	200
WH10BLK-50H	50	5/8	200
WH10BLK-100H	100	5/8	200
WH12BLK-25H	25	3/4	150
WH12BLK-50H	50	3/4	150
WH12BLK-100H	100	3/4	150



Green Arctic Force - Low Temp

Heavy Hex Female End
By Male Water Thread
Working Pressure: 1/2" I.D. 300 P.S.I.
Temp.: -65°F to +150°F, -54°C to +65°C

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WHGL8GRN-25H	25	1/2	300
WHGL8GRN-50H	50	1/2	300
WHGL8GRN-100H	100	1/2	300
WHGL10GRN-25H	25	5/8	250
WHGL10GRN-50H	50	5/8	250
WHGL10GRN-100H	100	5/8	250



Commercial Yellow PVC

Heavy Hex Female End
By Male Water Thread
Working Pressure: 1/2" I.D. 125 P.S.I.
Temp: +25°F to +150°F, -4°C to +65°C

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WH8YEL-25H	25	1/2	125
WH8YEL-50H	50	1/2	125
WH8YEL-100H	100	1/2	125
WH12YEL-50H	50	3/4	125

BULK PRESSURE WASH HOSE



BLACK COVER (4,000 P.S.I.)

(PW2) is a one wire construction, wrapped black, covered hose. Its tube is specially formulated to handle high pressure water. Suitable for pressures up to 4,000 P.S.I., at +70°F, (+21°C), or temperatures up to +250°F, (+121°C) at lower pressures.

GREY COVER HIGH PRESSURE (6,000 P.S.I.)

(PW4) is a two wire construction, grey wrapped cover hose. Suitable for pressures up to 6,000 P.S.I., at +70°F, (+21°C) or temperatures up to +250°F, (+121°C), at lower pressures.

BLUE NON-MARKING COVER (4,000 P.S.I.)

(PW3) is a one wire construction hose with a special Blue non-marking smooth cover. Suitable for pressures up to 4,000 P.S.I., at +70°F, (+21°C), or temperatures up to +275°F, (+135°C)

RED NON-MARKING HIGH TEMP (3,000 P.S.I.)

Heat-Star-Combo (PW5) is a one wire construction, Red non-marking heat resistant smooth cover, dual purpose hose. This hose will handle steam up to +325°F, (+163°C) at 350 P.S.I. and hot water to +250°F, (+121°C) at 3,000 P.S.I.

*** Any increase in temp. up to a maximum of 275°F will lower the working pressure considerably. For more than Intermittent applications in this environment (275°F Max) we recommend our PW5 High Temp Non Marking Hose.**

NOTE: The outer cover of PW5 hose must be skived (removed) before attaching over the wire crimp ends.

NOTE
WORKING PRESSURE RATED
AT +70°F +21°C. ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.

PREVAILER™ YELLOW (ARPM CLASS A) (4,000 P.S.I.)

(PW6) Yellow oil and fat resistant (ARPM CLASS A) special synthetic rubber covered hose providing superior strength, flexibility, abrasion resistance and long service life. One high tensile steel wire braid. Suitable for pressures up to 4,000 P.S.I., at +70°F, (+21°C), or temperatures up to +250°F, (+121°C) at lower pressures.

PART No.	Color	Actual Inside Diameter (IN.)	Maximum Working Pressure (P.S.I.)	Approximate Weight Per Foot (LBS.)	Reel Length (FT.)
PW2-6-REEL	Black	3/8	4,000	.23	300
PW3-4-REEL	Blue	1/4	4,000	.15	300
PW3-6-REEL	Blue	3/8	4,000	.25	300
PW4-6-REEL	Grey	3/8	6,000	.35	300
PW5-6-REEL	Red	3/8	3,000	.21	300
PW6-6-REEL	Yellow	3/8	4000	.22	500



PRESSURE WASH HOSE ASSEMBLIES

BLACK COVER (4,000 P.S.I.)

(PW2) is a one wire construction, black, blue or grey covered hose. Its' tube is specially formulated to handle high pressure water. Suitable for pressures up to 4,000 P.S.I., at +70°F, (+21°C), or temperatures up to +250°F, (+121°C) at lower pressures.

PART No.	Length (FT.)	Actual I.D (IN.)
PW2A-6-25	25	3/8
PW2A-6-30	30	3/8
PW2A-6-50	50	3/8
PW2A-6-75	75	3/8
PW2A-6-100	100	3/8



Style of bend protectors may vary.

BLUE NON-MARKING COVER (4,000 P.S.I.)

(PW3) is a one wire construction hose with a special blue non-marking cover. Suitable for pressures up to 4,000 P.S.I., at +70°F, (+21°C), or temperatures up to +275°F, (+135°C)

Swivels on both ends available upon request.

Suffix PART No. with "SW" Example: PW3A-6-50SW

* Any increase in temp. up to a maximum of 275°F will lower the working pressure considerably. For more than Intermittent applications in this environment (275°F Max) we recommend our PW5 High Temp Non Marking Hose.

PART No.	Length (FT.)	Actual I.D (IN.)
PW3A-4-30	30	1/4
PW3A-4-50	50	1/4
PW3A-4-100	100	1/4
PW3A-6-25	25	3/8
PW3A-6-30	30	3/8
PW3A-6-35	35	3/8
PW3A-6-50	50	3/8
PW3A-6-75	75	3/8
PW3A-6-100	100	3/8
PW3A-6-50SW	50	3/8



GREY COVER HIGH PRESSURE (6,000 P.S.I.)

(PW4) is a two wire construction, grey wrapped cover hose. Suitable for pressures up to 6,000 P.S.I., at +70°F, (+21°C) or temperatures up to +250°F, (+121°C), at lower pressures.

PART No.	Length (FT.)	Actual I.D (IN.)
PW4A-6-30	30	3/8
PW4A-6-50	50	3/8
PW4A-6-75	75	3/8
PW4A-6-100	100	3/8



RED NON-MARKING HIGH TEMP (3,000 P.S.I.)

(PW5) is a one wire construction, Red non-marking heat resistant smooth cover, dual purpose hose. This hose will handle steam up to +325°F, (+163°C) at 350 P.S.I. and hot water to +250°F, (+121°C) at 3,000 P.S.I.

NOTE: The outer cover of PW5 hose must be skived (removed) before attaching over the wire crimp ends.

PART No.	Length (FT.)	Actual I.D (IN.)
PW5A-6-30	30	3/8
PW5A-6-50	50	3/8
PW5A-6-75	75	3/8
PW5A-6-100	100	3/8



NOTE: Any ambient or internal increase in temperature will lower the above listed working pressures.

PRESSURE WASH HOSE ASSEMBLIES

OIL AND FAT RESISTANT COVER (4,000 P.S.I.)

(PW6 PREVAILER™) is a yellow cover, oil and fat resistant hose providing superior strength, flexibility, abrasion resistance and long service life. Excellent resistance to oils and animal fats. Suitable for pressures up to 4,000 P.S.I., at +70°F, (+21°C), or temperatures up to +250°F, (+121°C) at lower pressures.

PART No.	Length (FT.)	Actual I.D (IN.)
PW6A-6-30	30	3/8
PW6A-6-50	50	3/8
PW6A-6-100	100	3/8



• ASSEMBLIES CAN BE MADE TO ORDER • ALL ASSEMBLIES COME WITH THERMOPLASTIC BEND PROTECTORS • SYNTHETIC RUBBER BEND PROTECTORS ALSO AVAILABLE • STANDARD HOSE ASSEMBLIES CONSIST OF SWIVEL MALE PIPE X SOLID MALE PIPE ENDS

NOTE: Any ambient or internal increase in temperature will lower the above listed working pressures.

KARCHER STYLE PRESSURE WASH HOSE ASSEMBLIES

BLACK / GREY COVER (4,000 P.S.I.)

(PW2) is a one wire construction, black cover hose. (also available in blue) Its' tube is specially formulated to handle high pressure water. Suitable for pressures up to 4,000 P.S.I., at +70°F, (+21°C), or temperatures up to +250°F, (+121°C) at lower pressures.

PART No.	Length (FT.)	Actual I.D (IN.)
PW2K-6-20	20	3/8
PW2K-6-30	30	3/8
PW2K-6-50	50	3/8

Complete with KARCHER style M22 X 1.5 female swivel power washer machine attachments on both ends.



BLUE NON-MARKING COVER (4000 P.S.I.)

(PW3) is a one wire construction hose with a special blue non-marking cover. Suitable for pressures up to 4,000 P.S.I., at +70°F, (+21°C), or temperatures up to +275°F, (+135°C)

PART No.	Length (FT.)	Actual I.D (IN.)
PW3K-6-30	30	3/8
PW3K-6-50	50	3/8

Complete with KARCHER style M22 X 1.5 female swivel power washer machine attachments on both ends.



* Any increase in temp. up to a maximum of 275°F will lower the working pressure considerably. For more than Intermittent applications in this environment (275°F Max) we recommend our PW5 High Temp Non Marking Hose.

CAUTION

A pressure washer's powerful spray is hazardous when misdirected, strong enough to damage skin in an instant. With pressures up to 6000 psi they can cause serious injury. Appropriate protection should be worn during use.

• ASSEMBLIES CAN BE MADE TO ORDER • ALL ASSEMBLIES COME WITH THERMOPLASTIC BEND PROTECTORS

NOTE: Any ambient or internal increase in temperature will lower the above listed working pressures.



TUBE

ALUMINUM - COPPER - NYLON - STEEL- VINYL

AIR BRAKE TUBE D.O.T.	30
AIR SHIFT TRANSMISSION TUBE	24
BRAKE LINE ASSEMBLIES -STEEL	34
CLEAR VINYL TUBE.....	32
COPPER TUBE	33
POLYETHYLENE TUBE.....	31
POLYURETHANE (FUEL LINE) TUBE	32
STEEL TUBE (S.A.E. 527)	33

NOTE:

Use of Fairview Hose and Tube with other than Fairview original recommended fittings may void warranty. Verify with a Fairview representative prior to installation.



**100 FT COILS
STANDARD COLOR
IS BLACK**



TYPE 3B REINFORCED

Air brake tube is designed for use with truck, trailer and other mobile air brake and auxiliary systems.

This lightweight, flexible and UV stabilized tube is highly resistant to abrasion, oil, grease and road salt.

- **COLORS:** Black, Blue, Green, Orange, Red, Yellow.
Other colors quoted on request. Minimum runs apply.
- **TEMPERATURE:** -85°F to +200°F, -65°C to +93°C
- **PACKAGING:** Reels, Coils -50, -100
- **FITTINGS:** 1400, PC1400, PCDOT, CPC1400 Series (Page 58, 60 - 62)
800 Series (Page 72)
- **MEETS OR EXCEEDS:** D.O.T. F.M.V.S.S. 106 S.A.E. J844 TEST REQUIREMENTS
- * NOTE: 1/8 does not comply with F.M.V.S.S. 106
- ** NOTE: S.A.E. does not recognize 5/32 O.D. for airbrake systems.

NOTE:
THE WORKING PRESSURES LISTED FOR THIS TUBE IS RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE ABOVE LISTED WORKING PRESSURES.

TYPE 3A NON-REINFORCED

PART No.	Tube O.D. (IN.)	Wall Thickness (IN.)	Working Pressure (P.S.I.)	Reel-Coil Length (FT.)
1485-6-50	3/8	0.062	350	50
1485-6-100	3/8	0.062	350	100
1485-6-REEL	3/8	0.062	350	500
1485-6BLU-100	3/8	0.062	350	100
1485-6BLU-REEL	3/8	0.062	350	500
1485-6GRN-100	3/8	0.062	350	100
1485-6GRN-REEL	3/8	0.062	350	500
1485-6ORA-100	3/8	0.062	350	100
1485-6ORA-REEL	3/8	0.062	350	500
1485-6RED-100	3/8	0.062	350	100
1485-6RED-REEL	3/8	0.062	350	500
1485-6YEL-100	3/8	0.062	350	100
1485-6YEL-REEL	3/8	0.062	350	500
1485-8-50	1/2	0.062	240	50
1485-8-100	1/2	0.062	240	100
1485-8-REEL	1/2	0.062	240	500
1485-8BLU-100	1/2	0.062	240	100
1485-8BLU-REEL	1/2	0.062	240	500
1485-8GRN-100	1/2	0.062	240	100
1485-8GRN-REEL	1/2	0.062	240	500
1485-8ORA-100	1/2	0.062	240	100
1485-8ORA-REEL	1/2	0.062	240	500
1485-8RED-100	1/2	0.062	240	100
1485-8RED-REEL	1/2	0.062	240	500
1485-8YEL-100	1/2	0.062	240	100
1485-8YEL-REEL	1/2	0.062	240	500
1485-10-50	5/8	0.092	225	50
1485-10-100	5/8	0.092	225	100
1485-10-REEL	5/8	0.092	225	250
1485-10GRN-100	5/8	0.092	225	100
1485-10GRN-REEL	5/8	0.092	225	250
1485-10ORA-100	5/8	0.092	225	100
1485-10ORA-REEL	5/8	0.092	225	250
1485-10RED-50	5/8	0.092	225	50
1485-10RED-100	5/8	0.092	225	100
1485-10RED-REEL	5/8	0.092	225	250
1485-10YEL-100	5/8	0.092	225	100
1485-10YEL-REEL	5/8	0.092	225	250
1485-12-50	3/4	0.092	200	50
1485-12-100	3/4	0.092	200	100
1485-12-REEL	3/4	0.092	200	250
1485-12BLU-100	3/4	0.092	200	100
1485-12BLU-REEL	3/4	0.092	200	250
1485-12GRN-100	3/4	0.092	200	100
1485-12GRN-REEL	3/4	0.092	200	250
1485-12ORA-100	3/4	0.092	200	100
1485-12ORA-REEL	3/4	0.092	200	250
1485-12RED-100	3/4	0.092	200	100
1485-12RED-REEL	3/4	0.092	200	250

PART No.	Tube O.D. (IN.)	Wall Thickness (IN.)	Working Pressure (P.S.I.)	Reel-Coil Length (FT.)
* 1485-2-100	1/8	0.023	250	100
* 1485-2-REEL	1/8	0.023	250	2000
** 1485-2-1/2-100	5/32	0.036	250	100
** 1485-2-1/2-REEL	5/32	0.036	250	1000
1485-3-100	3/16	0.035	250	100
1485-3-REEL	3/16	0.035	250	1000
1485-4-50	1/4	0.040	300	50
1485-4-100	1/4	0.040	300	100
1485-4-REEL	1/4	0.040	300	1000
1485-4BLU-100	1/4	0.040	300	100
1485-4BLU-REEL	1/4	0.040	300	1000
1485-4GRN-100	1/4	0.040	300	100
1485-4GRN-REEL	1/4	0.040	300	1000
1485-4ORA-100	1/4	0.040	300	100
1485-4ORA-REEL	1/4	0.040	300	1000
1485-4RED-100	1/4	0.040	300	100
1485-4RED-REEL	1/4	0.040	300	1000
1485-4YEL-100	1/4	0.040	300	100
1485-4YEL-REEL	1/4	0.040	300	1000
1485-5-100	5/16	0.040	250	100
1485-5-REEL	5/16	0.040	250	500



LOW DENSITY

PART No.	Tube O.D. (IN.)	Actual I.D. (IN.)	Wall Thickness	Working Pressure (P.S.I.)
360-4-100	1/4	.170	.040	125
360-4-1000	1/4	.170	.040	125
360-4H-100	1/4	.125	.062	170
360-5-100	5/16	.187	.062	130
360-6-100	3/8	.250	.062	100
360-8-100	1/2	.375	.062	90
360-10-100	5/8	.500	.062	80
360-12-100	3/4	.625	.062	60

HIGH DENSITY

PART No.	Tube O.D. (IN.)	Actual I.D. (IN.)	Wall Thickness	Working Pressure (P.S.I.)
359-4-100	1/4	.170	.040	250
359-4-1000	1/4	.170	.040	250
359-4H-100	1/4	.125	.062	280
359-5-100	5/16	.187	.062	250
359-6-100	3/8	.250	.062	250
359-8-100	1/2	.375	.062	250
359-10-100	5/8	.500	.062	160

Fairview's low-density polyethylene (LDPE) is a soft, flexible, lightweight tube recognized for its low temperature flexibility, durability, and corrosion resistance. High-density polyethylene tube (HDPE), while not as flexible as LDPE, has a higher temperature and pressure rating. LDPE & HDPE are not suitable for applications requiring the tube to be installed in concealed locations (e.g. walls, ceilings, floors) and is not for use with potable water (e.g. refrigerator lines, dishwashers, sinks etc.). Applications requiring a concealed or potable water installation should use Fairview 363 Series LLDPE.

ORDERING INFORMATION

- **PACKAGING:** 100 FT. COILS
500 AND 1000 FT. REELS ON 360 TUBE
TO ORDER REELS CHANGE -100 TO -500
OR -1000
- **TEMPERATURE:** LOW DENSITY -40°F to +160°F, -40°C to +71°C
HIGH DENSITY -40°F to +250°F, -40°C to +121°C
- **FITTINGS:** 400 Series
PC60 Series for air applications only
900 Series (Page 42)
- **COLOR CODES:** 360 SERIES ONLY: BLK (Black), BLU (Blue), GRN (Green), ORA (Orange), Red (Red), YEL (Yellow)
NOT ALL SIZES ARE AVAILABLE IN ALL COLORS.
MINIMUM RUNS MAY APPLY.

NOTE: Part numbers shown are for natural color.
To order other colors, suffix the size code with a color code
Example: 360-6GRN-100, 360-6RED-1000.
Dark colors have better U.V. resistance for outdoor applications.

WARNING
USE OF THIS TUBE WITH ANYTHING OTHER THAN FAIRVIEW ORIGINAL
RECOMMENDED FITTINGS WILL VOID WARRANTY.

NOTE:
THE WORKING PRESSURES LISTED FOR THIS TUBE IS RATED AT +70°F,
+21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL
LOWER THE ABOVE LISTED WORKING PRESSURES



**CERTIFIED
UNDER
STANDARD
51 and 61**

Clear polyvinyl-chloride tube is manufactured from F.D.A. approved resins. It is clear, flexible, easy to clean, abrasion resistant and non-contaminating. It is suitable for the conveyance of air, and water and is used extensively where food and beverages are conveyed.

- **PACKAGING:** 50 FT & 100 FT COILS 1/8" TO 1-1/4" I.D.
500 FT REELS 1/8" TO 1/2" I.D.

NOTE: TO ORDER REEL LENGTHS CHANGE -100 TO REEL
TO ORDER 50 FOOT COILS CHANGE -100 TO -50

- **TEMPERATURE:** +25°F to +149°F, -4°C to +65 °C
- **FITTINGS:** Hose barbs (Pages 39 - 40)

PART No.	Tube O.D. (IN.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
JFT-42-100	1/4	1/8	65
JFT-53-100	5/16	3/16	55
JFT-63-100	3/8	3/16	65
JFT-64-100	3/8	1/4	55
JFT-75-100	7/16	5/16	50
JFT-84-100	1/2	1/4	70
JFT-85-100	1/2	5/16	60
JFT-86-100	1/2	3/8	45
JFT-106-100	5/8	3/8	55
JFT-108-100	5/8	1/2	30
JFT-128-100	3/4	1/2	45
JFT-1210-100	3/4	5/8	30
JFT-1410-100	7/8	5/8	40
JFT-1612-100	1	3/4	35
JFT-1812-100	1-1/8	3/4	50
JFT-2014-100	1-1/4	7/8	35
JFT-2016-100	1-1/4	1	25
JFT-2416-100	1-1/2	1	35
JFT-2420-100	1-1/2	1-1/4	20
JFT-3224-50	2	1-1/2	35

NOTE:
THE WORKING PRESSURES LISTED FOR THIS TUBE IS RATED AT +70°F, +21°C. ANY
AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE ABOVE LISTED
WORKING PRESSURES.

PART No.	Tube O.D. (IN.)	Actual I.D. (IN.)	Length (FT)
JFTA-42-10P	1/4	1/8	10
JFTA-53-10P	5/16	3/16	10
JFTA-64-10P	3/8	1/4	10
JFTA-75-10P	7/16	5/16	10
JFTA-86-10P	1/2	3/8	10

**Certain Sizes Now
Available Packaged x
10 Ft. (Series JFTA)**



POLYURETHANE (FUEL LINE) CLEAR TUBE



NOTE:
THE WORKING PRESSURES
LISTED FOR THIS TUBE IS RATED
AT +70°F, +21°C. ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER
THE ABOVE LISTED WORKING
PRESSURES.

This Ether based polyurethane tube has been specially formulated for use with gasoline and is also suitable for such applications as air transfer lines, granular transfer lines, lubrication lines and robotics control lines. It is clear with a blue tint to allow see-through convenience. Polyurethane tube features abrasion and cut resistance, good flex fatigue and resilience and excellent resistance to ozone, solvents and fuel. Items and colors not shown are subject to minimum runs.

- **PACKAGING:** 25 FT & 100 FT COILS
- **TEMPERATURE:** -40°F to +175°F, -40°C to +79°C
- **FITTINGS:** Hose barbs (Page 39 - 40)
- **FOR FUEL LINE HOSE** (Page 19)

PART No.	Tube O.D. (IN.)	Actual I.D. (IN.)	Wall Thickness	Working Pressure P.S.I.
FLT-42-25	1/4	1/8	1/16	100
FLT-53-25	5/16	3/16	1/16	75
FLT-64-25	3/8	1/4	1/16	60
FLT-75-25	7/16	5/16	1/16	50
FLT-86-25	1/2	3/8	1/16	45
FLT-128-25	3/4	1/2	1/8	60

PART No.	Tube O.D. (IN.)	Actual I.D. (IN.)	Wall Thickness	Working Pressure P.S.I.
FLT-42-100	1/4	1/8	1/16	100
FLT-53-100	5/16	3/16	1/16	75
FLT-64-100	3/8	1/4	1/16	60
FLT-75-100	7/16	5/16	1/16	50
FLT-86-100	1/2	3/8	1/16	45
FLT-128-100	3/4	1/2	1/8	60

GENERAL USE (ASTM B75)

FAIRVIEW COPPER TUBE IS SOFT, SEAMLESS AND ANNEALED FOR FLEXIBILITY. CHECK LOCAL CODES TO ENSURE PROPER COPPER TUBE SELECTION TO MEET APPLICATION REQUIREMENTS.



PART No.	Tube O.D. (IN.)	Wall Thickness (IN.)	Working Pressure (P.S.I.)*	Coil Length (FT.)
CTG-4-25	1/4	.030	1,406	25
CTG-5-25	5/16	.032	1,197	25
CTG-6-25	3/8	.032	984	25
CTG-8-25	1/2	.032	727	25
CTG-10-25	5/8	.035	618	25
CTG-12-25	3/4	.035	511	25

Working pressure rated @ +100°F. (+38°C)

REFRIGERATION (ASTM B280)



PART No.	Tube O.D. (IN.)	Wall Thickness (IN.)	Working Pressure (P.S.I.)*	Coil Length (FT.)
CTR-2-50	1/8	.030	3,074	50
CTR-3-50	3/16	.030	1,935	50
CTR-4-50	1/4	.030	1,406	50
CTR-4-100	1/4	.030	1,406	100
CTR-5-50	5/16	.032	1,197	50
CTR-6-50	3/8	.032	984	50
CTR-6-100	3/8	.032	984	100
CTR-8-50	1/2	.032	727	50
CTR-8-100	1/2	.032	727	100
CTR-10-50	5/8	.035	618	50
CTR-10-100	5/8	.035	618	100
CTR-12-50	3/4	.035	511	50
CTR-14-50	7/8	.045	582	50

Working pressure rated @ +100°F. (+38°C)

S.A.E. - 527 STEEL TUBE



The green (GRN) anti-corrosion poly coating complies with GM123M-ASV and S.A.E. J527B

PART No.	Tube O.D. (IN.)	Wall Thickness (IN.)	Working Pressure (P.S.I.)*	Coil Length (FT.)
BLT-3-25	3/16	.028	5,000	25
BLT-3-100	3/16	.028	5,000	100
BLT-4-25	1/4	.028	5,000	25
BLT-5-25	5/16	.028	5,000	25
BLT-6-25	3/8	.028	5,000	25
BLT-3GRN-25	3/16	.028	5,000	25
BLT-4GRN-25	1/4	.028	5,000	25
BLT-5GRN-25	5/16	.028	5,000	25
BLT-6GRN-25	3/8	.028	5,000	25

FITTINGS: Threaded sleeve

ASSEMBLIES: Ready-made brake lines

***NOTE:**

THE WORKING PRESSURES LISTED FOR THIS TUBE IS RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE ABOVE LISTED WORKING PRESSURES.

STANDARD INVERTED FLARE THREAD



PART No.	Tube O.D. (IN.)	Thread	Length (IN.)
BL-3-08	3/16	3/8 - 24	8
BL-3-12	3/16	3/8 - 24	12
BL-3-20	3/16	3/8 - 24	20
BL-3-30	3/16	3/8 - 24	30
BL-3-40	3/16	3/8 - 24	40
BL-3-51	3/16	3/8 - 24	51
BL-3-60	3/16	3/8 - 24	60
BL-3-72	3/16	3/8 - 24	72
BL-4-08	1/4	7/16 - 24	8
BL-4-12	1/4	7/16 - 24	12

PART No.	Tube O.D. (IN.)	Thread	Length (IN.)
BL-4-20	1/4	7/16 - 24	20
BL-4-30	1/4	7/16 - 24	30
BL-4-40	1/4	7/16 - 24	40
BL-4-51	1/4	7/16 - 24	51
BL-4-60	1/4	7/16 - 24	60
BL-4-72	1/4	7/16 - 24	72
BL-5-12	5/16	1/2 - 20	12
BL-5-20	5/16	1/2 - 20	20
BL-5-30	5/16	1/2 - 20	30
BL-5-40	5/16	1/2 - 20	40
BL-5-51	5/16	1/2 - 20	51
BL-5-60	5/16	1/2 - 20	60
BL-6-12	3/8	5/8 - 18	12
BL-6-20	3/8	5/8 - 18	20
BL-6-30	3/8	5/8 - 18	30
BL-6-40	3/8	5/8 - 18	40
BL-6-51	3/8	5/8 - 18	51
BL-6-60	3/8	5/8 - 18	60

STANDARD ARMoured INVERTED FLARE THREAD



PART No.	Tube O.D. (IN.)	Thread	Length (IN.)
BLA-3-08	3/16	3/8 - 24	8
BLA-3-12	3/16	3/8 - 24	12
BLA-3-20	3/16	3/8 - 24	20
BLA-3-30	3/16	3/8 - 24	30
BLA-3-40	3/16	3/8 - 24	40
BLA-3-51	3/16	3/8 - 24	51
BLA-3-60	3/16	3/8 - 24	60
BLA-3-72	3/16	3/8 - 24	72
BLA-4-12	1/4	7/16 - 24	12
BLA-4-20	1/4	7/16 - 24	20
BLA-4-30	1/4	7/16 - 24	30
BLA-4-40	1/4	7/16 - 24	40
BLA-4-51	1/4	7/16 - 24	51
BLA-4-60	1/4	7/16 - 24	60
BLA-4-72	1/4	7/16 - 24	72

JAPANESE STANDARD (10 x 1.0mm Thread)



PART No.	Tube O.D. (IN.)	Length (IN.)
BLJ-3-08	3/16	8
BLJ-3-12	3/16	12
BLJ-3-20	3/16	20
BLJ-3-30	3/16	30
BLJ-3-40	3/16	40
BLJ-3-51	3/16	51
BLJ-3-60	3/16	60
BLJ-3-72	3/16	72

EUROPEAN STANDARD (Bubble Flare Thread 10 x 1.0mm)



PART No.	Tube O.D. (IN.)	Length (IN.)
BLE-3-08	3/16	8
BLE-3-12	3/16	12
BLE-3-20	3/16	20
BLE-3-30	3/16	30
BLE-3-40	3/16	40
BLE-3-51	3/16	51
BLE-3-60	3/16	60
BLE-3-72	3/16	72



HOSE ENDS

BRASS - STEEL - BLACK IRON- NYLON

AIR BRAKE HOSE COUPLINGS	36
AIR BRAKE HOSE MENDER KITS	37
COMBINATION NIPPLES AND HOSE MENDERS (STEEL)	41
FERRULES (BRASS)	41
HOSE BARBS (BRASS)	39-41
HOSE BARBS-GRIP-TITE (BRASS)	38
HOSE BARBS - FUEL LINE (BRASS)	41
HOSE BARBS (NYLON)	40
HOSE INSERTS (STEEL)	49
HYDRAULIC CRIMP INSTRUCTIONS	48
PERMANENT HOSE ENDS SAE 100R7,100R8,100R18	54
REUSABLE HOSE FITTINGS (BRASS)	42
REUSABLE - SAE 100R14	51
RING - BARB FITTINGS (BRASS)	42
STEEL CRIMP ENDS - SAE 100R7	49
STEEL ONE PIECE CRIMP ENDS SAE	43-47
STEEL ONE PIECE CRIMP ENDS SAE 100R1-AT, 100R2-AT	43-46
STEEL ONE PIECE CRIMP ENDS SAE 100R5	52-53
STEEL ONE PIECE CRIMP ENDS SAE 100R12	47
STEEL ONE PIECE CRIMP ENDS SAE 100R14	50-51
STEEL ONE PIECE CRIMP ENDS SAE 100R16, 100R17	43-46
STEEL REUSABLE ENDS	49,50-51,53
STEEL REUSABLE HOSE ENDS - SAE 100R1-AT, 100R2-AT	50
STEEL REUSABLE HOSE ENDS - SAE 100R5	52-53
STEEL REUSABLE HOSE ENDS - SAE 100R7	54
TERMINAL BOLTS	36

BRASS D.O.T. AIR BRAKE HOSE COUPLINGS AND STEEL TERMINAL BOLTS



SLEEVE

PART No.	For Hose I.D.
1490-6	3/8
1490-8	1/2



NUT

PART No.	For Hose I.D.
1491-6	3/8
1491-8	1/2



COUPLER ASSEMBLY (NUT, SLEEVE AND COUPLER)

PART No.	For Hose I.D.	Pipe
1492-6B	3/8	1/4
1492-6C	3/8	3/8
1492-6D	3/8	1/2
1492-8C	1/2	3/8
1492-8D	1/2	1/2



SWIVEL COUPLER ASSEMBLY (NUT, SLEEVE AND COUPLER)

PART No.	Hose I.D.	Pipe
1492SW-6	3/8	--
1492SW-8	1/2	--
1492SW-6B *	3/8	1/4
1492SW-6C *	3/8	3/8
1492SW-6D *	3/8	1/2
1492SW-8C *	1/2	3/8

* Complete with 4134 series adapter.



COUPLER ASSEMBLY WITH SPRING GUARD (NUT, SLEEVE, COUPLER AND SPRING)

PART No.	For Hose I.D.	Pipe
1493-6B	3/8	1/4
1493-6C	3/8	3/8
1493-6D	3/8	1/2
1493-8C	1/2	3/8
1493-8D	1/2	1/2



SWIVEL COUPLER ASSEMBLY WITH SPRING GUARD (NUT, SLEEVE, COUPLER AND SPRING)

PART No.	For Hose I.D.	Pipe
1493SW-6	3/8	--
1493SW-8	1/2	--
1493SW-6B *	3/8	1/4
1493SW-6C *	3/8	3/8
1493SW-8C *	1/2	3/8

* Complete with 4134 series adapter.



TERMINAL BOLT (STEEL)

PART No.	For Nylon Tube O.D.	For Hose I.D.
1499N-6 *	3/8	3/8

* Complete with 1461 series nut.

PART No.	For Copper Tube O.D.	For Hose I.D.
1499-6	3/8	3/8



HOSE CONNECTOR FOR HAB ASSEMBLIES

PART No.	Straight Thread	Pipe
4134-6B	3/4-20	1/4
4134-6C	3/4-20	3/8
4134-6D	3/4-20	1/2
4134-8C	3/4-20	3/8
4134-8D	3/4-20	1/2
4134-8C-WH	7/8-20	3/8
4134-8D-WH	7/8-20	1/2

USED WITH HAB ASSEMBLIES.



HOSE SPLICER

PART No.	For Hose I.D.
1492-6S	3/8
1492-8S	1/2



COUPLER

PART No.	For Hose I.D.	Pipe
B1492-6B	3/8	1/4
B1492-6C	3/8	3/8
B1492-6D	3/8	1/2
B1492-8C	1/2	3/8
B1492-8D	1/2	1/2



NUT WITH SPRING HOSE GUARD

PART No.	For Hose I.D.
1494-6	3/8
1494-8	1/2



TERMINAL BOLT (STEEL)

PART No.	Female Pipe	Length (IN.)
1495-C	3/8 X 3/8	1-3/8
1495-L	1/4 X 1/4	1-1/2
1495-S	1/4 X 1/4	31/32



TERMINAL BOLT (BRASS)

PART No.	Female Pipe	Length (IN.)
1495B-A	1/8 X 1/8	1-1/2
1495B-C	3/8 X 3/8	1-1/4
1495B-D	1/2 X 1/2	1-1/2
1495B-L	1/4 X 1/4	1-1/2
1495B-S	1/4 X 1/4	31/32



TERMINAL BOLT (STEEL)

PART No.	Pipe	Length (IN.)
1496-DC	1/2M X 3/8F	2



TERMINAL BOLT

PART No.	Pipe	Material	Length (IN.)
1497-DB	1/2M X 1/4F	Steel	2-3/4
1497-DBS	1/2M X 1/4F	Brass	1-5/8



BULKHEAD ADAPTER (BRASS)

PART No.	For Nylon Tube O.D.	Female Pipe
1495N-6C	3/8	3/8
1495N-8C	1/2	3/8



PUSH-TO CONNECT BULKHEAD ADAPTER (STEEL-BRASS)

PART No.	For Nylon Tube O.D.	Female Pipe
PC1495S-6D	3/8	1/2



PUSH-TO CONNECT TERMINAL BOLT (STEEL-BRASS)

PART No.	For Nylon Tube O.D.	Pipe	Length (IN.)
PC1483S-6D	3/8	1/2	2
PC1483S-8D	1/2	1/2	2



For Nylon



For Copper

TERMINAL BOLT (STEEL)

PART No.	For Nylon Tube O.D.	Pipe	Length (IN.)
1498N-6D	3/8	1/2M X 1/4F	2-5/8

(Complete with 1461 series brass nut.)

PART No.	For Copper Tube O.D.	Length Pipe	(IN.)
1498-6D	3/8	1/2M X 1/4F	3-1/4

(Complete with 1161 series brass nut & sleeve.)

AIR BRAKE HOSE MENDERS & QUICK SERVICE KITS

PART No. ABFR-KIT-HAB (AIR BRAKE HAB HOSE REPAIR KIT)

Designed for use in the field, this kit includes a selection of items to complete many temporary air brake hose repairs. Single sided carry case, with handle.

Kit Dimensions

Height: 12.0 In.

Width: 14.5 In.

Depth: 2.375 In.



D.O.T. Air Brake Hose Repair Kit Selection:

PART No.	Description	Qty.	PART No.	Description	Qty.
HAB-6-CUT	DOT Air Brake Hose 3/8 ID	16 In.	1492SW-8	DOT Swivel Coupler 1/2 ID	1
HAB-8-CUT	DOT Air Brake Hose 1/2 ID	16 In.	4134-6B	Hose Adapter 3/8 ID to 1/4 MPT	2
110-CB	Pipe Bushing 3/8 to 1/4	2	4134-6C	Hose Adapter 3/8 ID to 3/8 MPT	2
110-DC	Pipe Bushing 1/2 to 3/8	2	4134-8C-WH	Hose Adapter 1/2 ID to 3/8 MPT	2
121-M8	Thread Sealant Tape	1	4134-8D-WH	Hose Adapter 1/2 ID to 1/2 MPT	2
1492-6S	DOT Air Brake Splicer 3/8 ID	1	TK-1	Thumb knife	1
1492-8S	DOT Air Brake Splicer 1/2 ID	1	ABFR-BOX-1	1 Sided Case	1
1492SW-6	DOT Swivel Coupler 3/8 ID	1			

ALL METAL FIELD ATTACHABLE AIR BRAKE HOSE MENDERS

Fairview's all metal hose menders are ruggedly designed for easy, reliable roadside or shop air brake hose repairs.

PART No.	Description	Swivel Pipe	Min. Hose Hose	O.D.
4120R-6C-RK	Carded Repair Kit	3/8	3/8	.750
4120R-6D-RK	Carded Repair Kit	1/2	3/8	.750
4120R-8C-RK	Carded Repair Kit	3/8	1/2	.875

(HOSE TO HOSE UNION)

4129R-6-RK	Bagged Splicer Kit	3/8	3/8	.750
4129R-8-RK	Bagged Splicer Kit	1/2	1/2	.875

Patent
D759,216 D760,876



Allen wrench supplied
with each kit.




D.O.T. LISTED - NO ADDITIONAL TOOLS REQUIRED



Threaded Shell
On Hose



Push Stem and
Screw to Start



Hold Shell and
Tighten Stem
With Key

Watch our instructional video online on Youtube at:
<https://www.youtube.com/watch?v=rr2iRCOCs3k>




Male Pipe

PART No.	Hose I.D.	Pipe
725-4A	1/4	1/8
725-4B	1/4	1/4
725-4C	1/4	3/8
725-5A	5/16	1/8
725-5B	5/16	1/4
725-6A	3/8	1/8
725-6B	3/8	1/4
725-6C	3/8	3/8
725-6D	3/8	1/2
725-8B	1/2	1/4
725-8C	1/2	3/8
725-8D	1/2	1/2
725-8E	1/2	3/4
725-10C	5/8	3/8
725-10D	5/8	1/2
725-10E	5/8	3/4
725-12D	3/4	1/2
725-12E	3/4	3/4


Working Male Pipe Swivel

PART No.	Hose I.D.	Pipe
725SW-4B	1/4	1/4
725SW-6B	3/8	1/4
725SW-6C	3/8	3/8
725SW-8C	1/2	3/8
725SW-8D	1/2	1/2
725SW-12E	3/4	3/4


Rigid Female Pipe

PART No.	Hose I.D.	Tube
726-4A	1/4	1/8
726-4B	1/4	1/4
726-6B	3/8	1/4
726-6C	3/8	3/8
726-8C	1/2	3/8
726-8D	1/2	1/2
726-8E	1/2	3/4
726-12E	3/4	3/4


45° S.A.E. Male Flare

PART No.	Hose I.D.	Tube
727-44	1/4	1/4
727-45	1/4	5/16
727-66	3/8	3/8
727-88	1/2	1/2


45° S.A.E. Female Flare Swivel

PART No.	Hose I.D.	Tube
728-44	1/4	1/4
728-45	1/4	5/16
728-66	3/8	3/8
728-68	3/8	1/2
728-86	1/2	3/8
728-88	1/2	1/2
728-810	1/2	5/8
728-108	5/8	1/2
728-1010	5/8	5/8
728-1212	3/4	3/4


Hose Splicer

PART No.	Hose I.D.
729-4	1/4
729-5	5/16
729-6	3/8
729-8	1/2
729-10	5/8
729-12	3/4


Female Straight Pipe Swivel
BALL TYPE

PART No.	Hose I.D.	Straight Pipe
731-4A	1/4	1/8
731-4B	1/4	1/4
731-6B	3/8	1/4
731-6C	3/8	3/8
731-8D	1/2	1/2
731-12E	3/4	3/4


Rigid Tube Shank

PART No.	Hose I.D.	Tube
732-44	1/4	1/4
732-66	3/8	3/8


45° S.A.E. Male Inverted Flare Swivel

PART No.	Hose I.D.	Tube
735-43	1/4	3/16
735-44	1/4	1/4
735-45	1/4	5/16
735-65	3/8	5/16
735-66	3/8	3/8
735-88	1/2	1/2
735-1010	5/8	5/8


45° S.A.E. Female Inverted Flare

PART No.	Hose I.D.	Tube
736-45	1/4	5/16
736-65	3/8	5/16
736-66	3/8	3/8


37° S.A.E. Male Flare

PART No.	Hose I.D.	Tube
737-44	1/4	1/4
737-66	3/8	3/8
737-88	1/2	1/2



37° J.I.C. Female Flare Swivel

PART No.	Hose I.D.	Tube
738-44	1/4	1/4
738-45	1/4	5/16
738-66	3/8	3/8
738-88	1/2	1/2
738-1010	5/8	5/8
738-1212	3/4	3/4


90° ELBOW Hose To Male Pipe

PART No.	Hose I.D.	Pipe
739-4A	1/4	1/8
739-4B	1/4	1/4
739-6B	3/8	1/4
739-6C	3/8	3/8
739-8C	1/2	3/8
739-8D	1/2	1/2
739-12E	3/4	3/4

ASSEMBLY INSTRUCTIONS



- LUBRICATE HOSE AND BARB.
- PUSH HOSE ON FITTING UNTIL SEATED UNDER PROTECTIVE CAP.
- NO CLAMPS REQUIRED WHEN USED WITH GRIP-TITE HOSE.

BRASS HOSE BARB FITTINGS

Fairview



**COUPLER
Hose Barb To
Male Pipe**

PART No.	Hose I.D.	Pipe
125-2-10/32	1/8	10/32 UNF
125-2A	1/8	1/8
125-2B	1/8	1/4
125-3A	3/16	1/8
125-3B	3/16	1/4
125-4A	1/4	1/8
125-4B	1/4	1/4
125-4C	1/4	3/8
125-4D	1/4	1/2
125-5A	5/16	1/8
125-5B	5/16	1/4
125-5C	5/16	3/8
125-6A	3/8	1/8
125-6B	3/8	1/4
125-6C	3/8	3/8
125-6D	3/8	1/2
125-6E	3/8	3/4
125-8B	1/2	1/4
125-8C	1/2	3/8
125-8D	1/2	1/2
125-8E	1/2	3/4
125-10C	5/8	3/8
125-10D	5/8	1/2
125-10E	5/8	3/4
125-12D	3/4	1/2
125-12E	3/4	3/4
125-16E	1	3/4
125-16H	1	1
Lead Free		
Part No.		
LF-125-8D	1/2	1/2



**COUPLER
Hose Barb To
Male Pipe
(Cast Bronze)**

125CA-8D	1/2	1/2
125CA-12E	3/4	3/4
125CA-16H	1	1
125CA-20J	1-1/4	1-1/4
125CA-24K	1-1/2	1-1/2
125CA-32M	2	2



**WORKING SWIVEL
COUPLER
Hose Barb To
Male Pipe**

PART No.	Hose I.D.	Pipe
1925-4B	1/4	1/4
1925-6B	3/8	1/4
1925-6C	3/8	3/8
1925-6D	3/8	1/2
1925-8C	1/2	3/8
1925-8D	1/2	1/2



**COUPLER
Hose Barb To
Female Pipe**

PART No.	Hose I.D.	Pipe
126-2A	1/8	1/8
126-2B	1/8	1/4
126-3A	3/16	1/8
126-3B	3/16	1/4
126-4A	1/4	1/8
126-4B	1/4	1/4



**COUPLER
Hose Barb To
Female Pipe
(Cont.)**

PART No.	Hose I.D.	Pipe
126-4C	1/4	3/8
126-5A	5/16	1/8
126-5B	5/16	1/4
126-5C	5/16	3/8
126-6A	3/8	1/8
126-6B	3/8	1/4
126-6C	3/8	3/8
126-6D	3/8	1/2
126-8B	1/2	1/4
126-8C	1/2	3/8
126-8D	1/2	1/2
126-12D	3/4	1/2
126-16H	1	1



**SWIVEL COUPLER
Hose Barb Flat
Seat With Gasket
To Female
Straight Pipe**

PART No.	Hose I.D.	Straight Pipe
130-4A	1/4	1/8
130-4B	1/4	1/4
130-6B	3/8	1/4
130-6C	3/8	3/8
130-6D	3/8	1/2
130-8D	1/2	1/2



**SWIVEL COUPLER
Hose Barb Ball
Seat To Female
Straight Pipe**

Use With 134 Series

PART No.	Hose I.D.	Straight Pipe
131-3A	3/16	1/8
131-3B	3/16	1/4
131-4A	1/4	1/8
131-4B	1/4	1/4
131-4C	1/4	3/8
131-5B	5/16	1/4
131-6B	3/8	1/4
131-6C	3/8	3/8
131-8C	1/2	3/8
131-8D	1/2	1/2
131-12E	3/4	3/4



**COUPLER
Hose Barb To
Male 45°
S.A.E. Flare**

PART No.	Hose I.D.	Tube
127-4A	1/4	1/4
127-4B	1/4	3/8
127-55	5/16	5/16
127-66	3/8	3/8
127-68	3/8	1/2



**CONNECTOR
Male Straight
Pipe Thread With
Ball Seat To Male
Taper Pipe Thread**

Use With 130, 131 Series

PART No.	Straight Pipe	Pipe
134-BB	1/4	1/4
134-CC	3/8	3/8
134-CD	3/8	1/2
134-DD	1/2	1/2



**SWIVEL COUPLER
Hose Barb To
Female 45°
S.A.E. Flare**

PART No.	Hose I.D.	Tube
128-34	3/16	1/4
128-44	1/4	1/4
128-46	1/4	3/8
128-55	5/16	5/16
128-56	5/16	3/8
128-66	3/8	3/8
128-68	3/8	1/2
128-88	1/2	1/2
128-810	1/2	5/8
128-1212	3/4	3/4



**90° ELBOW
Hose Barb
To
Male Pipe**

PART No.	Hose I.D.	Pipe
139-3A	3/16	1/8
139-4A	1/4	1/8
139-4B	1/4	1/4
139-4C	1/4	3/8
139-5A	5/16	1/8
139-5B	5/16	1/4
139-5C	5/16	3/8
139-6A	3/8	1/8
139-6B	3/8	1/4
139-6C	3/8	3/8
139-6D	3/8	1/2
139-8B	1/2	1/4
139-8C	1/2	3/8
139-8D	1/2	1/2
139-10C	5/8	3/8
139-10D	5/8	1/2
139-12D	3/4	1/2
139-12E	3/4	3/4
139-16E	1	3/4
139-16H	1	1



**45° ELBOW
Hose Barb To
Male Pipe**

PART No.	Hose I.D.	Pipe
140-4A	1/4	1/8
140-4B	1/4	1/4
140-5A	5/16	1/8
140-6A	3/8	1/8
140-6B	3/8	1/4
140-6C	3/8	3/8
140-8C	1/2	3/8
140-10C	5/8	3/8

HOSE BARB FITTINGS



SPLICER
Hose Barb

PART No.	Hose I.D.
129-3	3/16
129-4	1/4
129-5	5/16
129-6	3/8
129-8	1/2
129-10	5/8
129-12	3/4



Y CONNECTOR
Hose Barb
All Ends

PART No.	Hose I.D.
123Y-4	1/4
123Y-6	3/8
123Y-8	1/2
123Y-10	5/8
123Y-12	3/4

NOTE: Lead Free Brass hose barbs are available on request. Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.

(Special Order)

Minimum quantities apply.



90° ELBOW
Hose Barb To
Hose Barb

PART No.	Hose I.D.
99HB-4	1/4
99HB-5	5/16
99HB-6	3/8
99HB-8	1/2



TEE
Hose Barb
All Ends

PART No.	Hose I.D.
123-4	1/4
123-5	5/16
123-6	3/8

NYLON HOSE BARB FITTINGS (MADE WITH NSF APPROVED RESINS)




COUPLER
Hose Barb
To
Male Pipe

PART No.	Hose I.D.	Pipe
525-4A	1/4	1/8
525-4B	1/4	1/4
525-4D	1/4	1/2
525-6B	3/8	1/4
525-6C	3/8	3/8
525-6D	3/8	1/2
525-8C	1/2	3/8
525-8D	1/2	1/2
525-8E	1/2	3/4
525-10D	5/8	1/2
525-10E	5/8	3/4
525-12E	3/4	3/4



SPLICER
Hose Barb

PART No.	Hose I.D.
529-4	1/4
529-6	3/8
529-8	1/2
Reducing	
529-42	1/4 to 1/8
529-64	3/8 to 1/4
529-86	1/2 to 3/8



90° ELBOW
Hose Barb
To
Hose Barb

PART No.	Hose I.D.
555-4	1/4
555-6	3/8
555-8	1/2
555-10	5/8
555-12	3/4



COUPLER
Hose Barb
To
Female Pipe

PART No.	Hose I.D.	Pipe
526-4B	1/4	1/4
526-4D	1/4	1/2
526-6B	3/8	1/4
526-6C	3/8	3/8
526-8D	1/2	1/2



90° ELBOW
Hose Barb
To
Male Pipe

PART No.	Hose I.D.	Pipe
539-4A	1/4	1/8
539-4B	1/4	1/4
539-6B	3/8	1/4
539-6C	3/8	3/8
539-6D	3/8	1/2
539-8C	1/2	3/8
539-8D	1/2	1/2
539-10E	5/8	3/4



TEE
Hose Barb
All Ends

PART No.	Hose I.D.
544-3	3/16
544-4	1/4
544-6	3/8
544-8	1/2
544-10	5/8

BRASS FUEL LINE HOSE BARBS

Fairview



**Hose Barb
To Male Pipe**

PART No.	Hose I.D.	Pipe
325-3A	3/16	1/8
325-4A	1/4	1/8
325-4B	1/4	1/4
325-5A	5/16	1/8
325-5B	5/16	1/4
325-6A	3/8	1/8
325-6B	3/8	1/4
325-6C	3/8	3/8
325-10C	5/8	3/8
325-10D	5/8	1/2
325-12D	3/4	1/2



**Hose Barb To
Male Inverted
Flare**

PART No.	Hose I.D.	Tube Size
335-54	5/16	1/4
335-55	5/16	5/16
335-65	3/8	5/16
335-66	3/8	3/8



**90° ELBOW
Hose Barb
To
Male Pipe**

PART No.	Hose I.D.	Pipe
339-4A	1/4	1/8
339-5A	5/16	1/8
339-5B	5/16	1/4
339-6A	3/8	1/8
339-6B	3/8	1/4
339-6C	3/8	3/8
339-10C	5/8	3/8

FOR FUEL LINE HOSE PAGE

STEEL COMBINATION NIPPLES AND HOSE MENDERS

(NOT RECOMMENDED FOR USE WITH AIR)



**COMBINATION
NIPPLE
Hose Barb To
Male Pipe**

PART No.	Hose I.D.	Pipe
BI-125-8D	1/2	1/2
BI-125-12E	3/4	3/4
BI-125-16H	1	1
BI-125-20J	1-1/4	1-1/4
BI-125-24K	1-1/2	1-1/2
BI-125-32M	2	2



**HOSE
MENDER
Hose Barb**

PART No.	Hose I.D.
BI-129-8	1/2
BI-129-12	3/4
BI-129-16	1
BI-129-20	1-1/4
BI-129-24	1-1/2
BI-129-32	2



**PLATED
COMBINATION
NIPPLE
Hose Barb To
Male Pipe**

PART No.	Hose I.D.	Pipe
GI-125-8D	1/2	1/2
GI-125-12E	3/4	3/4
GI-125-16H	1	1
GI-125-20J	1-1/4	1-1/4
GI-125-24K	1-1/2	1-1/2
GI-125-32M	2	2



**PLATED
HOSE
MENDER
Hose Barb**

PART No.	Hose I.D.
GI-129-12	3/4
GI-129-16	1
GI-129-20	1-1/4

BRASS STANDARD FERRULES

(FBL - Ferrule Brass Long, FBS - Ferrule Brass Short)



FBL



FBS

- SIZE RANGE FROM 3/8 TO 1 INCH OUTSIDE DIAMETER
- THE PART NUMBER DESIGNATES THE OUTSIDE DIAMETER OF THE HOSE OR TUBE
- WALL THICKNESS OF THE FERRULE IS .025
- TO ORDER A FERRULE CRIMPER PAGE

PART No.	Inside Dia. (IN.)	Ferrule Length (IN.)	Hole Size (IN.)	PART No.	Inside Dia. (IN.)	Ferrule Length (IN.)	Hole Size (IN.)
FBL-450	.450	23/32	.328	FBL-825	.825	31/32	.625
FBL-475	.475	23/32	.328	FBL-850	.850	31/32	.586
FBL-500	.500	23/32	.328	FBL-875	.875	31/32	.750
FBL-525	.525	23/32	.453	FBL-900	.900	31/32	.750
FBL-550	.550	23/32	.438	FBL-925	.925	31/32	.750
FBL-575	.575	31/32	.438	FBL-975	.975	31/32	.875
FBL-600	.600	31/32	.453	FBL-1000	1.000	31/32	.875
FBL-625	.625	31/32	.453	FBL-1025	1.025	31/32	.875
FBL-650	.650	31/32	.453	FBL-1100	1.100	31/32	.875
FBL-675	.675	31/32	.500	FBL-1125	1.125	31/32	.875
FBL-700	.700	31/32	.500	FBL-1150	1.150	31/32	.875
FBL-725	.725	31/32	.500	FBL-1175	1.175	55/64	.875
FBL-750	.750	31/32	.500	FBL-1275	1.275	31/32	.875
FBL-775	.775	31/32	.500	FBL-1500	1.500	31/32	.875
FBL-800	.800	31/32	.625				

BRASS RING-BARB FITTINGS FOR POLY TUBE (USE WITH POLYETHYLENE TUBE: Page 31)



COUPLING
Tube To
Tube

PART No.	Tube O.D.	Tube I.D.
962-4	1/4	.170
962-6	3/8	.250



**BULKHEAD
UNION**

PART No.	Tube O.D.	Tube I.D.
977-4	1/4	.170



TEE
Tube
Three Ends

PART No.	Tube O.D.	Tube I.D.
964-4	1/4	.170
964-6	3/8	.250
964-8	1/2	.375



CONNECTOR
Tube To
Female Pipe

PART No.	Tube O.D.	Tube I.D.	Pipe
966-4A	1/4	.170	1/8
966-4B	1/4	.170	1/4



90° ELBOW
Tube
To
Tube

PART No.	Tube O.D.	Tube I.D.
965-4	1/4	.170
965-6	3/8	.250
965-8	1/2	.375



CONNECTOR
Tube To
Male Pipe

PART No.	Tube O.D.	Tube I.D.	Pipe
968-4A	1/4	.170	1/8
968-4B	1/4	.170	1/4
968-6A	3/8	.250	1/8
968-6B	3/8	.250	1/4



90° ELBOW
Tube
To
Male Pipe

PART No.	Tube O.D.	Tube I.D.	Pipe
969-4A	1/4	.170	1/8
969-4B	1/4	.170	1/4
969-6A	3/8	.250	1/8
969-6B	3/8	.250	1/4

RING-BARB FITTINGS ARE DESIGNED FOR USE WITH FAIRVIEW POLYETHYLENE TUBE. THE BARB HAS A RAISED RING THAT IMBEDS INTO THE TUBE. THIS ASSURES A LEAKPROOF CONNECTION WHEN USED WITHIN THE NORMAL TEMPERATURE AND PRESSURE RANGE OF THE TUBE. SIMPLY PUSH FITTING INTO TUBE TO ASSEMBLE. NO TOOLS OR CLAMPS REQUIRED.



SEE PAGE 31 FOR POLY TUBE

Note:

Use of Fairview Hose and Tube with other than Fairview original recommended fittings, may void warranty. Verify with a Fairview representative prior to installation.

BRASS SCREW-ON REUSABLE HOSE FITTINGS



**HOSE
FERRULES**

PART No.	Hose O.D.	Hose I. D.
750-84	1/2	1/4
750-106	5/8	3/8
750-116	11/16	3/8



**HOSE STEM
With
Male Pipe
Thread**

PART No.	Hose I.D.	Pipe
751-4B	1/4	1/4
751-6B	3/8	1/4
751-6C	3/8	3/8



**HOSE STEM
With Female
Pipe Thread
(Two Piece
Swivel)**

PART No.	Hose I.D.	Pipe
752-4B	1/4	1/4
752-6B	3/8	1/4
752-6C	3/8	3/8

STEEL ONE PIECE CRIMP HOSE ENDS (BITE-TO-THE-WIRE)



FOR USE WITH S.A.E. 100R1-AT, 100R2-AT, T1SN, T2SN, 100R16, 100R16LT, 100R17, AND 100R17LT HOSE (Pages 9 - 11, 13 - 14)

ITEMS SHOWN ARE INTERCHANGEABLE WITH PARKER "43" SERIES COUPLINGS.
(THEY ARE FAIRVIEW EQUIVALENTS AND ARE NOT PARKER ORIGINAL PRODUCT.)



Male Pipe

PART No.	Hose I.D.	Pipe
SC925-4A	1/4	1/8
SC925-4B	1/4	1/4
SC925-4C	1/4	3/8
SC925-4D	1/4	1/2
SC925-6B	3/8	1/4
SC925-6C	3/8	3/8
SC925-6D	3/8	1/2
SC925-8C	1/2	3/8
SC925-8D	1/2	1/2
SC925-8E	1/2	3/4
SC925-10D	5/8	1/2
SC925-12D	3/4	1/2
SC925-12E	3/4	3/4
SC925-12H	3/4	1
SC925-16E	1	3/4
SC925-16H	1	1
SC925-20J	1-1/4	1-1/4



Male Pipe
(Working Swivel)

PART No.	Hose I.D.	Pipe
SC925SW-4B	1/4	1/4
SC925SW-4C	1/4	3/8
SC925SW-6B	3/8	1/4
SC925SW-6C	3/8	3/8
SC925SW-6D	3/8	1/2
SC925SW-8D	1/2	1/2
SC925SW-12E	3/4	3/4
SC925SW-16H	1	1



Female
Pipe

PART No.	Hose I.D.	Pipe
SC926-4B	1/4	1/4
SC926-6B	3/8	1/4
SC926-6C	3/8	3/8
SC926-6D	3/8	1/2
SC926-8D	1/2	1/2



S.A.E. 37°
Male Flare

PART No.	Hose I.D.	Tube
SC937-44	1/4	1/4
SC937-45	1/4	5/16
SC937-46	1/4	3/8
SC937-66	3/8	3/8
SC937-68	3/8	1/2
SC937-610	3/8	5/8
SC937-88	1/2	1/2
SC937-810	1/2	5/8
SC937-812	1/2	3/4
SC937-1010	5/8	5/8
SC937-1012	5/8	3/4
SC937-1212	3/4	3/4
SC937-1216	3/4	1
SC937-1616	1	1



S.A.E. 37°
Female Flare
(Swivel)

PART No.	Hose I.D.	Tube
SC938-44	1/4	1/4
SC938-45	1/4	5/16
SC938-46	1/4	3/8
SC938-48	1/4	1/2
SC938-64	3/8	1/4
SC938-66	3/8	3/8
SC938-68	3/8	1/2
SC938-610	3/8	5/8
SC938-86	1/2	3/8
SC938-88	1/2	1/2
SC938-810	1/2	5/8
SC938-812	1/2	3/4
SC938-1010	5/8	5/8
SC938-1012	5/8	3/4
SC938-1210	3/4	5/8
SC938-1212	3/4	3/4
SC938-1214	3/4	7/8
SC938-1216	3/4	1
SC938-1612	1	3/4
SC938-1616	1	1
SC938-2020	1-1/4	1-1/4
SC938-2424	1-1/2	1-1/2



Female
NPSM Pipe
(Swivel)

PART No.	Hose I.D.	Pipe
SC926SW-4B	1/4	1/4
SC926SW-6C	3/8	3/8
SC926SW-6D	3/8	1/2
SC926SW-8D	1/2	1/2
SC926SW-12E	3/4	3/4
SC926SW-16H	1	1



Female
(Grease Tap)

PART No.	Hose I.D.	Thread
SC926GT-4A	1/4	1/2 - 27



S.A.E. 45°
Female Flare
(Swivel)

PART No.	Hose I.D.	Tube
SC928-66	3/8	3/8
SC928-1212	3/4	3/4



S.A.E. 45°
Inverted Flare
(Swivel)

PART No.	Hose I.D.	Tube
SC935-44	1/4	1/4
SC935-66	3/8	3/8



Male
O-Ring
Boss

PART No.	Hose I.D.	O-Ring
SC943-44	1/4	7/16 - 18
SC943-46	1/4	9/16 - 18
SC943-66	3/8	9/16 - 18
SC943-68	3/8	3/4 - 16
SC943-88	1/2	3/4 - 16
SC943-810	1/2	7/8 - 14
SC943-1212	3/4	1-1/16 - 12



Male
O-Ring Boss
(Working Swivel)

PART No.	Hose I.D.	O-Ring
SC943SW-68	3/8	3/4 - 16
SC943SW-88	1/2	3/4 - 16



Male
O-Ring Face Seal

PART No.	Hose I.D.	ORFS
SC953-44	1/4	9/16 - 18
SC953-66	3/8	11/16 - 16
SC953-68	3/8	13/16 - 16
SC953-88	1/2	13/16 - 16
SC953-810	1/2	1 - 14
SC953-1010	5/8	1 - 14
SC953-1212	3/4	1-3/16 - 12



Female
O-Ring Face Seal
(Swivel)

PART No.	Hose I.D.	ORFS
SC958-44	1/4	9/16 - 18
SC958-46	1/4	11/16 - 16
SC958-48	1/4	13-16 - 16
SC958-66	3/8	11/16 - 16
SC958-68	3/8	13/16 - 16
SC958-88	1/2	13/16 - 16
SC958-810	1/2	1 - 14
SC958-1010	5/8	1 - 14
SC958-1012	5/8	1-3/16 - 12
SC958-1210	3/4	1 - 14
SC958-1212	3/4	1-3/16 - 12
SC958-1616	1	1-7/16 - 12



Tube
Repair
(Flareless)

PART No.	Hose I.D.	Tube
SC967-65	3/8	5/16
SC967-66	3/8	3/8
SC967-88	1/2	1/2
SC967-810	1/2	5/8
SC967-1212	3/4	3/4

STEEL ONE PIECE CRIMP HOSE ENDS (BITE-TO-THE-WIRE)

FOR USE WITH S.A.E. 100R1-AT, 100R2-AT, T1SN, T2SN, 100R16, 100R16LT, 100R17, AND
100R17LT HOSE (Pages 9 - 11, 13 - 14)

ITEMS SHOWN ARE INTERCHANGEABLE WITH PARKER "43" SERIES COUPLINGS.
(THEY ARE FAIRVIEW EQUIVALENTS AND ARE NOT PARKER ORIGINAL PRODUCT.)



**Hose
Splicer**

PART No.	Hose I.D.
SC929-44	1/4
SC929-66	3/8
SC929-88	1/2
SC929-1212	3/4



**British
Standard
Pipe Parallel
Female (Swivel)
(BSPP)**

PART No.	Hose I.D.	Pipe
SC931BSP-44	1/4	1/4 - 19
SC931BSP-66	3/8	3/8 - 19
SC931BSP-88	1/2	1/2 - 14



**Female 30°
JIS Flare
Parallel Pipe
Female
(Swivel)**

PART No.	Hose I.D.	Pipe
SC931JIS-66	3/8	3/8



**Universal
Seat
(Light) Female
(Swivel) (DIN)**

PART No.	Hose I.D.	Tube	Metric
SC931LM-4-16	1/4	10 MM	M16X1.5
SC931LM-6-16	3/8	10 MM	M16X1.5
SC931LM-6-18	3/8	12 MM	M18X1.5
SC931LM-8-22	1/2	15 MM	M22X1.5



**90° ELBOW
Male Pipe
(Working
Swivel)**

PART No.	Hose I.D.	Pipe
SC916SW-4B	1/4	1/4
SC916SW-6C	3/8	3/8
SC916SW-8D	1/2	1/2



**90° ELBOW
Male O-Ring
Boss
(Working
Swivel)**

PART No.	Hose I.D.	O-Ring
SC936-66	3/8	9/16 - 18
SC936-68	3/8	3/4 - 16
SC936-88	1/2	3/4 - 16
SC936-810	1/2	7/8 - 14



**90° ELBOW
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC939-44	1/4	1/4
SC939-46	1/4	3/8
SC939-64	3/8	1/4
SC939-66	3/8	3/8
SC939-68	3/8	1/2
SC939-88	1/2	1/2
SC939-810	1/2	5/8
SC939-1010	5/8	5/8
SC939-1212	3/4	3/4
SC939-1616	1	1
SC939-2020	1-1/4	1-1/4
SC939-2424	1-1/2	1-1/2



**90° ELBOW
(LONG STYLE)
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC939L-44	1/4	1/4
SC939L-46	1/4	3/8
SC939L-66	3/8	3/8
SC939L-88	1/2	1/2
SC939L-810	1/2	5/8
SC939L-1212	3/4	3/4
SC939L-1616	1	1



**90° ELBOW
S.A.E. 45°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC941-66	3/8	3/8



**90° ELBOW
S.A.E. 45° Inverted
Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC931-44	1/4	1/4
SC931-66	3/8	3/8



**90° ELBOW
Female O-Ring
Face Seal
(Swivel)**

PART No.	Hose I.D.	ORFS
SC959-44	1/4	9/16 - 18
SC959-46	1/4	11/16 - 16
SC959-66	3/8	11/16 - 16
SC959-68	3/8	13/16 - 16
SC959-88	1/2	13/16 - 16
SC959-810	1/2	1 - 14
SC959-1010	5/8	1 - 14
SC959-1212	3/4	1-3/16 - 12
SC959-1616	1	1-7/16 - 12



**90° ELBOW
British Standard
Pipe Parallel
Female (Swivel)
(BSPP)**

PART No.	Hose I.D.	Pipe
SC939BSP-44	1/4	1/4 - 19
SC939BSP-66	3/8	3/8 - 19
SC939BSP-88	1/2	1/2 - 14



**45° ELBOW
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC940-44	1/4	1/4
SC940-46	1/4	3/8
SC940-66	3/8	3/8
SC940-68	3/8	1/2
SC940-88	1/2	1/2
SC940-810	1/2	5/8
SC940-1010	5/8	5/8
SC940-1212	3/4	3/4
SC940-1616	1	1



**45° ELBOW
Female O-Ring
Face Seal
(Swivel)**

PART No.	Hose I.D.	ORFS
SC950-44	1/4	9/16 - 18
SC950-46	1/4	11/16 - 16
SC950-66	3/8	11/16 - 16
SC950-68	3/8	13/16 - 16
SC950-88	1/2	13/16 - 16
SC950-810	1/2	1 - 14
SC950-1010	5/8	1 - 14
SC950-1212	3/4	1-3/16 - 12
SC950-1616	1	1-7/16 - 12



**45° ELBOW
British Standard
Pipe Parallel
Female (Swivel)
(BSPP)**

PART No.	Hose I.D.	Pipe
SC940BSP-44	1/4	1/4 - 19
SC940BSP-66	3/8	3/8 - 19

STEEL ONE PIECE CRIMP HOSE ENDS (COMPRESSION STYLE)



USE WITH S.A.E. 100R1-AT, 100R2-AT, T1SN, T2SN, 100R3, 100R4, 100R16 AND 100R17 HOSE (Pages 9 - 10)

ITEMS SHOWN ARE INTERCHANGEABLE WITH WEATHERHEAD "U" SERIES COUPLINGS.
(THEY ARE FAIRVIEW EQUIVALENTS AND ARE NOT WEATHERHEAD ORIGINAL PRODUCT.)



Male Pipe

PART No.	Hose I.D.	Pipe
SC625-4A	1/4	1/8
SC625-4B	1/4	1/4
SC625-4C	1/4	3/8
SC625-4D	1/4	1/2
SC625-6B	3/8	1/4
SC625-6C	3/8	3/8
SC625-6D	3/8	1/2
SC625-8C	1/2	3/8
SC625-8D	1/2	1/2
SC625-8E	1/2	3/4
SC625-10D	5/8	1/2
SC625-10E	5/8	3/4
SC625-12D	3/4	1/2
SC625-12E	3/4	3/4
SC625-12H	3/4	1
SC625-16E	1	3/4
SC625-16H	1	1
SC625-20J	1-1/4	1-1/4



**Male Pipe
(Working Swivel)**

PART No.	Hose I.D.	Pipe
SC625SW-4B	1/4	1/4
SC625SW-6B	3/8	1/4
SC625SW-6C	3/8	3/8
SC625SW-6D	3/8	1/2
SC625SW-8D	1/2	1/2
SC625SW-12E	3/4	3/4
SC625SW-16H	1	1



**Female
Pipe**

PART No.	Hose I.D.	Pipe
SC626-4A	1/4	1/8
SC626-4B	1/4	1/4
SC626-6B	3/8	1/4
SC626-6C	3/8	3/8
SC626-8D	1/2	1/2



**S.A.E. 37°
Male Flare**

PART No.	Hose I.D.	Tube
SC637-44	1/4	1/4
SC637-45	1/4	5/16
SC637-46	1/4	3/8
SC637-66	3/8	3/8
SC637-68	3/8	1/2
SC637-610	3/8	5/8
SC637-88	1/2	1/2
SC637-810	1/2	5/8
SC637-812	1/2	3/4
SC637-108	5/8	1/2
SC637-1010	5/8	5/8
SC637-1012	5/8	3/4
SC637-1212	3/4	3/4
SC637-1216	3/4	1
SC637-1616	1	1



**Female
N.P.S.M. Pipe
(Swivel)**

PART No.	Hose I.D.	Pipe
SC626SW-4B	1/4	1/4
SC626SW-6C	3/8	3/8
SC626SW-6D	3/8	1/2
SC626SW-8D	1/2	1/2
SC626SW-12E	3/4	3/4
SC626SW-16H	1	1



**Female
(Grease Tap)**

PART No.	Hose I.D.	Thread
SC626GT-4A	1/4	1/2 - 27



**S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC638-44	1/4	1/4
SC638-45	1/4	5/16
SC638-46	1/4	3/8
SC638-64	3/8	1/4
SC638-66	3/8	3/8
SC638-68	3/8	1/2
SC638-610	3/8	5/8
SC638-86	1/2	3/8
SC638-88	1/2	1/2
SC638-810	1/2	5/8
SC638-812	1/2	3/4
SC638-1010	5/8	5/8
SC638-1012	5/8	3/4
SC638-1210	3/4	5/8
SC638-1212	3/4	3/4
SC638-1214	3/4	7/8
SC638-1216	3/4	1
SC638-1616	1	1
SC638-2020	1-1/4	1-1/4



**S.A.E. 45°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC628-66	3/8	3/8
SC628-1212	3/4	3/4



**S.A.E. 45°
Inverted Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC635-44	1/4	1/4
SC635-65	3/8	5/16
SC635-66	3/8	3/8
SC635-88	1/2	1/2



**Male
O-Ring
Boss**

PART No.	Hose I.D.	O-Ring
SC643-66	3/8	9/16 - 18
SC643-68	3/8	3/4 - 16
SC643-610	3/8	7/8 - 14
SC643-88	1/2	3/4 - 16
SC643-810	1/2	7/8 - 14
SC643-1212	3/4	1-1/16 - 12



**Male
O-Ring Boss
(Swivel)**

PART No.	Hose I.D.	O-Ring
SC643SW-68	3/8	3/4 - 16
SC643SW-88	1/2	3/4 - 16
SC643SW-810	1/2	7/8 - 14



**Male
O-Ring Face
Seal**

PART No.	Hose I.D.	ORFS
SC653-66	3/8	11/16 - 16
SC653-68	3/8	13/16 - 16
SC653-88	1/2	13/16 - 16
SC653-810	1/2	1 - 14



**Female
O-Ring Face
Seal
(Swivel)**

PART No.	Hose I.D.	ORFS
SC658-44	1/4	9/16 - 18
SC658-46	1/4	11/16 - 16
SC658-66	3/8	11/16 - 16
SC658-68	3/8	13/16 - 16
SC658-88	1/2	13/16 - 16
SC658-810	1/2	1 - 14
SC658-1010	5/8	1 - 14
SC658-1212	3/4	1-3/16 - 12
SC658-1616	1	1-7/16 - 12

STEEL ONE PIECE CRIMP HOSE ENDS (COMPRESSION STYLE)

USE WITH S.A.E. 100R1-AT, 100R2-AT, T1SN, T2SN, 100R3, 100R4, 100R16 AND
100R17 HOSE (Pages 9 - 11)

ITEMS SHOWN ARE INTERCHANGEABLE WITH WEATHERHEAD "U" SERIES COUPLINGS.
(THEY ARE FAIRVIEW EQUIVALENTS AND ARE NOT WEATHERHEAD ORIGINAL PRODUCT.)




**Tube
Repair
(Flareless)**

PART No.	Hose I.D.	Tube
SC667-44	1/4	1/4
SC667-65	3/8	5/16
SC667-66	3/8	3/8
SC667-88	1/2	1/2
SC667-810	1/2	5/8
SC667-1212	3/4	3/4



**Hose
Splicer**

PART No.	Hose I.D.
SC629-44	1/4
SC629-66	3/8
SC629-88	1/2
SC629-1212	3/4
SC629-1616	1



**British
Standard
Pipe Parallel
Female
(Swivel)
(BSPP)**

PART No.	Hose I.D.	Pipe
SCK631BSP-66	3/8	3/8 - 19
SCK631BSP-88	1/2	1/2 - 14



**90° ELBOW
Male Pipe
(Working
Swivel)**

PART No.	Hose I.D.	Pipe
SC616SW-4B	1/4	1/4
SC616SW-6C	3/8	3/8
SC616SW-8D	1/2	1/2



**90° ELBOW
Male O-Ring
Boss
(Working
Swivel)**

PART No.	Hose I.D.	O-Ring
SC636-66	3/8	9/16 - 18
SC636-68	3/8	3/4 - 16
SC636-610	3/8	7/8 - 14
SC636-88	1/2	3/4 - 16
SC636-810	1/2	7/8 - 14



**90° ELBOW
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC639-44	1/4	1/4
SC639-46	1/4	3/8
SC639-66	3/8	3/8
SC639-68	3/8	1/2
SC639-88	1/2	1/2
SC639-810	1/2	5/8
SC639-1010	5/8	5/8
SC639-1212	3/4	3/4
SC639-1616	1	1



**90° ELBOW
(LONG STYLE)
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC639L-44	1/4	1/4
SC639L-66	3/8	3/8
SC639L-88	1/2	1/2
SC639L-1212	3/4	3/4



**90° ELBOW
S.A.E. 45°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC641-66	3/8	3/8



**90° ELBOW
S.A.E. 45°
Inverted
Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC631-44	1/4	1/4
SC631-66	3/8	3/8
SC631-88	1/2	1/2



**90° ELBOW
British Standard
Parallel Pipe
Female (Swivel)
(BSPP)**

PART No.	Hose I.D.	BSPP
SCK639BSP-66	3/8	3/8 - 19
SCK639BSP-88	1/2	1/2 - 14



**90° ELBOW
Female O-Ring
Face Seal
(Swivel)**

PART No.	HOSE	ORFS
SC659-44	1/4	9/16 - 18
SC659-46	1/4	11/16 - 16
SC659-66	3/8	11/16 - 16
SC659-68	3/8	13/16 - 16
SC659-88	1/2	13/16 - 16
SC659-810	1/2	1 - 14
SC659-1010	5/8	1 - 14
SC659-1212	3/4	1-3/16 - 12
SC659-1616	1	1-7/16 - 12



**45° ELBOW
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC640-44	1/4	1/4
SC640-66	3/8	3/8
SC640-68	3/8	1/2
SC640-88	1/2	1/2
SC640-810	1/2	5/8
SC640-1212	3/4	3/4
SC640-1616	1	1



**45° ELBOW
S.A.E. 45°
Inverted Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SC632-44	1/4	1/4
SC632-66	3/8	3/8



**45° ELBOW
Female O-Ring
Face Seal
(Swivel)**

PART No.	Hose I.D.	ORFS
SC650-44	1/4	9/16 - 18
SC650-66	3/8	11/16 - 16
SC650-88	1/2	13/16 - 16
SC650-810	1/2	1 - 14

STEEL ONE PIECE CRIMP HOSE ENDS (BITE-TO-THE-WIRE)



FOR USE WITH S.A.E. 100R12 HOSE
(Page 13)

ITEMS SHOWN ARE INTERCHANGEABLE WITH PARKER "71" SERIES COUPLINGS.
(THEY ARE FAIRVIEW EQUIVALENTS AND ARE NOT PARKER ORIGINAL PRODUCT.)



Male Pipe

PART No.	Hose I.D.	Pipe
SCT925MS-8D	1/2	1/2
SCT925MS-12E	3/4	3/4
SCT925MS-16H	1	1
SCT925MS-20J	1-1/4	1-1/4
SCT925MS-24K	1-1/2	1-1/2
SCT925MS-32M	2	2



Split Flange
Code 61

PART No.	Hose I.D.	Flange
SCT900MS-1212	3/4	3/4
SCT900MS-1616	1	1
SCT900MS-2020	1-1/4	1-1/4

Code 62 Available SCT900MS62 in series.



90° ELBOW
S.A.E. 37°
Female Flare
(Swivel)

PART No.	Hose I.D.	Tube
SCT939MS-88	1/2	1/2
SCT939MS-810	1/2	5/8
SCT939MS-1212	3/4	3/4
SCT939MS-1616	1	1
SCT939MS-2020	1-1/4	1-1/4
SCT939MS-2424	1-1/2	1-1/2



S.A.E. 37°
Male Flare

PART No.	Hose I.D.	Tube
SCT937MS-88	1/2	1/2
SCT937MS-810	1/2	5/8
SCT937MS-1212	3/4	3/4
SCT937MS-1616	1	1
SCT937MS-2020	1-1/4	1-1/4



45° ELBOW
S.A.E. 37°
Female Flare
(Swivel)

PART No.	Hose I.D.	Tube
SCT940MS-88	1/2	1/2
SCT940MS-810	1/2	5/8
SCT940MS-1212	3/4	3/4
SCT940MS-1216	3/4	1
SCT940MS-1616	1	1
SCT940MS-2020	1-1/4	1-1/4
SCT940MS-2424	1-1/2	1-1/2



90° ELBOW
BSP Parallel
Female
60° Cone
(Swivel)

PART No.	Hose I.D.	Thread
SCT939BSPMS-1212	3/4	3/4 - 14
SCT939BSPMS-1616	1	1 - 11



S.A.E. 37°
Female Flare
(Swivel)

PART No.	Hose I.D.	Tube
SCT938MS-88	1/2	1/2
SCT938MS-810	1/2	5/8
SCT938MS-1212	3/4	3/4
SCT938MS-1216	3/4	1
SCT938MS-1616	1	1
SCT938MS-2020	1-1/4	1-1/4
SCT938MS-2424	1-1/2	1-1/2



45° ELBOW
Split Flange
Code 61

PART No.	Hose I.D.	Flange
SCT945MS-1616	1	1
SCT945MS-2020	1-1/4	1-1/4

Code 62 Available SCT945MS62 in series.



90° ELBOW
Female O-Ring
Face Seal
(Swivel)

PART No.	Hose I.D.	ORFS
SCT959MS-88	1/2	13/16 - 16
SCT959MS-810	1/2	1 - 14
SCT959MS-1212	3/4	1-3/16 - 12
SCT959MS-1616	1	1-7/16 - 12



90° ELBOW
Split Flange
Code 61

PART No.	Hose I.D.	Flange
SCT990MS-1212	3/4	3/4
SCT990MS-1216	3/4	1
SCT990MS-1616	1	1
SCT990MS-1620	1	1-1/4
SCT990MS-2020	1-1/4	1-1/4

Code 62 Available SCT990MS62 in series.



Female O-Ring
Face Seal
(Swivel)

PART No.	Hose I.D.	ORFS
SCT958MS-88	1/2	13/16 - 16
SCT958MS-810	1/2	1 - 14
SCT958MS-1212	3/4	1-3/16 - 12
SCT958MS-1616	1	1-7/16 - 12
SCT958MS-2020	1-1/4	1-11/16 - 12



45° ELBOW
Female O-Ring
Face Seal
(Swivel)

PART No.	Hose I.D.	ORFS
SCT950MS-88	1/2	13/16 - 16
SCT950MS-1212	3/4	1-3/16 - 12
SCT950MS-1616	1	1-7/16 - 12



British Standard
Pipe Parallel
Female
60° Cone
(Swivel)

PART No.	Hose I.D.	Thread
SCT931BSPMS-1212	3/4	3/4 - 14
SCT931BSPMS-1616	1	1 - 11

HYDRAULIC CRIMP INSTRUCTIONS

1.



1. Cut hose to length.

Using a cut-off saw or cut-off wheel, cut the hose square to the desired length. Clean hose with air pressure to remove dust particles.


2.



2. Mark insertion depth.

Find the insertion depth by measuring the distance from the end of the ferrule to the shoulder of the ferrule. Using a ruler or by holding the hose next to the ferrule, mark a line on the hose indicating the insertion depth.

3.

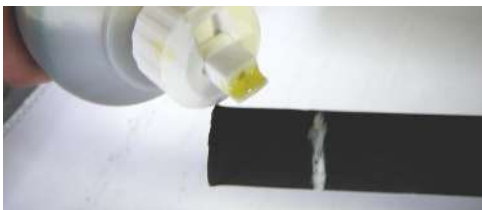

3. Lubricate hose with hose assembly lubricant.

Place a small amount of lubricant on the outer and inner tube portion of the hose. Only use approved hose assembly lubricant. Other non-approved lubricants or oil products may not be compatible with hose material.

4.



4. Insert fitting into hose.

Push the fitting into the hose until the insertion depth mark lines up with the end of the ferrule.

5.



5. Insert Hose into crimping machine.

When crimping Fairview's SC600 and SCK600 Series, align the dots on the ferrule with the top of the dies. (figure 1)

When crimping Fairview's SC500, SC900 and SCT900MS Series, align the top shoulder of the ferrule with the top of the dies and crimp the entire ferrule. (figure 2)

6.



6. Check Crimp Diameter.

After crimping verify crimp diameter is within specifications using calipers. Place caliper on the lower or smooth portion of the ferrule. Do not place calipers on any raised ridges on the ferrule. Measure the top, middle and bottom of the ferrule to ensure crimp diameter is correct and uniform.

All hydraulic assemblies should be pressure tested prior to use.

STEEL HOSE ENDS

LUBE HOSE ENDS FOR USE WITH S.A.E. 100R7 HOSE



Male Pipe

PART No.	Hose I.D.	Pipe
SC725-2A	1/8	1/8
SC725-3A	3/16	1/8
SC725-4B	1/4	1/4



Male Pipe (Swivel)

PART No.	Hose I.D.	Pipe
SC725SW-2A	1/8	1/8



S.A.E. Female Flare (Swivel)

PART No.	Hose I.D.	Tube
SC738-24	1/8	1/4
SC738-34	3/16	1/4
SC738-44	1/4	1/4
SC738-46	1/4	3/8

STEEL REUSABLE ENDS



S.A.E. Female Flare (Swivel)

PART No.	Hose I.D.	Tube
SR738-24	1/8	1/4



Male Pipe (Swivel)

PART No.	Hose I.D.	Pipe
SR725SW-2A	1/8	1/8

CRIMP SPECIFICATIONS FOR PERMANENTLY ATTACHED HOSE ENDS

All hydraulic assemblies should be pressure tested prior to use.

NOTE: Fairview's Accutek® 100R7 hose ends are not to be swaged.

HOSE	DESCRIPTION	DASH SIZE	HOSE I.D.	Crimp DIA. SC700 Series
HR7	S.A.E. 100R7	-2	1/8	0.3650
		-3	3/16	0.5100
		-4	1/4	0.5550

IMPORTANT: This reference chart is provided by Fairview Ltd. for convenience only. The information contained herein cannot be guaranteed because conditions of use are beyond our control, such as variances in hose outside diameters. This document should not be substituted for the judgement of a qualified professional. Assemblies should be tested prior to installation. The user of this information assumes all risk associated with its use.

STEEL HOSE INSERTS



Hose Insert To Male Pipe

PART No.	Hose I.D.	Pipe
S1125-10C	5/8	3/8
S1125-10D	5/8	1/2
S1125-12E	3/4	3/4



90° ELBOW Hose Insert To Male Pipe

PART No.	Hose I.D.	Pipe
S1139-10D	5/8	1/2
S1139-12E	3/4	3/4
S1139-16H	1	1



45° ELBOW Hose Insert To Male Pipe

PART No.	Hose I.D.	Pipe
S1140-10D	5/8	1/2
S1140-12E	3/4	3/4



Hose Insert To Male O-Ring

PART No.	Hose I.D.	O-Ring
SO1125-6	3/8	9/16 - 18
SO1125-12	3/4	1-1/16 - 12
SO1125-16	1	1-5/16 - 12
SO1125-1612	1	1-1/16 - 12
SO1125-20	1-1/4	1-5/8 - 12



45° ELBOW Hose Insert To Male O-Ring

PART No.	Hose I.D.	O-Ring
SO1140-16	1	1-5/16 - 12



90° ELBOW Hose Insert To Male O-Ring

PART No.	Hose I.D.	O-Ring
SO1139-4	1/4	7/16 - 20
SO1139-6	3/8	9/16 - 18
SO1139-8	1/2	3/4 - 16
SO1139-16	1	1-5/16 - 12
SO1139-1612	1	1-1/16 - 12

STEEL REUSABLE HOSE ENDS

FOR USE WITH: S.A.E. 100R1-AT



Male
Pipe

PART No.	Hose I.D.	Pipe
SRT125-4B	1/4	1/4
SRT125-6C	3/8	3/8
SRT125-8D	1/2	1/2



S.A.E. 37°
Female
Flare
(Swivel)

PART No.	Hose I.D.	Tube
SRT138-44 *	1/4	1/4
SRT138-66 *	3/8	3/8
SRT138-88 *	1/2	1/2

* Item is available in stainless steel.
Change prefix to "SS"
(eg. SSRT238-44) *

FOR USE WITH: S.A.E. 100R2-AT



Male
Pipe

PART No.	Hose I.D.	Pipe
SRT225-4B	1/4	1/4
SRT225-6C	3/8	3/8
SRT225-8D	1/2	1/2




S.A.E. 37°
Female
Flare
(Swivel)

PART No.	Hose I.D.	Tube
SRT238-44 *	1/4	1/4
SRT238-66 *	3/8	3/8
SRT238-88 *	1/2	1/2
SRT238-1212 *	3/4	3/4

* Item is available in stainless steel.
Change prefix to "SS"
(eg. SSRT238-44) *

ASSEMBLY INSTRUCTIONS FOR NON-SKIVE S.A.E. 100R1, 100R2 & 100R5 STEEL REUSABLE HOSE ENDS




STEP 1

Using a fine-toothed saw or cut-off wheel, cut the hose square to the desired length. Clean hose with air pressure to remove dust particles.




STEP 2

Dip the end of the hose into a lubricant. Use a light viscosity oil (S.A.E. 10 or 20)




STEP 3

Turn the hose counterclockwise into the socket until the hose bottoms.



STEP 4

Dip the nipple end into a lubricant. Refer to step 2. (Light weight oil S.A.E. 10 or 20).



STEP 5

Turn the stem clockwise into the hose and socket until the stem hex shoulders against the ferrule.

CAUTION: Larger diameter hose is subject to "Neck Down" during cut-off operations. This condition does not allow the nipple to be pushed into the hose. When this happens, that portion of the hose I.D. must be chamfered with a sharp knife, just enough to allow the nipple to be pushed into the hose. Be sure to remove the cut-off rubber from the assembly.

IMPORTANT: Back the hose off at least 1/2 turn, check to be sure that there is a gap of 1/32" to 1/16" between the hose end and the shoulder on the inside of the socket. Failure to provide this gap may cause cracking of the socket.

ONE PIECE CRIMP ENDS FOR PTFE HOSE

FOR USE WITH S.A.E. 100R14 SMOOTH BORE PTFE HOSE (Page 16)

ALL WETTED PARTS ARE BRASS.



Male
Pipe

PART No.	Nominal Hose I.D.	Tube
SCT425-4A	1/4	1/8
SCT425-4B	1/4	1/4
SCT425-6C	3/8	3/8
SCT425-8D	1/2	1/2
SCT425-10D	5/8	1/2
SCT425-12E	3/4	3/4



S.A.E. 37°
Female
Flare
(Swivel)

PART No.	Nominal Hose I.D.	Tube
SCT438-44	1/4	1/4
SCT438-66	3/8	3/8
SCT438-88	1/2	1/2
SCT438-1010	5/8	5/8
SCT438-1212	3/4	3/4

REUSABLE END FITTINGS FOR PTFE HOSE



FOR USE WITH S.A.E. 100R14 SMOOTH BORE PTFE HOSE (Page 16)
ALL WETTED PARTS ARE BRASS



Male Pipe

PART No.	Nominal Hose I.D.	Pipe
SR425-4A	1/4	1/8
SR425-4B	1/4	1/4
SR425-6B	3/8	1/4
SR425-6C	3/8	3/8
SR425-8D	1/2	1/2
SR425-10D	5/8	1/2
SR425-12E	3/4	3/4



Female
Swivel
37° S.A.E.
Flare

PART No.	Nominal Hose I.D.	Tube
SR438-44	1/4	1/4
SR438-55	5/16	5/16
SR438-66	3/8	3/8
SR438-88	1/2	1/2
SR438-1010	5/8	5/8
SR438-1212	3/4	3/4



Replacement
Sleeve

PART No.	Nominal Hose I.D.
SR4S-4	1/4
SR4S-6	3/8
SR4S-8	1/2
SR4S-10	5/8
SR4S-12	3/4



Female
Swivel
45° S.A.E.
Flare

PART No.	Nominal Hose I.D.	Tube
SR428-44	1/4	1/4
SR428-55	5/16	5/16
SR428-66	3/8	3/8
SR428-88	1/2	1/2
SR428-1010	5/8	5/8
SR428-1212	3/4	3/4




D.O.T.
Air Brake
Compression

PART No.	Nominal Hose I.D.	Tube
SR468-1010	5/8	5/8


STAINLESS STEEL AVAILABLE
UPON REQUEST (SSR4 Series •)

PTFE REUSABLE FITTINGS ASSEMBLY INSTRUCTIONS




STEP 1

Wrap masking tape around hose at desired length and cut square with fine-tooth hack saw. Trim any loose wires and slip two shells on back to back, placing them about 3 From each end of hose.




STEP 4

Lubricate stem and shell threads. Push hose onto stem with twisting motion until hose seats against stem chamfer. Push shell forward and hand start threading.




STEP 2

Use a flat surface to push the sleeve over the tube underneath the wire until the tube stock butts against the inside shoulder of the sleeve.



STEP 5

Wrench tighten stem until clearance with shell is 1/32" or less. Clean, inspect and test.



STEP 3

Mount stem hex in vise. Work the hose bore over the stem to size tube.

STEEL ONE PIECE CRIMP HOSE ENDS

FOR USE WITH S.A.E. 100R5, S.A.E. J1402 HOSE (Page 8)

ITEMS SHOWN ARE INTERCHANGEABLE WITH WEATHERHEAD "069E" SERIES COUPLINGS.
(THEY ARE FAIRVIEW EQUIVALENTS AND ARE NOT WEATHERHEAD ORIGINAL PRODUCT.)



Male Pipe

PART No.	Nominal Hose I.D.	Pipe
SCW525-4B	1/4	1/4
SCW525-6B	3/8	1/4
SCW525-6C	3/8	3/8
SCW525-8C	1/2	3/8
SCW525-8D	1/2	1/2
SCW525-10D	5/8	1/2
SCW525-12E	3/4	3/4
SCW525-16H	1	1
SCW525-20J	1-1/4	1-1/4
SCW525-32M	2	2



S.A.E. 37°
Female Flare
(Swivel)

PART No.	Nominal Hose I.D.	Tube
SCW538-44	1/4	1/4
SCW538-66	3/8	3/8
SCW538-88	1/2	1/2
SCW538-1010	5/8	5/8
SCW538-1212	3/4	3/4
SCW538-1616	1	1
SCW538-2020	1-1/4	1-1/4
SCW538-3232	2	2



90° ELBOW
S.A.E. 37°
Female Flare
(Swivel)

PART No.	Nominal Hose I.D.	Tube
SCW539-44	1/4	1/4
SCW539-66	3/8	3/8
SCW539-88	1/2	1/2
SCW539-1212	3/4	3/4
SCW539-1616	1	1



S.A.E. 45°
Female Flare
(Swivel)

PART No.	Nominal Hose I.D.	Tube
SCW528-66	3/8	3/8
SCW528-1212	3/4	3/4



45° ELBOW
S.A.E. 37°
Female Flare
(Swivel)

PART No.	Nominal Hose I.D.	Tube
SCW540-1212	3/4	3/4
SCW540-1616	1	1



90° ELBOW
S.A.E. 45°
Female Flare
(Swivel)

PART No.	Nominal Hose I.D.	Tube
SCW541-66	3/8	3/8



STEEL REUSABLE HOSE ENDS

FOR USE WITH S.A.E. 100R5, S.A.E. J1402 HOSE (Page 8)



Male Pipe

PART No.	Nominal Hose I.D.	Pipe
SR525-4A	1/4	1/8
SR525-4B	1/4	1/4
SR525-5B	5/16	1/4
SR525-6B	3/8	1/4
SR525-6C	3/8	3/8
SR525-8C	1/2	3/8
SR525-8D	1/2	1/2
SR525-10D	5/8	1/2
SR525-12E	3/4	3/4
SR525-16H	1	1
SR525-20J	1-1/4	1-1/4
SR525-24K	1-1/2	1-1/2
SR525-32M	2	2



**S.A.E. 45°
Male Flare**

PART No.	Nominal Hose I.D.	Tube
SR527-44	1/4	1/4
SR527-66	3/8	3/8
SR527-1010	5/8	5/8
SR527-1212	3/4	3/4



**S.A.E. 37°
Male Flare**

PART No.	Nominal Hose I.D.	Tube
SR537-44	1/4	1/4
SR537-66	3/8	3/8
SR537-88	1/2	1/2
SR537-1010	5/8	5/8
SR537-1212	3/4	3/4
SR537-1616	1	1



**S.A.E. 45°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SR528-44	1/4	1/4
SR528-55	5/16	5/16
SR528-66	3/8	3/8
SR528-88	1/2	1/2
SR528-1010	5/8	5/8
SR528-1212	3/4	3/4



**S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SR538-44	1/4	1/4
SR538-55	5/16	5/16
SR538-66	3/8	3/8
SR538-88	1/2	1/2
SR538-1010	5/8	5/8
SR538-1212	3/4	3/4
SR538-1616	1	1
SR538-2020	1-1/4	1-1/4
SR538-2424	1-1/2	1-1/2
SR538-3232	2	2



**S.A.E. 45°
Inverted
Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SR535-66	3/8	3/8



**90° ELBOW
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SR539-44	1/4	1/4
SR539-55	5/16	5/16
SR539-66	3/8	3/8
SR539-88	1/2	1/2
SR539-1010	5/8	5/8
SR539-1212	3/4	3/4
SR539-1616	1	1
SR539-2020	1-1/4	1-1/4



**90° ELBOW
S.A.E. 45°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SR541-44	1/4	1/4
SR541-66	3/8	3/8
SR541-1212	3/4	3/4



**45° ELBOW
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Nominal Hose I.D.	Tube
SR540-44	1/4	1/4
SR540-66	3/8	3/8
SR540-88	1/2	1/2
SR540-1010	5/8	5/8
SR540-1212	3/4	3/4
SR540-1616	1	1

**SEE PAGE 51
FOR ASSEMBLY
INSTRUCTIONS**

PERMANENTLY ATTACHED HOSE ENDS

FOR SAE 100R7, 100R8 AND 100R18 THERMOPLASTIC HOSE (Pages 12 - 14)
NOT FOR USE ON REDUCED OD S.A.E. 100R7



Male Pipe

PART No.	Hose I.D.	Pipe
SCTP25-2A	1/8	1/8
SCTP25-3A	3/16	1/8
SCTP25-3B	3/16	1/4
SCTP25-4A	1/4	1/8
SCTP25-4B	1/4	1/4
SCTP25-4C	1/4	3/8
SCTP25-5B	5/16	1/4
SCTP25-6C	3/8	3/8
SCTP25-8D	1/2	1/2
SCTP25-12E	3/4	3/4
SCTP25-16H	1	1



**Male Pipe
(Working Swivel)**

PART No.	Hose I.D.	Pipe
SCTP25SW-4B	1/4	1/4
SCTP25SW-6C	3/8	3/8
SCTP25SW-8D	1/2	1/2

All hydraulic assemblies should be pressure tested prior to use.



**Female
NPSM Pipe
(Swivel)**

PART No.	Hose I.D.	Pipe
SCTP26SW-3B	3/16	1/4
SCTP26SW-4B	1/4	1/4
SCTP26SW-6C	3/8	3/8



**J.I.C. 37°
Male Flare**

PART No.	Hose I.D.	Tube
SCTP37-66	3/8	3/8



**S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SCTP38-24	1/8	1/4
SCTP38-34	3/16	1/4
SCTP38-44	1/4	1/4
SCTP38-45	1/4	5/16
SCTP38-46	1/4	3/8
SCTP38-66	3/8	3/8
SCTP38-68	3/8	1/2
SCTP38-88	1/2	1/2
SCTP38-1212	3/4	3/4



**90° ELBOW
S.A.E. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SCTP39-34	3/16	1/4
SCTP39-45	1/4	5/16
SCTP39-66	3/8	3/8
SCTP39-88	1/2	1/2



**45° ELBOW
J.I.C. 37°
Female Flare
(Swivel)**

PART No.	Hose I.D.	Tube
SCTP40-66	3/8	3/8



**Female O-Ring
Face Seal
(Swivel)**

PART No.	Hose I.D.	ORFS
SCTP58-66	3/8	11/16 - 16

CRIMP SPECIFICATIONS FOR PERMANENTLY ATTACHED HOSE ENDS (FOR USE WITH ALL HR7, HR8 & HR18 HOSE TYPES)

Dash Size	Inside Diameter (IN.)	Crimp Outside Diameter (IN.)
-2	1/8	0.365
-3	3/16	0.500
-4	1/4	0.555
-5	5/16	0.630
-6	3/8	0.675
-8	1/2	0.830
-12	3/4	1.080
-16	1	1.340

All hydraulic assemblies should be pressure tested prior to use.

NOTE: Also see Fairview's

Accutek® 100R7 lube hose ends

SC700 & SR700 series.

IMPORTANT: This reference chart is provided by Fairview Ltd. for convenience only. The information contained herein cannot be guaranteed because conditions of use are beyond our control, such as variances in hose outside diameters. This document should not be substituted for the judgement of a qualified professional. Assemblies should be tested prior to installation. The user of this information assumes all risk associated with its use.



FITTINGS

BRASS - STEEL - BLACK IRON

AIR BRAKE D.O.T. (FOR NYLON TUBE)	58
AIR BRAKE D.O.T. (PUSH-TO-CONNECT).....	61-62
AIR BRAKE D.O.T. (FOR COPPER TUBE)	59
AIR BRAKE SERVICE KITS	56-57
AIR SHIFT TRANSMISSION (D.O.T.)	72
FLANGE ADAPTERS AND KITS (STEEL).....	78
FLARE S.A.E. 45° (BRASS)	69-71
FLARE J.I.C. 37° (STEEL)	74-77
FLARELESS (STEEL)	82
GREASE FITTINGS (SEE TOOLS SECTION FOR GUNS).....	73
NPSM SWIVEL ADAPTERS (STEEL).....	86
O-RING BOSS ADAPTERS (STEEL).....	79
O-RING FACE SEAL ADAPTERS (STEEL)	80-82
PIPE FITTINGS (BRASS)	63-66
PIPE FITTINGS (BLACK IRON).....	67-69
PIPE ADAPTERS (STEEL)	83-85

WHAT'S NEW IN THIS SECTION

PUSH TO CONNECT AIR BRAKE SERVICE KIT	59
COMPOSITE AIR BRAKE FITTINGS.....	60

PART No. ABFR-KIT-1 (AIR BRAKE SERVICE KIT - SELECTION 1)

Designed for use in the field or shop, this kit includes a selection of items to complete many general repairs. Single sided carry case, with handle.

D.O.T. Air Brake Fittings; Service Kit Selection:

PART No.	Description	Qty.	PART No.	Description	Qty.
121-M8	Thread Sealant Tape	1	1468-6B	Connector Tube-MP 3/8-1/4	2
1460-4	DOT Sleeve 1/4	5	1468-8C	Connector Tube-MP 1/2-3/8	1
1460-6	DOT Sleeve 3/8	5	1469-4B	Elbow Tube-MP 1/4-1/4	2
1460-8	DOT Sleeve 1/2	5	1469-6B	Elbow Tube-MP 3/8-1/4	2
1461-4	DOT Nut 1/4	2	1481-4	Air Brake Insert 1/4	5
1461-6	DOT Nut 3/8	2	1481-6	Air Brake Insert 3/8	5
1461-8	DOT Nut 1/2	2	1490-6	Air Brake Sleeve 3/8	6
1462-4	DOT Union 1/4	2	1491-6	Air Brake Nut 3/8	4
1462-6	DOT Union 3/8	2	1494-6	Nut with Spring Guard 3/8	2
1462-8	DOT Union 1/2	1	1495B-C	Brass Terminal Bolt 3/8	1
1468-4A	DOT Adapter 1/4 to 1/8 MPT	2	B1492-6C	Hose End Body 3/8	4
1468-4B	DOT Adapter 1/4 to 1/4 MPT	2	B1492-6S	Hose Splicer Body 3/8	1
			ABFR-BOX-1	1 Sided Case	1



Kit Dimensions
Height: 14.5 In.
Width: 15.5 In.
Depth: 2.5 In.



PART No. ABFR-KIT-2 (AIR BRAKE SERVICE KIT - SELECTION 2)

Designed for use in the field or shop, this kit includes a large selection of items to complete most general repairs in a double sided carry case, with handle.

D.O.T. Air Brake & Pipe; Service Kit Selection:

PART No.	Desc.	Qty.	PART No.	Desc.	Qty.
103-A	Coupling 1/8 FPT	2	1461-10	DOT Nut 5/8	2
103-B	Coupling 1/4 FPT	2	1462-6	DOT Union 3/8	2
103-C	Coupling 3/8 FPT	2	1462-8	DOT Union 1/2	2
103-D	Coupling 1/2 FPT	1	1462-10	DOT Union 5/8	1
110-BA	Pipe Bushing 1/4 to 1/8	3	1468-4A	DOT Adapter 1/4 to 1/8 MPT	2
110-CB	Pipe Bushing 3/8 to 1/4	2	1468-4B	DOT Adapter 1/4 to 1/4 MPT	2
110-DC	Pipe Bushing 1/2 to 3/8	2	1468-6B	DOT Adapter 3/8 to 1/4 MPT	2
121-B	Plug Hex 1/4 MPT	3	1468-6C	DOT Adapter 3/8 to 3/8 MPT	2
121-C	Plug Hex 3/8 MPT	2	1468-8C	DOT Adapter 1/2 to 3/8 MPT	2
121-D	Plug Hex 1/2 MPT	2	1469-4A	DOT Elbow 1/4 to 1/8 MPT	2
121-M8	Thread Sealant Tape	2	1469-4B	DOT Elbow 1/4 to 1/4 MPT	2
122-B	Hex Nipple 1/4 MPT	3	1469-6B	DOT Elbow 3/8 to 1/4 MPT	2
122-C	Hex Nipple 3/8 MPT	2	1469-6C	DOT Elbow 3/8 to 3/8 MPT	2
122-D	Hex Nipple 1/2 MPT	2	1469-8C	DOT Elbow 1/2 to 3/8 MPT	2
1460-4	DOT Sleeve 1/4	3	1481-4	DOT Tube Insert 1/4	3
1460-6	DOT Sleeve 3/8	3	1481-6	DOT Tube Insert 3/8	3
1460-8	DOT Sleeve 1/2	3	1481-8	DOT Tube Insert 1/2	3
1460-10	DOT Sleeve 5/8	2	1481-10	DOT Tube Insert 5/8	3
1461-4	DOT Nut 1/4	3	X115-B	Pipe Street Elbow 1/4	2
1461-6	DOT Nut 3/8	3	X115-C	Pipe Street Elbow 3/8	2
1461-8	DOT Nut 1/2	3	ABFR-BOX-2	2 Sided Case	1



Kit Dimensions
Height: 12.0 In.
Width: 14.0 In.
Depth: 4.0 In.



PART No. ABFR-KIT-1-PC

(AIR BRAKE TUBE REPAIR KIT-PUSH-TO-CONNECT FITTINGS)

This kit includes a selection of DOT push-to-connect fittings and tube to complete many temporary air brake tube repairs in the field or shop. Single sided carry case, with handle.

Push-To-Connect; Tube Repair Kit Selection:

PART No.	Description	Qty.	PART No.	Description	Qty.
1485-4-CUT	Air Brake Tube 1/4	24 In.	PC1468-8C	Connector Tube-MP 1/2-3/8	1
1485-6-CUT	Air Brake Tube 3/8	24 In.	PC1469-4A	Elbow Tube-MP 1/4-1/8	2
1485-8-CUT	Air Brake Tube 1/2	24 In.	PC1469-6B	Elbow Tube-MP 3/8-3/8	2
PC1462-4	Brass PTC DOT Union 1/4	2	PC1469-8C	Elbow Tube-MP 1/2-3/8	1
PC1462-6	Brass PTC DOT Union 3/8	2	TK-1	Thumb Knife	1
PC1462-8	Brass PTC DOT Union 1/2	2	ABFR-BOX-1	1 Sided Case	1
PC1468-4A	Brass PTC DOT Adapter 1/4 to 1/8 MPT	2			
PC1468-6B	Brass PTC DOT Adapter 1/4 to 1/4 MPT	2			
PC1468-6C	Connector Tube-MP 3/8-3/8	2			



No Tool Required
Push-To Connect Fittings
Kit Dimensions
Height: 14.5 In.
Width: 15.5 In.
Depth: 2.5 In.



PART No. ABFR-KIT-2-PC (AIR BRAKE SERVICE KIT W/ PUSH-TO-CONNECT)

Designed for use in the field or shop, this kit includes Fairview's Nylon DOT Push-to-Connect Fittings and a large selection of items to complete most general repairs. Double sided carry case, with handle.

Kit Dimensions

Height: 12.0 In.

Width: 14.0 In.

Depth: 4.0 In.



Push-To-Connect; Tube Repair Kit Selection:

PART No.	Description	Qty.
103-A	Coupling 1/8 FPT	2
103-B	Coupling 1/4 FPT	2
103-C	Coupling 3/8 FPT	2
103-D	Coupling 1/2 FPT	1
110-BA	Pipe Bushing 1/4 to 1/8	3
110-CB	Pipe Bushing 3/8 to 1/4	2
110-DC	Pipe Bushing 1/2 to 3/8	2
121-B	Plug Hex 1/4 MPT	3
121-C	Plug Hex 3/8 MPT	2
121-D	Plug Hex 1/2 MPT	2
121-M8	Thread Sealant Tape	2
122-B	Hex Nipple 1/4 MPT	3
122-C	Hex Nipple 3/8 MPT	2
122-D	Hex Nipple 1/2 MPT	2
CPC1462-4	Nylon PTC DOT Union 1/4	2
CPC1462-6	Nylon PTC DOT Union 3/8	2
CPC1462-8	Nylon PTC DOT Union 1/2	2
CPC1462-10	Nylon PTC DOT Union 5/8	1
CPC1468-4A	Nylon PTC DOT Adapter 1/4 to 1/8 MPT	2

PART No.	Description	Qty.
CPC1468-4B	Nylon PTC DOT Adapter 1/4 to 1/4 MPT	2
CPC1468-6B	Nylon PTC DOT Adapter 3/8 to 1/4 MPT	2
CPC1468-6C	Nylon PTC DOT Adapter 3/8 to 3/8 MPT	2
CPC1469SW-4A	Nylon PTC DOT Elbow 1/4 to 1/8 MPT	2
CPC1469SW-4B	Nylon PTC DOT Elbow 1/4 to 1/4 MPT	2
CPC1469SW-6B	Nylon PTC DOT Elbow 3/8 to 1/4 MPT	2
CPC1469SW-6C	Nylon PTC DOT Elbow 3/8 to 3/8 MPT	2
CPC1469SW-8C	Nylon PTC DOT Elbow 1/2 to 3/8 MPT	2
42-4	Union 1/4 M.SAE	2
42-6	Union 3/8 M.SAE	2
42-8	Union 1/2 M.SAE	2
48-4A	Adptr 1/4 M.SAE to 1/8 MPT	2
48-4B	Adptr 1/4 M.SAE to 1/4 MPT	2
48-6B	Adptr 3/8 M.SAE to 1/4 MPT	2
48-6C	Adptr 3/8 M.SAE to 3/8 MPT	2
48-8C	Adptr 1/2 M.SAE to 3/8 MPT	2
48-8D	Adptr 1/2 M.SAE to 1/2 MPT	2
ABFR-BOX-2	2 Sided Case	1

FAIRVIEW VALVE,
HOSE AND FITTING CUSTOM KITS.
ASK US ABOUT PREASSEMBLING YOUR
COMPONENTS, SO YOU CAN RECEIVE THEM
READY TO INSTALL.





INSERT

PART No.	For Tube I.D.
1481-2	.078
1481-4	.170
1481-5	.232
1481-6	.250
1481-8	.375
1481-10	.440
1481-12	.566



SLEEVE

PART No.	Tube
1460-4	1/4
1460-6	3/8
1460-8	1/2
1460-10	5/8
1460-12	3/4



NUT

PART No.	Tube
1461-4	1/4
1461-6	3/8
1461-8	1/2
1461-10	5/8
1461-12	3/4



CONNECTOR Tube To Male Pipe

PART No.	Tube	Pipe
1468-4A	1/4	1/8
1468-4B	1/4	1/4
1468-4C	1/4	3/8
1468-4D	1/4	1/2
1468-6A	3/8	1/8
1468-6B	3/8	1/4
1468-6C	3/8	3/8
1468-6D	3/8	1/2
1468-8B	1/2	1/4
1468-8C	1/2	3/8
1468-8D	1/2	1/2
1468-8E	1/2	3/4
1468-10C	5/8	3/8
1468-10D	5/8	1/2
1468-10E	5/8	3/4
1468-12D	3/4	1/2
1468-12E	3/4	3/4



CONNECTOR Tube To Female Pipe

PART No.	Tube	Pipe
1466-4A	1/4	1/8
1466-4B	1/4	1/4
1466-4C	1/4	3/8
1466-6A	3/8	1/8
1466-6B	3/8	1/4
1466-6C	3/8	3/8
1466-8C	1/2	3/8
1466-8D	1/2	1/2
1466-10C	5/8	3/8
1466-10D	5/8	1/2
1466-12D	3/4	1/2
1466-12E	3/4	3/4



UNION COUPLING

PART No.	Tube
1462-4	1/4
1462-6	3/8
1462-8	1/2
1462-10	5/8
1462-12	3/4



45° ELBOW Tube To Male Pipe

PART No.	Tube	Pipe
1474-4A	1/4	1/8
1474-4B	1/4	1/4
1474-6B	3/8	1/4
1474-6C	3/8	3/8
1474-6D	3/8	1/2
1474-8B	1/2	1/4
1474-8C	1/2	3/8
1474-8D	1/2	1/2
1474-10D	5/8	1/2



90° ELBOW Tube To Tube

PART No.	Tube
1465-4	1/4
1465-6	3/8
1465-8	1/2
1465-10	5/8
1465-12	3/4




90° ELBOW Tube To Male Pipe

PART No.	Tube	Pipe
1469-4A	1/4	1/8
1469-4B	1/4	1/4
1469-4C	1/4	3/8
1469-4D	1/4	1/2
1469-6A	3/8	1/8
1469-6B	3/8	1/4
1469-6C	3/8	3/8
1469-6D	3/8	1/2
1469-8B	1/2	1/4
1469-8C	1/2	3/8
1469-8D	1/2	1/2
1469-10C	5/8	3/8
1469-10D	5/8	1/2
1469-10E	5/8	3/4
1469-12D	3/4	1/2
1469-12E	3/4	3/4



90° ELBOW Tube To Female Pipe

PART No.	Tube	Pipe
1470-4A	1/4	1/8
1470-4B	1/4	1/4
1470-6A	3/8	1/8
1470-6B	3/8	1/4
1470-6C	3/8	3/8
1470-8C	1/2	3/8
1470-8D	1/2	1/2
1470-10D	5/8	1/2
1470-12D	3/4	1/2



TEE Tube Three Ends

PART No.	Tube
1464-4	1/4
1464-6	3/8
1464-8	1/2
1464-10	5/8
1464-12	3/4

	Reducing	1	2	3
1464R-64		3/8	3/8	1/4
1464R-86		1/2	1/2	3/8



TEE Ends Tube To Male Pipe Center Tube

PART No.	Tube	Pipe
1471-4A	1/4	1/8
1471-4B	1/4	1/4
1471-6B	3/8	1/4
1471-6C	3/8	3/8
1471-8C	1/2	3/8
1471-8D	1/2	1/2
1471-10D	5/8	1/2
1471-12D	3/4	1/2



TEE Ends Tube Center Male Pipe

PART No.	Tube	Pipe
1472-4A	1/4	1/8
1472-4B	1/4	1/4
1472-6A	3/8	1/8
1472-6B	3/8	1/4
1472-6C	3/8	3/8
1472-8B	1/2	1/4
1472-8C	1/2	3/8
1472-8D	1/2	1/2
1472-10D	5/8	1/2
1472-12D	3/4	1/2
1472-12E	3/4	3/4



TEE Female To Male Pipe Center Tube

PART No.	Tube	Pipe
1476-4A	1/4	1/8
1476-6B	3/8	1/4



BULKHEAD UNION (With Lock Washer)

PART No.	Tube
1477-4	1/4
1477-6	3/8
1477-8	1/2
1477-10	5/8



TEE Ends Tube To Center Female Pipe

PART No.	Tube	Pipe
1478-6B	3/8	1/4

BRASS D.O.T. AIR BRAKE FITTINGS (FOR COPPER TUBE)

Fairview



SLEEVE

PART No.	Tube
1160-4	1/4
1160-6	3/8
1160-8	1/2
1160-10	5/8



NUT

PART No.	Tube
1161-4	1/4
1161-6	3/8
1161-8	1/2
1161-10	5/8
1161-12	3/4



**UNION
COUPLING**

PART No.	Tube
1162-4	1/4
1162-6	3/8
1162-8	1/2



**CONNECTOR
Tube
To
Male Pipe**

PART No.	Tube	Pipe
1168-4A	1/4	1/8
1168-4B	1/4	1/4
1168-6B	3/8	1/4
1168-6C	3/8	3/8
1168-8C	1/2	3/8
1168-8D	1/2	1/2
1168-10D	5/8	1/2
1168-12E	3/4	3/4



**45° ELBOW
Tube
To
Male Pipe**

PART No.	Tube	Pipe
1174-6B	3/8	1/4
1174-6C	3/8	3/8



**90° ELBOW
Tube
To
Male Pipe**

PART No.	Tube	Pipe
1169-4A	1/4	1/8
1169-4B	1/4	1/4
1169-6B	3/8	1/4
1169-6C	3/8	3/8
1169-8C	1/2	3/8



**90° ELBOW
Tube
To
Female Pipe**

PART No.	Tube	Pipe
1170-4A	1/4	1/8



**TEE
Tube
Three Ends**

PART No.	Tube
1164-4	1/4
1164-6	3/8



**TEE
Ends Tube
To Male Pipe
Center Tube**

PART No.	Tube	Pipe
1171-4B	1/4	1/4



**TEE
Ends Tube
To Male Pipe
Center Tube**


PART No.	Tube	Pipe
1172-6B	3/8	1/4

BRASS D.O.T. AIR BRAKE FITTINGS (WITH FIXED INSERTS, FOR D.O.T. AIR BRAKE TUBE: PAGE 30)

BRASS D.O.T. AIR BRAKE FITTINGS ASSEMBLY INSTRUCTIONS

1. Cut tube squarely.
2. Slide nut and then sleeve onto tube.
3. Insert tube fitting until it bottoms on seat.
4. Hand tighten and mark body.
5. Full clockwise wrench turns as per chart.

Tube Size	Additional Full Turns from Hand Tight.
1/4"	3
3/8", 1/2" and 5/8"	4
3/4"	3-1/2

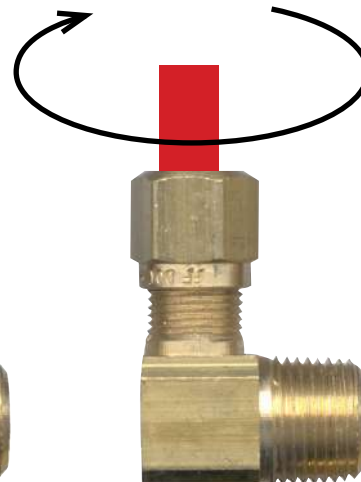

COMPOSITE AIR BRAKE FITTINGS

(FOR D.O.T. AIR BRAKE TUBE 1485)

This product meets and exceeds the performance requirement of FMVSS 106 & SAE J844.
 Low Temp Buna O-Ring (-52° to +100° C) - Brass sleeves, grippers and tube supports / inserts DOT markings (FF DOT)
 - Red Loctite Male Pipe Thread Sealant



**UNION
COUPLING**

PART No.	PTC DOT
CPC1462-5/32	5/32
CPC1462-4X5/32	1/4 TO 5/32
CPC1462-4	1/4
CPC1462-6	3/8
CPC1462-8	1/2
CPC1462-86	1/2 TO 3/8
CPC1462-10	5/8



**90° ELBOW
Tube To
Swivel
Female Pipe**

PART No.	PTC DOT	Pipe
CPC1470SW-4A	1/4	1/8
CPC1470SW-4B	1/4	1/4
CPC1470SW-6B	3/8	1/4
CPC1470SW-6C	3/8	3/8



**TEE
Ends Tube
Center
Swivel
Male Pipe**

PART No.	PTC DOT	Pipe
CPC1472SW-4A	1/4	1/8
CPC1472SW-4B	1/4	1/4
CPC1472SW-6A	3/8	1/8
CPC1472SW-6B	3/8	1/4
CPC1472SW-6C	3/8	3/8
CPC1472SW-6D	3/8	1/2
CPC1472SW-8C	1/2	3/8
CPC1472SW-8D	1/2	1/2



**CONNECTOR
Tube To
Male Pipe**

PART No.	PTC DOT	Pipe
CPC1468-5/32A	5/32	1/8
CPC1468-4A	1/4	1/8
CPC1468-4B	1/4	1/4
CPC1468-4C	1/4	3/8
CPC1468-6A	3/8	1/8
CPC1468-6B	3/8	1/4
CPC1468-6C	3/8	3/8
CPC1468-6D	3/8	1/2
CPC1468-8B	1/2	1/4
CPC1468-8C	1/2	3/8
CPC1468-8D	1/2	1/2
CPC1468-10D	5/8	1/2
CPC1468-12D	3/4	1/2
CPC1468-12E	3/4	3/4



**45° ELBOW
Tube To
Swivel
Male Pipe**

PART No.	PTC DOT	Pipe
CPC1474SW-4A	1/4	1/8
CPC1474SW-4B	1/4	1/4
CPC1474SW-6B	3/8	1/4
CPC1474SW-6C	3/8	3/8
CPC1474SW-6D	3/8	1/2
CPC1474SW-8B	1/2	1/4
CPC1474SW-8C	1/2	3/8
CPC1474SW-8D	1/2	1/2
CPC1474SW-10C	5/8	3/8
CPC1474SW-10D	5/8	1/2



**“Y”
Ends Tube
Center
Swivel
Male Pipe**

PART No.	PTC DOT	Pipe
CPC1472YSW-4A	1/4	1/8
CPC1472YSW-4B	1/4	1/4
CPC1472YSW-6B	3/8	1/4



**90° ELBOW
Tube To
Tube**

PART No.	PTC DOT
CPC1465-4	1/4
CPC1465-6	3/8
CPC1465-8	1/2



**TEE
Tube
Three Ends**

PART No.	PTC DOT
CPC1464-4	1/4
CPC1464-6	3/8
CPC1464-8	1/2



**90° ELBOW
Tube To
Swivel
Male Pipe**

PART No.	PTC DOT	Pipe
CPC1469SW-5/32A	5/32	1/8
CPC1469SW-4A	1/4	1/8
CPC1469SW-4B	1/4	1/4
CPC1469SW-4C	1/4	3/8
CPC1469SW-6A	3/8	1/8
CPC1469SW-6B	3/8	1/4
CPC1469SW-6C	3/8	3/8
CPC1469SW-6D	3/8	1/2
CPC1469SW-8B	1/2	1/4
CPC1469SW-8C	1/2	3/8
CPC1469SW-8D	1/2	1/2
CPC1469SW-10C	5/8	3/8
CPC1469SW-10D	5/8	1/2

①



②

**“Y”
Tube
Three Ends**

PART No.	PTC DOT
CPC1464Y-4	1/4
CPC1464Y-6	3/8
CPC1464YR-46	1/4 TO 1/4 TO 3/8
CPC1464YR-64	3/8 TO 3/8 TO 1/4

③

① ② ③



**TEE
Ends Tube To
Swivel
Male Pipe
Center Tube**

PART No.	PTC DOT	Pipe
CPC1471SW-4A	1/4	1/8
CPC1471SW-4B	1/4	1/4
CPC1471SW-6B	3/8	1/4
CPC1471SW-6C	3/8	3/8
CPC1471SW-6D	3/8	1/2
CPC1471SW-8C	1/2	3/8

PUSH-TO-CONNECT D.O.T. AIR BRAKE FITTINGS (FOR D.O.T. AIR BRAKE TUBE 1485)

Fairview

D.O.T. RECOGNIZED FOR ALL AIR BRAKE APPLICATIONS EXCEPT THOSE FOR USE BETWEEN FRAME AND AXLE OR BETWEEN TOWED AND TOWING VEHICLES.



**UNION
COUPLING**

PART No.	Tube
PC1462-5/32	5/32
PC1462-4	1/4
PC1462-6	3/8
PC1462-8	1/2
PC1462-10	5/8
PC1462-12	3/4



**CONNECTOR
Tube
To
Female Pipe**

PART No.	Tube	Pipe
PC1466-4A	1/4	1/8
PC1466-4B	1/4	1/4
PC1466-6B	3/8	1/4
PC1466-6C	3/8	3/8
PC1466-8C	1/2	3/8
PC1466-8D	1/2	1/2



**CONNECTOR
Tube To
Male Pipe**

PART No.	Tube	Pipe
PC1468-3A	3/16	1/8
PC1468-3B	3/16	1/4
PC1468-5/32X1	5/32	1/16
PC1468-5/32A	5/32	1/8
PC1468-4A	1/4	1/8
PC1468-4B	1/4	1/4
PC1468-4C	1/4	3/8
PC1468-6A	3/8	1/8
PC1468-6B	3/8	1/4
PC1468L-6B	3/8	Long 1/4
PC1468-6C	3/8	3/8
PC1468-6D	3/8	1/2
PC1468-8B	1/2	1/4
PC1468-8C	1/2	3/8
PC1468-8D	1/2	1/2
PC1468-10C	5/8	3/8
PC1468-10D	5/8	1/2
PC1468-12D	3/4	1/2
PC1468-12E	3/4	3/4



**BULKHEAD
UNION**

PART No.	Tube
PC1477-4	1/4
PC1477-6	3/8
PC1477-8	1/2
PC1477-10	5/8



**BULKHEAD
UNION
Tube To
Female Pipe**

PART No.	Tube	Pipe
PC1486-4B	1/4	1/4
PC1486-6C	3/8 (*With Washer)	3/8
PC1486-8C	1/2	3/8



**BULKHEAD
UNION
Tube To
Male Pipe**

PART No.	Tube	Pipe
PC1483-6D	3/8	1/2
PC1483-8D	1/2	1/2



**90° ELBOW
Tube To
Tube**

PART No.	Tube
PC1465-4	1/4
PC1465-6	3/8
PC1465-8	1/2



**90° ELBOW
Tube To
Female Pipe**

PART No.	Tube	Pipe
PC1470-4A	1/4	1/8
PC1470-4B	1/4	1/4
PC1470-6B	3/8	1/4
PC1470-6C	3/8	3/8
PC1470-8D	1/2	1/2



**90° ELBOW
Tube
To
Male Pipe**

PART No.	Tube	Pipe
PC1469-3A	3/16	1/8
PC1469-5/32A	5/32	1/8
PC1469-4A	1/4	1/8
PC1469-4B	1/4	1/4
PC1469-4C	1/4	3/8
PC1469-6A	3/8	1/8
PC1469-6B	3/8	1/4
PC1469-6C	3/8	3/8
PC1469-6D	3/8	1/2
PC1469-8B	1/2	1/4
PC1469-8C	1/2	3/8
PC1469-8D	1/2	1/2
PC1469-10C	5/8	3/8
PC1469-10D	5/8	1/2
PC1469-12D	3/4	1/2
PC1469-12E	3/4	3/4



**90° ELBOW
Tube To
Male Pipe
Swivel**

PART No.	Tube	Pipe
PC1469SW-4A	1/4	1/8
PC1469SW-4B	1/4	1/4
PC1469SW-4C	1/4	3/8
PC1469SW-6A	3/8	1/8
PC1469SW-6B	3/8	1/4
PC1469SW-6C	3/8	3/8
PC1469SW-6D	3/8	1/2
PC1469SW-8B	1/2	1/4
PC1469SW-8C	1/2	3/8
PC1469SW-8D	1/2	1/2
PC1469SW-10C	5/8	3/8
PC1469SW-10D	5/8	1/2
PC1469SW-12D	3/4	1/2
PC1469SW-12E	3/4	3/4



**45° ELBOW
Tube
To
Male Pipe**

PART No.	Tube	Pipe
PC1474-4A	1/4	1/8
PC1474-4B	1/4	1/4
PC1474-6A	3/8	1/8
PC1474-6B	3/8	1/4
PC1474-6C	3/8	3/8
PC1474-8B	1/2	1/4
PC1474-8C	1/2	3/8
PC1474-8D	1/2	1/2
PC1474-10C	5/8	3/8
PC1474-10D	5/8	1/2
PC1474-12D	3/4	1/2
PC1474-12E	3/4	3/4



**45° ELBOW
Tube To
Male Pipe
Swivel**

PART No.	Tube	Pipe
PC1474SW-4A	1/4	1/8
PC1474SW-4B	1/4	1/4
PC1474SW-6A	3/8	1/8
PC1474SW-6B	3/8	1/4
PC1474SW-6C	3/8	3/8
PC1474SW-6D	3/8	1/2
PC1474SW-8B	1/2	1/4
PC1474SW-8C	1/2	3/8
PC1474SW-8D	1/2	1/2
PC1474SW-10C	5/8	3/8
PC1474SW-10D	5/8	1/2
PC1474SW-12E	3/4	3/4



**UNION TEE
Tube Each
End**

PART No.	Tube
PC1464-4	1/4
PC1464-6	3/8
PC1464R-64	3/8 TO 1/4
PC1464-8	1/2
PC1464-10	5/8
PC1464-12	3/4



PUSH-TO-CONNECT D.O.T. AIR BRAKE FITTINGS (FOR D.O.T. AIR BRAKE TUBE 1485)

D.O.T. RECOGNIZED FOR ALL AIR BRAKE APPLICATIONS EXCEPT THOSE FOR USE BETWEEN FRAME AND AXLE OR BETWEEN TOWED AND TOWING VEHICLES.



**TEE
Ends Tube
and
Male Pipe
Center Tube**

PART No.	Tube	Pipe
PC1471-4A	1/4	1/8
PC1471-4B	1/4	1/4
PC1471-6B	3/8	1/4
PC1471-6C	3/8	3/8
PC1471-8C	1/2	3/8



**TEE
Ends Tube
Center
Male Pipe**

PART No.	Tube	Pipe
PC1472-4A	1/4	1/8
PC1472-4B	1/4	1/4
PC1472-6A	3/8	1/8
PC1472-6B	3/8	1/4
PC1472-6C	3/8	3/8
PC1472-8B	1/2	1/4
PC1472-8C	1/2	3/8



**TEE
Ends Tube
Center
Female Pipe**

PART No.	Tube	Pipe
PC1478-4A	1/4	1/8
PC1478-4B	1/4	1/4
PC1478-6B	3/8	1/4



**TEE
Ends Tube
Center Female
Pipe Swivel**

PART No.	Tube	Pipe
PC1478SW-4A	1/4	1/8
PC1478SW-6B	3/8	1/4



**TEE
Ends Tube
and Male Pipe
Swivel
Center Tube**

PART No.	Tube	Pipe
PC1471SW-4A	1/4	1/8
PC1471SW-4B	1/4	1/4
PC1471SW-6B	3/8	1/4
PC1471SW-6C	3/8	3/8
PC1471SW-8C	1/2	3/8
PC1471SW-8D	1/2	1/2



**TEE
Ends Tube
Center Male
Pipe Swivel**

PART No.	Tube	Pipe
PC1472SW-4A	1/4	1/8
PC1472SW-4B	1/4	1/4
PC1472SW-6B	3/8	1/4
PC1472SW-6C	3/8	3/8
PC1472SW-8B	1/2	1/4
PC1472SW-8C	1/2	3/8
PC1472SW-8D	1/2	1/2



**TUBE
INSERT**

PART No.	Tube
PC1400-4	1/4
PC1400-6	3/8
PC1400-8	1/2

BRASS PUSH-TO-CONNECT FITTINGS ASSEMBLY INSTRUCTIONS

Temperature Range -40°F to 225°F (-40°C to 107°C)




TO CONNECT TUBE:

Cut tube as squarely as possible. Insert tube end into fitting, slide the I.D. of the tube over the tube support until friction is felt as tube slides past the O-ring. Using a slight twisting motion while inserting the tube is often helpful. After this initial friction is felt, continue to push in the tube until it bottoms firmly against the internal tube support.

**PUSH-TO-CONNECT
FITTINGS FEATURE
A LABOR SAVING
FULL FLOW DESIGN
THAT REQUIRES NO
TOOLS.**

FOR D.O.T. AIR
BRAKE TUBE 1485
SEE PAGE 30

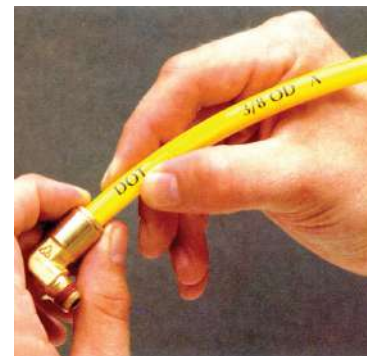

TO DISCONNECT TUBE:

With thumb and forefinger, hold down the top of the insert against the fitting body and then, with the other hand, pull out the tube. No tools are needed.



HEX NIPPLE

PART No.	Length (IN.)	Pipe
122-A		1/8
122-B		1/4
122L-B *	1-3/8	1/4
122-C		3/8
122-D		1/2
122L-D *	1-3/4	1/2
122-E		3/4
122-H		1

* LONG PATTERN

Lead Free

Part No.

LF-122-A	1/8
LF-122-B	1/4
LF-122-C	3/8
LF-122-D	1/2
LF-122-E	3/4
LF-122-H	1

REDUCING

PART No.	Pipe	to	Pipe
122-BA	1/4	to	1/8
122-CA	3/8	to	1/8
122-CB	3/8	to	1/4
122-DB	1/2	to	1/4
122-DC	1/2	to	3/8
122-ED	3/4	to	1/2

Lead Free

Part No.

LF-122-BA	1/4	to	1/8
LF-122-CB	3/8	to	1/4
LF-122-DB	1/2	to	1/4
LF-122-DC	1/2	to	3/8
LF-122-ED	3/4	to	1/2



CLOSE NIPPLE

PART No.	Pipe
112-A	1/8
112-B	1/4
112-C	3/8
112-D	1/2
112-E	3/4
112-H	1
112-J	1-1/4
112-K	1-1/2
112-M	2
112-N	2-1/2
112-P	3

Lead Free

Part No.

LF-112-A	1/8
LF-112-B	1/4
LF-112-C	3/8
LF-112-D	1/2
LF-112-E	3/4



CLOSE NIPPLE (Red Brass)

PART No.	Pipe
112RED-D	1/2
112RED-E	3/4



LONG NIPPLE

PART No.	Pipe	Length (IN.)
1/8NPT		
113-A1-1/2	1/8	1-1/2
113-A2	1/8	2
113-A2-1/2	1/8	2-1/2
113-A3	1/8	3
113-A3-1/2	1/8	3-1/2

Lead Free

Part No.

LF-113-A1-1/2	1/8	1-1/2
LF-113-A2	1/8	2

1/4NPT

113-B1-1/2	1/4	1-1/4
113-B2	1/4	2
113-B2-1/2	1/4	2-1/2
113-B3	1/4	3
113-B3-1/2	1/4	3-1/2
113-B4	1/4	4
113-B4-1/2	1/4	4-1/2
113-B5	1/4	5
113-B5-1/2	1/4	5-1/2
113-B6	1/4	6

Lead Free

Part No.

LF-113-B1-1/2	1/4	1-1/2
LF-113-B2	1/4	2
LF-113-B2-1/2	1/4	2-1/2
LF-113-B3	1/4	3

3/8NPT

113-C1-1/2	3/8	1-1/2
113-C2	3/8	2
113-C2-1/2	3/8	2-1/2
113-C3	3/8	3
113-C3-1/2	3/8	3-1/2
113-C4	3/8	4
113-C4-1/2	3/8	4-1/2
113-C5	3/8	5
113-C6	3/8	6

Lead Free

Part No.

LF-113-C1-1/2	3/8	1-1/2
LF-113-C2	3/8	2
LF-113-C2-1/2	3/8	2-1/2
LF-113-C3	3/8	3

1/2NPT

113-D1-1/2	1/2	1-1/2
113-D2	1/2	2
113-D2-1/2	1/2	2-1/2
113-D3	1/2	3
113-D3-1/2	1/2	3-1/2
113-D4	1/2	4
113-D4-1/2	1/2	4-1/2
113-D5	1/2	5
113-D5-1/2	1/2	5-1/2
113-D6	1/2	6

Lead Free

Part No.

LF-113-D1-1/2	1/2	1-1/2
LF-113-D2	1/2	2
LF-113-D2-1/2	1/2	2-1/2
LF-113-D3	1/2	3
LF-113-D3-1/2	1/2	3-1/2
LF-113-D4	1/2	4

3/4NPT

113-E2	3/4	2
113-E2-1/2	3/4	2-1/2
113-E3	3/4	3
113-E3-1/2	3/4	3-1/2
113-E4	3/4	4
113-E4-1/2	3/4	4-1/2
113-E5	3/4	5
113-E5-1/2	3/4	5-1/2
113-E6	3/4	6

Lead Free

Part No.

LF-113-E2	3/4	2
LF-113-E2-1/2	3/4	2-1/2
LF-113-E3	3/4	3



LONG NIPPLE

PART No.	Pipe	Length (IN.)
1NPT		
113-H2	1	2
113-H2-1/2	1	2-1/2
113-H3	1	3
113-H3-1/2	1	3-1/2
113-H4	1	4
113-H6	1	6

1-1/4NPT

113-J2	1-1/4	2
113-J2-1/2	1-1/4	2-1/2
113-J3	1-1/4	3
113-J3-1/2	1-1/4	3-1/2
113-J4	1-1/4	4
113-J5	1-1/4	5
113-J6	1-1/4	6

1-1/2NPT

113-K2	1-1/2	2
113-K3	1-1/2	3
113-K3-1/2	1-1/2	3-1/2
113-K4	1-1/2	4
113-K6	1-1/2	6

2NPT

113-M2-1/2	2	2-1/2
113-M3	2	3
113-M3-1/2	2	3-1/2
113-M4	2	4
113-M5	2	5
113-M6	2	6

LONGER LENGTHS AVAILABLE ON REQUEST.



LONG NIPPLE (Red Brass)

PART No.	Pipe	Length (IN.)
1/2NPT		
113RED-D1-1/2	1/2	1-1/2
113RED-D2-1/2	1/2	2-1/2
113RED-D3	1/2	3
113RED-D4	1/2	4

3/4NPT

113RED-E1-1/2	3/4	1-1/2
113RED-E2	3/4	2
113RED-E2-1/2	3/4	2-1/2
113RED-E3	3/4	3
113RED-E4	3/4	4



COUPLING

PART No.	Pipe
103-A	1/8
103-B	1/4
103-C	3/8
103-D	1/2
103-E	3/4

Lead Free

Part No.

LF-103-A	1/8
LF-103-B	1/4
LF-103-C	3/8
LF-103-D	1/2
LF-103-E	3/4

COUPLING (Cast Bronze)

PART No.	Pipe
103CA-D	1/2
103CA-E	3/4
103-H	1
103-J	1-1/4
103-K	1-1/2
103-M	2
103-N	2-1/2



REDUCING COUPLING

PART No.	Pipe	to	Pipe
119-BA	1/4	to	1/8
119-CA	3/8	to	1/8
119-CB	3/8	to	1/4
119-DA	1/2	to	1/8
119-DB	1/2	to	1/4
119-DC	1/2	to	3/8
119-ED	3/4	to	1/2

Lead Free

Part No.

LF-119-BA	1/4	to	1/8
LF-119-CB	3/8	to	1/4
LF-119-ED	3/4	to	1/2



REDUCING COUPLING (Cast Bronze)

PART No.	Pipe	to	Pipe
119-EB	3/4	to	1/4
119-EC	3/4	to	3/8
119-HD	1	to	1/2
119-HE	1	to	3/4
119-JE	1-1/4	to	3/4
119-JH	1-1/4	to	1
119-KH	1-1/2	to	1
119-KJ	1-1/2	to	1-1/4
119-MK	2	to	1-1/2



UNION COUPLING

PART No.	Pipe
104-A	1/8
104-B	1/4
104-C	3/8
104-D	1/2
104-E	3/4
Lead Free Part No.	
LF-104-D	1/2



UNION COUPLING (Cast Bronze)

PART No.	Pipe
104-H	1
104-J	1-1/4
104-K	1-1/2
104-M	2



ADAPTER

PART No.	Female Pipe	to	Male Pipe
120-AA	1/8	to	1/8
120-BB	1/4	to	1/4
120-CC	3/8	to	3/8
120-DD	1/2	to	1/2
Lead Free Part No.			
LF-120-BB	1/4	to	1/4
LF-120-DD	1/2	to	1/2



ADAPTER (Continued)

PART No.	Female Pipe	to	Male Pipe
120-A-1	1/8	to	1/16
120-BA	1/4	to	1/8
120-CA	3/8	to	1/8
120-CB	3/8	to	1/4
120-DB	1/2	to	1/4
120-DC	1/2	to	3/8
120-EC	3/4	to	3/8
120-ED	3/4	to	1/2

Lead Free

Part No.

LF-120-BA	1/4	to	1/8
LF-120-CB	3/8	to	1/4
LF-120-DB	1/2	to	1/4
LF-120-ED	3/4	to	1/2



BUSHING

PART No.	Male Pipe	to	Female Pipe
110-BA	1/4	to	1/8
110-CA	3/8	to	1/8
110-CB	3/8	to	1/4
110-DA	1/2	to	1/8
110-DB	1/2	to	1/4
110-DC	1/2	to	3/8
110-EA	3/4	to	1/8
110-EB	3/4	to	1/4
110-EC	3/4	to	3/8
110-ED	3/4	to	1/2
110-HB	1	to	1/4
110-HC	1	to	3/8
110-HD	1	to	1/2
110-HE	1	to	3/4

Lead Free

Part No.

LF-110-BA	1/4	to	1/8
LF-110-CA	3/8	to	1/8
LF-110-CB	3/8	to	1/4
LF-110-DA	1/2	to	1/8
LF-110-DB	1/2	to	1/4
LF-110-DC	1/2	to	3/8
LF-110-EB	3/4	to	1/4
LF-110-EC	3/4	to	3/8
LF-110-ED	3/4	to	1/2
LF-110-HB	1	to	1/4
LF-110-HD	1	to	1/2
LF-110-HE	1	to	3/4



BUSHING (Cast Bronze)

PART No.	Male Pipe	to	Female Pipe
110CA-ED	3/4	to	1/2
110CA-HC	1	to	3/8
110CA-HD	1	to	1/2
110CA-HE	1	to	3/4
110-JD	1-1/4	to	1/2
110-JE	1-1/4	to	3/4
110-JH	1-1/4	to	1
110-KD	1-1/2	to	1/2
110-KE	1-1/2	to	3/4
110-KH	1-1/2	to	1
110-KJ	1-1/2	to	1-1/4
110-ME	2	to	3/4
110-MH	2	to	1
110-MJ	2	to	1-1/4
110-MK	2	to	1-1/2
110-NM	2-1/2	to	2
110-PM	3	to	2
110-PN	3	to	2-1/2



LOCK NUT

PART No.	Pipe
111-A	1/8
111-B	1/4
111-C	3/8
111-D	1/2
111-E	3/4



LOCK NUT (Cast Bronze)

PART No.	Pipe
111-H	1



PLUG Square Head

PART No.	Pipe
109-A	1/8
109-B	1/4
109-C	3/8
109-D	1/2
109-E	3/4
Lead Free Part No.	
LF-109-A	1/8
LF-109-E	3/4



PLUG Square Head (Cast Bronze)

PART No.	Pipe
109-H	1
109-J	1-1/4
109-K	1-1/2
109-M	2
109-N	2-1/2



PLUG Slotted

PART No.	Pipe
117-A	1/8
117-B	1/4
117-C	3/8



PLUG Hex Countersunk

PART No.	Pipe
118-A	1/8
118-B	1/4
118-C	3/8
118-D	1/2
118-E	3/4
Lead Free Part No.	
LF-118-A	1/8
LF-118-B	1/4



**PLUG
Hex
Head**

PART No.		Pipe
121-1	Cored	1/16
121-A	Cored	1/8
121-B	Cored	1/4
121-C	Cored	3/8
121-D	Cored	1/2
121-E	Cored	3/4
121-H	Cored	1

Lead Free

Part No.

LF-121-A	Cored	1/8
LF-121-B	Cored	1/4



LF-121S-B	Solid	1/4
LF-121S-C	Solid	3/8
LF-121S-D	Solid	1/2
LF-121S-E	Solid	3/4

PART No.		Pipe
121S-A	Solid	1/8
121S-B	Solid	1/4
121S-C	Solid	3/8
121S-D	Solid	1/2
121S-E	Solid	3/4



CAP

PART No.	Pipe
108-A	1/8
108-B	1/4
108-C	3/8
108-D	1/2
108-E	3/4

Lead Free

Part No.

LF-108-B	1/4
LF-108-C	3/8
LF-108-D	1/2



**CAP
(Cast Bronze)**

PART No.	Pipe
108CA-D	1/2
108CA-E	3/4
108-H	1
108-J	1-1/4
108-K	1-1/2
108-M	2



**FORGED
90° ELBOW**

PART No.	Pipe
99-A	1/8
99-B	1/4
99-C	3/8
99-D	1/2

Lead Free

Part No.

LF-99-C	3/8
---------	-----

PART No.	Pipe	Pipe
99-BA	1/4	1/8
99-CB	3/8	1/4
99-DC	1/2	3/8



**EXTRUDED
90° STREET
ELBOW**

PART No.	Pipe
X115-A	1/8
X115-B	1/4
X115-C	3/8
X115-D	1/2
X115-E	3/4

PART No.	Female Pipe	Male Pipe
X115-BA	1/4	1/8
X115-DC	1/2	3/8



**FORGED
90° STREET
ELBOW**

PART No.	Pipe
116-A	1/8
116-B	1/4
116-C	3/8
116-D	1/2
116-E	3/4

Lead Free

Part No.

LF-116-A	1/8
LF-116-B	1/4
LF-116-C	3/8
LF-116-D	1/2

PART No.	Female Pipe	Male Pipe
116-AB	1/8	1/4
116-BA	1/4	1/8
116-CB	3/8	1/4
116-CD	3/8	1/2
116-DC	1/2	3/8

Lead Free

Part No.

LF-116-BA	1/4	1/8
-----------	-----	-----



**90° STREET
ELBOW
(Cast Bronze)**

PART No.	Pipe
116CA-D	1/2
116CA-E	3/4
116-H	1
116-J	1-1/4
116-K	1-1/2
116-M	2
116-N	2-1/2
116-P	3



**FORGED
90° STREET
ELBOW
Heavy Pattern**

PART No.	Pipe
116H-B	1/4
116H-C	3/8



**FORGED
90° ELBOW**

PART No.	Pipe
100-A	1/8
100-B	1/4
100-C	3/8
100-D	1/2
100-E	3/4



**FORGED
90° ELBOW**

PART No.	Pipe Lead Free
LF-100-B	1/4
LF-100-C	3/8
LF-100-D	1/2
LF-100-E	3/4

PART No.	Pipe	Pipe
100-BA	1/4	1/8
100-CB	3/8	1/4
100-DC	1/2	3/8



**90° ELBOW
(Cast Bronze)**

PART No.	Pipe
100CA-D	1/2
100CA-E	3/4
100-H	1
100-J	1-1/4
100-K	1-1/2
100-M	2
100-N	2-1/2
100-P	3

PART No.	Pipe	Pipe
100-ED	3/4	1/2
100-HE	1	3/4



**EXTRUDED
90° ELBOW**

PART No.	Pipe
X100-A	1/8
X100-B	1/4
X100-C	3/8
X100-D	1/2



**FORGED
45° STREET
ELBOW**

PART No.	Pipe
124-A	1/8
124-B	1/4
124-C	3/8

Lead Free

Part No.

LF-124-B	1/4
LF-124-C	3/8



**45° STREET
ELBOW
(Cast Bronze)**

PART No.	Pipe
124-D	1/2
124-E	3/4
124-H	1



**EXTRUDED
45° STREET
ELBOW**

PART No.	Pipe
X124-A	1/8
X124-B	1/4
X124-C	3/8
X124-D	1/2
X124-E	3/4



**45° ELBOW
(Cast Bronze)**

PART No.	Pipe
105-B	1/4
105-C	3/8
105-D	1/2
105-E	3/4
105-H	1
105-J	1-1/4
105-K	1-1/2
105-M	2



**EXTRUDED
45° ELBOW**

PART No.	Pipe
X105-A	1/8
X105-B	1/4



**FORGED
CROSS**

PART No.	Pipe
102-A	1/8
102-B	1/4
102-C	3/8
102-D	1/2

Lead Free

Part No.	Pipe
LF-102-B	1/4
LF-102-C	3/8
LF-102-D	1/2



**CROSS
(Cast Bronze)**

PART No.	Pipe
102-E	3/4
102-H	1



**EXTRUDED
CROSS**

PART No.	Pipe
X102-A	1/8
X102-B	1/4
X102-C	3/8
X102-D	1/2



**FORGED
MALE BRANCH
TEE**

PART No.	Pipe
106-A	1/8
106-B	1/4
106-C	3/8
106-D	1/2



**EXTRUDED
MALE BRANCH
TEE**

PART No.	Pipe
X106-A	1/8
X106-B	1/4
X106-C	3/8



**FORGED
MALE
TEE**

PART No.	Pipe
101M-A	1/8
101M-B	1/4
101M-C	3/8
101M-D	1/2
101M-E	3/4



**FORGED
STREET
TEE**

PART No.	Pipe
107-A	1/8
107-B	1/4
107-C	3/8
107-D	1/2
107-E	3/4

Lead Free

Part No.	Pipe
LF-107-B	1/4
LF-107-C	3/8



**EXTRUDED
STREET
TEE**

PART No.	Pipe
X107-A	1/8
X107-B	1/4
X107-C	3/8
X107-D	1/2
X107-E	3/4



**FORGED
TEE**

PART No.	Pipe
101-A	1/8
101-B	1/4
101-C	3/8
101-D	1/2
101-E	3/4

Lead Free

Part No.	Pipe
LF-101-A	1/8
LF-101-B	1/4
LF-101-C	3/8
LF-101-D	1/2

(LF-) Lead Free have a weighted average lead content less than or equal to 0.25%.



**TEE
(Cast Bronze)**

PART No.	Pipe
101CA-C	3/8
101CA-D	1/2
101CA-E	3/4
101-H	1
101-J	1-1/4
101-K	1-1/2
101-M	2



**EXTRUDED
TEE**

PART No.	Pipe
X101-A	1/8
X101-B	1/4
X101-C	3/8
X101-D	1/2



**REDUCING
FORGED
TEE**

PART No.	Reducing	1	2	3
101-BA	1/4	1/4	1/8	
101-CB	3/8	3/8	1/4	
101-DC	1/2	1/2	3/8	
101-ED	3/4	3/4	1/2	



**REDUCING
TEE
(Cast Bronze)**

PART No.	Reducing	1	2	3
101-DB	1/2	1/2	1/4	
101-EDE	3/4	1/2	3/4	
101-HDH	1	1/2	1	
101-HE	1	1	3/4	
101-JDJ	1-1/4	1/2	1-1/4	
101-JE	1-1/4	1-1/4	3/4	
101-KDK	1-1/2	1/2	1-1/2	



**FLOOR
FLANGE**

PART No.	Pipe
114-D	1/2



**“Y”
BLOCK**

PART No.	Female Pipe	Male Pipe
678-YB	1/4	1/4



**“Y”
SPLITTER**

PART No.	Female Pipe	Male Pipe
202-B	1/4	1/4

BLACK IRON PIPE FITTINGS

SCHEDULE 40 (150 LBS.)

Fairview



**CLOSE
NIPPLE**

PART No.	Pipe
BI-112-A	1/8
BI-112-B	1/4
BI-112-C	3/8
BI-112-D	1/2
BI-112-E	3/4
BI-112-H	1
BI-112-J	1-1/4
BI-112-K	1-1/2
BI-112-M	2
BI-112-N	2-1/2
BI-112-P	3
BI-112-S	4



**LONG
NIPPLE**

PART No.	Pipe	Length (IN.)
1/8 NPT		
BI-113-A1-1/2	1/8	1-1/2
BI-113-A2	1/8	2
BI-113-A2-1/2	1/8	2-1/2
BI-113-A3	1/8	3
BI-113-A3-1/2	1/8	3-1/2
BI-113-A4	1/8	4
BI-113-A4-1/2	1/8	4-1/2
BI-113-A5	1/8	5
BI-113-A5-1/2	1/8	5-1/2
BI-113-A6	1/8	6
1/4 NPT		
BI-113-B1-1/2	1/4	1-1/2
BI-113-B2	1/4	2
BI-113-B2-1/2	1/4	2-1/2
BI-113-B3	1/4	3
BI-113-B3-1/2	1/4	3-1/2
BI-113-B4	1/4	4
BI-113-B4-1/2	1/4	4-1/2
BI-113-B5	1/4	5
BI-113-B5-1/2	1/4	5-1/2
BI-113-B6	1/4	6
BI-113-B8	1/4	8
3/8 NPT		
BI-113-C1-1/2	3/8	1-1/2
BI-113-C2	3/8	2
BI-113-C2-1/2	3/8	2-1/2
BI-113-C3	3/8	3
BI-113-C3-1/2	3/8	3-1/2
BI-113-C4	3/8	4
BI-113-C4-1/2	3/8	4-1/2
BI-113-C5	3/8	5
BI-113-C5-1/2	3/8	5-1/2
BI-113-C6	3/8	6
1/2 NPT		
BI-113-D1-1/2	1/2	1-1/2
BI-113-D2	1/2	2
BI-113-D2-1/2	1/2	2-1/2
BI-113-D3	1/2	3
BI-113-D3-1/2	1/2	3-1/2
BI-113-D4	1/2	4
BI-113-D4-1/2	1/2	4-1/2
BI-113-D5	1/2	5
BI-113-D5-1/2	1/2	5-1/2
BI-113-D6	1/2	6
BI-113-D7	1/2	7
BI-113-D8	1/2	8



**LONG
NIPPLE**

PART No.	Pipe	Length (IN.)
3/4 NPT		
BI-113-E1-1/2	3/4	1-1/2
BI-113-E2	3/4	2
BI-113-E2-1/2	3/4	2-1/2
BI-113-E3	3/4	3
BI-113-E3-1/2	3/4	3-1/2
BI-113-E4	3/4	4
BI-113-E4-1/2	3/4	4-1/2
BI-113-E5	3/4	5
BI-113-E5-1/2	3/4	5-1/2
BI-113-E6	3/4	6
BI-113-E8	3/4	8
BI-113-E10	3/4	10
BI-113-E12	3/4	12
1 NPT		
BI-113-H2	1	2
BI-113-H2-1/2	1	2-1/2
BI-113-H3	1	3
BI-113-H3-1/2	1	3-1/2
BI-113-H4	1	4
BI-113-H4-1/2	1	4-1/2
BI-113-H5	1	5
BI-113-H5-1/2	1	5-1/2
BI-113-H6	1	6
BI-113-H8	1	8
BI-113-H12	1	12
1-1/4 NPT		
BI-113-J2	1-1/4	2
BI-113-J2-1/2	1-1/4	2-1/2
BI-113-J3	1-1/4	3
BI-113-J3-1/2	1-1/4	3-1/2
BI-113-J4	1-1/4	4
BI-113-J4-1/2	1-1/4	4-1/2
BI-113-J5	1-1/4	5
BI-113-J5-1/2	1-1/4	5-1/2
BI-113-J6	1-1/4	6
1-1/2 NPT		
BI-113-K2	1-1/2	2
BI-113-K2-1/2	1-1/2	2-1/2
BI-113-K3	1-1/2	3
BI-113-K3-1/2	1-1/2	3-1/2
BI-113-K4	1-1/2	4
BI-113-K4-1/2	1-1/2	4-1/2
BI-113-K5	1-1/2	5
BI-113-K5-1/2	1-1/2	5-1/2
BI-113-K6	1-1/2	6
2 NPT		
BI-113-M2-1/2	2	2-1/2
BI-113-M3	2	3
BI-113-M3-1/2	2	3-1/2
BI-113-M4	2	4
BI-113-M4-1/2	2	4-1/2
BI-113-M5	2	5
BI-113-M5-1/2	2	5-1/2
BI-113-M6	2	6
2-1/2 NPT		
BI-113-N3	2-1/2	3
BI-113-N3-1/2	2-1/2	3-1/2
BI-113-N4	2-1/2	4
BI-113-N5	2-1/2	4
BI-113-N6	2-1/2	6
3 NPT		
BI-113-P3	3	3
BI-113-P4	3	4
BI-113-P5	3	5
BI-113-P6	3	6
4 NPT		
BI-113-S4	4	4
BI-113-S5	4	5
BI-113-S6	4	6

**SCHEDULE 80:
Replace prefix BI- with BI80-
for schedule 80 (300LB.)**



COUPLING

PART No.	Pipe
BI-103-A	1/8
BI-103-B	1/4
BI-103-C	3/8
BI-103-D	1/2
BI-103-E	3/4
BI-103-H	1
BI-103-J	1-1/4
BI-103-K	1-1/2
BI-103-M	2
BI-103-N	2-1/2
BI-103-P	3
BI-103-S	4



**REDUCING
COUPLING**

PART No.	Pipe	Pipe
BI-119-BA	1/4	1/8
BI-119-CA	3/8	to 1/8
BI-119-CB	3/8	to 1/4
BI-119-DA	1/2	to 1/8
BI-119-DB	1/2	to 1/4
BI-119-DC	1/2	to 3/8
BI-119-EB	3/4	to 1/4
BI-119-EC	3/4	to 3/8
BI-119-ED	3/4	to 1/2
BI-119-HB	1	to 1/4
BI-119-HC	1	to 3/8
BI-119-HD	1	to 1/2
BI-119-HE	1	to 3/4
BI-119-JD	1-1/4	to 1/2
BI-119-JE	1-1/4	to 3/4
BI-119-JH	1-1/4	to 1
BI-119-KD	1-1/2	to 1/2
BI-119-KE	1-1/2	to 3/4
BI-119-KH	1-1/2	to 1
BI-119-KJ	1-1/2	to 1-1/4
BI-119-MD	2	to 1/2
BI-119-ME	2	to 3/4
BI-119-MH	2	to 1
BI-119-MJ	2	to 1-1/4
BI-119-MK	2	to 1-1/2
BI-119-NK	2-1/2	to 1-1/2
BI-119-NM	2-1/2	to 2
BI-119-PM	3	to 2
BI-119-PN	3	to 2-1/2
BI-119-SP	4	to 3



UNION

PART No.	Pipe
BI-104-A	1/8
BI-104-B	1/4
BI-104-C	3/8
BI-104-D	1/2
BI-104-E	3/4
BI-104-H	1
BI-104-J	1-1/4
BI-104-K	1-1/2
BI-104-M	2
BI-104-N	2-1/2
BI-104-P	3
BI-104-S	4

BLACK IRON PIPE FITTINGS

SCHEDULE 40 (150 LBS.)



BUSHING

Steel merchant see BI-110MC

PART No.	Pipe	Pipe
BI-110-BA	1/4	to 1/8
BI-110-CA	3/8	to 1/8
BI-110-CB	3/8	to 1/4
BI-110-DA	1/2	to 1/8
BI-110-DB	1/2	to 1/4
BI-110-DC	1/2	to 3/8
BI-110-EA	3/4	to 1/8
BI-110-EB	3/4	to 1/4
BI-110-EC	3/4	to 3/8
BI-110-ED	3/4	to 1/2
BI-110-HB	1	to 1/4
BI-110-HC	1	to 3/8
BI-110-HD	1	to 1/2
BI-110-HE	1	to 3/4
BI-110-JC	1-1/4	to 3/8
BI-110-JD	1-1/4	to 1/2
BI-110-JE	1-1/4	to 3/4
BI-110-JH	1-1/4	to 1
BI-110-KD	1-1/2	to 1/2
BI-110-KE	1-1/2	to 3/4
BI-110-KH	1-1/2	to 1
BI-110-KJ	1-1/2	to 1-1/4
BI-110-MD	2	to 1/2
BI-110-ME	2	to 3/4
BI-110-MH	2	to 1
BI-110-MJ	2	to 1-1/4
BI-110-MK	2	to 1-1/2
BI-110-NH	2-1/2	to 1
BI-110-NJ	2-1/2	to 1-1/4
BI-110-NK	2-1/2	to 1-1/2
BI-110-NM	2-1/2	to 2
BI-110-PM	3	to 2
BI-110-PN	3	to 2-1/2
BI-110-SM	4	to 2
BI-110-SN	4	to 2-1/2
BI-110-SP	4	to 3



LOCK NUT

PART No.	Pipe
BI-111-B	1/4
BI-111-C	3/8
BI-111-D	1/2
BI-111-E	3/4



PLUG (Square Head)

Steel merchant see BI-109MC

PART No.	Pipe
BI-109-A	1/8
BI-109-B	1/4
BI-109-C	3/8
BI-109-D	1/2
BI-109-E	3/4
BI-109-H	1
BI-109-J	1-1/4
BI-109-K	1-1/2
BI-109-M	2
BI-109-N	2-1/2
BI-109-P	3
BI-109-S	4



90° ELBOW

PART No.	Pipe
BI-100-A	1/8
BI-100-B	1/4
BI-100-C	3/8
BI-100-D	1/2
BI-100-E	3/4
BI-100-H	1
BI-100-J	1-1/4
BI-100-K	1-1/2
BI-100-M	2
BI-100-N	2-1/2
BI-100-P	3
BI-100-S	4



REDUCING 90° ELBOW

PART No.	Pipe	Pipe
BI-100-CB	3/8	to 1/4
BI-100-DB	1/2	to 1/4
BI-100-DC	1/2	to 3/8
BI-100-EC	3/4	to 3/8
BI-100-ED	3/4	to 1/2
BI-100-HD	1	to 1/2
BI-100-HE	1	to 3/4
BI-100-JD	1-1/4	to 1/2
BI-100-JE	1-1/4	to 3/4
BI-100-JH	1-1/4	to 1
BI-100-KH	1-1/2	to 1
BI-100-KJ	1-1/2	to 1-1/4
BI-100-MH	2	to 1
BI-100-MJ	2	to 1-1/4
BI-100-MK	2	to 1-1/2



45° ELBOW

PART No.	Pipe
BI-105-A	1/8
BI-105-B	1/4
BI-105-C	3/8
BI-105-D	1/2
BI-105-E	3/4
BI-105-H	1
BI-105-J	1-1/4
BI-105-K	1-1/2
BI-105-M	2
BI-105-N	2-1/2
BI-105-P	3
BI-105-S	4



90° STREET ELBOW

PART No.	Pipe
BI-116-A	1/8
BI-116-B	1/4
BI-116-C	3/8
BI-116-D	1/2
BI-116-E	3/4
BI-116-H	1
BI-116-J	1-1/4
BI-116-K	1-1/2
BI-116-M	2
BI-116-N	2-1/2
BI-116-P	3
BI-116-S	4



45° STREET ELBOW

PART No.	Pipe
BI-124-A	1/8
BI-124-B	1/4
BI-124-C	3/8
BI-124-D	1/2
BI-124-E	3/4
BI-124-H	1
BI-124-J	1-1/4
BI-124-K	1-1/2
BI-124-M	2



TEE

PART No.	Pipe
BI-101-A	1/8
BI-101-B	1/4
BI-101-C	3/8
BI-101-D	1/2
BI-101-E	3/4
BI-101-H	1
BI-101-J	1-1/4
BI-101-K	1-1/2
BI-101-M	2
BI-101-N	2-1/2
BI-101-P	3
BI-101-S	4



REDUCING TEE

PART No.	Pipe Size	Pipe Size	Pipe Size
BI-101-DB	1	2	3
BI-101-DC	1/2	1/2	3/8
BI-101-EB	3/4	3/4	1/4
BI-101-EBE	3/4	1/4	3/4
BI-101-ED	3/4	3/4	1/2
BI-101-EDD	3/4	1/2	1/2
BI-101-EDE	3/4	1/2	3/4
BI-101-EH	3/4	3/4	1
BI-101-HB	1	1	1/4
BI-101-HBH	1	1/4	1
BI-101-HD	1	1	1/2
BI-101-HDD	1	1/2	1/2
BI-101-HDH	1	1/2	1
BI-101-HE	1	1	3/4
BI-101-HED	1	3/4	1/2
BI-101-HEE	1	3/4	3/4
BI-101-HEH	1	3/4	1
BI-101-JDJ	1-1/4	1/2	1-1/4
BI-101-JE	1-1/4	1-1/4	3/4
BI-101-JEE	1-1/4	3/4	3/4
BI-101-JH	1-1/4	1-1/4	1
BI-101-KD	1-1/2	1-1/2	1/2
BI-101-KDK	1-1/2	1/2	1-1/2
BI-101-KE	1-1/2	1-1/2	3/4
BI-101-KH	1-1/2	1-1/2	1
BI-101-KJ	1-1/2	1-1/2	1-1/4
BI-101-MD	2	2	1/2
BI-101-ME	2	2	3/4
BI-101-MH	2	2	1
BI-101-MHH	2	1	1
BI-101-MHM	2	1	2
BI-101-MJ	2	2	1-1/4
BI-101-MK	2	2	1-1/2
BI-101-NK	2-1/2	2-1/2	1-1/2

BLACK IRON PIPE FITTINGS

SCHEDULE 40 (150 LBS.)

Fairview



CAP

PART No.	Pipe
BI-108-A	1/8
BI-108-B	1/4
BI-108-C	3/8
BI-108-D	1/2
BI-108-E	3/4
BI-108-H	1
BI-108-J	1-1/4
BI-108-K	1-1/2
BI-108-M	2
BI-108-N	2-1/2
BI-108-P	3
BI-108-S	4

Replace prefix BI- with BI80-
for schedule 80 (300LB.)
Replace BI- with GI-
for galvanized



CROSS

PART No.	Pipe
BI-102-C	3/8
BI-102-D	1/2
BI-102-E	3/4
BI-102-H	1
BI-102-J	1-1/4
BI-102-K	1-1/2
BI-102-M	2



FLANGE

PART No.	Pipe
BI-114-B	1/4
BI-114-C	3/8
BI-114-D	1/2
BI-114-E	3/4
BI-114-H	1
BI-114-J	1-1/4
BI-114-K	1-1/2
BI-114-M	2
BI-114-N	2-1/2



**NOTE: For thread
sealants
See Page 150**

BRASS S.A.E. 45° FLARE



FORGED NUT
Long
Standard Type

PART No.	Tube
39-4	1/4
39-6	3/8
39-8	1/2
39-10	5/8
39-12	3/4



FORGED NUT
Short
Standard Type

PART No.	Hex Size	Tube
40-3	1/2	3/16
40-4	5/8	1/4
40-5	11/16	5/16
40-6	13/16	3/8
40-8	15/16	1/2
40-10	1-1/16	5/8
40-12	1-5/16	3/4
40-14	1-39/64	7/8

Reducing

PART No.	Hex Size	Tube
40R-64	13/16	3/8 to 1/4
40R-86	15/16	1/2 to 3/8
40R-108	1-1/16	5/8 to 1/2

Lead Free
Part No.
LF-40-12

1-5/16 3/4



MILLED NUT
Short Type

PART No.	Length	Tube
41S-3	5/8	3/16
41S-4	3/4	1/4
41S-5	7/8	5/16
41S-6	1	3/8
41S-8	1-1/8	1/2

Lead Free
Part No.
LF-41S-4
LF-41S-6

3/4 1/4
7/8 3/8

Forged Nuts

PART No.	Length	Tube
FO41S-6	1	3/8
FO41S-8	1-1/8	1/2
FO41S-10	1-5/16	5/8
FO41S-12	1-1/2	3/4

NOTE: For reducing size use 40R series.



MILLED NUT
Long Type

PART No.	Length	Tube
41-3	13/16	3/16
41-4	15/16	1/4
41-5	1-1/8	5/16
41-6	1-5/16	3/8
41-8	1-5/8	1/2
41-10	1-7/8	5/8
41-12	2-3/16	3/4



**BULKHEAD
UNION**
Tube to Tube

PART No.	Tube Description
31-6	3/8 includes L.N.
31-8	1/2 includes L.N.

Note: Locknuts supplied in steel.



**TUBE
COUPLING**
Female Flare to
Female Flare

PART No.	Tube
32-4	1/4
32-6	3/8

Note:
Fairview 40 series flare nuts are
hot forged and marked C37700 in
accordance with CAN/CSA-B149 gas
installation code requirements.



**TUBE
COUPLING
Swivel Flare
(FORGED NUTS)**

PART No.	Tube
34-4	1/4
34-5	5/16
34-6	3/8
34-8	1/2
34-10	5/8
34-12	3/4
Reducing	
34R-64	3/8 to 1/4
34R-86	1/2 to 3/8



**TUBE
COUPLING
Female Flare to
Male Flare**

PART No.	Tube Female	Tube Male
35-46	1/4	3/8
35-64	3/8	1/4
35-68	3/8	1/2
35-84	1/2	1/4
35-86	1/2	3/8
35-810	1/2	5/8
35-108	5/8	1/2



**UNION
COUPLING
Tube to Tube**

PART No.	Tube
42-2	1/8
42-3	3/16
42-4	1/4
42-5	5/16
42-6	3/8
42-8	1/2
42-10	5/8
42-12	3/4
Reducing Tube	
42R-64	3/8 to 1/4
42R-65	3/8 to 5/16
42R-84	1/2 to 1/4
42R-86	1/2 to 3/8
42R-106	5/8 to 3/8
42R-108	5/8 to 1/2
42R-128	3/4 to 1/2



**CONNECTOR
Female Flare
to
Female Pipe**

PART No.	Tube	Pipe
30-6B	3/8	1/4



**CONNECTOR
Female Flare to
Male Pipe**

PART No.	Tube	Pipe
33-4A	1/4	1/8
33-4B	1/4	1/4
33-6B	3/8	1/4
33-6C	3/8	3/8
33-8C	1/2	3/8
33-8D	1/2	1/2



**CONNECTOR
Tube To
Female Pipe**

PART No.	Tube	Pipe
46-3A	3/16	1/8
46-4A	1/4	1/8
46-4B	1/4	1/4
46-4C	1/4	3/8
46-4D	1/4	1/2
46-5A	5/16	1/8
46-5B	5/16	1/4
46-6A	3/8	1/8
46-6B	3/8	1/4
46-6C	3/8	3/8
46-6D	3/8	1/2
46-6E	3/8	3/4
46-8B	1/2	1/4
46-8C	1/2	3/8
46-8D	1/2	1/2
46-8E	1/2	3/4
46-10D	5/8	1/2
46-10E	5/8	3/4
46-12D	3/4	1/2
46-12E	3/4	3/4



**CONNECTOR
Tube To
Male Pipe**

PART No.	Tube	Pipe
48-2A	1/8	1/8
48-3A	3/16	1/8
48-4A	1/4	1/8
48-4B	1/4	1/4
48-4C	1/4	3/8
48-4D	1/4	1/2
48-5A	5/16	1/8
48-5B	5/16	1/4
48-5C	5/16	3/8
48-6A	3/8	1/8
48-6B	3/8	1/4
48-6C	3/8	3/8
48-6D	3/8	1/2
48-6E	3/8	3/4
48-8B	1/2	1/4
48-8C	1/2	3/8
48-8D	1/2	1/2
48-8E	1/2	3/4
48-10C	5/8	3/8
48-10D	5/8	1/2
48-10E	5/8	3/4
48-12D	3/4	1/2
48-12E	3/4	3/4
48-14E	7/8	3/4
48-16E	1	3/4
48-16H	1	1

Lead Free

PART No.	Tube	Pipe
LF-48-4A	1/4	1/8
LF-48-4B	1/4	1/4
LF-48-6B	3/8	1/4
LF-48-6C	3/8	3/8
LF-48-8C	1/2	3/8
LF-48-8D	1/2	1/2
LF-48-12E	3/4	3/4

Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.



**90° ELBOW
Tube To
Male Pipe**

PART No.	Tube	Pipe
49-2A	1/8	1/8
49-3A	3/16	1/8
49-4A	1/4	1/8
49-4B	1/4	1/4
49-4C	1/4	3/8
49-4D	1/4	1/2
49-5A	5/16	1/8
49-5B	5/16	1/4
49-5C	5/16	3/8
49-6A	3/8	1/8
49-6B	3/8	1/4
49-6C	3/8	3/8
49-6D	3/8	1/2
49-6E	3/8	3/4
49-8B	1/2	1/4
49-8C	1/2	3/8
49-8D	1/2	1/2
49-8E	1/2	3/4
49-10C	5/8	3/8
49-10D	5/8	1/2
49-10E	5/8	3/4
49-12D	3/4	1/2
49-12E	3/4	3/4
49-12H	3/4	1
49-16H	1	1

Lead Free

PART No.	Tube	Pipe
LF-49-4A	1/4	1/8
LF-49-4B	1/4	1/4
LF-49-6B	3/8	1/4
LF-49-6C	3/8	3/8
LF-49-8C	1/2	3/8
LF-49-8D	1/2	1/2
LF-49-12E	3/4	3/4



**90° ELBOW
Tube To
Swivel
Female Flare**

PART No.	Tube
47-44	1/4
47-66	3/8



**90° ELBOW
Tube
To
Female Pipe**

PART No.	Tube	Pipe
50-4A	1/4	1/8
50-4B	1/4	1/4
50-6A	3/8	1/8
50-6B	3/8	1/4
50-6C	3/8	3/8
50-6D	3/8	1/2
50-6E	3/8	3/4
50-8B	1/2	1/4
50-8C	1/2	3/8
50-8D	1/2	1/2
50-8E	1/2	3/4
50-10C	5/8	3/8
50-10D	5/8	1/2
50-10E	5/8	3/4
50-12D	3/4	1/2
50-12E	3/4	3/4



90° ELBOW
Tube
To
Tube

PART No.	Tube
55-4	1/4
55-5	5/16
55-6	3/8
55-8	1/2
55-10	5/8
55-12	3/4
	Reducing
55R-64	3/8 to 1/4
55R-84	1/2 to 1/4
55R-86	1/2 to 3/8
55R-108	5/8 to 1/2



45° ELBOW
Tube
To
Male Pipe

PART No.	Tube	Pipe
54-4A	1/4	1/8
54-4B	1/4	1/4
54-4C	1/4	3/8
54-5A	5/16	1/8
54-5B	5/16	1/4
54-6B	3/8	1/4
54-6C	3/8	3/8
54-6D	3/8	1/2
54-8C	1/2	3/8
54-8D	1/2	1/2
54-10D	5/8	1/2
54-12D	3/4	1/2
54-12E	3/4	3/4



TEE
Tube
To
Female Pipe

PART No.	Tube	Pipe
36-4B	1/4	1/4
36-6B	3/8	1/4
36-6C	3/8	3/8
36-6D	3/8	1/2
36-8C	1/2	3/8
36-8D	1/2	1/2



TEE
Ends Male
And Female
Pipe
Center Tube

PART No.	Tube	Pipe
53-4A	1/4	1/8

Note: Fairview 40 series flare nuts are hot forged and marked C37700 in accordance with CAN/CSA-B149 gas installation code requirements.



TEE
Ends Tube
And Male Pipe
Center Tube

PART No.	Tube	Pipe
51-4A	1/4	1/8
51-4B	1/4	1/4
51-6B	3/8	1/4
51-6C	3/8	3/8
51-6D	3/8	1/2
51-8C	1/2	3/8
51-8D	1/2	1/2
51-10D	5/8	1/2



Tee
Tube
Three Ends

PART No.	Tube
44-2	1/8
44-3	3/16
44-4	1/4
44-5	5/16
44-6	3/8
44-8	1/2
44-10	5/8
44-12	3/4




Tee
Tube
Three Ends

PART No.	REDUCING		
	1	2	3
44R-64	3/8	3/8	1/4
44R-68	3/8	3/8	1/2
44R-84	1/2	1/2	1/4
44R-86	1/2	1/2	3/8
44R-866	1/2	3/8	3/8
44R-868	1/2	3/8	1/2
44R-810	1/2	1/2	5/8
44R-106	5/8	5/8	3/4
44R-108	5/8	5/8	1/2
44R-1088	5/8	1/2	1/2



TEE
Ends Tube
Center
Male Pipe

PART No.	Tube	Pipe
45-4A	1/4	1/8
45-4B	1/4	1/4
45-6B	3/8	1/4
45-6C	3/8	3/8
45-6D	3/8	1/2
45-8B	1/2	1/4
45-8C	1/2	3/8
45-8D	1/2	1/2
45-10D	5/8	1/2
45-12D	3/4	1/2
45-12E	3/4	3/4



CROSS
Tube
Four Ends

PART No.	Tube
52-6	3/8
52-8	1/2



Sealing
Cap
Nut

PART No.	Tube
56-4	1/4
56HP-4	1/4
56-5	5/16
56-6	3/8
56-8	1/2
56-10	5/8
56-12	3/4



Sealing
Plug

PART No.	Tube
58-4	1/4
58-5	5/16
58-6	3/8
58-8	1/2
58-10	5/8
58-12	3/4



Copper Flare
Gasket

PART No.	Tube
59-4	1/4
59-6	3/8
59-8	1/2
59-10	5/8
59-12	3/4

Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.

BRASS AIR SHIFT TRANSMISSION FITTINGS



SLEEVE

PART No.	Tube	Fuller No.
860-2	1/8	83001
860-2-1/2	5/32	83002



**UNION
COUPLING**

PART No.	Tube	Fuller No.
862-2	1/8	84101
862-2-1/2	5/32	84102



**90° ELBOW
Tube To
Male Pipe**

PART No.	Tube	Pipe	Fuller No.
869-2A	1/8	1/8	85002
869-2-1/2A	5/32	1/8	85001



NUT

PART No.	Tube	Fuller No.
861-2	1/8	83501
861-2-1/2	5/32	83502



**CONNECTOR
Tube To
Male Pipe**

PART No.	Tube	Pipe	Fuller No.
868-2-1	1/8	1/16	84001
868-2A	1/8	1/8	84002
868-2-1/2-1	5/32	1/16	83003
868-2-1/2A	5/32	1/8	N/A

TO ASSEMBLE

- 1 PLACE NUT AND SLEEVE OVER TUBE
- 2 PUSH TUBE INTO FITTING AS FAR AS POSSIBLE
- 3 FINGER TIGHTEN NUT
4. COMPLETE SEAL WITH WRENCH ONE FULL TURN

AIR SHIFT TRANSMISSION KITS

Fairview's air shift transmission kit has a selection of fittings in a light weight compact kit.



**Split Sleeve
Compression Fittings**

PART No. ASTM-KIT

PART No.	Description	Qty.
862-2	Union, 1/8 Tube	3
862-2-1/2	Union, 5/32 Tube	3
868-2-1	Connector, 1/8 Tube 1/16 Pipe	3
868-2-1/2-1	Connector, 5/32 Tube 1/16 Pipe	3
868-2-1/2A	Connector, 5/32 Tube 1/8 Pipe	3
868-2A	Connector, 1/8 Tube 1/8 Pipe	3
869-2-1/2A	Elbow, 5/32 Tube 1/8 Pipe	3
869-2A	Elbow, 1/8 Tube 1/8 Pipe	3

Kit Dimensions
Height: 3.50 In.
Width: 6.25 In.
Depth: 1.25 In.

Fairview's push-to-connect air shift transmission kit has a selection of fittings in a light weight compact kit.



**Push-to-Connect
Fittings**

PART No. ASTM-KIT-PC

PART No.	Description	Qty.
PC62-2	Union, 1/8 Tube	3
PC62-2-1/2	Union, 5/32 Tube	3
PC68-2X1	Connector, 1/8 Tube 1/16 Pipe	3
PC68-2-1/2-1	Connector, 5/32 Tube 1/16 Pipe	3
PC68-2-1/2A	Connector, 5/32 Tube 1/8 Pipe	3
PC68-2A	Connector, 1/8 Tube 1/8 Pipe	3
PC69-2-1/2A	Elbow, 5/32 Tube 1/8 Pipe	3
PC69-2A	Elbow, 1/8 Tube 1/8 Pipe	3

Kit Dimensions
Height: 3.50 In.
Width: 6.25 In.
Depth: 1.25 In.



See Page 24 for J1402 D.O.T. Air Shift Transmission Assemblies

STEEL GREASE FITTINGS

Fairview



STRAIGHT


PART No.	Thread Size	Overall Length (IN.)
GN-607	1/8 x 27	1.25
GN-610	1/8 x 27	0.62
GN-627	1/4 x 18	0.80
GN-641	1/4 x 28	0.54
GN-652	1/4 x 28	0.67
GN-680	1/4 x 28	0.93



STRAIGHT METRIC

PART No.	Thread Size	Overall Length (mm)
GNM-301	10mm x 1	15.2
GNM-601	6mm x 1	13.5
GNM-901	8mm x 1	15.0

GREASE WHIP COUPLER



4-Jaw steel coupler for use with rubber or nylon grease whip hose assemblies.

PART No.	Pipe
GWC-A	1/8
C-GWC-A	Carded X 1



45° ANGLE

PART No.	Thread Size	Overall Length (IN.)
GN-637	1/4 x 28	0.88
GN-688	1/8 x 27	0.98



45° ANGLE METRIC

PART No.	Thread Size	Overall Length (mm)
GNM-045	6mm x 1	22.6
GNM-345	10mm x 1	23.5
GNM-445	8mm x 1	22.6



65° ANGLE

PART No.	Thread Size	Overall Length (IN.)
GN-612	1/8 X 27	0.88
GN-629	1/4 X 18	0.96

Grease fittings are available in retail carded blister packs, ten per card. Prefix PART No. with C10- (10 Pcs.) Example: C10-GN607



90° ANGLE

PART No.	Thread Size	Overall Length (IN.)
GN-613	1/8 X 27	0.82
GN-911	1/4 X 28	0.69



90° ANGLE METRIC

PART No.	Thread Size	Overall Length (mm)
GNM-090	6mm x 1	18.0
GNM-390	10mm x 1	19.0
GNM-490	8mm x 1	18.0



DRIVE FIT

PART No.	Thread Size	Overall Length (IN.)
GN-608	5/16	0.58
GN-728	3/16	0.50
GN-743	1/4	0.50

GREASE FITTING ASSORTMENT KITS

Fairview's grease fitting kits provide the most popular grease nipple fittings all in one place when you need them. This light weight compact kit is ideal for any shop.

PART No.	Description
GN-100-KIT	Standard
GNM-100-KIT	Metric



GREASE FITTING KIT GN-100-KIT

Kit Dimensions:
Height: 3.50 In.
Width: 6.25 In.
Depth: 1.25 In.



PART No. GN-100-KIT: 100 STANDARD GREASE FITTINGS IN 6 POPULAR SIZES. KIT CONTAINS:

PART No.	Quantity	Style	Thread Size	Overall Length (IN.)
GN-610	20	Straight	1/8 x 27	0.62
GN-613	4	90°	1/8 X 27	0.82
GN-637	6	45°	1/4 x 28	0.88
GN-641	60	Straight	1/4 x 28	0.54
GN-688	4	45°	1/8 x 27	0.98
GN-911	6	90°	1/4 X 28	0.69

PART No. GNM-100-KIT: 100 METRIC GREASE FITTINGS IN 6 POPULAR SIZES. KIT CONTAINS:

PART No.	Quantity	Style	Thread Size	Overall Length (mm)
GNM-045	10	45°	6mm x 1	22.6
GNM-090	10	90°	6mm x 1	18.0
GNM-301	10	Straight	10mm x 1	15.2
GNM-445	10	45°	8mm x 1	22.6
GNM-601	40	Straight	6mm x 1	13.5
GNM-901	20	Straight	8mm x 1	15.0

STEEL 37° J.I.C. FLARE SWIVEL ADAPTERS



CONNECTOR
Female 37°
Swivel To
Male Pipe

PART No.	Swivel	Pipe
S3520-4A	1/4	1/8
S3520-4B	1/4	1/4
S3520-6B	3/8	1/4
S3520-6C	3/8	3/8
S3520-8C	1/2	3/8
S3520-8D	1/2	1/2
S3520-10D	5/8	1/2
S3520-10E	5/8	3/4
S3520-12D	3/4	1/2
S3520-12E	3/4	3/4
S3520-16E	1	3/4
S3520-16H	1	1
S3520-20J	1-1/4	1-1/4



CONNECTOR
Female 37°
Swivel To
Male O-Ring

PART No.	Swivel	O-Ring
S3522-4	1/4	7/16 - 20
S3522-6	3/8	9/16 - 18
S3522-8	1/2	3/4 - 16
S3522-10	5/8	7/8 - 14
S3522-12	3/4	1-1/16 - 12
S3522-16	1	1-5/16 - 12
S3522-810	1/2	7/8-14



CONNECTOR
Female 37°
Swivel To
Female Pipe

PART No.	Swivel	Pipe
S3526-4A	1/4	1/8
S3526-4B	1/4	1/4
S3526-6B	3/8	1/4
S3526-6C	3/8	3/8
S3526-8C	1/2	3/8
S3526-8D	1/2	1/2
S3526-10D	5/8	1/2
S3526-12E	3/4	3/4
S3526-16H	1	1
S3526-20J	1-1/4	1-1/4



UNION
Female 37°
Swivel

PART No.	Swivel
S3542-4	1/4
S3542-6	3/8
S3542-8	1/2
S3542-12	3/4
S3542-16	1



CONNECTOR
Female 37°
Swivel To
Male JIC

PART No.	Swivel	Tube
S3548-4	1/4	1/4
S3548-6	3/8	3/8
S3548-8	1/2	1/2
S3548-10	5/8	5/8
S3548-12	3/4	3/4
S3548-16	1	1



90° ELBOW
Female 37°
Swivel To
Male Pipe

PART No.	Swivel	Pipe
S3516-4A	1/4	1/8
S3516-4B	1/4	1/4
S3516-6B	3/8	1/4
S3516-6C	3/8	3/8
S3516-8C	1/2	3/8
S3516-8D	1/2	1/2
S3516-10D	5/8	1/2
S3516-12E	3/4	3/4
S3516-16H	1	1



90° ELBOW
Female 37°
Swivel To
Male O-Ring

PART No.	Swivel	O-Ring
S3599-6	3/8	9/16 - 18
S3599-8	1/2	3/4 - 16
S3599-10	5/8	7/8 - 14
S3599-12	3/4	1-1/16 - 12



90° ELBOW
Female 37°
Swivel To
Male JIC

PART No.	Swivel	Tube
S3549-4	1/4	1/4
S3549-6	3/8	3/8
S3549-6B	3/8	1/2
S3549-8	1/2	1/2
S3549-8B	1/2	3/8
S3549-810	1/2	5/8
S3549-10	5/8	5/8
S3549-12	3/4	3/4
S3549-16	1	1
S3549-20	1-1/4	1-1/4
S3549-24	1-1/2	1-1/2



**90° BENT TUBE
ELBOW**
Female 37°
Swivel To
Male JIC

PART No.	Swivel	Tube	Drop Length
S3549BT-4	1/4	1/4	0.68
S3549BT-8	1/2	1/2	1.09
S3549BT-10	5/8	5/8	1.23
S3549BT-12	3/4	3/4	1.83
S3549BT-16	1	1	2.14



**90° BENT TUBE
ELBOW
(LONG STYLE)**
Female 37°
Swivel To
Male JIC

PART No.	Swivel	Tube	Drop Length
S3549LBT-6	3/8	3/8	2.66
S3549LBT-8	1/2	1/2	2.44
S3549LBT-12	3/4	3/4	3.73
S3549LBT-16	1	1	4.33



45° ELBOW
Female 37°
Swivel To
Male JIC

PART No.	Swivel	Tube
S3554-4	1/4	1/4
S3554-6	3/8	3/8
S3554-8	1/2	1/2
S3554-10	5/8	5/8
S3554-12	3/4	3/4
S3554-16	1	1
S3554-20	1-1/4	1-1/4
S3554-24	1-1/2	1-1/2



TEE
Male JIC To
Male JIC To
Female 37°
Swivel

PART No.	Swivel	Tube
S3545-4	1/4	1/4
S3545-6	3/8	3/8
S3545-8	1/2	1/2
S3545-10	5/8	5/8
S3545-12	3/4	3/4
S3545-16	1	1
S3545-20	1-1/4	1-1/4



TEE
Male JIC To
Female
37° Swivel To
Male JIC

PART No.	Swivel	Tube
S3551-4	1/4	1/4
S3551-6	3/8	3/8
S3551-8	1/2	1/2
S3551-10	5/8	5/8
S3551-12	3/4	3/4
S3551-16	1	1
S3551-20	1-1/4	1-1/4

STEEL 37° J.I.C. FLARE ADAPTERS



SLEEVE

PART No.	Tube
S3721-4	1/4
S3721-6	3/8
S3721-8	1/2
S3721-10	5/8
S3721-12	3/4
S3721-16	1
S3721-20	1-1/4



**SLEEVE
NUT**

PART No.	Tube
S3720-4	1/4
S3720-6	3/8
S3720-8	1/2
S3720-10	5/8
S3720-12	3/4
S3720-16	1
S3720-20	1-1/4



**REDUCER
Female JIC
To Male JIC
(ONE PIECE TYPE)**

PART No.	Female Tube	Male Tube
S3735-46	1/4	3/8
S3735-64	3/8	1/4
S3735-68	3/8	1/2
S3735-84	1/2	1/4
S3735-86	1/2	3/8
S3735-810	1/2	5/8
S3735-812	1/2	3/4
S3735-106	5/8	3/8
S3735-108	5/8	1/2
S3735-1012	5/8	3/4
S3735-124	3/4	1/4
S3735-126	3/4	3/8
S3735-128	3/4	1/2
S3735-1210	3/4	5/8
S3735-1216	3/4	1
S3735-164	1	1/4
S3735-166	1	3/8
S3735-168	1	1/2
S3735-1610	1	5/8
S3735-1612	1	3/4
S3735-1620	1	1-1/4
S3735-2012	1-1/4	3/4
S3735-2016	1-1/4	1
S3735-2416	1-1/2	1
S3735-2420	1-1/2	1-1/4
S3735-3224	2	1-1/2



**UNION
Male JIC To
Male JIC**

PART No.	Tube	Tube
S3742-4	1/4	1/4
S3742-5	5/16	5/16
S3742-6	3/8	3/8
S3742-64	3/8	1/4
S3742-8	1/2	1/2
S3742-86	1/2	3/8
S3742-10	5/8	5/8
S3742-108	5/8	1/2
S3742-12	3/4	3/4
S3742-128	3/4	1/2
S3742-1210	3/4	5/8
S3742-16	1	1
S3742-1612	1	3/4
S3742-20	1-1/4	1-1/4
S3742-2016	1-1/4	1
S3742-24	1-1/2	1-1/2



**CONNECTOR
Male JIC To
Female Pipe**

PART No.	Tube	Pipe
S3746-4A	1/4	1/8
S3746-4B	1/4	1/4
S3746-6B	3/8	1/4
S3746-6C	3/8	3/8
S3746-6D	3/8	1/2
S3746-8B	1/2	1/4
S3746-8C	1/2	3/8
S3746-8D	1/2	1/2
S3746-10D	5/8	1/2
S3746-10E	5/8	3/4
S3746-12D	3/4	1/2
S3746-12E	3/4	3/4
S3746-16H	1	1
S3746-20J	1-1/4	1-1/4
S3746-24K	1-1/2	1-1/2
S3746-32M	2	2



**CONNECTOR
37° Tube to
British Standard
Pipe Parallel
Male**

PART No.	Tube	BSPP
S3748BSPP-44	1/4	1/4
S3748BSPP-66	3/8	3/8
S3748BSPP-88	1/2	1/2



**CONNECTOR
Male JIC To
Male Pipe**

PART No.	Tube	Pipe
S3748-2A	1/8	1/8
S3748-3A	3/16	1/8
S3748-4A	1/4	1/8
S3748-4B	1/4	1/4
S3748-4C	1/4	3/8
S3748-4D	1/4	1/2
S3748-5B	5/16	1/4
S3748-6A	3/8	1/8
S3748-6B	3/8	1/4
S3748-6C	3/8	3/8
S3748-6D	3/8	1/2
S3748-6E	3/8	3/4
S3748-8B	1/2	1/4
S3748-8C	1/2	3/8
S3748-8D	1/2	1/2
S3748-8E	1/2	3/4
S3748-8H	1/2	1
S3748-10C	5/8	3/8
S3748-10D	5/8	1/2
S3748-10E	5/8	3/4
S3748-12D	3/4	1/2
S3748-12E	3/4	3/4
S3748-12H	3/4	1
S3748-16D	1	1/2
S3748-16E	1	3/4
S3748-16H	1	1
S3748-16J	1	1-1/4
S3748-20H	1-1/4	1
S3748-20J	1-1/4	1-1/4
S3748-20K	1-1/4	1-1/2
S3748-24J	1-1/2	1-1/4
S3748-24K	1-1/2	1-1/2
S3748-32K	2	1-1/2
S3748-32M	2	2



**Male JIC
PLUG**

PART No.	Tube
S3758-3	3/16
S3758-4	1/4
S3758-5	5/16
S3758-6	3/8
S3758-8	1/2
S3758-10	5/8
S3758-12	3/4
S3758-14	7/8
S3758-16	1
S3758-20	1-1/4
S3758-24	1-1/2
S3758-32	2



**Cap
NUT**

PART No.	Tube
S3756-4	1/4
S3756-5	5/16
S3756-6	3/8
S3756-8	1/2
S3756-10	5/8
S3756-12	3/4
S3756-14	7/8
S3756-16	1
S3756-20	1-1/4
S3756-24	1-1/2
S3756-32	2

STEEL 37° J.I.C. FLARE ADAPTERS



90° ELBOW
Male JIC To
Male Pipe

PART No.	Tube	Pipe
S3749-2A	1/8	1/8
S3749-4A	1/4	1/8
S3749-4B	1/4	1/4
S3749-4C	1/4	3/8
S3749-6A	3/8	1/8
S3749-6B	3/8	1/4
S3749-6C	3/8	3/8
S3749-6D	3/8	1/2
S3749-6E	3/8	3/4
S3749-8B	1/2	1/4
S3749-8C	1/2	3/8
S3749-8D	1/2	1/2
S3749-8E	1/2	3/4
S3749-8H	1/2	1
S3749-10C	5/8	3/8
S3749-10D	5/8	1/2
S3749-10E	5/8	3/4
S3749-12D	3/4	1/2
S3749-12E	3/4	3/4
S3749-12H	3/4	1
S3749-16E	1	3/4
S3749-16H	1	1
S3749-16J	1	1-1/4
S3749-20H	1-1/4	1
S3749-20J	1-1/4	1-1/4
S3749-20K	1-1/4	1-1/2
S3749-24K	1-1/2	1-1/2
S3749-32M	2	2



45° ELBOW
Male JIC To
Male Pipe

PART No.	Tube	Pipe
S3754-4A	1/4	1/8
S3754-4B	1/4	1/4
S3754-6B	3/8	1/4
S3754-6C	3/8	3/8
S3754-6D	3/8	1/2
S3754-8C	1/2	3/8
S3754-8D	1/2	1/2
S3754-8E	1/2	3/4
S3754-10C	5/8	3/8
S3754-10D	5/8	1/2
S3754-12D	3/4	1/2
S3754-12E	3/4	3/4
S3754-12H	3/4	1
S3754-16E	1	3/4
S3754-16H	1	1
S3754-20J	1-1/4	1-1/4
S3754-24K	1-1/2	1-1/2
S3754-32M	2	2



TEE
Male JIC
All Ends

PART No.	Tube	Tube
S3744-4	1/4	1/4
S3744-6	3/8	3/8
S3744-8	1/2	1/2
S3744-10	5/8	5/8
S3744-12	3/4	3/4
S3744-16	1	1



TEE
Male JIC To
Male Pipe To
Tube

PART No.	Tube	Pipe
S3751-4B	1/4	1/4
S3751-6B	3/8	1/4
S3751-6C	3/8	3/8
S3751-6D	3/8	1/2
S3751-8C	1/2	3/8
S3751-8D	1/2	1/2
S3751-8E	1/2	3/4
S3751-12E	3/4	3/4
S3751-16H	1	1



90° ELBOW
(EXTRA-EXTRA
LONG STYLE)
Male JIC To
Male Pipe

PART No.	Tube	Pipe
S3749EEL-4A	1/4	1/8



90° ELBOW
Male JIC To
Female Pipe

PART No.	Tube	Pipe
S3750-4A	1/4	1/8
S3750-4B	1/4	1/4
S3750-6B	3/8	1/4
S3750-6C	3/8	3/8
S3750-8C	1/2	3/8
S3750-8D	1/2	1/2
S3750-10D	5/8	1/2
S3750-12E	3/4	3/4
S3750-16H	1	1




TEE
Male JIC To
Male JIC To
Female Pipe

PART No.	Tube	Pipe
S3736-6B	3/8	1/4
S3736-8C	1/2	3/8
S3736-8D	1/2	1/2
S3736-12E	3/4	3/4



90° ELBOW
(EXTRA LONG STYLE)
Male JIC To
Male Pipe

PART No.	Tube	Pipe
S3749EL-4A	1/4	1/8
S3749EL-4B	1/4	1/4



90° ELBOW
(LONG STYLE)
Male JIC To
Male Pipe

PART No.	Tube	Pipe
S3749L-4A	1/4	1/8
S3749L-4B	1/4	1/4
S3749L-6B	3/8	1/4
S3749L-8D	1/2	1/2



90° ELBOW
Male JIC To
Male JIC

PART No.	Tube	Tube
S3755-4	1/4	1/4
S3755-6	3/8	3/8
S3755-8	1/2	1/2
S3755-10	5/8	5/8
S3755-12	3/4	3/4
S3755-16	1	1
S3755-20	1-1/4	1-1/4



TEE
Male JIC To
Male JIC To
Male Pipe

PART No.	Tube	Pipe
S3745-4B	1/4	1/4
S3745-6B	3/8	1/4
S3745-6C	3/8	3/8
S3745-8C	1/2	3/8
S3745-8D	1/2	1/2
S3745-12E	3/4	3/4
S3745-16H	1	1

STEEL 37° J.I.C. FLARE BULKHEAD ADAPTERS



BULKHEAD UNION
Male JIC To
Male JIC

PART No.	Tube
S3842-4	1/4
S3842-6	3/8
S3842-8	1/2
S3842-10	5/8
S3842-12	3/4
S3842-16	1
S3842-20	1-1/4



90° BULKHEAD ELBOW
Male JIC To
Male JIC

PART No.	Tube
S3855-4	1/4
S3855-6	3/8
S3855-8	1/2
S3855-12	3/4
S3855-16	1



BULKHEAD CONNECTOR
Male JIC To
Female Pipe

PART No.	Tube	Pipe
S3846-4A	1/4	1/8
S3846-4B	1/4	1/4
S3846-6C	3/8	3/8
S3846-8D	1/2	1/2
S3846-12E	3/4	3/4
S3846-16H	1	1



45° BULKHEAD ELBOW
Male JIC To
Male JIC

PART No.	Tube
S3854-6	3/8
S3854-8	1/2
S3854-12	3/4
S3854-16	1



BULKHEAD LOCKNUT

PART No.	Tube
S3831N-4	1/4
S3831N-6	3/8
S3831N-8	1/2
S3831N-12	3/4
S3831N-16	1



BULKHEAD CONNECTOR
Male JIC To
Pipe

PART No.	Tube	Pipe
S3848-4B	1/4	1/4
S3848-6B	3/8	1/4
S3848-6C	3/8	3/8
S3848-8D	1/2	1/2
S3848-10D	5/8	1/2
S3848-12E	3/4	3/4
S3848-16H	1	1
S3848-20J	1-1/4	1-1/4



BULKHEAD TEE
Male JIC All Ends

PART No.	Tube
S3845-4	1/4
S3845-6	3/8
S3845-8	1/2
S3845-12	3/4

NOTE:
BULKHEADS COME COMPLETE
WITH LOCKNUTS



**CONTACT US FOR CUSTOM MADE
HYDRAULIC HOSE ASSEMBLIES**

FLANGE ADAPTERS AND KITS

(CODE 61 MAXIMUM WORKING PRESSURE 3000 PSI)



PART No.	Tube	Split Flange
S3700BT-1212	3/4	3/4
S3700BT-1216	3/4	1
S3700BT-1616	1	1



PART No.	Tube	Split Flange
S3790BT-1212	3/4	3/4
S3790BT-1216	3/4	1
S3790BT-1616	1	1
S3790BT-1620	1	1-1/4
S3790BT-2424	1-1/2	1-1/2
S3790BT-2432	1-1/2	2



PART No.	Tube	Split Flange
S3740BT-812	1/2	3/4
S3740BT-1212	3/4	3/4
S3740BT-1616	1	1



HALVES KIT
Code 61 Split Flange

** Includes Bolts, Lock Washers and O-Ring.

PART No.	Flange Size	Head Size
SFK61-12	3/4	1.50
SFK61-16	1	1.75
SFK61-20	1-1/4	2.00
SFK61-24	1-1/2	2.38
SFK61-32	2	2.81



FLANGE PAD KIT
Code 61 Female Pipe

** Includes Bolts, Lock Washers and O-Ring.

PART No.	Pipe	Pad Size
SFPK2661-16H	1	1
SFPK2661-20J	1-1/4	1-1/4
SFPK2661-24K	1-1/2	1-1/2
SFPK2661-32M	2	2



BUNA-N
SPLIT FLANGE
O-Ring

PART No.	Flange Size	Dia.
SFO-12	3/4	.984
SFO-16	1	1.296
SFO-20	1-1/4	1.484
SFO-24	1-1/2	1.859
SFO-32	2	2.234

(CODE 62 MAXIMUM WORKING PRESSURE 6000 PSI)



PART No.	Tube	Split Flange
S3700BT62-1212	3/4	3/4
S3700BT62-1616	1	1



PART No.	Tube	Split Flange
S3790BT62-1212	3/4	3/4
S3790BT62-1616	1	1
S3790BT62-1620	1	1-1/4
S3790BT62-2020	1-1/4	1-1/4



HALVES KIT
Code 62 Split Flange

** Includes Bolts, Lock Washers and O-Ring.

PART No.	Flange Size	Head Size
SFK62-12	3/4	1.63
SFK62-16	1	1.88
SFK62-20	1-1/4	2.12



BUNA-N
SPLIT FLANGE
O-Ring

PART No.	Flange Size	Dia.
SFO-12	3/4	.984
SFO-16	1	1.296
SFO-20	1-1/4	1.484
SFO-24	1-1/2	1.859
SFO-32	2	2.234

STEEL S.A.E. O-RING BOSS ADAPTERS (BUNA-N O-RING STANDARD)



CONNECTOR
Male O-Ring To
Female Pipe

PART No.	O-Ring	Pipe
S3620-4A	7/16 - 20	1/8
S3620-4B	7/16 - 20	1/4
S3620-5A	1/2 - 20	1/8
S3620-5B	1/2 - 20	1/4
S3620-6B	9/16 - 18	1/4
S3620-6C	9/16 - 18	3/8
S3620-6D	9/16 - 18	1/2
S3620-8C	3/4 - 16	3/8
S3620-8D	3/4 - 16	1/2
S3620-10C	7/8 - 14	3/8
S3620-10D	7/8 - 14	1/2
S3620-10E	7/8 - 14	3/4
S3620-12D	1-1/16 - 12	1/2
S3620-12E	1-1/16 - 12	3/4
S3620-16E	1-5/16 - 12	3/4
S3620-16H	1-5/16 - 12	1
S3620-20J	1-5/8 - 12	1-1/4



CONNECTOR
Male O-Ring To
Male Pipe

PART No.	O-Ring	Pipe
S3622-4B	7/16 - 20	1/4
S3622-6B	9/16 - 18	1/4
S3622-6C	9/16 - 18	3/8
S3622-6D	9/16 - 18	1/2
S3622-8B	3/4 - 16	1/4
S3622-8C	3/4 - 16	3/8
S3622-8D	3/4 - 16	1/2
S3622-10D	7/8 - 14	1/2
S3622-12D	1-1/16 - 12	1/2
S3622-12E	1-1/16 - 12	3/4
S3622-16H	1-5/16 - 12	1
S3622-20J	1-5/8 - 12	1-1/4



CONNECTOR
Female O-Ring To
Male Pipe

PART No.	O-Ring	Pipe
S3622F-4B	7/16 - 20	1/4
S3622F-6B	9/16 - 18	1/4
S3622F-6C	9/16 - 18	3/8
S3622F-8D	3/4 - 16	1/2
S3622F-10D	7/8 - 14	1/2
S3622F-12E	1-1/16 - 12	3/4



CONNECTOR
Male O-Ring To
Female O-Ring

PART No.	Male	Female
S3623-4	7/16 - 20	7/16 - 20
S3623-6	9/16 - 18	9/16 - 18
S3623-6A	9/16 - 18	7/16 - 20
S3623-6B	9/16 - 18	3/4 - 16
S3623-8	3/4 - 16	3/4 - 16
S3623-8A	3/4 - 16	7/16 - 20
S3623-8B	3/4 - 16	9/16 - 18
S3623-810	3/4 - 16	7/8 - 14
S3623-106	7/8 - 14	9/16 - 18
S3623-108	7/8 - 14	3/4 - 16
S3623-1012	7/8 - 14	1-1/16 - 12
S3623-12	1-1/16 - 12	1-1/16 - 12
S3623-128	1-1/16 - 12	3/4 - 16
S3623-1210	1-1/16 - 12	7/8 - 14
S3623-1612	1-5/16 - 12	1-1/16 - 12
S3623-2016	1-5/8 - 12	1-5/16 - 12



CONNECTOR
Male JIC To
Male O-Ring

PART No.	Tube	O-Ring
S3648-4	1/4	7/16 - 20
S3648-45	1/4	1/2 - 20
S3648-46	1/4	9/16 - 18
S3648-48	1/4	3/4 - 16
S3648-410	1/4	7/8 - 14
S3648-6	3/8	9/16 - 18
S3648-64	3/8	7/16 - 20
S3648-65	3/8	1/2 - 20
S3648-68	3/8	3/4 - 16
S3648-610	3/8	7/8 - 14
S3648-612	3/8	1-1/16 - 12
S3648-8	1/2	3/4 - 16
S3648-84	1/2	7/16 - 20
S3648-86	1/2	9/16 - 18
S3648-810	1/2	7/8 - 14
S3648-812	1/2	1-1/16 - 12
S3648-816	1/2	1-5/16 - 12
S3648-10	5/8	7/8 - 14
S3648-108	5/8	3/4 - 16
S3648-1012	5/8	1-1/16 - 12
S3648-12	3/4	1-1/16 - 12
S3648-128	3/4	3/4 - 16
S3648-1210	3/4	7/8 - 14
S3648-1216	3/4	1-5/16 - 12
S3648-1220	3/4	1-5/8 - 12
S3648-16	1	1-5/16 - 12
S3648-1610	1	7/8 - 14
S3648-1612	1	1-1/16 - 12
S3648-1620	1	1-5/8 - 12
S3648-1624	1	1-7/8 - 12
S3648-20	1-1/4	1-5/8 - 12
S3648-2016	1-1/4	1-5/16 - 12
S3648-2024	1-1/4	1-7/8 - 12
S3648-24	1-1/2	1-7/8 - 12
S3648-2420	1-1/2	1-5/8 - 12



UNION
Male O-Ring To
Male O-Ring

PART No.	O-Ring
S3642-6	9/16 - 18
S3642-8	3/4 - 16
S3642-12	1-1/16 - 12
S3642-16	1-5/16 - 12
S3642-20	1-5/8 - 12



PLUG
O-Ring
Counter Sunk
Hex

PART No.	O-Ring
S3618-2	5/16 - 24
S3618-4	7/16 - 20
S3618-5	1/2 - 20
S3618-6	9/16 - 18
S3618-8	3/4 - 16
S3618-10	7/8 - 14
S3618-12	1-1/16 - 12
S3618-16	1-5/16 - 12



PLUG
O-Ring
Hex Head

PART No.	O-Ring
S3621-4	7/16 - 20
S3621-5	1/2 - 20
S3621-6	9/16 - 18
S3621-8	3/4 - 16
S3621-10	7/8 - 14
S3621-12	1-1/16 - 12
S3621-14	1-3/16 - 12
S3621-16	1-5/16 - 12
S3621-20	1-5/8 - 12
S3621-24	1-7/8 - 12
S3621-32	2-1/2 - 12

STEEL S.A.E. O-RING BOSS ADAPTERS (BUNA-N O-RING STANDARD)



90° ELBOW
Male O-Ring To
Female Pipe

PART No.	O-Ring	Pipe
S3616-6B	9/16 - 18	1/4
S3616-8C	3/4 - 16	3/8
S3616-8D	3/4 - 16	1/2
S3616-10D	7/8 - 14	1/2
S3616-12E	1-1/16 - 12	3/4
S3616-16H	1-5/16 - 12	1
S3616-20J	1-5/8 - 12	1-1/4



90° ELBOW
Male JIC To
Male O-Ring

PART No.	Tube	O-Ring
S3649-4	1/4	7/16 - 20
S3649-45	1/4	1/2 - 20
S3649-46	1/4	9/16 - 18
S3649-48	1/4	3/4 - 16
S3649-6	3/8	9/16 - 18
S3649-64	3/8	7/16 - 20
S3649-65	3/8	1/2 - 20
S3649-68	3/8	3/4 - 16
S3649-610	3/8	7/8 - 14
S3649-8	1/2	3/4 - 16
S3649-86	1/2	9/16 - 18
S3649-810	1/2	7/8 - 14
S3649-812	1/2	1-1/16 - 12
S3649-10	5/8	7/8 - 14
S3649-108	5/8	3/4 - 16
S3649-1012	5/8	1-1/16 - 12
S3649-12	3/4	1-1/16 - 12
S3649-128	3/4	3/4 - 16
S3649-1210	3/4	7/8 - 14
S3649-1216	3/4	1-5/16 - 12
S3649-1220	3/4	1-5/8 - 12
S3649-16	1	1-5/16 - 12
S3649-1612	1	1-1/16 - 12
S3649-1620	1	1-5/8 - 12
S3649-20	1-1/4	1-5/8 - 12
S3649-2016	1-1/4	1-5/16 - 12
S3649-2024	1-1/4	1-7/8 - 12
S3649-24	1-1/2	1-7/8 - 12



**90° ELBOW
(EXTRA LONG STYLE)**
Male JIC To
Male O-Ring

PART No.	Tube	O-Ring
S3649EL-6	3/8	9/16 - 18
S3649EL-8	1/2	3/4 - 16



90° ELBOW
Male O-Ring To
Male O-Ring

PART No.	O-Ring
S3655-6	9/16 - 18



90° ELBOW
Male O-Ring To
Male Pipe

PART No.	O-Ring	Pipe
S3699-6B	9/16 - 18	1/4
S3699-8C	3/4 - 16	3/8
S3699-8D	3/4 - 16	1/2
S3699-10D	7/8 - 14	1/2
S3699-12E	1-1/16 - 12	3/4
S3699-16H	1-5/16 - 12	1



45° ELBOW
Male JIC To
Male O-Ring

PART No.	Tube	O-Ring
S3654-4	1/4	7/16 - 20
S3654-6	3/8	9/16 - 18
S3654-68	3/8	3/4 - 16
S3654-610	3/8	7/4-14
S3654-8	1/2	3/4 - 16
S3654-86	1/2	9/16 - 18
S3654-810	1/2	7/8 - 14
S3654-10	5/8	7/8 - 14
S3654-108	5/8	3/4 - 16
S3654-12	3/4	1-1/16 - 12
S3654-1210	3/4	7/8 - 14
S3654-1216	3/4	1-5/16 - 12
S3654-16	1	1-5/16 - 12
S3654-1612	1	1-1/16 - 12
S3654-1620	1	1-5/8 - 12
S3654-20	1-1/4	1-5/8 - 12



TEE
Male JIC To
Male JIC To
Male O-Ring

PART No.	Tube	O-Ring
S3645-4	1/4	7/16 - 20
S3645-6	3/8	9/16 - 18
S3645-8	1/2	3/4 - 16
S3645-86	1/2	9/16 - 18
S3645-810	1/2	7/8 - 14
S3645-10	5/8	7/8 - 14
S3645-12	3/4	1-1/16 - 12
S3645-16	1	1-5/16 - 12



TEE
Male JIC To
Male O-Ring To
Male JIC

PART No.	Tube	O-Ring
S3651-4	1/4	7/16 - 20
S3651-6	3/8	9/16 - 18
S3651-8	1/2	3/4 - 16
S3651-810	1/2	7/8 - 14
S3651-10	5/8	7/8 - 14
S3651-12	3/4	1-1/16 - 12
S3651-16	1	1-5/16 - 12
S3651-20	1-1/4	1-5/8 - 12



**BUNA-N
O-RING**

PART No.	O-Ring	Dia.
S3631R-2	1/8	.239
S3631R-3	3/16	.301
S3631R-4	1/4	.351
S3631R-5	5/16	.414
S3631R-6	3/8	.468
S3631R-8	1/2	.644
S3631R-10	5/8	.755
S3631R-12	3/4	.924
S3631R-14	7/8	1.048
S3631R-16	1	1.171
S3631R-20	1-1/4	1.475
S3631R-24	1-1/2	1.720
S3631R-32	2	2.234

STEEL O-RING FACE SEAL ADAPTERS (BUNA-N O-RING STANDARD)



CONNECTOR
Female O-Ring
Face Seal To
Male O-Ring
Face Seal

PART No.	Female ORFS	Male ORFS
S3935-86	13/16 - 16	11/16 - 16
S3935-1012	1 - 14	1-3/16 - 12
S3935-126	1-3/16 - 12	11/16 - 16
S3935-128	1-3/16 - 12	13/16 - 16
S3935-1210	1-3/16 - 12	1 - 14
S3935-1612	1-7/16 - 12	1-3/16 - 12



UNION
O-Ring
Face Seal

PART No.	ORFS
S3942-6	11/16 - 16
S3942-8	13/16 - 16
S3942-10	1 - 14
S3942-12	1-3/16 - 12
S3942-16	1-7/16 - 12



CONNECTOR
O-Ring Face
Seal To Male Pipe

PART No.	ORFS	Pipe
S3948-4A	9/16 - 18	1/8
S3948-6B	11/16 - 16	1/4
S3948-6C	11/16 - 16	3/8
S3948-8D	13/16 - 16	1/2
S3948-10D	1 - 14	1/2
S3948-12E	1-3/16 - 12	3/4
S3948-16H	1-7/16 - 12	1



CONNECTOR
O-Ring Face Seal
To Male
O-Ring Boss

PART No.	ORFS	O-Ring
S3968-4	9/16 - 18	7/16 - 20
S3968-46	9/16 - 18	9/16 - 18
S3968-6	11/16 - 16	9/16 - 18
S3968-68	11/16 - 16	3/4 - 16
S3968-610	11/16 - 16	7/8 - 14
S3968-8	13/16 - 16	3/4 - 16
S3968-86	13/16 - 16	9/16 - 18
S3968-810	13/16 - 16	7/8 - 14
S3968-10	1 - 14	7/8 - 14
S3968-12	1-3/16 - 12	1-1/16 - 12
S3968-1216	1-3/16 - 12	1-5/16 - 12
S3968-16	1-7/16 - 12	1-5/16 - 12
S3968-1612	1-7/16 - 12	1-1/16 - 12
S3968-20	1-11/16 - 12	1-5/8 - 12
S3968-2016	1-11/16 - 12	1-5/16 - 12



CONNECTOR
O-Ring Face
Seal To
Male JIC

PART No.	ORFS	Tube
S3937-4	9/16 - 18	1/4
S3937-6	11/16 - 16	3/8
S3937-8	13/16 - 16	1/2
S3937-10	1 - 14	5/8
S3937-12	1-3/16 - 12	3/4
S3937-16	1-7/16 - 12	1



CONNECTOR
Female
O-Ring Face
Seal To
Male JIC

PART No.	Female ORFS	Tube
S3937F-4	9/16 - 18	1/4
S3937F-6	11/16 - 16	3/8
S3937F-8	13/16 - 16	1/2
S3937F-10	1 - 14	5/8
S3937F-12	1-3/16 - 12	3/4
S3937F-16	1-7/16 - 12	1



PLUG
O-Ring Face
Seal

PART No.	ORFS
S3958-4	9/16 - 18
S3958-6	11/16 - 16
S3958-8	13/16 - 16
S3958-10	1 - 14
S3958-12	1-3/16 - 12
S3958-16	1-7/16 - 12
S3958-20	1-11/16 - 12
S3958-24	2 - 12



CAP
O-Ring Face
Seal

PART No.	ORFS
S3956-4	9/16 - 18
S3956-6	11/16 - 16
S3956-8	13/16 - 16
S3956-10	1 - 14
S3956-12	1-3/16 - 12
S3956-16	1-7/16 - 12
S3956-20	1-11/16 - 12
S3956-24	2 - 12



**BULKHEAD
UNION**
O-Ring Face Seal

PART No.	ORFS
S3942BH-4	9/16 - 18
S3942BH-6	11/16 - 16



90° ELBOW
Male O-Ring
Face Seal To
Female O-Ring
Face Seal

PART No.	Male ORFS	Female ORFS
S3947-4	9/16 - 18	9/16 - 18
S3947-6	11/16 - 16	11/16 - 16
S3947-8	13/16 - 16	13/16 - 16
S3947-10	1 - 14	1 - 14
S3947-12	1-3/16 - 12	1-3/16 - 12
S3947-16	1-7/16 - 12	1-7/16 - 12
S3947-20	1-11/16 - 12	1-11/16 - 12



TEE
Male To Female
To Male O-Ring
Face Seal

PART No.	Male ORFS	Female ORFS
S3951F-4	9/16 - 18	9/16 - 18
S3951F-6	11/16 - 16	11/16 - 16
S3951F-8	13/16 - 16	13/16 - 16
S3951F-10	1 - 14	1 - 14
S3951F-12	1-3/16 - 12	1-3/16 - 12
S3951F-16	1-7/16 - 12	1-7/16 - 12



45° ELBOW
O-Ring Face
Seal To Male
O-Ring Boss

PART No.	ORFS	O-Ring
S3974-4	9/16 - 18	7/16 - 20
S3974-6	11/16 - 16	9/16 - 18
S3974-8	13/16 - 16	3/4 - 16
S3974-10	1 - 14	7/8 - 14



90° ELBOW
Male O-Ring Face
Seal To Male
O-Ring Boss

PART No.	Male ORFS	Male O-Ring
S3969-4	9/16 - 18	7/16 - 20
S3969-46	9/16 - 18	9/16 - 18
S3969-6	11/16 - 16	9/16 - 18
S3969-68	11/16 - 16	3/4 - 16
S3969-8	13/16 - 16	3/4 - 16
S3969-86	13/16 - 16	9/16 - 18
S3969-810	13/16 - 16	7/8 - 14
S3969-812	13/16 - 16	1-1/16 - 12
S3969-10	1 - 14	7/8 - 14
S3969-108	1 - 14	3/4 - 16
S3969-12	1-3/16 - 12	1-1/16 - 12
S3969-1210	1-3/16 - 12	7/8 - 14
S3969-16	1-7/16 - 12	1-5/16 - 12
S3969-20	1-11/16 - 12	1-5/8 - 12

STEEL O-RING FACE SEAL ADAPTERS (BUNA-N O-RING STANDARD)

BUNA-N O-RING Face Seal



LOCK NUT

Steel O-Ring Face Seal Fittings (ORFS):

Steel O-ring face seal adapter fittings use a straight thread and have a machined groove in the face of the male fitting to accept an O-ring (of either Buna N or Viton material). This O-ring is compressed against the flat face of the female fitting for a leak proof connection, and offers excellent leak protection at high pressures.

PART No.	ORFS	DIA.
S3931R-4	9/16 - 18	.301
S3931R-6	11/16 - 16	.364
S3931R-8	13/16 - 16	.489
S3931R-10	1 - 14	.614
S3931R-12	1-3/16 - 12	.739
S3931R-16	1-7/16 - 12	.926
S3931R-20	1-11/16 - 12	1.176

PART No.	ORFS
S3931N-4	9/16 - 18
S3931N-6	11/16 - 16
S3931N-8	13/16 - 16
S3931N-10	1 - 14
S3931N-12	1-3/16 - 12
S3931N-16	1-7/16 - 12

STEEL FLARELESS ADAPTERS



TUBE SLEEVE

PART No.	Tube
S6760-4	1/4
S6760-6	3/8
S6760-8	1/2
S6760-10	5/8
S6760-12	3/4
S6760-16	1



CONNECTOR Tube To Female Pipe

PART No.	Tube	Pipe
S6766-4A	1/4	1/8
S6766-4B	1/4	1/4
S6766-6B	3/8	1/4
S6766-6C	3/8	3/8
S6766-8C	1/2	3/8
S6766-10D	5/8	1/2
S6766-12E	3/4	3/4
S6766-16H	1	1



90° ELBOW Tube To Tube

PART No.	Tube
S6765-4	1/4
S6765-6	3/8
S6765-8	1/2



TUBE NUT

PART No.	Tube
S6761-4	1/4
S6761-6	3/8
S6761-8	1/2
S6761-10	5/8
S6761-12	3/4
S6761-16	1



CONNECTOR Tube To Male Pipe

PART No.	Tube	Pipe
S6768-4A	1/4	1/8
S6768-4B	1/4	1/4
S6768-6B	3/8	1/4
S6768-6C	3/8	3/8
S6768-8C	1/2	3/8
S6768-8D	1/2	1/2
S6768-10D	5/8	1/2
S6768-12D	3/4	1/2
S6768-12E	3/4	3/4
S6768-16H	1	1



90° ELBOW Tube To Male Pipe

PART No.	Tube	Pipe
S6769-4A	1/4	1/8
S6769-4B	1/4	1/4
S6769-6B	3/8	1/4
S6769-6C	3/8	3/8
S6769-8C	1/2	3/8
S6769-8D	1/2	1/2
S6769-10D	5/8	1/2
S6769-12E	3/4	3/4



UNION Tube To Tube

PART No.	Tube
S6762-3	3/16
S6762-4	1/4
S6762-6	3/8
S6762-8	1/2
S6762-10	5/8
S6762-12	3/4
S6762-16	1



TEE Tube Three Ends

PART No.	Tube
S6764-4	1/4
S6764-6	3/8
S6764-8	1/2
S6764-10	5/8

STEEL S.A.E. PIPE ADAPTERS



COUPLING
Female
Both Ends

PART No.	Pipe	Pipe
S1003-A	1/8	1/8
S1003-B	1/4	1/4
S1003-BA	1/4	1/8
S1003-C	3/8	3/8
S1003-CB	3/8	1/4
S1003-D	1/2	1/2
S1003-DB	1/2	1/4
S1003-DC	1/2	3/8
S1003-E	3/4	3/4
S1003-ED	3/4	1/2
S1003-H	1	1
S1003-HD	1	1/2
S1003-HE	1	3/4
S1003-J	1-1/4	1-1/4
S1003-K	1-1/2	1-1/2
S1003-M	2	2



BUSHING
Male To
Female

PART No.	Male Pipe	Female Pipe
S1010-BA	1/4	1/8
S1010-CA	3/8	1/8
S1010-CB	3/8	1/4
S1010-DA	1/2	1/8
S1010-DB	1/2	1/4
S1010-DC	1/2	3/8
S1010-EB	3/4	1/4
S1010-EC	3/4	3/8
S1010-ED	3/4	1/2
S1010-HB	1	1/4
S1010-HC	1	3/8
S1010-HD	1	1/2
S1010-HE	1	3/4
S1010-JD	1-1/4	1/2
S1010-JE	1-1/4	3/4
S1010-JH	1-1/4	1
S1010-KD	1-1/2	1/2
S1010-KE	1-1/2	3/4
S1010-KH	1-1/2	1
S1010-KJ	1-1/2	1-1/4
S1010-ME	2	3/4
S1010-MH	2	1
S1010-MJ	2	1-1/4
S1010-MK	2	1-1/2




REDUCER
Female To
Male

PART No.	Female Pipe	Male Pipe
S1020-AA	1/8	1/8
S1020-BA	1/4	1/8
S1020-BB	1/4	1/4
S1020-BC	1/4	3/8
S1020-CA	3/8	1/8
S1020-CB	3/8	1/4
S1020-CC	3/8	3/8
S1020-CD	3/8	1/2
S1020-DA	1/2	1/8
S1020-DB	1/2	1/4



REDUCER
Female To Male
(Continued)

PART No.	Female Pipe	Male Pipe
S1020-DC	1/2	3/8
S1020-DD	1/2	1/2
S1020-DE	1/2	3/4
S1020-EB	3/4	1/4
S1020-EC	3/4	3/8
S1020-ED	3/4	1/2
S1020-EE	3/4	3/4
S1020-HD	1	1/2
S1020-HE	1	3/4
S1020-HH	1	1
S1020-JH	1-1/4	1
S1020-KJ	1-1/2	1-1/4



HEX NIPPLE
Male Both
Ends

PART No.	Pipe	Pipe
S1022-A	1/8	1/8
S1022-B	1/4	1/4
S1022-BA	1/4	1/8
S1022-C	3/8	3/8
S1022-CA	3/8	1/8
S1022-CB	3/8	1/4
S1022-D	1/2	1/2
S1022-DB	1/2	1/4
S1022-DC	1/2	3/8
S1022-E	3/4	3/4
S1022-EC	3/4	3/8
S1022-ED	3/4	1/2
S1022-H	1	1
S1022-HD	1	1/2
S1022-HE	1	3/4
S1022-J	1-1/4	1-1/4
S1022-JH	1-1/4	1
S1022-K	1-1/2	1-1/2
S1022-KJ	1-1/2	1-1/4
S1022-M	2	2



PLUG
SQUARE
HEAD

PART No.	Pipe
S1009-A	1/8
S1009-B	1/4
S1009-C	3/8
S1009-D	1/2
S1009-E	3/4
S1009-H	1
S1009-K	1-1/2



PLUG
COUNTER SUNK
HEX

PART No.	Pipe
S1018-A	1/8
S1018-B	1/4
S1018-C	3/8
S1018-D	1/2
S1018-E	3/4
S1018-H	1
S1018-J	1-1/4
S1018-K	1-1/2
S1018-M	2



CAP
Female

PART No.	Pipe
S1008-A	1/8
S1008-B	1/4
S1008-C	3/8
S1008-D	1/2
S1008-E	3/4



PLUG
HEX HEAD

PART No.	Pipe
S1021-A	1/8
S1021-B	1/4
S1021-C	3/8
S1021-D	1/2
S1021-E	3/4
S1021-H	1
S1021-J	1-1/4
S1021-K	1-1/2
S1021-M	2



SHORT
NIPPLE

PART No.	Pipe	Length
S1012-A	1/8	3/4
S1012-B	1/4	7/8
S1012-C	3/8	1
S1012-D	1/2	1-1/8
S1012-E	3/4	1-3/8
S1012-H	1	1-1/2



LONG
NIPPLE

PART No.	Pipe	Length
S1013-B1-1/2	1/4	1-1/2
S1013-B2	1/4	2
S1013-B2-1/2	1/4	2-1/2
S1013-B3	1/4	3
S1013-C2	3/8	2
S1013-C3	3/8	3
S1013-C4	3/8	4
S1013-D1-1/2	1/2	1-1/2
S1013-D2	1/2	2
S1013-D3	1/2	3
S1013-D4	1/2	4
S1013-E3	3/4	3
S1013-E4	3/4	4

STEEL S.A.E. PIPE ADAPTERS



**90° ELBOW
Female To
Female**

PART No.	Pipe	Pipe
S1000-A	1/8	1/8
S1000-B	1/4	1/4
S1000-C	3/8	3/8
S1000-CB	3/8	1/4
S1000-D	1/2	1/2
S1000-DC	1/2	3/8
S1000-E	3/4	3/4
S1000-ED	3/4	1/2
S1000-H	1	1
S1000-J	1-1/4	1-1/4
S1000-K	1-1/2	1-1/2
S1000-M	2	2



**90° ELBOW
Male To
Female**

PART No.	Male Pipe	Female Pipe
S1016-A	1/8	1/8
S1016-AB	1/8	1/4
S1016-B	1/4	1/4
S1016-BC	1/4	3/8
S1016-C	3/8	3/8
S1016-CB	3/8	1/4
S1016-CD	3/8	1/2
S1016-D	1/2	1/2
S1016-DC	1/2	3/8
S1016-DE	1/2	3/4
S1016-E	3/4	3/4
S1016-ED	3/4	1/2
S1016-H	1	1
S1016-J	1-1/4	1-1/4
S1016-K	1-1/2	1-1/2
S1016-M	2	2



**90° ELBOW
Female To
Male Swivel**

PART No.	Female Pipe	Male Pipe
S1016SW-B	1/4	1/4
S1016SW-C	3/8	3/8
S1016SW-D	1/2	1/2



**90° ELBOW
Male To
Male**

PART No.	Pipe	Pipe
S1099-A	1/8	1/8
S1099-B	1/4	1/4
S1099-C	3/8	3/8
S1099-CB	3/8	1/4
S1099-D	1/2	1/2
S1099-DC	1/2	3/8
S1099-E	3/4	3/4
S1099-ED	3/4	1/2
S1099-H	1	1
S1099-J	1-1/4	1-1/4
S1099-K	1-1/2	1-1/2



**90° ELBOW
Male To
Male Swivel**

PART No.	Pipe	Pipe
S1099SW-B	1/4	1/4



**45° ELBOW
Female To
Female**

PART No.	Pipe
S1005-B	1/4
S1005-C	3/8
S1005-D	1/2
S1005-E	3/4
S1005-H	1



**45° ELBOW
Male To
Male**

PART No.	Pipe
S1005M-B	1/4
S1005M-C	3/8
S1005M-D	1/2
S1005M-E	3/4
S1005M-H	1
S1005M-J	1-1/4



**45° ELBOW
Male To
Female**

PART No.	Male Pipe	Female Pipe
S1024-A	1/8	1/8
S1024-B	1/4	1/4
S1024-C	3/8	3/8
S1024-D	1/2	1/2
S1024-E	3/4	3/4
S1024-H	1	1
S1024-J	1-1/4	1-1/4



**TEE
Female
All Ends**

PART No.	Pipe
S1001-A	1/8
S1001-B	1/4
S1001-C	3/8
S1001-D	1/2
S1001-E	3/4
S1001-H	1
S1001-J	1-1/4
S1001-K	1-1/2



**TEE
Male To
Female To
Male**

PART No.	Female Pipe	Male Pipe
S1004-B	1/4	1/4
S1004-C	3/8	3/8
S1004-D	1/2	1/2
S1004-E	3/4	3/4
S1004-H	1	1



**TEE
Male
All Ends**

PART No.	Pipe
S1001M-C	3/8
S1001M-D	1/2
S1001M-E	3/4



**TEE
Female To
Female To
Male**

PART No.	Female Pipe	Male Pipe
S1006-A	1/8	1/8
S1006-B	1/4	1/4
S1006-C	3/8	3/8
S1006-D	1/2	1/2
S1006-E	3/4	3/4
S1006-H	1	1



**TEE
Male To Male
To Female**

PART No.	Male Pipe	Female Pipe
S1006M-B	1/4	1/4
S1006M-C	3/8	3/8
S1006M-D	1/2	1/2
S1006M-E	3/4	3/4
S1006M-H	1	1



**TEE
Female To
Male To
Female**


PART No.	Female Pipe	Male Pipe
S1007-A	1/8	1/8
S1007-B	1/4	1/4
S1007-C	3/8	3/8
S1007-D	1/2	1/2
S1007-E	3/4	3/4
S1007-H	1	1
S1007-J	1-1/4	1-1/4
S1007-K	1-1/2	1-1/2



**CROSS
Female All
Ends**


PART No.	Pipe
S1002-B	1/4
S1002-C	3/8
S1002-D	1/2
S1002-E	3/4
S1002-H	1

STEEL MERCHANT PIPE FITTINGS (Weldable)

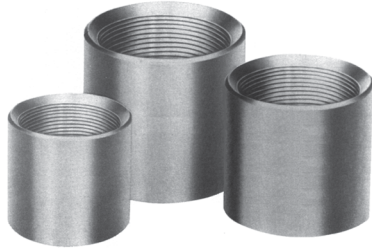

COUPLING

PART No.	Pipe
BI-103MC-A	1/8
BI-103MC-B	1/4
BI-103MC-C	3/8
BI-103MC-D	1/2
BI-103MC-E	3/4
BI-103MC-H	1
BI-103MC-J	1-1/4
BI-103MC-K	1-1/2
BI-103MC-M	2
BI-103MC-N	2-1/2
BI-103MC-P	3
BI-103MC-S	4

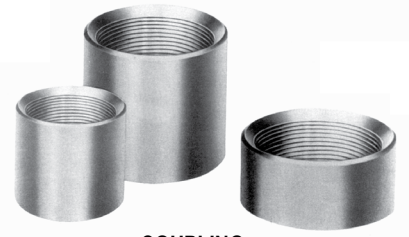

**COUPLING
(Half Height)**

PART No.	Pipe
BI-103HMC-A	1/8
BI-103HMC-B	1/4
BI-103HMC-C	3/8
BI-103HMC-D	1/2
BI-103HMC-E	3/4
BI-103HMC-H	1
BI-103HMC-J	1-1/4
BI-103HMC-K	1-1/2
BI-103HMC-M	2

BUSHING



PART No.	Pipe
BI-110MC-CB	3/8 to 1/4
BI-110MC-DB	1/2 to 1/4
BI-110MC-DC	1/2 to 3/8
BI-110MC-ED	3/4 to 1/2

**PLUG
(Square Head)**



PART No.	Pipe
BI-109MC-A	1/8
BI-109MC-B	1/4
BI-109MC-C	3/8
BI-109MC-D	1/2
BI-109MC-E	3/4
BI-109MC-H	1

O-RING BOSS TO NPSM (BUNA-N O-RING STANDARD)



**CONNECTOR
Male O-Ring To
NPSM Swivel**

PART No.	O-Ring	Swivel
SO1120-4B	7/16 - 20	1/4
SO1120-6B	9/16 - 18	1/4
SO1120-6C	9/16 - 18	3/8
SO1120-6D	9/16 - 18	1/2
SO1120-8B	3/4 - 16	1/4
SO1120-8C	3/4 - 16	3/8
SO1120-8D	3/4 - 16	1/2
SO1120-8E	3/4 - 16	3/4
SO1120-10C	7/8 - 14	3/8
SO1120-10D	7/8 - 14	1/2
SO1120-10E	7/8 - 14	3/4
SO1120-12D	1-1/16 - 12	1/2
SO1120-12E	1-1/16 - 12	3/4
SO1120-16E	1-5/16 - 12	3/4
SO1120-16H	1-5/16 - 12	1



**90° ELBOW
Male O-Ring To
NPSM Swivel**

PART No.	O-Ring	Swivel
SO1116-4B	7/16 - 20	1/4
SO1116-6B	9/16 - 18	1/4
SO1116-6C	9/16 - 18	3/8
SO1116-6D	9/16 - 18	1/2
SO1116-8C	3/4 - 16	3/8
SO1116-8D	3/4 - 16	1/2
SO1116-8E	3/4 - 16	3/4
SO1116-10C	7/8 - 14	3/8
SO1116-10D	7/8 - 14	1/2
SO1116-10E	7/8 - 14	3/4
SO1116-12D	1-1/16 - 12	1/2
SO1116-12E	1-1/16 - 12	3/4
SO1116-16E	1-5/16 - 12	3/4
SO1116-16H	1-5/16 - 12	1
SO1116-20J	1-5/8 - 12	1-1/4



**45° ELBOW
Male O-Ring To
NPSM Swivel**

PART No.	O-Ring	Swivel
SO1124-4B	7/16 - 20	1/4
SO1124-6B	9/16 - 18	1/4
SO1124-6C	9/16 - 18	3/8
SO1124-8C	3/4 - 16	3/8
SO1124-8D	3/4 - 16	1/2
SO1124-10D	7/8 - 14	1/2
SO1124-10E	7/8 - 14	3/4
SO1124-12D	1-1/16 - 12	1/2
SO1124-12E	1-1/16 - 12	3/4
SO1124-16H	1-5/16 - 12	1

STEEL S.A.E. SWIVEL NPSM ADAPTERS



CONNECTOR
Female Pipe To
NPSM Swivel

PART No.	Pipe	Swivel
S1103-AA	1/8	1/8
S1103-BB	1/4	1/4
S1103-BC	1/4	3/8
S1103-CB	3/8	1/4
S1103-CC	3/8	3/8
S1103-CD	3/8	1/2
S1103-DC	1/2	3/8
S1103-DD	1/2	1/2
S1103-EE	3/4	3/4
S1103-HE	1	3/4
S1103-HH	1	1
S1103-JJ	1-1/4	1-1/4
S1103-KK	1-1/2	1-1/2
S1103-MM	2	2



CONNECTOR
Male Pipe To
NPSM Swivel

PART No.	Pipe	Swivel
S1120-AA	1/8	1/8
S1120-AB	1/8	1/4
S1120-BA	1/4	1/8
S1120-BB	1/4	1/4
S1120-BC	1/4	3/8
S1120-CB	3/8	1/4
S1120-CC	3/8	3/8
S1120-CC.000*	3/8	3/8
S1120-CD	3/8	1/2
S1120-DB	1/2	1/4
S1120-DC	1/2	3/8
S1120-DD	1/2	1/2
S1120-DD.000*	1/2	1/2
S1120-DE	1/2	3/4
S1120-ED	3/4	1/2
S1120-EE	3/4	3/4
S1120-EH	3/4	1
S1120-HE	1	3/4
S1120-HH	1	1
S1120-HJ	1	1-1/4
S1120-JH	1-1/4	1
S1120-JJ	1-1/4	1-1/4
S1120-KJ	1-1/2	1-1/4
S1120-KK	1-1/2	1-1/2
S1120-MM	2	2



90° ELBOW
Female Pipe To
NPSM Swivel

PART No.	Pipe	Swivel
S1100-AA	1/8	1/8
S1100-BB	1/4	1/4
S1100-CC	3/8	3/8
S1100-DD	1/2	1/2
S1100-EE	3/4	3/4
S1100-HH	1	1



90° ELBOW
Male Pipe To
NPSM Swivel

PART No.	Pipe	Swivel
S1116-AA	1/8	1/8
S1116-AB	1/8	1/4
S1116-BB	1/4	1/4
S1116-BC	1/4	3/8
S1116-CB	3/8	1/4
S1116-CC	3/8	3/8
S1116-CD	3/8	1/2
S1116-DC	1/2	3/8
S1116-DD	1/2	1/2
S1116-DE	1/2	3/4
S1116-ED	3/4	1/2
S1116-EE	3/4	3/4
S1116-EH	3/4	1
S1116-HE	1	3/4
S1116-HH	1	1
S1116-JH	1-1/4	1
S1116-JJ	1-1/4	1-1/4
S1116-KK	1-1/2	1-1/2
S1116-MM	2	2

*** WHEN ORDERING
RESTRICTED FLOW
ADAPTERS SUFFIX
PART NUMBER WITH
REQUIRED RESTRICTION
HOLE SIZE
(Ex: S1120-DD.062)**



45° ELBOW
Male Pipe To
NPSM Swivel

PART No.	Pipe	Swivel
S1124-AA	1/8	1/8
S1124-BB	1/4	1/4
S1124-CC	3/8	3/8
S1124-CD	3/8	1/2
S1124-DC	1/2	3/8
S1124-DD	1/2	1/2
S1124-EE	3/4	3/4
S1124-HE	1	3/4
S1124-HH	1	1
S1124-JJ	1-1/4	1-1/4
S1124-KK	1-1/2	1-1/2



45° ELBOW
Female Pipe To
NPSM Swivel

PART No.	Pipe	Swivel
S1105-CC	3/8	3/8
S1105-DD	1/2	1/2
S1105-EE	3/4	3/4
S1105-HH	1	1



TEE
NPSM Swivel To
NPSM Swivel To
Female Pipe

PART No.	Pipe	Swivel
S1101-BB	1/4	1/4
S1101-CC	3/8	3/8
S1101-DD	1/2	1/2




TEE
NPSM Swivel To
NPSM Swivel To
Male Pipe

PART No.	Pipe	Swivel
S1106-BB	1/4	1/4
S1106-CC	3/8	3/8
S1106-DD	1/2	1/2
S1106-EE	3/4	3/4



TEE
NPSM Swivel
All Ends

PART No.	Swivel
S1111-B	1/4
S1111-C	3/8
S1111-D	1/2
S1111-E	3/4

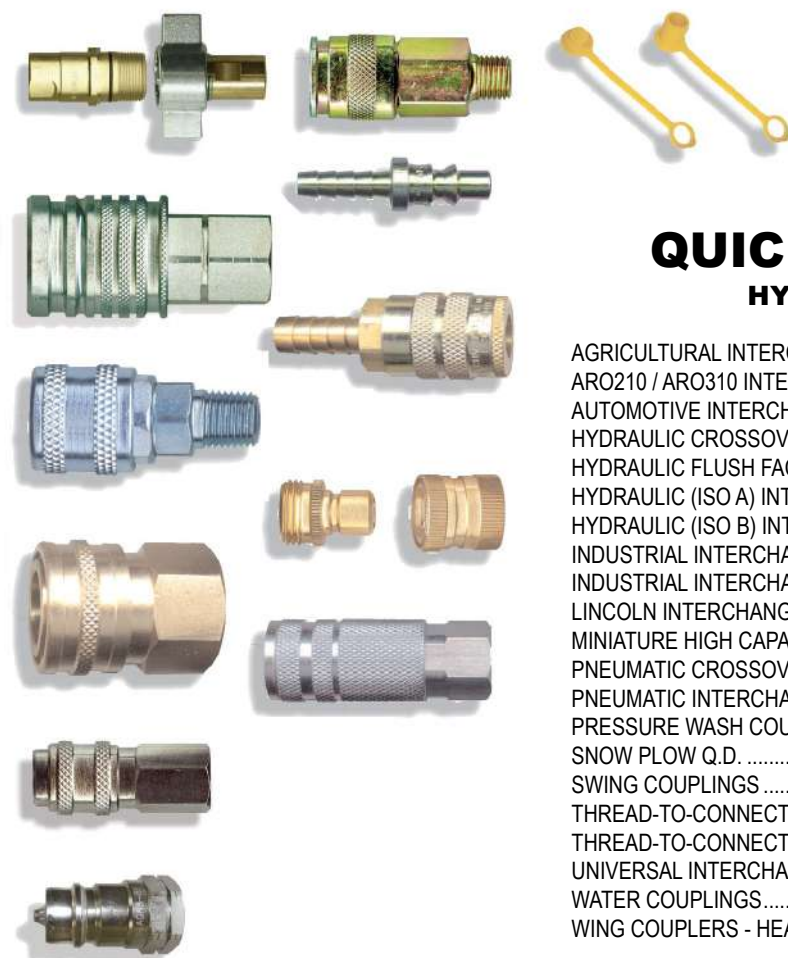

QUICK DISCONNECTS

HYDRAULIC - PNEUMATIC

AGRICULTURAL INTERCHANGE (PIONEER 4000)	90
ARO210 / ARO310 INTERCHANGES.....	97
AUTOMOTIVE INTERCHANGE (TRU-FLATE).....	97
HYDRAULIC CROSSOVER.....	88
HYDRAULIC FLUSH FACE (ISO 16028 HTMA).....	93
HYDRAULIC (ISO A) INTERCHANGE.....	92
HYDRAULIC (ISO B) INTERCHANGE.....	91
INDUSTRIAL INTERCHANGE - AUTOMATIC	96
INDUSTRIAL INTERCHANGE - MANUAL	95
LINCOLN INTERCHANGE.....	98
MINIATURE HIGH CAPACITY SERIES - AUTOMATIC	98
PNEUMATIC CROSSOVER.....	94
PNEUMATIC INTERCHANGE (ARO210 / ARO310).....	97
PRESSURE WASH COUPLINGS & ADAPTERS	100
SNOW PLOW Q.D.	90
SWING COUPLINGS	99
THREAD-TO-CONNECT HIGH PRESSURE (TCC)	92
THREAD-TO-CONNECT UNDER PRESSURE (75).....	92
UNIVERSAL INTERCHANGE COUPLING - AUTOMATIC.....	98
WATER COUPLINGS.....	100
WING COUPLERS - HEAVY DUTY	89

HYDRAULIC QUICK DISCONNECT CROSSOVER LISTING

BODY	FAIRVIEW No.	AEROQUIP	FOSTER	PARKER	SAFEWAY	FASTER	PIONEER
1/2	QD-AGC8-8F				S45-4		
1/2	QD-AGN8-8F				S71-4		
1/4	QD-AGC4-4F	FD42-1001-4-4		4050-2P	S25A-2P		4050-2P
3/8	QD-AGC6-6F			4250-3P	S45-3P		4250-3P
3/4	QD-AGC12-12F			4150-5	S25F-6	NSP-34-NPT-F	4150-5
1	QD-AGC16-16F			4050-6P	S25-8P	NV-1-NPT-F	4050-6P
1/4	QD-AGN4-4F	FD42-1002-4-4		4010-2P	S41-2P		4010-2P
3/8	QD-AGN6-6F			4010-3	S41-3P		4010-3
1/2	QD-AGN8-8F			8010-4	S71-4	2NS-12-NPT-M	8010-4
3/4	QD-AGN12-12F			4110-5	S21F-6	NSP-34-NPT-M	4110-5
1	QD-AGN16-16F			4010-6P	S21-8P	NV-1-NPT-M	4010-6P
1/4	QD-ISOAC4-4F	5601-4-4S		6601-4-4	S565-2	ANV 14 NPT F	
3/8	QD-ISOAC6-6F	5601-6-6S		6601-6-6	S565-3	ANV 38 NPT F	4050-3
1/2	QD-ISOAC8-8F	5601-8-10S		6601-8-10	S565-4	ANV 12 NPT F	4050-4
3/4	QD-ISOAC12-12F	5601-12-12S		6601-12-12	S565-6	ANV 34 NPT F	
1	QD-ISOAC16-16F	5601-16-16S		6601-16-16	S565-8	ANV 1 NPT F	
1/4	QD-ISOAN4-4F	5602-4-4S		6602-4-4	S561-2	ANV 14 NPT M	
3/8	QD-ISOAN6-6F	5602-6-6S		6602-6-6	S561-3	ANV 38 NPT M	
1/2	QD-ISOAN8-8F	5602-8-10S		6602-8-10	S561-4	ANV 12 NPT M	8010-4
3/4	QD-ISOAN12-12F	5602-12-12S		6602-12-12	S561-6	ANV 34 NPT M	
1	QD-ISOAN16-16F	5602-16-16S		6602-16-16	S561-8	ANV 1 NPT M	
1/4	QD-ISOBC4-4F	FD45-1003-4-4	H2S	H2-62	S105-2	HNV-14-NPT-F	
3/8	QD-ISOBC6-6F	FD45-1003-6-6	H3S	H3-62	S105-3	HNV-38-NPT-F	
1/2	QD-ISOBC8-8F	FD45-1003-8-10	H4S	H4-62	S105-4	HNV-12-NPT-F	
3/4	QD-ISOBC12-12F	FD45-1003-12-12	H6S	H6-62	S105-6	HNV-34-NPT-F	
1	QD-ISOBC16-16F	FD45-1003-16-16	H8S	H8-62	S105-8	HNV-1-NPT-F	
1/4	QD-ISOBN4-4F	FD45-1002-4-4	K2S	H2-63 & HDH2-63	S101-2	HNV-14-NPT-M	
3/8	QD-ISOBN6-6F	FD45-1002-6-6	K3S	H3-63 & HDH3-63	S101-3	HNV-38-NPT-M	
1/2	QD-ISOBN8-8F	FD45-1002-8-10	K4S	H4-63 & HDH4-63	S101-4	HNV-12-NPT-M	
3/4	QD-ISOBN12-12F	FD45-1002-12-12	K6S	H6-63 & HDH6-63	S101-6	HNV-34-NPT-M	
1	QD-ISOBN16-16F	FD45-1002-16-16	K8S	H8-63 & HDH8-63	S101-8	HNV-1-NPT-M	
1/4	QD-TCC4-4M			3050-2	S35-2P	PVVM1/14-NPT-M	3050-2
3/8	QD-TCC6-6M			3050-3	S35-3P	PVVM1/38-NPT-M	3050-3
1/4	QD-TCN4-4F			3010-2	S31-2P	PVVM-14-NPT-F	3010-2
3/8	QD-TCN6-6F			3010-3	S31-3P	PVVM-38-NPT-F	3010-3
1/4	QD-BISOBC4-4F	FD45-1101-4-4	H2B	BH2-60	BS105-2	HNV-14-NPT-F5	
3/8	QD-BISOBC6-6F	FD45-1101-6-6	H3B	BH3-60	BS105-3	HNV-38-NPT-F5	
1/2	QD-BISOBC8-8F	FD45-1101-8-10	H4B	BH4-60	BS105-4	HNV-12-NPT-F5	
3/4	QD-BISOBC12-12F	FD45-1101-12-12	H6B	BH6-60	BS105-6	HNV-34-NPT-F5	
1	QD-BISOBC16-16F	FD45-1101-16-16	H8B	BH8-60	BS105-8	HNV-1-NPT-F5	
1/4	QD-BISOBN4-4F	FD45-1086-4-4	K2B	BH2-61	BS101-2	HNV-14-NPT-M5	
3/8	QD-BISOBN6-6F	FD45-1086-6-6	K3B	BH3-61	BS101-3	HNV-38-NPT-M5	
1/2	QD-BISOBN8-8F	FD45-1086-8-10	K4B	BH4-61	BS101-4	HNV-12-NPT-M5	
3/4	QD-BISOBN12-12F	FD45-1086-12-12	K6B	BH6-61	BS101-6	HNV-34-NPT-M5	
1	QD-BISOBN16-16F	FD45-1086-16-16	K8B	BH8-61	BS101-8	HNV-1-NPT-M5	
3/4	QD-BTTWC12-12F	5100-S5-12B		6125-12			
1	QD-BTTWC16-16F	5100-S5-16B		6125-16		FB16/1 NPT F5	
1-1/4	QD-BTTWC20-20F	5100-S5-20B		6125-20			
1-1/2	QD-BTTWC24-24F	5100-S5-24B		6125-24			
3/4	QD-BTTWN12-12F	5100-S2-12B		6105-12			
1	QD-BTTWN16-16F	5100-S2-16B		6105-16		FB16/1 NPT M5	
1-1/4	QD-BTTWN20-20F	5100-S2-20B		6105-20			
1-1/2	QD-BTTWN24-24F	5100-S2-24B		6105-24			
1/4	QD-HTMAC4-4F	FD89-1001-04-04			FFE495-2	2FFI14 NPT F	
3/8	QD-HTMAC6-6F	FD89-1001-06-06		FF-371-6FP	FFE495-3	2FFI38 NPT F	
3/8	QD-HTMAC6-8F	FD89-1001-08-06		FF-371-8FP	FFE495-3-8	2FFI38-1/2 NPT F	
1/2	QD-HTMAC8-8F	FD89-1001-08-08			FFE495-8	2FFI12 NPT F	
1/2	QD-HTMAC8-12F	FD89-1001-12-08			FFE495-8-3/4	2FFI12-34 NPT F	
3/4	QD-HTMAC12-12F	FD89-1001-12-12			FFE495-6	2FFI34 NPT F	
1	QD-HTMAC16-16F	FD89-1001-16-16			FFE495-8	2FFI11 NPT F	
1/4	QD-HTMAN4-4F	FD89-1002-04-04			FFE491-2	2FFI14 NPT M	
3/8	QD-HTMAN6-6F	FD89-1002-06-06		FF-372-6FP	FFE491-3	2FFI38 NPT M	
3/8	QD-HTMAN6-8F	FD89-1002-08-06		FF-372-8FP	FFE491-3-8	2FFI38-1/2 NPT M	
1/2	QD-HTMAN8-8F	FD89-1002-08-08			FFE491-8	2FFI12 NPT M	
1/2	QD-HTMAN8-12F	FD89-1002-12-08			FFE491-8-3/4	2FFI12-34 NPT M	
3/4	QD-HTMAN12-12F	FD89-1002-12-12			FFE491-6	2FFI34 NPT M	
1	QD-HTMAN16-16F	FD89-1002-16-16			FFE491-8	2FFI11 NPT M	

HEAVY DUTY WING SERIES INTERCHANGE



- Interchangeable with Aeroquip 5100 series and Parker 6100 series.
- Heavy duty wing nut or hex nut for easy connection.
- Thread-To-Connect.
- Dry-Break feature minimizes air inclusion and contamination of systems.
- Up to 3,000 PSI connected and disconnected.
- Ideal for use on hydraulic dump trucks, coal trucks, sand and salt spreaders and oil well equipment.



Operating Size	Pressure (PSI)	Air Inclusion CC. Max.	Spillage CC. Max.
3/4	3,000	.34	.26
1	3,000	.50	.35
1-1/4	2,750	.68	.70
1-1/2	2,750	.60	.94



VALVED COUPLER - BRASS

PART No.	Body Size	Female Pipe
QD-BTTWC12-12F	3/4	3/4
QD-BTTWC16-16F	1	1
QD-BTTWC20-20F	1-1/4	1-1/4
QD-BTTWC24-24F	1-1/2	1-1/2

VALVED NIPPLE - BRASS

PART No.	Body Size	Female Pipe
QD-BTTWN12-12F	3/4	3/4
QD-BTTWN16-16F	1	1
QD-BTTWN20-20F	1-1/4	1-1/4
QD-BTTWN24-24F	1-1/2	1-1/2

HEAVY DUTY WING INTERCHANGE (BTTW) ACCESSORIES

BRASS
DUST
CAP

PART No.	Size
QD-BTTWDC-12	3/4
QD-BTTWDC-16	1
QD-BTTWDC-20	1-1/4
QD-BTTWDC-24	1-1/2

BRASS
DUST
PLUG

PART No.	Size
QD-BTTWDP-12	3/4
QD-BTTWDP-16	1
QD-BTTWDP-20	1-1/4
QD-BTTWDP-24	1-1/2

AGRICULTURAL (PIONEER 4000) INTERCHANGE



STEEL



QD-AGC8-DMB

- Interchangeable with Pioneer 4000 series, Safeway S20 and S40 series
- High strength steel construction
- Superior "Poppet" style valves
- Nitrile NBR seals with PTFE back-up ring
- Typical applications include agricultural equipment, gravel trucks and dump trucks.



COUPLER SET MAXIMUM WORKING PRESSURE (PSI)					
	1/4	3/8	1/2	3/4	1
STEEL	5,000	4,350	3,600	3,600	3,300

VALVED COUPLER - STEEL

PART No.	Body Size	Female Pipe	Sleeve Style
QD-AGC4-4F	1/4 Coupler	1/4	One Way
QD-AGC6-6F	3/8 Coupler	3/8	One Way
QD-AGC8-8F	1/2 Coupler	1/2	Two Way
QD-AGC8-DMB	1/2 Coupler	(Double Mounting Bracket)	
QD-AGC12-12F	3/4 Coupler	3/4	One Way
QD-AGC16-16F	1 Coupler	1	One Way

VALVED NIPPLE - STEEL

PART No.	Body Size	Female Pipe
QD-AGN4-4F	1/4 Nipple	1/4
QD-AGN6-6F	3/8 Nipple	3/8
QD-AGN8-8F	1/2 Nipple	1/2
QD-AGN12-12F	3/4 Nipple	3/4
QD-AGN16-16F	1 Nipple	1

SNOW PLOW QUICK DISCONNECT



STEEL



This high quality economical coupler is at the center of every snow plow replacement parts package.

- High strength steel construction.
- Coupler set maximum working pressure is 4,000 P.S.I.

Also ask us about...

- 1/4" S.A.E. 100R7 hose assemblies in various lengths and configurations.
- Steel hydraulic adapters and brass adapters to meet all your fitting needs.

VALVED COUPLER - STEEL

PART No.	Description	Body Size	Female Pipe
QD-SP90	Snow Plow Set	1/4	1/4

SERIES B ISO 7241-1 INDUSTRIAL INTERCHANGE



STEEL



BRASS



- High flow characteristics and pressure ratings superior to Parker 60 series.
- Industry interchangeability with other manufacturer's ISO "B" couplers and nipples.
- Poppet style double shut-off.
- Nitrile NBR seals with PTFE back-up ring
- Proven ball lock mechanism.
- 4 : 1 safety factor (Min. Burst = W.P. X 4)
- Ideal for use with hydraulic and other fluids in both stationary and mobile industrial applications.



COUPLER SET					
MAXIMUM WORKING PRESSURE (PSI)					
	1/4	3/8	1/2	3/4	1
STEEL	5000	4,350	4,000	2,600	2,175
BRASS	3500	3,500	3,500	2,500	1,500
STAINLESS	5500	3,750	3,750	3,000	3,000

VALVED COUPLER - STEEL

PART No.	Body Size	Female Pipe
QD-ISOBC4-4F	1/4	1/4
QD-ISOBC6-6F	3/8	3/8
QD-ISOBC8-8F	1/2	1/2
QD-ISOBC12-12F	3/4	3/4
QD-ISOBC16-16F	1	1

VALVED NIPPLE - STEEL

PART No.	Body Size	Female Pipe
QD-ISOBN4-4F	1/4	1/4
QD-ISOBN6-6F	3/8	3/8
QD-ISOBN8-8F	1/2	1/2
QD-ISOBN12-12F	3/4	3/4
QD-ISOBN16-16F	1	1

VALVED COUPLER - BRASS

PART No.	Body Size	Female Pipe
QD-BISOBC4-4F	1/4	1/4
QD-BISOBC6-6F	3/8	3/8
QD-BISOBC8-8F	1/2	1/2
QD-BISOBC12-12F	3/4	3/4
QD-BISOBC16-16F	1	1

VALVED NIPPLE - BRASS

PART No.	Body Size	Female Pipe
QD-BISOBN4-4F	1/4	1/4
QD-BISOBN6-6F	3/8	3/8
QD-BISOBN8-8F	1/2	1/2
QD-BISOBN12-12F	3/4	3/4
QD-BISOBN16-16F	1	1

VALVED COUPLER - STAINLESS (303)

PART No.	Body Size	Female Pipe
QD-SISOBC4-4F	1/4	1/4
QD-SISOBC6-6F	3/8	3/8

VALVED NIPPLE - STAINLESS (303)

PART No.	Body Size	Female Pipe
QD-SISOBN4-4F	1/4	1/4
QD-SISOBN6-6F	3/8	3/8



DUST PLUG

Size	Dust Plug	Dust Cap
1/4	QD-PDP-9	QD-PDC-11
3/8	---	QD-PDC-14
1/2	QD-PDP-16	---
3/4	QD-PDP-20	QD-PDC-21
1	QD-PDP-24	---



DUST CAP

SERIES A ISO 7241-1 INTERCHANGE



STEEL

- Interchangeable with Parker 6600 series, Aeroquip 5600 Series, Safeway S56 Series and other manufacturer's couplers and nipples built in accordance to I.S.O. 7241-1 Series "A".
- 4 : 1 Safety factor (Min. Burst = W.P. X 4)
- High strength steel construction.
- Proven ball lock mechanism.
- Nitrile NBR seals with PTFE back-up ring
- For use with hydraulic fluids in mobile and stationary applications.
- Temperature Range: -40F to 250F



COUPLER SET MAXIMUM WORKING PRESSURE (PSI)					
	1/4	3/8	1/2	3/4	1
STEEL	5,000	4,600	4,000	4,000	4,000

VALVED COUPLER - STEEL

PART No.	Body Size	Female Pipe
QD-ISOAC4-4F	1/4	1/4
QD-ISOAC6-6F	3/8	3/8
QD-ISOAC8-8F	1/2	1/2
QD-ISOAC12-12F	3/4	3/4
QD-ISOAC16-16F	1	1



DUST PLUG

Size	Dust Plug	Dust Cap
3/8	QD-PDP-11	QD-PDC-13
1/2	QD-PDP-14	QD-PDC-15
3/4	QD-PDP-19	QD-PDC-20
1	QD-PDP-23	QD-PDC-24

VALVED NIPPLE - STEEL

PART No.	Body Size	Female Pipe
QD-ISOAN4-4F	1/4	1/4
QD-ISOAN6-6F	3/8	3/8
QD-ISOAN8-8F	1/2	1/2
QD-ISOAN12-12F	3/4	3/4
QD-ISOAN16-16F	1	1



DUST CAP

HIGH PRESSURE / THREAD TO CONNECT (PARKER 3000) INTERCHANGE



STEEL

- Interconnect with Parker 3000 series, Faster PVV series and other screw to connect couplings used in the hydraulic tool and rescue equipment markets.
- Zero leakage and higher flow rates than commonly used metal to metal sealing.
- High strength steel construction with heavy duty clear zinc plating for excellent corrosion resistance

VALVED COUPLER - STEEL

PART No.	Body Size	Pipe	Working Pressure (PSI)
QD-TCC4-4M	1/4 Coupler	1/4 NPT	10,000
QD-TCC6-6F	3/8 Coupler	3/8 FPT	10,000
QD-TCC6-6M	3/8 Coupler	3/8 NPT	10,000

VALVED NIPPLE - STEEL

PART No.	Body Size	Pipe	Working Pressure (PSI)
QD-TCN4-4F	1/4 Nipple	1/4 FPT	10,000
QD-TCN6-6F	3/8 Nipple	3/8 FPT	10,000

ISO 16028 HTMA FLUSH FACE



- Interchange with Aeroquip FD89/FD49 and Parker FE, FF size 3/8.
- Up to 4,000 PSI operation pressures.
- Superior flow and low pressure drop.
- Sleeve lock feature.
- Exceeds ANSI/NFPA T3.20.15-1990 (R 2016)

COUPLER SET					
MAXIMUM WORKING PRESSURE (PSI)					
	1/4	3/8	1/2	3/4	1
STEEL	4,285	4,285	3,571	3,571	3,571

VALVED COUPLER - STEEL

PART No.	Body Size	Female Pipe
QD-HTMAC4-4F	1/4	1/4
QD-HTMAC6-6F	3/8	3/8
QD-HTMAC6-8F	3/8	1/2
QD-HTMAC8-8F	1/2	1/2
QD-HTMAC8-12F	1/2	3/4
QD-HTMAC12-12F	3/4	3/4
QD-HTMAC16-16F	1	1

Note: Available with Female S.A.E. thread suffix with -EF

VALVED NIPPLE - STEEL

PART No.	Body Size	Female Pipe
QD-HTMAN4-4F	1/4	1/4
QD-HTMAN6-6F	3/8	3/8
QD-HTMAN6-8F	3/8	1/2
QD-HTMAN8-8F	1/2	1/2
QD-HTMAN8-12F	1/2	3/4
QD-HTMAN12-12F	3/4	3/4
QD-HTMAN16-16F	1	1

Note: Available with Female S.A.E. thread suffix with -EF

PNEUMATIC QUICK DISCONNECT CROSSOVER

ACCUTEK INDUSTRIAL INTERCHANGE

ACCUTEK INDUSTRIAL INTERCHANGE										
SIZE	THREAD	FAIRVIEW PART No.	AMFLO	PARKER	DIXON	FOSTER	TOP-RING	MILTON	SCHRADER BRIDGEPORT	TRUFLATE
1/4	1/4 FPT	QD-INDMC4-4F	C20	B23	DC20	3003	20.842	715	5142-12	13-234
1/4	3/8 FPT	QD-INDMC4-6F	C20-23	B23E	DC2023	3203	20.862	718	5263-12	13-254
3/8	1/4 FPT	QD-INDMC6-4F	C26-22	25C	DC2622	4004	21.842	1833		
3/8	3/8 FPT	QD-INDMC6-6F	C26	25	DC26	4204	21.862	1835	3541	13-536
3/8	1/2 FPT	QD-INDMC6-8F	C26-24	25F	DC2624	4404	21.882			13-556
1/2	1/2 FPT	QD-INDMC8-8F	C10	17	DC10	5205	22.882	1815		
1/4	1/4 NPT	QD-INDMC4-4M	C21	B22	DC21	3103	20.942	716	5141-12	13-224
1/4	3/8 NPT	QD-INDMC4-6M	C21-03	B22E	DC-2103	3303	20.962	719	5140-12	13-244
3/8	1/4 NPT	QD-INDMC6-4M	C25-02	24C	DC2502	4104	21.942			
3/8	3/8 NPT	QD-INDMC6-6M	C25	24	DC25	4304	21.962	1836		13-526
3/8	1/2 NPT	QD-INDMC6-8M	C25-04	24F	DC2504	4504	21.982			13-546
1/2	1/2 NPT	QD-INDMC8-8M	C9	16	DC9	5305	22.982	1816		
1/4	1/4 Hbarb	QD-INDMC4-4H	C20-42	B20-3B	DC2042	3603	20.542	717	171	
1/4	3/8 Hbarb	QD-INDMC4-6H	C20-44	B20-5B	DC2044	3703	20.562	717-6		
3/8	3/8 Hbarb	QD-INDMC6-6H	C26-44	24-5B	DC2644	4804	21.562	1836-6		
3/8	1/2 Hbarb	QD-INDMC6-8H	C26-45	24-6B	DC2645	4904	21.582			
1/4	1/4 FPT	QD-INDN4-4F	CP20	H3C	DCP20	11-3	20.142	728	5139-11	12-234
1/4	3/8 FPT	QD-INDN4-6F	CP20-23	H3C-E	DCP2023	15-3	20.162	732	5263-11	12-236
3/8	1/4 FPT	QD-INDN6-4F	CP26-22	H1E	DCP2622	41-4	21.142	1840		
3/8	3/8 FPT	QD-INDN6-6F	CP26	H3E	DCP26	43-4	21.162	1838	3543	12-536
3/8	1/2 FPT	QD-INDN6-8F	CP26-24	H3E-F	DCP2624	45-4	21.182			
1/2	1/2 FPT	QD-INDN8-8F	CP18	H3F	DCP18	55-5	22.182	1858		12-762
1/4	1/4 NPT	QD-INDN4-4M	CP21	H2C	DCP21	10-3	20.242	727	5138-11	12-224
1/4	3/8 NPT	QD-INDN4-6M	CP21-03	H2C-E	DCP2103	14-3	20.262	733	5263-11	12-226
3/8	1/4 NPT	QD-INDN6-4M	CP25-02	H0E	DCP2502	40-4	21.242	1839		
3/8	3/8 NPT	QD-INDN6-6M	CP25	H2E	DCP25	42-4	21.262	1837	3542	12-526
3/8	1/2 NPT	QD-INDN6-8M	CP25-04	H2E-F	DCP2504	44-4	21.282			
1/2	1/2 NPT	QD-INDN8-8M	CP17	H2F	DCP9	54-5	22.282	1857		12-752
1/4	1/4 Hbarb	QD-INDN4-4H	CP21-42	H8C	DCP2142	16-3	20.342	736	5223-11	
1/4	3/8 Hbarb	QD-INDN4-6H	CP21-44	H9C	DCP2144	17-3	20.362	736-6		
3/8	3/8 Hbarb	QD-INDN6-6H	CP25-44	H5E	DCP2544	48-4	21.362	1837-6		
3/8	1/2 Hbarb	QD-INDN6-8H	CP25-45	H6E	DCP2545	49-4	21.382			

ARO 210 INTERCHANGE

SIZE	THREAD	FAIRVIEW PART No.	AMFLO	PARKER	DIXON	FOSTER	TOP-RING	MILTON	SCHRADER BRIDGEPORT	TRUFLATE
1/4	1/4 FPT	QD-AROAC4-4F	C38	B53	DC38	210-3003	23.442	775	3526	13-334
1/4	3/8 FPT	QD-AROAC4-6F	C38-23	B53E	DC3823	210-3203	23.462			
1/4	1/4 NPT	QD-AROAC4-4M	C37	B52	DC37	210-3103	23.642	776-4	3525	13-324
1/4	3/8 NPT	QD-AROAC4-6M	C37-03	B52E	DC3703	210-3303	23.662	776-6		
1/4	1/4 Hbarb	QD-AROAC4-4H	C38-42	B50-3B	DC3842	210-3603	23.742			
1/4	1/4 FPT	QD-ARON4-4F	CP38	A3C	DCP38	210-11	23.142	778	3530	12-334
1/4	1/4 NPT	QD-ARON4-4M	CP37	A2C	DCP37	210-10	23.242	777	3529	12-324
1/4	1/4 Hbarb	QD-ARON4-4H	C37-42	A8C	DCP3742	210-16	23.342	777-4		

TRU-FLATE (AUTOMOTIVE) INTERCHANGE

SIZE	THREAD	FAIRVIEW PART No.	AMFLO	PARKER	DIXON	FOSTER	TOP-RING	MILTON	SCHRADER BRIDGEPORT	TRUFLATE
1/4	1/4 FPT	QD-TFMC4-4F	C2	B13	DC2	TF3003	24.842	785	3504	13-134
3/8	3/8 FPT	QD-TFMC6-6F	C6	B15	DC6	TF4204	25.862	1805	3516	13-612
1/4	1/4 NPT	QD-TFMC4-4M	C1	B12	DC1	TF3103	24.942	786	3503	13-124
3/8	1/4 NPT	QD-TFMC6-4M	C7	14C	DC7	TF4104	25.842			13-602
3/8	3/8 NPT	QD-TFMC6-6M	C5	14	DC5	TF4304	25.962	1806	3515	13-604
1/4	1/4 FPT	QD-TFN4-4F	CP2	3C	DCP2	TF11	24.142	784	3507	12-134
3/8	3/8 FPT	QD-TFN6-6F	CP6	3E	DCP6	TF43	25.162	1808	3518	12-612
1/4	1/4 NPT	QD-TFN4-4M	CP1	2C	DCP1	TF10	24.242	783	3506	12-124
3/8	1/4 NPT	QD-TFN6-4M	CP7	0E	DCP7	TF40	25.242	1809	3519	12-602
3/8	3/8 NPT	QD-TFN6-6M	CP5	2E	DCP5	TF42	25.262	1807	3517	12-604

LINCOLN INTERCHANGE

SIZE	THREAD	FAIRVIEW PART No.	AMFLO	PARKER	DIXON	FOSTER	TOP-RING	MILTON	SCHRADER BRIDGEPORT	TRUFLATE
1/4	1/4 FPT	QD-LINMC4-4F	C28	B73	DC28	LN3003		790	3528	13-434
1/4	1/4 NPT	QD-LINMC4-4M	C27	B72	DC27	LN3103				
1/4	1/4 FPT	QD-LINN4-4F	CP28	L3C	DCP28	LN10		792	3532	12-434
1/4	1/4 NPT	QD-LINN4-4M	CP27	L2C	DCP27	LN11		791	3531	12-424

INDUSTRIAL INTERCHANGE - MANUAL



The industrial interchange design is considered the industry standard. The nipple can be easily identified by its' short pilot and flat bottomed ball groove.

See Pneumatic Quick Disconnect Crossover - Page 94

Operating pressure: 300 P.S.I. (21 BAR)



Industrial Interchange --
Standard nose length.



Styles may vary
depending on size



COUPLERS

PART No.	Body Size	Pipe
QD-INDMC4-4F	1/4	1/4 FPT
QD-INDMC4-6F	1/4	3/8 FPT
QD-INDMC6-4F	3/8	1/4 FPT
QD-INDMC6-6F	3/8	3/8 FPT
QD-INDMC6-8F	3/8	1/2 FPT
QD-INDMC8-8F	1/2	1/2 FPT

PART No.	Body Size	Pipe
QD-INDMC4-4M	1/4	1/4 MPT
QD-INDMC4-6M	1/4	3/8 MPT
QD-INDMC6-4M	3/8	1/4 MPT
QD-INDMC6-6M	3/8	3/8 MPT
QD-INDMC6-8M	3/8	1/2 MPT
QD-INDMC8-6M	1/2	3/8 MPT
QD-INDMC8-8M	1/2	1/2 MPT

PART No.	Body Size	Hose Barb
QD-INDMC4-4H	1/4	1/4
QD-INDMC4-6H	1/4	3/8
QD-INDMC6-6H	3/8	3/8
QD-INDMC6-8H	3/8	1/2
QD-INDMC8-8H	1/2	1/2

NIPPLES

PART No.	Body Size	Pipe
QD-INDN4-4F	1/4	1/4 FPT
QD-INDN4-6F	1/4	3/8 FPT
QD-INDN6-4F	3/8	1/4 FPT
QD-INDN6-6F	3/8	3/8 FPT
QD-INDN6-8F	3/8	1/2 FPT
QD-INDN8-6F	1/2	3/8 FPT
QD-INDN8-8F	1/2	1/2 FPT

PART No.	Body Size	Pipe
QD-INDN4-4M	1/4	1/4 MPT
QD-INDN4-6M	1/4	3/8 MPT
QD-INDN6-4M	3/8	1/4 MPT
QD-INDN6-6M	3/8	3/8 MPT
QD-INDN6-8M	3/8	1/2 MPT
QD-INDN8-6M	1/2	3/8 MPT
QD-INDN8-8M	1/2	1/2 MPT

PART No.	Body Size	Hose Barb
QD-INDN4-4H	1/4	1/4
QD-INDN4-6H	1/4	3/8
QD-INDN6-6H	3/8	3/8
QD-INDN6-8H	3/8	1/2
QD-INDN8-6H	1/2	3/8

Fairview carries a wide selection
of pneumatic products.



page 145



page 23



page 23

INDUSTRIAL INTERCHANGE - AUTOMATIC



Interchangeable with QD-INDM series featured on previous page, Fairview's QD-INDA series industrial interchange features a push-to-connect style Automatic Coupler for easy one handed installations.

Operating pressure: 300 P.S.I. (21 BAR)



Industrial Interchange --
Standard nose length.



Styles may vary

COUPLERS

PART No.	Body Size	Pipe
QD-INDAC4-4F	1/4	1/4 FPT
QD-INDAC4-6F	1/4	3/8 FPT
QD-INDAC6-4F	3/8	1/4 FPT
QD-INDAC6-6F	3/8	3/8 FPT
QD-INDAC6-8F	3/8	1/2 FPT
QD-INDAC8-8F	1/2	1/2 FPT

PART No.	Body Size	Pipe
QD-INDAC4-4M	1/4	1/4 MPT
QD-INDAC4-6M	1/4	3/8 MPT
QD-INDAC6-6M	3/8	3/8 MPT

PART No.	Body Size	Hose Barb
QD-INDAC4-4H	1/4	1/4
QD-INDAC4-6H	1/4	3/8
QD-INDAC6-6H	3/8	3/8
QD-INDAC8-6H	1/2	1/2

NIPPLES

PART No.	Body Size	Pipe
QD-INDN4-4F	1/4	1/4 FPT
QD-INDN4-6F	1/4	3/8 FPT
QD-INDN6-4F	3/8	1/4 FPT
QD-INDN6-6F	3/8	3/8 FPT
QD-INDN6-8F	3/8	1/2 FPT
QD-INDN8-8F	1/2	1/2 FPT

PART No.	Body Size	Pipe
QD-INDN4-4M	1/4	1/4 MPT
QD-INDN4-6M	1/4	3/8 MPT
QD-INDN6-4M	3/8	1/4 MPT
QD-INDN6-6M	3/8	3/8 MPT
QD-INDN6-8M	3/8	1/2 MPT
QD-INDN8-6M	1/2	3/8 MPT
QD-INDN8-8M	1/2	1/2 MPT

PART No.	Body Size	Hose Barb
QD-INDN4-4H	1/4	1/4
QD-INDN4-6H	1/4	3/8
QD-INDN6-6H	3/8	3/8
QD-INDN6-8H	3/8	1/2
QD-INDN8-6H	1/2	3/8

Fairview carries a wide selection of pneumatic products.



page 145



page 23



page 23

ARO210 / ARO310 INTERCHANGE SERIES - AUTOMATIC



Fairview's QD-ARO series is a pin-type push-to-connect coupler designed for one way shut-off operation. It is interchangeable with ARO-210 / ARO-310 style couplers available from various manufacturers.

See Pneumatic Quick Disconnect Crossover - Page 94

Operating pressure: 250 P.S.I. (17 BAR)



Identified by it's slightly longer nose than Industrial style



COUPLERS

PART No.	Body Size	Pipe
QD-AROAC4-4F	1/4	1/4 FPT
QD-AROAC4-6F	1/4	3/8 FPT
QD-AROAC6-6F	3/8	3/8 FPT

PART No.	Body Size	Pipe
QD-AROAC4-4M	1/4	1/4 MPT
QD-AROAC4-6M	1/4	3/8 MPT
QD-AROAC6-6M	3/8	3/8 MPT

PART No.	Body Size	Hose Barb
QD-AROAC4-4H	1/4	1/4
QD-AROAC4-6H	1/4	3/8

NIPPLES

PART No.	Body Size	Pipe
QD-ARON4-4F	1/4	1/4 FPT
QD-ARON6-6F	3/8	3/8 FPT

PART No.	Body Size	Pipe
QD-ARON4-4M	1/4	1/4 MPT
QD-ARON4-6M	1/4	3/8 MPT
QD-ARON6-6M	3/8	3/8 MPT

PART No.	Body Size	Hose Barb
QD-ARON4-4H	1/4	1/4

TRU-FLATE INTERCHANGE (AUTOMOTIVE STANDARD)



Fairview's automotive standard series interchanges with Tru-Flate design as well as automotive standards produced by most manufacturers. The nipple can be easily identified by its' extremely short pilot.

See Pneumatic Quick Disconnect Crossover - Page 94

Operating pressure: 300 P.S.I. (21 BAR)



Identified by it's very short nose



COUPLERS

PART No.	Body Size	Material	Pipe
QD-TFMC4-4F	1/4	Brass	1/4 FPT
QD-TFMC6-4F	3/8	Steel	1/4 FPT
QD-TFMC6-6F	3/8	Steel	3/8 FPT
QD-TFMC8-8F	1/2	Steel	1/2 FPT

QD-TFMC4-4M	1/4	Brass	1/4 MPT
QD-TFMC6-4M	3/8	Steel	1/4 MPT
QD-TFMC6-6M	3/8	Steel	3/8 MPT

NIPPLES

PART No.	Body Size	Material	Pipe
QD-TFN4-4F	1/4	Brass	1/4 FPT
QD-TFN6-4F	3/8	Steel	1/4 FPT
QD-TFN6-6F	3/8	Steel	3/8 FPT
QD-TFN8-8F	1/2	Steel	1/2 FPT

QD-TFN4-4M	1/4	Brass	1/4 MPT
QD-TFN6-4M	3/8	Steel	1/4 MPT
QD-TFN6-6M	3/8	Steel	3/8 MPT

QD-STFN4-4F	1/4	Steel	1/4 FPT
QD-STFN4-4M	1/4	Steel	1/4 MPT

LINCOLN INTERCHANGE COUPLING - MANUAL



Fairview's Lincoln series interchange is a manual style connection easily identified by its' long pilot and short ball groove. It interchanges with Lincoln style couplings available from other manufacturers.

See Pneumatic Quick Disconnect Crossover - Page 94

Operating pressure: 300 P.S.I. (21 BAR)

Identified by it's very long nose

COUPLERS

PART No.	Body Size	Pipe
QD-LINMC4-4F	1/4	1/4 FPT
QD-LINMC4-4M	1/4	1/4 MPT

NIPPLES

PART No.	Body Size	Pipe
QD-LINN4-4F	1/4	1/4 FPT
QD-LINN4-4M	1/4	1/4 MPT

MINIATURE HIGH CAPACITY SERIES - AUTOMATIC



- One-handed operation
- High flow-low pressure drop
- Large range of connections
- Brass construction

Ideally suited for medical, dental equipment, small air tools, robotics, laboratories, air conditioning systems, plant feeding, training aids, auto emission testing, cooling lines, photo processing and breathing apparatus.

Maximum pressure rating: 1,000 psi

Working pressure: 0-230 psi

Vacuum: Over 12" Mercury

Temperature range: -40°F to +250°F, -40°C to +121°C

COUPLERS

PART No.	Body Size	Pipe
QD-MINIAC2-2F	1/8	1/8 FPT
QD-MINIAC2-4F	1/8	1/4 FPT
QD-MINIAC2-2M	1/8	1/8 MPT
QD-MINIAC2-4M	1/8	1/4 MPT

NIPPLES

PART No.	Body Size	Pipe
QD-MININ2-2F	1/8	1/8 FPT
QD-MININ2-4F	1/8	1/4 FPT
QD-MININ2-2M	1/8	1/8 MPT
QD-MININ2-4M	1/8	1/4 MPT

UNIVERSAL INTERCHANGE COUPLING - AUTOMATIC



Fairview's Universal series is a push-to-connect style coupler capable of accepting ARO 210, Industrial and Tru-Flate Interchanges.

Operating pressure: 300 P.S.I. (21 BAR)



COUPLERS

PART No.	Body Size	Pipe
QD-UNIAC4-4F	1/4	1/4 FPT
QD-UNIAC4-6F	1/4	3/8 FPT
QD-UNIAC4-4M	1/4	1/4 MPT
QD-UNIAC4-6M	1/4	3/8 MPT

COUPLERS


PART No.	Body Size	Hose Barb
QD-UNIAC4-4H	1/4	1/4
QD-UNIAC4-6H	1/4	3/8

INDUSTRIAL INTERCHANGE SWING COUPLINGS - MANUAL



Industrial interchange swing coupling offers full flow, safety exhaust, locking feature, and connect and disconnect under pressure.

Operating pressure: 360 P.S.I. (25 BAR)



Industrial Interchange --
Standard nose length.

For use with standard QD-INDN Series Industrial Interchange Nipples

COUPLERS

PART No.	Body Size	Pipe
QD-SCINDMC4-4F	1/4	1/4 FPT
QD-SCINDMC4-6F	1/4	3/8 FPT
QD-SCINDMC6-4F	3/8	1/4 FPT
QD-SCINDMC6-6F	3/8	3/8 FPT
QD-SCINDMC6-8F	3/8	1/2 FPT
QD-SCINDMC8-8F	1/2	1/2 FPT

COUPLERS

PART No.	Body Size	Pipe
QD-SCINDMC4-4M	1/4	1/4 MPT
QD-SCINDMC6-6M	3/8	3/8 MPT
QD-SCINDMC8-8M	1/2	1/2 MPT


PART No.	Body Size	Hose Barb
QD-SCINDMC4-4H	1/4	1/4
QD-SCINDMC4-6H	1/4	3/8
QD-SCINDMC6-6H	3/8	3/8

ARO210 INTERCHANGE SWING COUPLINGS



ARO210 Swing couplings offers full flow, safety exhaust, locking feature, and connect and disconnect under pressure. It is interchangeable with ARO210 style available from various manufacturers.

Operating Pressure: 360 P.S.I. (25 BAR)



Identified by it's slightly longer
nose than Industrial style

For use with standard QD-ARON Series ARO210 Interchange Nipples

COUPLERS

PART No.	Body Size	Pipe
QD-SCAROMC4-4F	1/4	1/4 FPT
QD-SCAROMC4-6F	1/4	3/8 FPT
QD-SCAROMC4-4M	1/4	1/4 MPT
QD-SCAROMC4-6M	1/4	3/8 MPT

COUPLERS

PART No.	Body Size	Hose Barb
QD-SCAROMC4-4H	1/4	1/4
QD-SCAROMC4-6H	1/4	3/8

CEJN INTERCHANGE SWING COUPLING



CEJN interchange Swing couplings offer full flow, safety exhaust, locking feature, and connect and disconnect under pressure.

Operating Pressure: 360 P.S.I. (25 BAR)

SWING COUPLERS

PART No.	Body Size	Pipe
QD-SCCEJNC4-6F	1/4	3/8 FPT

NIPPLES		
PART No.	Body Size	Pipe
QD-CEJNN4-4M	1/4	1/4 MPT

STRAIGHT THROUGH PRESSURE WASH Q.D.'S



- Smooth bore permits free flow.
- Ideal for high pressure water applications (Pressure Washers)
- Temperature: Hot Water +200°F, +93°C With EPR O-Ring

COUPLER SET PRESSURE RATINGS (P.S.I.)			
	1/4	3/8	1/2
BRASS	4,000	4,000	2,200
STEEL	4,000	4,000	2,700
STAINLESS STEEL	4,000	4,000	3,000

STRAIGHT THROUGH COUPLER - BRASS

PART No.	Body Size	Female Pipe
QD-BSTC4-4F	1/4	1/4
QD-BSTC6-6F	3/8	3/8
QD-BSTC8-8F	1/2	1/2

PART No.	Body Size	Male Pipe
QD-BSTC4-4M	1/4	1/4
QD-BSTC6-6M	3/8	3/8
QD-BSTC8-8M	1/2	1/2

STRAIGHT THROUGH COUPLER - STAINLESS STEEL

PART No.	Body Size	Female Pipe
QD-SSTC4-4F	1/4	1/4
QD-SSTC6-6F	3/8	3/8
QD-SSTC8-8F	1/2	1/2

PART No.	Body Size	Male Pipe
QD-SSTC4-4M	1/4	1/4
QD-SSTC6-6M	3/8	3/8

STRAIGHT THROUGH NIPPLE - BRASS

PART No.	Body Size	Female Pipe
QD-BSTN4-4F	1/4	1/4
QD-BSTN6-6F	3/8	3/8
QD-BSTN8-8F	1/2	1/2

STRAIGHT THROUGH NIPPLE - BRASS

PART No.	Body Size	Male Pipe
QD-BSTN4-4M	1/4	1/4
QD-BSTN6-6M	3/8	3/8
QD-BSTN8-8M	1/2	1/2

STRAIGHT THROUGH NIPPLE - STEEL

PART No.	Body Size	Female Pipe
QD-STN4-4F	1/4	1/4
QD-STN6-6F	3/8	3/8
QD-STN8-8F	1/2	1/2

PART No.	Body Size	Male Pipe
QD-STN4-4M	1/4	1/4
QD-STN6-6M	3/8	3/8
QD-STN8-8M	1/2	1/2

STRAIGHT THROUGH NIPPLE - STAINLESS STEEL

PART No.	Body Size	Female Pipe
QD-SSTN4-4F	1/4	1/4
QD-SSTN6-6F	3/8	3/8
QD-SSTN8-8F	1/2	1/2

PART No.	Body Size	Male Pipe
QD-SSTN4-4M	1/4	1/4
QD-SSTN6-6M	3/8	3/8
QD-SSTN8-8M	1/2	1/2

PRESSURE WASH HOSE ADAPTERS



PART No.	Pipe Size
QD-KARCHER-6F	3/8 FPT X M22 X 1.5
QD-KARCHER-6M	3/8 NPT X M22 X 1.5



PART No.	Pipe Size
QD-KARN-6F	3/8 FPT X M22 X 1.5
QD-KARN-6M	3/8 NPT X M22 X 1.5



PART No.	Pipe Size
B1120-CC-3000	3/8 MPT x 3/8 FPT SWIVEL

• USED TO ADAPT STANDARD PRESSURE WASH HOSES TO KARCHER STYLE EQUIPMENT • ABOVE PRESSURE WASH COUPLINGS COME WITH EPR O-RING GOOD FOR HOT WATER UP TO 200°F • PRESSURE RATING: 4000 PSI

3000 PSI BRASS SWIVEL: DESIGNED FOR USE WITH PRESSURE WASH ASSEMBLIES

BRASS WATER HOSE (GARDEN HOSE) QUICK DISCONNECTS



PART No.
QD-WHCF

DESCRIPTION
Quick Disconnect
Coupler X
Water Hose Thread

QD-WHVCF

Valved QD Coupler X
Water Hose Thread



PART No.
QD-WHNM

DESCRIPTION
Quick Disconnect
Nipple X
Water Hose Thread



VALVES AND SHUT-OFF COCKS

BRASS - STEEL - STAINLESS

AIR CONTROL ACCESSORIES	116
AIR CONTROL PRESSURE REGULATOR	116
AIR CHUCKS	115
AIR CONTROL SOLENOIDS	116
AIR TANK DRAIN VALVE	115
AIR VENTS AND MUFFLERS	114
ANGLE VALVES	108
BALL (CARBON STEEL)	106,107
BALL (CAST BRASS)	102
BALL (FORGED BRASS - FULL PORT)	102
BALL (LEAD FREE BRASS - FULL PORT)	102
BALL (STAINLESS STEEL)	106,107
BALL (THREE WAY)	103
CHECK VALVES	111
COMPRESSION VALVES	104
DRAIN COCKS & VALVES	110
GATE VALVES	108
GLADHANDS - SAE J318	112,113
FIFTH WHEEL SLIDER CYLINDER	116
MINATURE VALVES	104
NEEDLE SEAT VALVES	110
PRESSURE PROTECTION VALVES	115
SAFETY EXHAUST (BRASS)	103
SELECTOR VALVES (WITH CLICK)	108
SHUT - OFF COCKS	109
SWING CHECK	111
TANK VALVE	115
UTILITY VALVES	108
WATER THREAD VALVES	108

WHAT'S NEW IN THIS SECTION

CHROME PLATED MINIATURE BRASS BALL VALVES	104
---	-----

FORGED BRASS BALL VALVE - FULL PORT

Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.



PIPE
Female To
Female



PART No.	Pipe	W.O.G.	W.S.P.
BV2103-A**	1/8	600	150
BV2103-B	1/4	600	150
BV2103-C	3/8	600	150
BV2103-D	1/2	600	150
BV2103-E	3/4	600	150
BV2103-H	1	600	150
BV2103-J	1-1/4	600	150
BV2103-K	1-1/2	600	150
BV2103-M	2	600	150
BV2103-N	2-1/2	400	150
BV2103-P	3	400	150

**CSA does not recognize 1/8 NPT Valve Size



PIPE
Female To
Female



With Locking Handle

PART No.	Pipe	W.O.G.	W.S.P.
BV2103-B-LH	1/4	600	150
BV2103-C-LH	3/8	600	150
BV2103-D-LH	1/2	600	150
BV2103-E-LH	3/4	600	150
BV2103-H-LH	1	600	150
BV2103-J-LH	1-1/4	600	150
BV2103-K-LH	1-1/2	600	150
BV2103-M-LH	2	600	150

**CSA does not recognize 1/8 NPT Valve Size



PIPE
Female To
Female



Type K

PART No.	Size	W.O.G.
BVC4103-10 *	1/2	600
BVC4103-14 *	3/4	600
BVC4103-18 *	1	600
BVC4103-22	1-1/4	600
BVC4103-26	1-1/2	600
BVC4103-34	2	600

* C.S.A. Certified to 200 PSI for use with Fuel Oil

SOLDERING TEMP. NOT TO EXCEED 400° F.

Stainless Steel Handles Available



PIPE
Female To
Female

Lead Free

PART No.	Pipe	W.O.G.
LF-BV4103-B	1/4	600
LF-BV4103-C	3/8	600
LF-BV4103-D	1/2	600
LF-BV4103-E	3/4	600
LF-BV4103-H	1	600
LF-BV4103-J	1-1/4	600
LF-BV4103-K	1-1/2	600
LF-BV4103-M	2	600




PIPE
Female To
Female

With Stainless Handle

PART No.	Pipe	W.O.G.
BV4103-B-SSH	1/4	600
BV4103-C-SSH	3/8	600
BV4103-D-SSH	1/2	600
BV4103-E-SSH	3/4	600
BV4103-H-SSH	1	600
BV4103-J-SSH	1-1/4	600
BV4103-K-SSH	1-1/2	600
BV4103-M-SSH	2	600
BV4103-N-SSH	2-1/2	400
BV4103-P-SSH	3	400
BV4103-S-SSH	4	400

SAFETY EXHAUST BALL VALVE



PIPE
Female
To
Female

PART No.	Pipe
BVSE2103-B	1/4
BVSE2103-C	3/8
BVSE2103-D	1/2
BVSE2103-E	3/4



PIPE
Female
To
Female

With Locking Handle

PART No.	Pipe
BVSE2103-B-LH	1/4
BVSE2103-C-LH	3/8
BVSE2103-D-LH	1/2
BVSE2103-E-LH	3/4

THESE VALVES ARE DESIGNED TO EXHAUST DOWNSTREAM AIR IN THE CLOSED POSITION.

BRASS 3 PORT BALL VALVES



PIPE
Female Ends
3 Port
2 - Way

PART No.	Pipe	W.O.G.
BV2101-B	1/4	600
BV2101-C	3/8	600
BV2101-D	1/2	600
BV2101-E	3/4	600
BV2101-H	1	600
BV2101-J	1-1/4	600
BV2101-K	1-1/2	400
BV2101-M	2	400

FORGED BRASS 3 PORT BALL VALVE



PIPE
Female Ends
3 Port
2 - Way

PRESSURE RATING:
Bottom Port as inlet 500 P.S.I.
Side Port as inlet 100 P.S.I.

PART No.	Pipe
BV2101T-B	1/4
BV2101T-C	3/8
BV2101T-D	1/2

BRASS BALL VALVES

MINIATURE BALL VALVES



PIPE
Female
To
Female

- Up to 600 P.S.I. Working Pressure.
- **Temperature:** -40°F to +300°F (-40°C to 149°C)
- Non-adjusting O-Ring stem seal design never needs tightening.

PART No.	Pipe	W.O.G.
BV3103-A	1/8	600
BV3103-B	1/4	600



PIPE
Female
To
Male

- Long life nickel plated brass ball.
- Instantaneous on-off operation.
- Designed for use with water, oil and air pressure systems.

PART No.	Pipe	W.O.G.
BV3120-A	1/8	600
BV3120-B	1/4	600

CHROME PLATED BRASS BALL VALVE



PIPE
Female
To
Female

- Up to 450 P.S.I. Working Pressure.
- **Temperature:** 0°F to +200°F (-18°C to 93°C)
- Buna-N O-Ring stem seal.

PART No.	Pipe	W.O.G.
BVT3103-A	1/8	450
BVT3103-B	1/4	450
BVT3103-C	3/8	450
BVT3103-D	1/2	450



PIPE
Female
To
Male

- Up to 450 P.S.I. working pressure.
- **Temperature:** 0°F to +200°F (-18°C to 93°C)
- Buna-N O-Ring stem seal.

PART No.	Pipe	W.O.G.
BVT3120-A	1/8	450
BVT3120-B	1/4	450
BVT3120-C	3/8	450
BVT3120-D	1/2	450

COMPRESSION BALL VALVES



**FORGED BODY
TUBE TO TUBE**

Copper L

PART No.	Size
BV2062-10	1/2
BV2062-14	3/4
BV2062-18	1

Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.

**Lead Free
Part No.**

LF-BV2062-10	1/2
LF-BV2062-14	3/4

CARBON AND STAINLESS STEEL BALL VALVES

1 - PIECE DESIGN, STANDARD PORT


CARBON STEEL



PIPE
Female
To
Female

PART No.	W.O.G.	Pipe
BVCS2103-B	2000	1/4
BVCS2103-C	2000	3/8
BVCS2103-D	2000	1/2
BVCS2103-E	2000	3/4
BVCS2103-H	2000	1
BVCS2103-J	2000	1-1/4
BVCS2103-K	2000	1-1/2
BVCS2103-M	2000	2

316 STAINLESS STEEL

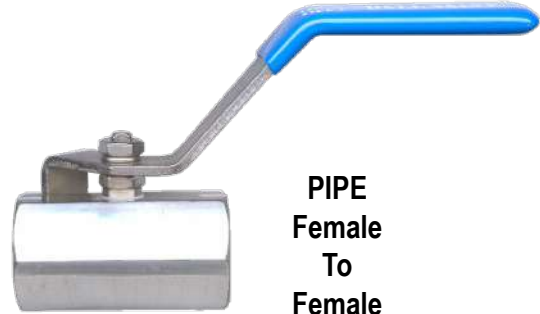

PIPE
Female
To
Female

PART No.	W.O.G.	Pipe
BVSS2103-B	2000	1/4
BVSS2103-C	2000	3/8
BVSS2103-D	2000	1/2
BVSS2103-E	2000	3/4
BVSS2103-H	2000	1
BVSS2103-J	2000	1-1/4
BVSS2103-K	2000	1-1/2
BVSS2103-M	2000	2

2 - PIECE DESIGN, FULL PORT 316 STAINLESS STEEL



PIPE
Female
To
Female

PART No.	W.O.G.	Pipe
BVSS2003-B-1000	1000	1/4
BVSS2003-C-1000	1000	3/8
BVSS2003-D-1000	1000	1/2
BVSS2003-E-1000	1000	3/4
BVSS2003-H-1000	1000	1
BVSS2003-J-1000	1000	1-1/4
BVSS2003-K-1000	1000	1-1/2
BVSS2003-M-1000	1000	2

CARBON AND STAINLESS STEEL BALL VALVES

2 - PIECE DESIGN, FULL PORT CARBON STEEL



PIPE
Female To
Female

PART No.	W.O.G.	Pipe
BVCS2203-B	2000	1/4
BVCS2203-C	2000	3/8
BVCS2203-D	2000	1/2
BVCS2203-E	2000	3/4
BVCS2203-H	2000	1
BVCS2203-J	1500	1-1/4
BVCS2203-K	1500	1-1/2

2 - PIECE DESIGN, MEDIUM PRESSURE, FULL PORT CARBON STEEL



PIPE
Female To
Female

PART No.	W.O.G.	Pipe
BVCS2303-B	3000	1/4
BVCS2303-C	3000	3/8
BVCS2303-D	3000	1/2
BVCS2303-E	3000	3/4
BVCS2303-H	3000	1

2 - PIECE DESIGN, FULL PORT 316 STAINLESS STEEL



PIPE
Female To
Female

PART No.	W.O.G.	Pipe
BVSS2203-B	2000	1/4
BVSS2203-C	2000	3/8
BVSS2203-D	2000	1/2
BVSS2203-E	2000	3/4
BVSS2203-H	2000	1
BVSS2203-J	1500	1-1/4
BVSS2203-K	1500	1-1/2
BVSS2203-M	1500	2

CARBON AND STAINLESS STEEL BALL VALVES

3 - PIECE DESIGN, HIGH PRESURE

HIGH PRESSURE CARBON STEEL



PIPE
Female To
Female

PART No.	W.O.G.	Female Pipe	Port Style
BVCS2403-B	7250	1/4	Full
BVCS2403-C	7250	3/8	Full
BVCS2403-D	7250	1/2	Full
BVCS2403-E	5075	3/4	Full
BVCS2403-H	5075	1	Full
BVCS2403-J	5075	1-1/4	Standard
BVCS2403-K	5075	1-1/2	Standard
BVCS2403-M	5075	2	Standard

ORB PORTS CARBON STEEL



Female ORB To
Female ORB

PART No.	W.O.G.	Female O-Ring	Port Style
BVCS2434-6	7250	9/16 - 18	Full
BVCS2434-8	7250	3/4 - 16	Full
BVCS2434-12	5075	1-1/16 - 12	Full
BVCS2434-16	5075	1-5/16 - 12	Full

FULL PORT 316 STAINLESS STEEL



PIPE
Female To
Female

PART No.	W.O.G.	Pipe
BVSS2403-B	7250	1/4
BVSS2403-C	7250	3/8
BVSS2403-D	7250	1/2
BVSS2403-E	5075	3/4
BVSS2403-H	5075	1

GATE VALVES


FEMALE PIPE			
PART No.	Pipe	W.O.G.	
217-B	1/4	200	
217-C	3/8	200	
217-D	1/2	200	
217-E	3/4	200	
217-H	1	200	
217-J	1-1/4	200	
217-K	1-1/2	200	
217-M	2	200	
217-N	2-1/2	200	
217-P	3	200	
217-S	4	200	

SELECTOR VALVES WITH CLICK


THREE WAY SHUT-OFF
(With Mounting Bracket)
Flow either of two side ports
to center port.
All Ports Female Pipe

PART No.	Pipe	Stem Length	P.S.I.
2101-B	1/4	1-3/8"	30
2101-C	3/8	1-3/8"	30

OPERATING TEMPERATURE:
-40°F to +180°F, -40°C to +82°C



FOUR WAY SHUT-OFF
(With Mounting Bracket)
Flow either of
three side ports
to bottom port.
All Ports Female Pipe

PART No.	Pipe	Stem Length	P.S.I.
2102-B	1/4	1-3/8"	30
2102-BL	1/4	2-7/8"	30
2102-C	3/8	1-3/8"	30

OPERATING TEMPERATURE:
-40°F to +180°F, -40°C to +82°C

ANGLE VALVES


FLARE TO MALE PIPE
Forged Body

PART No.	Tube	Pipe	P.S.I.
1049-6B	3/8	1/4	200
1049-6C	3/8	3/8	200
1049-6D	3/8	1/2	200
1049-8C	1/2	3/8	200
1049-10D	5/8	1/2	200



HOSE TO MALE PIPE
Forged Body

PART No.	Hose I.D.	Pipe	P.S.I.
1139-6C	3/8	3/8	200
1139-8C	1/2	3/8	200
1139-10C	5/8	3/8	200
1139-10D	5/8	1/2	200
1139-12C	3/4	3/8	200
1139-12D	3/4	1/2	200



HOSE TO MALE PIPE
Forged Body
Heater Valve

PART No.	Hose I.D.	Pipe	P.S.I.
HV1139-10C	5/8	3/8	200



MALE PIPE TO FEMALE PIPE
Forged Body

PART No.	Male Pipe	Female Pipe	P.S.I.
1115-CC	3/8	3/8	200
1115-DC	1/2	3/8	200



FLARE TO MALE PIPE
Forged Body

PART No.	Tube	Pipe	P.S.I.
1054-6D	3/8	1/2	200
1054-6E	3/8	3/4	200

C.S.A. CERTIFIED WATER THREAD VALVES
(Also known as Sediment Faucets)


WATER HOSE TO MALE PIPE

* I.D. OF MALE PIPE WILL ACCOMMODATE
1/2 TYPE K COPPER TUBE FOR SOLDERING

CSA Certified to 200 PSI for use with Fuel Oil.
Temperature: -40°F to +149°F
-40°C to +65°C

PART No.	Pipe
224-D *	1/2
224-E	3/4



WATER HOSE TO MALE PIPE

* I.D. OF MALE PIPE WILL ACCOMMODATE
1/2 TYPE K COPPER TUBE FOR SOLDERING

CSA Certified to 200 PSI for use with Fuel Oil.
Temperature: -40°F to +149°F
-40°C to +65°C

PART No.	Pipe
224-D *	1/2

BRASS SPRING BOTTOM SHUT-OFF COCKS

(Not Recommended For Use With Liquids)



FLARE
Tube
to
Tube

PART No.	Tube	P.S.I.
2042-6	3/8	30

TEMPERATURE: -40°F to +250°F
-40°C to +121°C



PIPE
Female
To
Female

PART No.	Pipe	P.S.I.
2103-A	1/8	30
2103-B	1/4	30
2103-C	3/8	30

TEMPERATURE: -40°F to +250°F
-40°C to +121°C



COMPRESSION
Shut Off
Union
Spring Bottom

PART No.	Tube	P.S.I.
2062-4	1/4	30
2062-6	3/8	30


TEMPERATURE: -40°F to +250°F
-40°C to +121°C



PIPE
Female
To
Male

PART No.	Pipe	P.S.I.
2120-A	1/8	30
2120-B	1/4	30
2120-C	3/8	30

TEMPERATURE: -40°F to +250°F
-40°C to +121°C



COMPRESSION
Tube
to
Male Pipe

PART No.	Tube	Pipe	P.S.I.
2068-4B	1/4	1/4	30

TEMPERATURE: -40°F to +250°F
-40°C to +121°C



PIPE
Male
To
Male

PART No.	Pipe	P.S.I.
2122-B	1/4	30
2122-C	3/8	30

TEMPERATURE: -40°F to +250°F
-40°C to +121°C

BRASS CLOSED BOTTOM SHUT-OFF COCKS



PIPE
Female
To
Female

PART No.	Pipe	P.S.I.
5103-B	1/4	30
5103-C	3/8	30

TEMPERATURE: -40°F to +250°F
-40°C to +121°C



PIPE
Female
To
Male

PART No.	Pipe	P.S.I.
5120-A	1/8	30
5120-B	1/4	30
5120-C	3/8	30

TEMPERATURE: -40°F to +250°F
-40°C to +121°C

BACK SEATING TYPE



BACK SEATING
TYPE WITH
EXTENSION
OUTLET

PART No.
239-B

Pipe
1/4

Working
Pressure
(P.S.I.)

Designed for
Constant
Pressure use
between 20
and 150 PSI



BACK
SEATING
TYPE

PART No.

Pipe

Working
Pressure
(P.S.I.)

240-A
240-B
240-C
240-D

1/8
1/4
3/8
1/2

Designed for
Constant
Pressure use
between 15
and 150 PSI

GROUND KEY-PLUG TYPE



GROUND KEY
PLUG TYPE
LEVER HANDLE

PART No.
241-A
241-B
241-C
241-D

Pipe
1/8
1/4
3/8
1/2

Working
Pressure
(P.S.I.)

30
30
30
30



GROUND KEY
PLUG TYPE
LEVER HANDLE
(Heavy Pattern)

PART No.
241HP-B

Pipe
1/4

Working
Pressure
(P.S.I.)

150



HEAVY DUTY
GROUND KEY
PLUG TYPE
TEE HANDLE

PART No.
T241-B

Pipe
1/4

Working
Pressure
(P.S.I.)

150

NEEDLE SEAT TYPE



NEEDLE SEAT
ONE PIECE
PLUG
AND HANDLE

PART No.
242-A
242-B
242-C

Pipe
1/8
1/4
3/8

Working
Pressure
(P.S.I.)

200
200
200



NEEDLE
SEAT

PART No.
243-A
243-B
243-C

Pipe
1/8
1/4
3/8

Working
Pressure
(P.S.I.)

Designed for
Constant
Pressure use
between 15
and 150 PSI



90° ELBOW
SHUT-OFF
WITH
SPOUT

PART No.
245-A
245-B


Hose I.D. Pipe
1/4 1/8
3/8 1/4

Working
Pressure
(P.S.I.)

50
50

LIMITED STOCK OF SOME DISCONTINUED ITEMS IS STILL AVAILABLE.
ASK YOUR LOCAL FAIRVIEW LOCATION.

CARBON STEEL



This check valve design is safe, compact, suitable to any hydraulic application using non-corrosive liquids. Also available with SAE threads, or with 65 PSI crack pressure.

COUPLING STYLE CHECK VALVE

PART No.	Female Pipe	Working P.S.I.	CRACK P.S.I.
SCV1003-A	1/8	5000	5 PSI
SCV1003-B	1/4	5000	5 PSI
SCV1003-C	3/8	5000	5 PSI
SCV1003-D	1/2	4000	5 PSI
SCV1003-E	3/4	4000	5 PSI

BRASS LOW PRESSURE CHECK



250 P.S.I. non-shock cold water. Forged brass construction for greater strength. May be installed horizontally or vertically. Less than 1 P.S.I. cracking pressure. (This valve is intended for use with air and water only)
Temperature: -20°F to +100°F
(-29°C to 38°C)

COUPLING STYLE CHECK VALVE

PART No.	Female Pipe	MAX. P.S.I.
103CV-C	3/8	250
103CV-D	1/2	250
103CV-E	3/4	250
103CV-H	1	250
103CV-J	1-1/4	250
103CV-K	1-1/2	250

BRASS HIGH PRESSURE



3000 P.S.I. Positive check valve. Stainless steel poppet and spring, viton seal - Less than 1 P.S.I. cracking pressure. Maxi-Flow Check Valves used in applications where back flow is not permitted. Can be used in air or fluid applications (This valve is intended for use with air and water only). Install valve so that flow is in the direction of the arrow on the part.

COUPLING STYLE CHECK VALVE

PART No.	Female Pipe	MAX. P.S.I.
103CV-B-3000	1/4	3000
103CV-C-3000	3/8	3000

BRONZE VALVE

FEMALE PIPE
HEX HEAD

PART No.	Female Pipe	W.S.P.	C.W.P.
293-C	3/8	150	300
293-D	1/2	150	300
293-E	3/4	150	300
293-H	1	150	300
293-J	1-1/4	150	300
293-K	1-1/2	150	300

ALLOWS FLOW IN ONE DIRECTION ONLY

STEEL ONE WAY VALVE



Precision engineered and manufactured to provide optimum performance for each specified application. Steel construction for years of dependable operation. Less than 1 P.S.I. cracking pressure.

ALLOWS FLOW IN ONE DIRECTION ONLY

PART No.	Pipe	MAX. PSI
CV1-B	1/4	135
CV1-C	3/8	135
CV1-D	1/2	135

BRASS Y CHECK VALVE

“Y” VALVE
FEMALE PIPE
HEX HEAD

ALLOWS FLOW IN ONE DIRECTION ONLY

PART No.	Female Pipe	W.S.P.	W.O.G.
298-D	1/2	125	200
298-E	3/4	125	200
298-H	1	125	200
298-J	1-1/4	125	200
298-K	1-1/2	125	200
298-M	2	125	200

GH SERIES (Standard Style)



GH SERIES WITH STANDARD SEAL

PART No.	Pipe Size	Type	Color Code
GHU	1/2 FPT	Universal	-
GHE	1/2 FPT	Emergency	Red
GHS	1/2 FPT	Service	Blue

GH SERIES WITH SCREEN SEAL

PART No.	Pipe Size	Type	Color Code
GHU-SC	1/2 FPT	Universal	-
GHE-SC	1/2 FPT	Emergency	Red
GHS-SC	1/2 FPT	Service	Blue

GH SERIES WITH UMBRELLA SEAL

PART No.	Pipe Size	Type	Color Code
GHU-2	1/2 FPT	Universal	-
GHE-2	1/2 FPT	Emergency	Red
GHS-2	1/2 FPT	Service	Blue

GHM SERIES (Rear & Bottom Mounting)




(Plug & Gasket Included)

PART No.	Pipe Size	Type	Color Code
GHM-E	3/8 FPT	Emergency	Red
GHM-S	3/8 FPT	Service	Blue

GHM SERIES WITH SCREEN SEAL

PART No.	Pipe Size	Type	Color Code
GHM-E-SC	3/8 FPT	Emergency	Red
GHM-S-SC	3/8 FPT	Service	Blue

REPLACEMENT SEALS

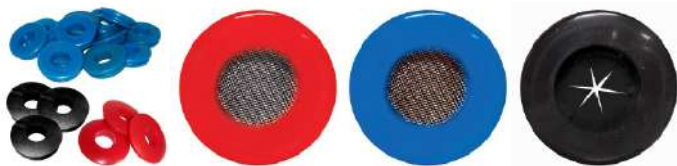

GH-SEAL
STANDARD

WITH SCREEN

UMBRELLA
SEAL

PART No.	Type	Color Code
GH-SEAL	Rubber	Black
GH-SEAL-2	Rubber Umbrella Seal	Black
GHE-SEAL	Polyurethane	Red
GHE-SEAL-SC	Polyurethane with Screen	Red
GHS-SEAL	Polyurethane	Blue
GHS-SEAL-SC	Polyurethane with Screen	Blue

SWING AWAY GLADHANDS



ROTATES A FULL 180°

(Coupled With Pacifier)

PART No.	Pipe Size	Type	Color Code
GHU-SW	3/8 FPT	Swing Away	-
GHE-SW	3/8 FPT	Swing Away	Red
GHS-SW	3/8 FPT	Swing Away	Blue

GHV (Valved Series)



GHV SERIES WITH BULKHEAD



GHV (VALVED) SERIES

PART No.	Bottom Pipe Size	Back Pipe Size	Type	Color Code
GHV-E	3/8 FPT	1/4 FPT	Emergency	Red
GHV-S	3/8 FPT	----	Service	Blue

Bulkhead PART No.	Female Pipe Size	Male Pipe Size	Type	Color Code
GHV-E-BH	3/8	3/4	Emergency	Red
GHV-S-BH	3/8	3/4	Service	Blue

GLADHAND GRIPS



Description
Gladhand Grip Handles
With Thread Sealant.
Sold Only in sets.
(Red and Blue)

PART No.
GH-GRIP

Pipe Size
1/2



Description
Knurled Solid Aluminum
Gladhand Grip Handles
With Thread Sealant.
Sold Only in sets.
(Red and Blue)

PART No.
GH-GRIP-ALUM

Pipe Size
1/2

COUPLING BRACKET



PART No.
GH-BRACKET

Description
Gladhand Holder

GLADHAND DUMMY



PART No.
GH-DUMMY

Description
c/w 26" Security Cable

GLADHAND DUMMY KIT



With Chain

PART No.
GH-DUMMY-NVI

Description
NON-VENTED

BREATHER VENTS



Low profile breather vents used on single acting cylinders or valves with, Pipe thread or O-Ring Boss thread, to prevent dirt and foreign particles from entering ports open to the atmosphere. Also used for vacuum relief in pressure equalization of gear boxes, crank cases, storage tanks or reservoirs.

PART No.	Pipe
BBV-A	1/8
BBV-B	1/4
BBV-C	3/8
BBV-D	1/2

Male Pipe Thread

Maximum Operating Pressure: 300 P.S.I.

Operating Temperature: +35°F to +300°F, +2°C to +149°C

Sintered Bronze (40 micron)



PART No.	ORB
BBV-ORB-6	9/16 - 18
BBV-ORB-8	3/4 - 16

O-Ring Boss Thread

Maximum Operating Pressure: 300 P.S.I.

Operating Temperature: +35°F to +300°F, +2°C to +149°C

Sintered Bronze (40 micron)

BRASS AIR VENTS



Brass Air Vent.

Set screw has 10/32 national fine thread.

PART No.	Pipe
WH-705	1/8

Maximum Operating Pressure: 150 P.S.I.

Operating Temperature: +35°F to +300°F, +2°C to +149°C

EXHAUST MUFFLERS



Exhaust mufflers utilize porous sintered bronze filter element secured to nickel plated pipe fittings. Used to diffuse air and muffle noise from the exhaust ports of air valves, air cylinders and air tools to an acceptable level within OSHA noise requirement. Also used as filters for gasoline, oil and air exhaust and intake.

PART No.	Pipe
BEM-A	1/8
BEM-B	1/4
BEM-C	3/8
BEM-D	1/2
BEM-E	3/4

Male Pipe

Maximum Operating Pressure: 300 P.S.I.

Operating Temperature: +35°F to +300°F, +2°C to +149°C

Sintered bronze (40 micron)

Available in unplated brass on request (suffix part no. with -BRASS)

Available in stainless steel on request (change prefix from BEM to BSSEM)



Adjusting screw

Speed control mufflers provide an infinite variation of control of air flow at an acceptable sound level on exhaust ports of air valves with complete safety. The speed of an operating cylinder or air tool maybe increased or decreased by adjusting the screw. Final position is then locked in place by the lock nut. Objectionable exhaust air noise is eliminated by the surrounding sleeve of sintered bronze.

PART No.	Pipe
BSCM-A	1/8
BSCM-B	1/4
BSCM-C	3/8
BSCM-D	1/2

Male Pipe

Maximum Operating Pressure: 300 P.S.I.

Operating Temperature: +35°F to +300°F, +2°C to +149°C

Sintered Bronze (40 micron)

AIR CHUCKS



Fairview's industrial grade brass ball chucks and dual foot filler valve with 1/4 Female NPT thread are ideally suited for use on live air lines supplying compressed air.

PART No.	Description
BC-B	Ball Chuck
BC-B-LH	Ball Chuck (Locking handle) **
BC-B-DF	Dual Foot (6" Overall Length)

BRASS TANK VALVES



AIR TANK VALVE

Fairview's industrial grade brass air tank valve with Male NPT thread for use on compressed air systems.

PART No.	Pipe	Description
BTV-A	1/8"	Complete with Cap
BTV-B	1/4"	Complete with Cap

AIR TANK DRAIN VALVE




AIR TANK DRAIN VALVE WITH PULL CABLE

Fairview's industrial grade brass air tank drain valve with Male NPT thread for use on compressed air systems. Empties your tank with just a pull.

PART No.	Pipe	Description
14DV-60B	1/4	60" Cable

PRESSURE PROTECTION VALVE

PPV SERIES

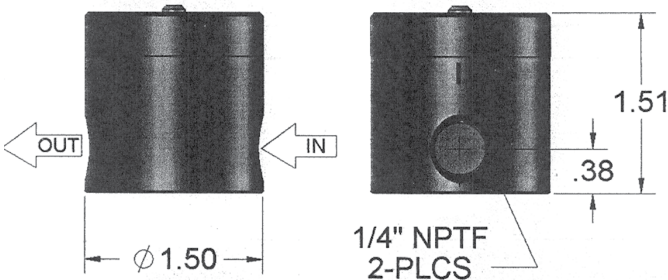


- Material: Black anodized aluminum
- Diaphragm: Low-temp Buna
- Temp Rating: -40°F To +180°F (-40°C To 82°C)
- Max Pressure: 200 PSI max. supply
- Pressure to open Adjustable 45-95 psi,
- Pressure to close Adjustable 40-90 psi.
- Downstream check, (optional)
- stainless steel adjustment screw.



PART No.	Thread "A"	Thread "B"	Closing Pressure (P.S.I.)	Opening Pressure (P.S.I.)
PPV90PC-60/65-6C	1/4 NPTF	1/4 NPTF	60	65

AIR SHIFT SOLENOIDS

Note: Must Be Mounted In Upright Position.



FEATURES:

- 2 Ports -
1/4 Female NPT
- 1 Vent
- 0 - 120 P.S.I.
- 12 Volt D.C.
- Electrically Actuated

PART No.
SV-120B12V

Description
NORMALLY CLOSED

3 WAY DIRECTIONAL CONTROL



FEATURES:

- 3 Ports -
1/4 Female NPT
- 0 - 100 P.S.I.
- 12 Volt D.C.
- Electrically Actuated

PART No.
SV-100B12V30

Description
NORMALLY OPEN

AIR CONTROL PRESSURE REGULATORS



FEATURES:

- Inlet-outlet - 1/4 NPT
- Gauge ports - 1/8 NPT
- Max. flow range
51 to 75 cfm
- Adjustment range -
Regulators 0 - 140 PSI
- Max. inlet pressure 250 PSIG
- Relieving type
- Standard knob

PART No.
R16-02-000

Description
Regulator 3.5" in height



FEATURES:

- Inlet-outlet - 3/8 NPT
- Gauge ports - 1/8 NPT
- Max. flow range
101 to 200 cfm
- Adjustment range -
Regulators 0 - 140 PSI
- Max. inlet pressure 250 PSIG
- Relieving type
- Standard knob

PART No.
R16-03-000

Description
Regulator 5.5" in height

FIFTH WHEEL SLIDER CYLINDER



FEATURES:

- Port Size: 1/4" NPT
- Shaft Size: 5/8" Diameter
- Clevis Hole: 17/32"
- Retracted Length: 12.75"
- Extended Length: 19.25"
- Operating Pressure: 100 PSI
- Max. Operating Pressure: 125 PSI

PART No.
FW-CYLINDER-1

Description
Stroke 6.5 inches



PRESSURE GAUGES

DRY - LIQUID

CENTER BACK MOUNT (DRY)	123-126
CENTER BACK MOUT (LIQUID)	120-123
EQUALIZER (DRY)	124-126
MOUNTING BRACKETS.....	122
SNUBBER	122
STEM MOUNT (DRY).....	123-126
STEM MOUNT (LIQUID FILLED).....	120-122
VACUUM SERVICE.....	122

Best Practices: Pressure Gauge Installation and Maintenance

Installation



Location

Vibration and extreme ambient temperatures can affect pressure gauge accuracy. It is important to choose the right pressure gauge for the application.
(See gauge selection chart next page)

Choosing materials

Brass wetted parts are suitable for use with air, oil, water, and other non-corrosive fluids. For corrosive fluids, stainless steel should be considered. Lead Free brass is also available on request for potable water applications



Preparation

Be sure to use thread sealant pipe dope or PTFE tape thread sealant on male pipe thread connections. Do not apply sealant to the first 2 pipe threads

Connection

Caution: Tightening the gauge by the dial face will severely damage the gauge. Use an open-ended wrench on the gauge stem wrench flats to tighten the gauge. Male Pipe Threads should be tightened a minimum of 2-1/2 turns past hand tight



Leak Testing

Leak test all connections. For air / gas systems, use non-corrosive leak test or soapy water solution. If a leak occurs (look for bubbles), gradually tighten fitting until leak stops.

Venting the gauge

Liquid filled gauges should be installed in an upright position to avoid the liquid from leaking. Cut off the tip of the fill plug (if present) or lift the vent plug then re-seat it when the pressure gauge reflects a reading that is slightly "off-zero". This allows the gauge to equalize to atmospheric pressure.



Operation and Maintenance

Pulsation and Vibration



Using the correct pressure gauge in areas where pulsation and vibration are constant and unavoidable can be critical in order to avoid errors in reading caused by damage to the gauge. The Equalizer™ dry gauge is recommended for harsh environments where leakage and discoloration are also a concern.

Best Practices: Pressure Gauge Installation and Maintenance

Storage

When not in use, storing pressure gauges in their original packing boxes is recommended. All pressure gauges should be placed in dry storage under ambient temperature.



Inspection Frequency

Pressure Gauge inspection frequency can range from monthly to annual basis depending on the severity of service and how critical the accuracy of the gauge is. It is strongly recommended that critical application gauges are recalibrated and certified at least once a year.

Pressure Gauge Selection Guide

Series	Dial Size				Pressure (Range) P.S.I					Case Material			Wetted parts		Conn. Size			Conn. Location		Accuracy				
	1.5" & Under	2"	2.5"	4"	30" Hg Vacuum	15-300 psi	400-600 psi	1,000-5,000	6,000 to 20,000	Steel	Plastic	Stainless Steel	Brass	Stainless Steel	1/8" NPT	1/4" NPT	1/2" NPT	Bottom	Center back	3-2-3% Grade B	2.5% of full scale value	1.5% full scale value	1% (Grade 1A)	0.75% of full scale value
Digital Gauge			X		X	X	X	X	X		X			X		X		X					X	
Liquid Filled	X	X	X	X	X	X	X	X	X			X	X	X		X		X	X	X	X	X		
Equalizer Dry			X	X		X	X	X	X			X	X			X	X	X	X			X		
Dry Gauge	X	X	X		X		X			X			X		X	X		X	X	X	X	X		

LIQUID FILLED PRESSURE GAUGES

- Glycerin Liquid Gauge • #304 Stainless Steel Case • 1.5% Full Scale Accuracy
- Ambient-Process Temp: -4°F To + 150°F, -20°C To +65°C • Meets ASME B40.100 Standards



Black Plug
Signifies Standard
Glycerin Liquid



Brown Plug
Signifies Low Temp
Silicone Liquid

NOTE: After installation lift plunger to vent gauge

(“LT” Items are Low Temp -76°F To + 392°F, -60°C To +200°C)

1/4 NPT BRASS STEM MOUNT (2.5” DIAL)



PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-15SG25	2.5	0-15	0-100
PG-30SG25	2.5	0-30	0-200
PG-30SG25LT	2.5	0-30	0-200
PG-60SG25	2.5	0-60	0-400
PG-60SG25LT	2.5	0-60	0-400
PG-100SG25	2.5	0-100	0-700
PG-100SG25LT	2.5	0-100	0-700
PG-160SG25	2.5	0-160	0-1,100
PG-160SG25LT	2.5	0-160	0-1,100
PG-200SG25	2.5	0-200	0-1,400
PG-300SG25	2.5	0-300	0-2,100

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-400SG25	2.5	0-400	0-2,800
PG-600SG25	2.5	0-600	0-4,000
PG-1000SG25	2.5	0-1,000	0-7,000
PG-1500SG25	2.5	0-1,500	0-10,000
PG-2000SG25	2.5	0-2,000	0-14,000
PG-3000SG25	2.5	0-3,000	0-21,000
PG-5000SG25	2.5	0-5,000	0-35,000
PG-10000SG25	2.5	0-10,000	0-70,000

1/4 NPT BRASS STEM MOUNT (4” DIAL)



PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-30SG4	4	0-30	0-200
PG-60SG4	4	0-60	0-400
PG-100SG4	4	0-100	0-700
PG-160SG4	4	0-160	0-1,100
PG-160SG4LT	4	0-160	0-1,100
PG-200SG4	4	0-200	0-1,400
PG-300SG4	4	0-300	0-2,100

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-400SG4	4	0-400	0-2,800
PG-1000SG4	4	0-1,000	0-7,000
PG-1500SG4	4	0-1,500	0-10,000
PG-3000SG4	4	0-3,000	0-21,000
PG-5000SG4	4	0-5,000	0-35,000
PG-10000SG4	4	0-10,000	0-70,000

1/4 NPT BRASS CENTER BACK MOUNT (2.5” DIAL)



PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-15CG25	2.5	0-15	0-100
PG-30CG25	2.5	0-30	0-200
PG-60CG25	2.5	0-60	0-400
PG-100CG25	2.5	0-100	0-700
PG-100CG25LT	2.5	0-100	0-700
PG-160CG25	2.5	0-160	0-1,100
PG-160CG25LT	2.5	0-160	0-1,100
PG-200CG25	2.5	0-200	0-1,400
PG-300CG25	2.5	0-300	0-2,100

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-400CG25	2.5	0-400	0-2,800
PG-600CG25	2.5	0-600	0-4,000
PG-1000CG25	2.5	0-1,000	0-7,000
PG-1500CG25	2.5	0-1,500	0-10,000
PG-2000CG25	2.5	0-2,000	0-14,000
PG-3000CG25	2.5	0-3,000	0-21,000
PG-5000CG25	2.5	0-5,000	0-35,000
PG-10000CG25	2.5	0-10,000	0-70,000

ALL STAINLESS STEEL LIQUID FILLED PRESSURE GAUGES



- Glycerin Liquid Gauge • All Stainless Steel • 1.5% Full Scale Accuracy
- Ambient-Process Temp: - 4°F To + 150°F, -20°C To +65°C • Meets ASME B40.100 Standards



Black Plug
Signifies Standard
Glycerin Liquid



Brown Plug
Signifies Low Temp
Silicone Liquid

NOTE: After installation lift plunger to vent gauge

("LT" Items are Low Temp -76°F To + 392°F, -60°C To +200°C)

1/4 NPT STAINLESS STEM MOUNT (2.5" DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I.)	(kPa)
PG-30SG25SS	2.5	0-30	0-200
PG-60SG25SS	2.5	0-60	0-400
PG-100SG25SS	2.5	0-100	0-700
PG-100SG25SSLT	2.5	0-100	0-700
PG-160SG25SS	2.5	0-160	0-1,100
PG-160SG25SSLT	2.5	0-160	0-1,100
PG-200SG25SS	2.5	0-200	0-1,400
PG-300SG25SS	2.5	0-300	0-2,100



1/4 NPT STAINLESS STEM MOUNT (4" DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I.)	(kPa)
PG-30SG4SS	4	0-30	0-200
PG-60SG4SS	4	0-60	0-400
PG-100SG4SS	4	0-100	0-700
PG-160SG4SS	4	0-160	0-1,100
PG-160SG4SSLT	4	0-160	0-1,100
PG-200SG4SS	4	0-200	0-1,400
PG-300SG4SS	4	0-300	0-2,100



1/4 NPT STAINLESS CENTER BACK MOUNT (2.5" DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I.)	(kPa)
PG-60CG25SS	2.5	0-60	0-400
PG-100CG25SS	2.5	0-100	0-700
PG-100CG25SSLT	2.5	0-100	0-700
PG-160CG25SS	2.5	0-160	0-1,100
PG-160CG25SSLT	2.5	0-160	0-1,100
PG-200CG25SS	2.5	0-200	0-1,400
PG-300CG25SS	2.5	0-300	0-2,100



LIQUID FILLED PRESSURE GAUGES

- Glycerin Liquid Gauge • #304 Stainless Steel Case • 1.5% Full Scale Accuracy
- Ambient-Process Temp: -4°F To + 150°F, -20°C To +65°C • Meets ASME B40.100 Standards

(“LT” Items are Low Temp -76°F To + 392°F, -60°C To +200°C)



Brown Plug
Signifies Low Temp
Silicone Liquid

NOTE: After installation lift plunger to vent gauge

WITH FACTORY FLANGE 1/4 NPT BRASS STEM MOUNT (2.5" DIAL)

	Dial Diameter	Range	
PART No.	(IN.)	(P.S.I.)	(kPa)
PG-30SGRF	4	0-30	0-200
PG-100SGRF	4	0-100	0-700
PG-100SGRFLT	4	0-100	0-700
PG-160SGRF	4	0-160	0-1,100

VACUUM SERVICE 1/4 NPT BRASS STEM MOUNT (2.5" DIAL)

	For Dial Dia.	Range	
PART No.	(IN.)	Vacuum	(P.S.I.)
PG-30SGV25	2.5	30-0 hg	
PG-30V30SG25	2.5	30-0 hg	0-30

VACUUM SERVICE 1/4 NPT BRASS CENTER BACK MOUNT (2.5" DIAL)

	For Dial Dia.	Range	
PART No.	(IN.)	Vacuum	(P.S.I.)
PG-30CGV25	2.5	30-0 hg	
PG-30V30CG25	2.5	30-0 hg	0-30

MOUNTING BRACKETS

	For Dial Dia.	Description
PART No.	(IN.)	
PG-MB25	2.5	2 Screw U-Clamp
PG-PM25	2.5	3 Hole Panel Mount

BRASS SNUBBER

PART No.	Range (P.S.I.)	Pre-Assembled
PG-SNUBBER *	0-10,000	(Viscous Fluids 40um)

- Brass 1/4" Female x 1/4" Male
 - Protects gauges from shock.
 - Ambient-Process Temp:- 65°F To + 650°F, - 54°C To + 343°C
- Complete with color coded interchangeable porosity elements. Standard factory element is 40 um. Follow instructions for replacing element if required. (5 um, 10 um, 20 um, 25 um, 30 um) Suitable for Water, Air and Gasoline applications.

*Conforms to requirements of MIL-D-2940A




PG-MB25
2 SCREW U-CLAMP



PG-PM25
3 HOLE PANEL MOUNT
(Only For Use With Center
Back Mount Gauges.)



(For Use With Center Back Or Stem
Mount Gauges.)



DRY PRESSURE GAUGES

- Dry Gauge • Steel Case • Accuracy: 3% -2% -3% • Connection: Brass • Bourdon Tube
- Ambient-Process Temp: -40°F To +140°F, -40°C To +60°C • Meets ASME B40.100 Standards

1/8 NPT BRASS STEM MOUNT (1.5" DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I.)	(kPa)
PG-100SD15	1.5	0-100	N/A
PG-160SD15	1.5	0-160	N/A



1/4 NPT BRASS STEM MOUNT

PART No.	Dial Dia. (IN.)	Range (P.S.I.)	(kPa)
PG-15SD2	2	0-15	N/A
PG-30SD2	2	0-30	N/A
PG-60SD2	2	0-60	N/A
PG-100SD2	2	0-100	N/A
PG-160SD2	2	0-160	N/A
PG-200SD2	2	0-200	N/A
PG-300SD2	2	0-300	N/A
PG-15SD25	2.5	0-15	0-100
PG-30SD25	2.5	0-30	0-200
PG-60SD25	2.5	0-60	0-400
PG-100SD25	2.5	0-100	0-700
PG-160SD25	2.5	0-160	0-1,100
PG-200SD25	2.5	0-200	0-1,400
PG-300SD25	2.5	0-300	0-2,100



1/4 NPT STEM MOUNT LOW PRESSURE (INCHES W.C.)

PART No.	Dial Dia. (IN.)	Range W.C.	(OZ/in ²)
PG-35WCSD-2.5	2.5	0-35	0-20

1/8 NPT BRASS CENTER BACK MOUNT (1.5" DIAL)

PART No.	Dial Dia. (IN.)	Range (P.S.I.)	(kPa)
PG-30CD15	1.5	0-30	N/A
PG-60CD15	1.5	0-60	N/A
PG-100CD15	1.5	0-100	N/A
PG-160CD15	1.5	0-160	N/A



- Dry Gauge • #304 Stainless Steel Case, Brass Wetted • 1.5% Full Scale Accuracy
- Ambient-Process Temp: -58°F To + 200°F, -50°C To +93°C • Meets ASME B40.100 Standards

The QUALIZER® Pressure Gauge Series

These gauges are dry gauges that come with a dampening movement that eliminates pointer flutter caused by vibration and pulsation. This makes pressure reading much easier. No more worries of fill fluid leaking or compatibility issues with the process media. Gauges can be easily serviced without the hassle of draining and refilling the case with fluid.

- Dampens vibration and pulsation
- Eliminates leaks and discoloration
- Can be used at higher temperatures than glycerine filled gauges
- Provides ease in reading
- Reinforced lightweight design



PG-3000ZRS25

1/4 NPT BRASS STEM MOUNT (2.5" DIAL)

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-15ZRS25	2.5	0-15	0-100
PG-30ZRS25	2.5	0-30	0-200
PG-60ZRS25	2.5	0-60	0-400
PG-100ZRS25	2.5	0-100	0-700
PG-160ZRS25	2.5	0-160	0-1,100
PG-200ZRS25	2.5	0-200	0-1,400
PG-300ZRS25	2.5	0-300	0-2,100

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-400ZRS25	2.5	0-400	0-2,800
PG-600ZRS25	2.5	0-600	0-4,000
PG-1000ZRS25	2.5	0-1,000	0-7,000
PG-1500ZRS25	2.5	0-1,500	0-10,000
PG-2000ZRS25	2.5	0-2,000	0-14,000
PG-3000ZRS25	2.5	0-3,000	0-21,000
PG-5000ZRS25	2.5	0-5,000	0-35,000
PG-10000ZRS25	2.5	0-10,000	0-70,000



1/4 NPT BRASS CENTER BACK MOUNT (2.5" DIAL)

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-15ZRCD25	2.5	0-15	0-100
PG-30ZRCD25	2.5	0-30	0-200
PG-60ZRCD25	2.5	0-60	0-400
PG-100ZRCD25	2.5	0-100	0-700
PG-160ZRCD25	2.5	0-160	0-1,100
PG-200ZRCD25	2.5	0-200	0-1,400
PG-300ZRCD25	2.5	0-300	0-2,100

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-400ZRCD25	2.5	0-400	0-2,800
PG-600ZRCD25	2.5	0-600	0-4,000
PG-1000ZRCD25	2.5	0-1,000	0-7,000
PG-1500ZRCD25	2.5	0-1,500	0-10,000
PG-2000ZRCD25	2.5	0-2,000	0-14,000
PG-3000ZRCD25	2.5	0-3,000	0-21,000
PG-5000ZRCD25	2.5	0-5,000	0-35,000
PG-10000ZRCD25	2.5	0-10,000	0-70,000



1/4 NPT BRASS STEM MOUNT (4" DIAL)

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-15ZRS4	4	0-15	0-100
PG-60ZRS4	4	0-60	0-400
PG-100ZRS4	4	0-100	0-700
PG-160ZRS4	4	0-160	0-1,100
PG-200ZRS4	4	0-200	0-1,400
PG-300ZRS4	4	0-300	0-2,100

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-400ZRS4	4	0-400	0-2,800
PG-600ZRS4	4	0-600	0-4,000
PG-1000ZRS4	4	0-1,000	0-7,000
PG-1500ZRS4	4	0-1,500	0-10,000
PG-2000ZRS4	4	0-2,000	0-14,000
PG-3000ZRS4	4	0-3,000	0-21,000
PG-5000ZRS4	4	0-5,000	0-35,000
PG-10000ZRS4	4	0-10,000	0-70,000



1/4 NPT Brass Center Back mount (4" Dial), Panel Mount and Factory Installed Flanges Also Available on Request

- Dry Gauge • All Stainless Steel • Accuracy: $\pm 1\%$ ANSI/ASME Grade 1A • Connection: Stainless
- Bourdon Tube • Ambient-Process Temp: -58°F To $+200^{\circ}\text{F}$, -50°C To $+93^{\circ}\text{C}$

1/4 NPT STEM PREMIUM ALL STAINLESS (4" DIAL)

Description & Features:

- Dampened movement minimizes effects of pulsation and vibration without liquid filling
- Restricted orifice standard on dual scale (optional on single scale)
- Stainless steel case
- 316 SS wetted parts
- Back, bottom, or panel mounted
- CRN registered

Applications:

- Ideally suited for process, chemical and petroleum industry
- Where chemical compatibility and contamination is a concern

Specifications:

Dial: 4" (100mm) white aluminum with black and red markings (2-1/2" dial available on request)
Case: AISI 304 SS (dry)
Lens: Polycarbonate
Ring: AISI 304 SS bayonet
Socket: 316 SS
Bourdon Tube: 316 SS
Movement: 304 SS, dampened
Pointer: Aluminum, anodized black, micrometer adjustable

Over-Pressure Limit:

25% for pressures up to 1,450 psi (9,998 kPa),
 15% for pressures over 1,500, psi (10,342 kPa)

Socket Gasket: 2.5" (63mm): Buna N for two-piece internal socket seal

Fill Plug: Buna N

Lens Ring: Gasket Silicone rubber

Ambient/Process Temperature:
 -58°F To $+200^{\circ}\text{F}$, -50°C To $+93^{\circ}\text{C}$

Working Pressure:

Maximum 75% of full scale value


Accuracy:

4" (100mm): $\pm 1\%$ ANSI/ASME Grade 1A



PART No.	Dial Dia. (IN.)	(P.S.I.)	Range (kPa)
PG-30ZRSD4SS	4	0-30	0-200
PG-60ZRSD4SS	4	0-60	0-400
PG-100ZRSD4SS	4	0-100	0-700
PG-160ZRSD4SS	4	0-160	0-1100
PG-200ZRSD4SS	4	0-200	0-1400
PG-300ZRSD4SS	4	0-300	0-2100
PG-600ZRSD4SS	4	0-600	0-4,200
PG-1000ZRSD4SS	4	0-1,000	0-7,000
PG-1500ZRSD4SS	4	0-1,500	0-10,000
PG-2000ZRSD4SS	4	0-2,000	0-14,000
PG-3000ZRSD4SS	4	0-3,000	0-21,000
PG-5000ZRSD4SS	4	0-5,000	0-35,000
PG-10000ZRSD4SS	4	0-10,000	0-70,000
PG-15000ZRSD4SS	4	0-15,000	0-100,000

• Others available: see (-D) next page.

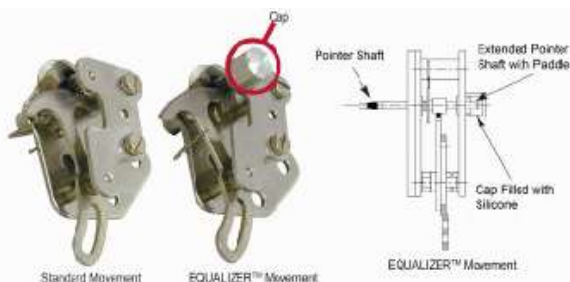

The pressure dampening mechanism of the Equalizer Gauge provides the reliability and accuracy of a liquid gauge without the risk of fogging, discoloring or cold weather gelling.

- Dry Gauge • All Stainless Steel • 1.5% Full Scale Accuracy
- Ambient-Process Temp: -58°F To + 200°F, -50°C To +93°C • Meets ASME B40.100 Standards

1/2 NPT STEM PREMIUM ALL STAINLESS (4" DIAL)

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-30ZRSD4SS-D	4	0-30	0-200
PG-60ZRSD4SS-D	4	0-60	0-400
PG-100ZRSD4SS-D	4	0-100	0-700
PG-160ZRSD4SS-D	4	0-160	0-1,100
PG-200ZRSD4SS-D	4	0-200	0-1,400
PG-300ZRSD4SS-D	4	0-300	0-2,100
PG-600ZRSD4SS-D	4	0-600	0-4,200

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-1000ZRSD4SS-D	4	0-1,000	0-7,000
PG-1500ZRSD4SS-D	4	0-1,500	0-10,000
PG-2000ZRSD4SS-D	4	0-2,000	0-14,000
PG-3000ZRSD4SS-D	4	0-3,000	0-21,000
PG-5000ZRSD4SS-D	4	0-5,000	0-35,000
PG-10000ZRSD4SS-D	4	0-10,000	0-70,000
PG-15000ZRSD4SS-D	4	0-15,000	0-100,000



1/2 NPT PREMIUM STAINLESS BACK MOUNT (4" DIAL) ALSO AVAILABLE
(SO Special order minimums apply)

1/4 NPT STEM PREMIUM ALL STAINLESS MOUNT (2.5" DIAL)

- Dry Gauge • All Stainless Steel • 1.5% Full Scale Accuracy
- Ambient-Process Temp: -58°F To + 200°F, -50°C To +93°C • Meets ASME B40.100 Standards

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-15ZRSD25SS	2.5	0-15	0-100
PG-30ZRSD25SS	2.5	0-30	0-200
PG-60ZRSD25SS	2.5	0-60	0-400
PG-100ZRSD25SS	2.5	0-100	0-700
PG-160ZRSD25SS	2.5	0-160	0-1,100
PG-200ZRSD25SS	2.5	0-200	0-1,400
PG-300ZRSD25SS	2.5	0-300	0-2,100
PG-400ZRSD25SS	2.5	0-400	0-2,800

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-600ZRSD25SS	2.5	0-600	0-4,000
PG-1000ZRSD25SS	2.5	0-1,000	0-7,000
PG-1500ZRSD25SS	2.5	0-1,500	0-10,000
PG-2000ZRSD25SS	2.5	0-2,000	0-14,000
PG-3000ZRSD25SS	2.5	0-3,000	0-21,000
PG-5000ZRSD25SS	2.5	0-5,000	0-35,000
PG-10000ZRSD25SS	2.5	0-10,000	0-70,000
PG-15000ZRSD25SS	2.5	0-15,000	0-100,000




1/4 NPT CENTER BACK PREMIUM ALL STAINLESS (2.5" DIAL)

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-15ZRCD25SS	2.5	0-15	0-100
PG-30ZRCD25SS	2.5	0-30	0-200
PG-60ZRCD25SS	2.5	0-60	0-400
PG-160ZRCD25SS	2.5	0-160	0-1,100
PG-200ZRCD25SS	2.5	0-200	0-1,400
PG-300ZRCD25SS	2.5	0-300	0-2,100

PART No.	Dial Diameter (IN.)	Range (P.S.I.)	Range (kPa)
PG-400ZRCD25SS	2.5	0-400	0-2,800
PG-600ZRCD25SS	2.5	0-600	0-4,000
PG-1000ZRCD25SS	2.5	0-1,000	0-7,000
PG-1500ZRCD25SS	2.5	0-1,500	0-10,000
PG-2000ZRCD25SS	2.5	0-2,000	0-14,000
PG-3000ZRCD25SS	2.5	0-3,000	0-21,000
PG-5000ZRCD25SS	2.5	0-5,000	0-35,000
PG-10000ZRCD25SS	2.5	0-10,000	0-70,000



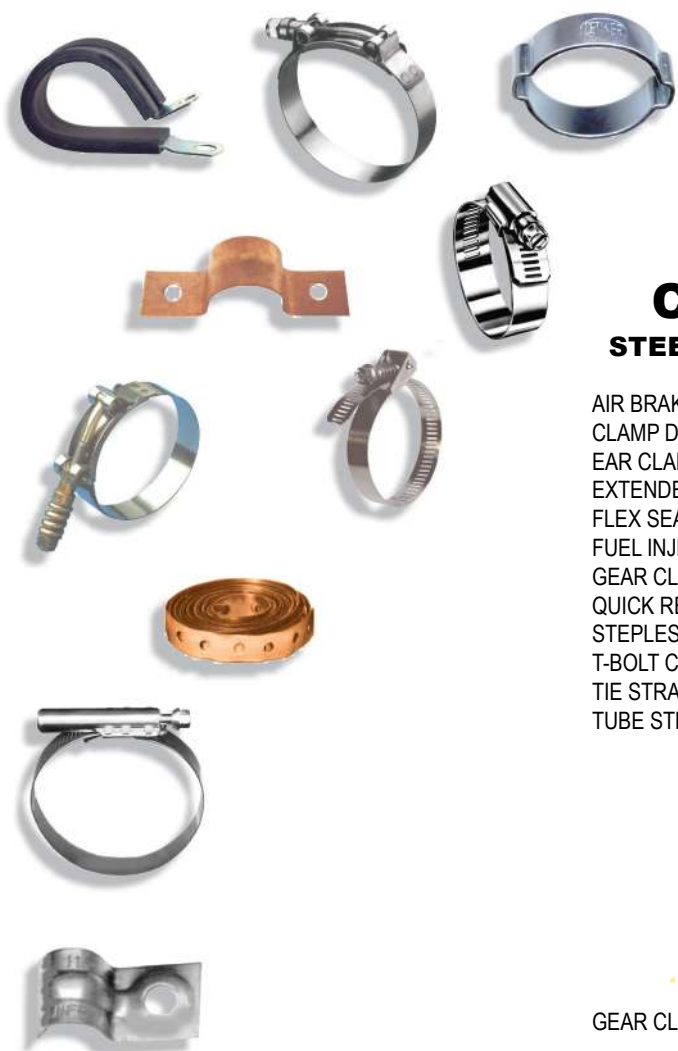

CLAMPS & TUBE STRAPS

STEEL - COPPER - COPPER PLATED - STAINLESS

AIR BRAKE HOSE ACCESSORIES	134
CLAMP DISPLAY RACKS	131
EAR CLAMPS (ONE & TWO)	131, 132
EXTENDED TONGUE CLAMPS	128
FLEX SEAL CLAMPS	130
FUEL INJECTION HOSE CLAMPS	131
GEAR CLAMPS (STANDARD)	128
QUICK RELEASE CLAMPS	131
STEPLESS EAR CLAMPS	132
T-BOLT CLAMPS	129
TIE STRAPS	134
TUBE STRAPS AND HANGERS	133-134

WHAT'S NEW IN THIS SECTION

GEAR CLAMP KITS	128
-----------------------	-----

STANDARD GEAR CLAMPS

HC5 SERIES



- ALL STAINLESS STEEL
- S.A.E. 1/2 INCH WIDE STAINLESS STEEL BAND AND HOUSING
- S.A.E. STAINLESS STEEL SCREW

HC6 SERIES



- S.A.E. 1/2 INCH WIDE STAINLESS STEEL BAND AND HOUSING
- S.A.E. STEEL CASE HARDENED PLATED SCREW

• PACKAGING: 10 Piece Cartons. • Sizes 116 and up are Bulk.

PART No.	Range (IN.)	Range (MM)	PART No.
HC5-4TB *	.22 - .63	6 - 16	HC6-4TB *
HC5-5TB *	.44 - .69	11 - 18	HC6-5TB *
HC5-6TB *	.31 - .88	8 - 22	HC6-6TB *
HC5-8TB *	.44 - 1.00	11 - 25	HC6-8TB *
HC5-10TB *	.50 - 1.06	13 - 27	HC6-10TB *
HC5-12TB *	.56 - 1.25	14 - 32	HC6-12TB *
HC5-16TB *	.68 - 1.50	18 - 38	HC6-16TB *
HC5-20TB *	.87 - 1.75	22 - 44	HC6-20TB *
HC5-24TB *	1.31 - 2.00	33 - 51	HC6-24TB *
HC5-28TB *	1.31 - 2.25	33 - 57	—
HC5-6	.37 - .88	10 - 22	HC6-6
HC5-8	.43 - 1.00	11 - 25	HC6-8
HC5-10	.56 - 1.06	14 - 27	HC6-10
HC5-12	.56 - 1.25	14 - 32	HC6-12
HC5-16	.68 - 1.50	17 - 38	HC6-16
HC5-20	.75 - 1.75	19 - 44	HC6-20
HC5-24	1.06 - 2.00	27 - 51	HC6-24
HC5-28	1.31 - 2.25	33 - 57	HC6-28
HC5-32	1.56 - 2.50	40 - 63	HC6-32
HC5-36	1.81 - 2.75	46 - 70	HC6-36
HC5-40	2.06 - 3.00	52 - 76	HC6-40
HC5-44	2.31 - 3.25	59 - 82	HC6-44
HC5-48	2.56 - 3.50	65 - 89	HC6-48
HC5-52	2.81 - 3.75	71 - 95	HC6-52
HC5-56	3.06 - 4.00	78 - 101	HC6-56
HC5-60	3.31 - 4.25	84 - 107	HC6-60
HC5-64	2.50 - 4.50	64 - 114	HC6-64
HC5-72	3.00 - 5.00	76 - 127	HC6-72
HC5-80	3.50 - 5.50	89 - 140	HC6-80
HC5-84	3.75 - 5.75	95 - 146	HC6-84
HC5-88	4.00 - 6.00	102 - 152	HC6-88
HC5-96	4.50 - 6.50	114 - 165	HC6-96
HC5-104	5.00 - 7.00	127 - 178	HC6-104
HC5-116	5.75 - 7.75	146 - 196	HC6-116
HC5-128	6.50 - 8.50	165 - 216	HC6-128
HC5-152	8.00 - 10.00	203 - 254	HC6-152
HC5-164	8.75 - 10.75	222 - 273	HC6-164
HC5-188	10.25 - 12.25	260 - 311	HC6-188
HC5-200	11.00 - 13.00	280 - 330	HC6-200
HC5-212	11.75 - 13.75	299 - 349	HC6-212
HC5-224	12.50 - 14.50	318 - 368	HC6-224
HC5-236	13.25 - 15.25	337 - 387	—
HC5-248	14.75 - 16.00	375 - 406	—
HC5-270	15.37 - 17.38	391 - 441	HC6-270
HC5-312	18.00 - 20.00	457 - 508	HC6-312
HC5-390	22.87 - 24.88	581 - 632	HC6-390

* DENOTES THIN BAND. TB SERIES HAS A 5/16 INCH WIDE BAND.

GEAR CLAMP KITS



Fairview Gear Clamp Kits include a variety of Extended-Tongue clamps with HC5 All Stainless (**HC5K-5**) or HC6 Stainless Band and Housing (**HC6K-6**) standard gear clamps for ranges up to 2-1/4" OD.

PART NO. HC5K-5

Item	Qty
ETM-4	5
ETM-6	5
ET-8	5
ET-10	5
ET-12	5
ET-16	5
ET-24	2
ET-20	2
ET-28	2
HC5-4TB	5
HC5-6	5
HC5-6TB	5
HC5-8	5
HC5-8TB	5
HC5-10	5
HC5-12	5
HC5-16	5
HC5-20	2
HC5-24	2
HC5-28	2

PART NO. HC6K-6

Item	Qty
ETM-4	5
ETM-6	5
ET-8	5
ET-10	5
ET-12	5
ET-16	5
ET-24	2
ET-20	2
ET-28	2
HC6-4TB	5
HC6-6	5
HC6-6TB	5
HC6-8	5
HC5-8TB	5
HC6-10	5
HC6-12	5
HC6-16	5
HC6-20	5
HC6-24	5
HC6-28	5

EXTENDED TONGUE CLAMPS



- S.A.E. 1/2 INCH WIDE STAINLESS STEELBAND HOUSING AND SHIELD
- S.A.E. STEEL CASE HARDENED PLATED SCREW
- EXTENDED TONGUE CLAMPS ARE INTENDED FOR USE WITH SOFT HOSE MATERIAL SUCH AS SILICONE HEATER HOSE AND COOLANT HOSE. THE INNER SHIELD PROTECTS THE HOSE FROM DAMAGE BY PREVENTING IT FROM COMING IN DIRECT CONTACT WITH THE NOTCHED BAND.



• PACKAGING: 10 Piece Cartons

PART No.	Range (IN.)	Range (MM)
ETM-4*	.31 - .56	8 - 14
ETM-6*	.56 - .88	14 - 22
ETM-12*	.81 - 1.31	21 - 33
ET-8	.62 - .81	16 - 21
ET-10	.65 - 1.06	17 - 27
ET-12	.68 - 1.51	17 - 33
ET-16	.75 - 1.50	19 - 38
ET-20	1.37 - 1.81	35 - 46
ET-24	1.50 - 2.00	38 - 51
ET-28	1.75 - 2.25	44 - 57
ET-32	2.00 - 2.50	50 - 64
ET-36	1.81 - 2.75	46 - 70
ET-40	2.06 - 3.06	52 - 78
ET-44	2.31 - 3.25	59 - 83
ET-48	2.56 - 3.56	65 - 91
ET-52	2.81 - 3.75	71 - 95
ET-56	3.12 - 4.06	79 - 103
ET-60	3.31 - 4.25	84 - 108
ET-64	3.56 - 4.50	91 - 114

* NOTE: ETM SERIES HAS A 5/16 INCH WIDE BAND

T-BOLT HOSE CLAMPS

For T-Bolt Clamp Display Rack See Page 131, 144



**ALL
STAINLESS
STEEL**



BAND: Stainless Steel

BRIDGE: Stainless Steel

SHOE: Stainless Steel

STAINLESS STEEL BOLT, TRUNNION AND NUT

APPLICATIONS:

- Heavy Duty hose connections.
- Used on filter bags, pipe, ducting and center joint irrigation equipment.

PACKAGING: 50 and 100 Piece Cartons.

PART No.	Range (IN.)	Range (MM)
HC2-150	1.31 - 1.56	33 - 40
HC2-175	1.56 - 1.81	40 - 46
HC2-188	1.69 - 1.94	43 - 49
HC2-200	1.81 - 2.06	46 - 52
HC2-225	2.06 - 2.31	52 - 59
HC2-238	2.19 - 2.50	58 - 64
HC2-250	2.31 - 2.62	59 - 67
HC2-256	2.38 - 2.69	60 - 68
HC2-263	2.44 - 2.75	62 - 70
HC2-275	2.56 - 2.87	65 - 73
HC2-288	2.69 - 3.00	68 - 76
HC2-300	2.81 - 3.12	71 - 79
HC2-312	2.94 - 3.25	75 - 83
HC2-325	3.06 - 3.37	78 - 86
HC2-350	3.31 - 3.62	84 - 92
HC2-375	3.56 - 3.87	90 - 98
HC2-382	3.63 - 3.94	92 - 100
HC2-400	3.81 - 4.12	97 - 105
HC2-425	4.06 - 4.37	103 - 111
HC2-450	4.31 - 4.62	110 - 117
HC2-475	4.56 - 4.87	116 - 124
HC2-500	4.81 - 5.12	122 - 130
HC2-525	5.06 - 5.37	129 - 137
HC2-550	5.31 - 5.62	135 - 143
HC2-575	5.56 - 5.87	141 - 149
HC2-600	5.81 - 6.12	148 - 156
HC2-625	6.06 - 6.37	154 - 162
HC2-650	6.31 - 6.62	160 - 168
HC2-700	6.81 - 7.12	173 - 181
HC2-750	7.31 - 7.62	186 - 194
HC2-825	8.06 - 8.37	205 - 213



STANDARD



BAND: Stainless Steel

BRIDGE: Stainless Steel

PLATED STEEL BOLT, TRUNNION AND NUT

APPLICATIONS:


- Heavy Duty hose connections.
- Used on filter bags, pipe, ducting and center joint irrigation equipment.

PACKAGING: 50 and 100 Piece Cartons.

PART No.	Range (IN.)	Range (MM)
HC3-150	1.31 - 1.56	33 - 40
HC3-175	1.56 - 1.81	40 - 46
HC3-188	1.69 - 1.94	43 - 49
HC3-200	1.81 - 2.06	46 - 52
HC3-225	2.06 - 2.31	52 - 59
HC3-238	2.19 - 2.50	58 - 64
HC3-250	2.31 - 2.62	59 - 67
HC3-256	2.38 - 2.69	60 - 68
HC3-263	2.44 - 2.75	62 - 70
HC3-275	2.56 - 2.87	65 - 73
HC3-288	2.69 - 3.00	68 - 76
HC3-300	2.81 - 3.12	71 - 79
HC3-312	2.94 - 3.25	75 - 83
HC3-325	3.06 - 3.37	78 - 86
HC3-350	3.31 - 3.62	84 - 92
HC3-375	3.56 - 3.87	90 - 98
HC3-382	3.63 - 3.94	92 - 100
HC3-400	3.81 - 4.12	97 - 105
HC3-425	4.06 - 4.37	103 - 111
HC3-450	4.31 - 4.62	110 - 117
HC3-475	4.56 - 4.87	116 - 124
HC3-500	4.81 - 5.12	122 - 130
HC3-525	5.06 - 5.37	129 - 137
HC3-550	5.31 - 5.62	135 - 143
HC3-575	5.56 - 5.87	141 - 149
HC3-600	5.81 - 6.12	148 - 156
HC3-625	6.06 - 6.37	154 - 162
HC3-650	6.31 - 6.62	160 - 168
HC3-675	6.56 - 6.87	167 - 175
HC3-700	6.81 - 7.12	173 - 181
HC3-750	7.31 - 7.62	186 - 194
HC3-800	7.81 - 8.12	192 - 200

FLEX SEAL CLAMPS

FLEX SEAL (HEAVY DUTY)



BAND: Stainless Steel
BRIDGE: Stainless Steel
T-BOLT: Carbon Steel
SPRING: High Carbon Steel
FINISH: (T-BOLT): Zinc Plated and Dichromate




APPLICATIONS:

- Designed specifically for silicone hose connections in turbocharged diesel engine air intake and air charge air systems.
- Solves hose "blow-off" Failures resulting from cold flow or thermal expansions.

PACKAGING: 50 and 100 Piece Cartons.

PART No.	Range (IN.)	Range (MM)
HC19-225	2.06 - 2.31	52 - 59
HC19-238	2.19 - 2.50	58 - 64
HC19-250	2.31 - 2.62	59 - 67
HC19-263	2.38 - 2.69	60 - 68
HC19-270	2.44 - 2.75	62 - 70
HC19-275	2.56 - 2.87	65 - 73
HC19-288	2.69 - 3.00	68 - 76
HC19-300	2.81 - 3.12	71 - 79
HC19-312	2.94 - 3.25	75 - 83
HC19-325	3.06 - 3.37	78 - 86
HC19-350	3.31 - 3.62	84 - 92
HC19-375	3.56 - 3.87	90 - 98
HC19-382	3.63 - 3.94	92 - 100
HC19-412	3.81 - 4.12	97 - 105
HC19-425	4.06 - 4.37	103 - 111
HC19-450	4.31 - 4.62	110 - 117
HC19-475	4.56 - 4.87	116 - 124
HC19-500	4.81 - 5.12	122 - 130
HC19-525	5.06 - 5.37	129 - 137
HC19-550	5.31 - 5.61	135 - 143
HC19-575	5.56 - 5.87	141 - 149
HC19-600	5.81 - 6.12	148 - 156

MINI FLEX SEAL



BAND: Stainless Steel
SLEEVE: Brass
BRIDGE: Carbon Steel
T-BOLT: Carbon Steel
SPRING: Carbon Steel
FINISH: (T-BOLT): Zinc Plated and Dichromate



APPLICATIONS:

- Wherever leakage caused by cold flow or thermal expansion is a problem.
- Designed specially for silicone and EPDM hose connections or on radiators and engine blocks / manifolds.
- Solves "blow-off" Failures common on air intake /charge-air systems of turbocharged internal combustion engines.

PACKAGING: 50 and 100 Piece Cartons.

PART No.	Range (IN.)	Range (MM)
HC20-150	1.31 - 1.56	33 - 40
HC20-175	1.56 - 1.81	40 - 46
HC20-188	1.69 - 1.94	43 - 49
HC20-200	1.81 - 2.06	46 - 52
HC20-225	2.06 - 2.31	52 - 59
HC20-238	2.19 - 2.50	58 - 64
HC20-250	2.31 - 2.62	59 - 67
HC20-263	2.38 - 2.69	60 - 68
HC20-270	2.44 - 2.75	62 - 70
HC20-275	2.56 - 2.87	65 - 73
HC20-288	2.69 - 3.00	68 - 76
HC20-300	2.81 - 3.12	71 - 79
HC20-312	2.94 - 3.25	75 - 83
HC20-325	3.06 - 3.37	78 - 86
HC20-350	3.31 - 3.62	84 - 92
HC20-375	3.56 - 3.87	90 - 98
HC20-382	3.63 - 3.94	92 - 100
HC20-400	3.81 - 4.12	97 - 105
HC20-425	4.06 - 4.37	103 - 111
HC20-450	4.31 - 4.62	110 - 117
HC20-475	4.56 - 4.87	116 - 124
HC20-550	5.31 - 5.61	135 - 143

QUICK RELEASE CLAMPS



Constructed from stainless steel materials for corrosion resistance. These clamps feature a unique quick release design that allows for quick and easy installation in restricted or difficult areas. 5/16 slotted hexagon head and 1/2 wide band.

APPLICATIONS:

For applications where clamp must be opened to be applied. Used extensively in the telecommunications industry on cable enclosures where open air applications demand durability.

PACKAGING: 10 Piece Carton.

PART No.	Range (IN.)	Range (MM)
LAS-56	1.00 - 4.00	25 - 101
LAS-72	2.00 - 5.00	51 - 127
LAS-88	2.06 - 6.00	52 - 152
LAS-96	3.50 - 6.56	89 - 166
LAS-104	1.75 - 7.00	44 - 178
LAS-128	1.75 - 8.56	44 - 218
LAS-152	2.00 - 10.00	51 - 254
LAS-188	2.06 - 12.31	52 - 313
LAS-248	1.75 - 16.00	44 - 406
LAS-312	1.88 - 20.00	48 - 508

ONE EAR CLAMPS

(With Mechanical Interlock)



Select nominal clamp size nearest to but larger than O.D. on which clamp is to be used.

APPLICATIONS:

1-Ear clamps are intended for low pressure applications such as automotive (not fuel lines), appliances, industrial machinery, underground irrigation systems and beverage dispensing equipment.

SPECIFICATIONS:

The standard HC8 series is manufactured from 1008 carbon steel tube and then zinc plated.

PACKAGING: 25 Piece Bags.

PART No.	Range (IN.)	Range (MM)
HC8-6	.350 - .414	8.9 - 10.5
HC8-9	.496 - .571	12.6 - 14.5
HC8-11	.549 - .669	15.1 - 17.0
HC8-12	.669 - .779	17.0 - 19.8
HC8-14	.779 - .890	19.8 - 22.6
HC8-16	.898 - 1.010	22.8 - 25.6
HC8-17	.944 - 1.067	24.0 - 27.1
HC8-20	1.122 - 1.244	28.5 - 31.6
HC8-21	1.181 - 1.303	30.0 - 33.1

CLAMP DISPLAY RACKS

Rack & Clamp Packages Are Available See Page 144



T-Bolt Clamp Kit: Contains a selection of common size clamps together with our HCR-18-RACK storage rack.

PART No.
HC3-KIT-1



Auto Clamp Kits: Contains a selection of common size clamps together with our HCR-10-RACK storage rack.

PART No.
HC6-AUTO-KIT-1

FUEL INJECTION HOSE CLAMPS



APPLICATIONS:

Clamps are intended for low pressure applications such as automotive fuel injection.

PART No.	Nominal Clamp Size (IN.)	Range (IN.)	Range (MM)
HC21-4	1/4	.433 - .512	11 - 13
HC21-5	5/16	.512 - .591	13 - 15
HC21-6	3/8	.551 - .630	14 - 16

TWO EAR CLAMPS



For Pincer
Tools See
Page

GREAT HOLDING POWER: Closing the ears builds strength into the clamp which works against the pressure in the hose.

APPLICATIONS: Two Ear Clamps are ideally suited for maintenance and O.E.M. applications, rubber hose, plastic tube, plastic pipe, and coaxial cable are all readily clamped. Uses on air, fluid, gas and steam lines are unlimited.

SPECIFICATIONS: The standard HC9 series is made from 1008 steel tube. They are then zinc plated. Stainless Steel clamps are manufactured from type 304 AISI tube.

PACKAGING: 25 Piece Bags.

Select Nominal Clamp Size nearest to but larger than O.D. on which clamp is to be used.

Steel PART No.	Range (IN.)	Range (MM)	Stainless Steel PART No.
HC9-2	.122 - .161	3.1 - 4.1	--
HC9-3	.118 - .197	3.0 - 5.0	--
HC9-4	.197 - .276	5.0 - 7.0	--
HC9-5	.276 - .354	7.0 - 9.0	HC9-5SS
HC9-6	.315 - .433	8.0 - 11.0	HC9-6SS
HC9-8	.433 - .512	11.0 - 13.0	HC9-8SS
HC9-9	.512 - .591	13.0 - 15.0	HC9-9SS
HC9-9-1/2	.544 - .669	15.0 - 17.0	HC9-9-1/2SS
HC9-10	.591 - .708	15.0 - 18.0	HC9-10SS
HC9-12	.669 - .787	17.0 - 20.0	HC9-12SS
HC9-13	.748 - .866	19.0 - 22.0	HC9-13SS
HC9-14	.787 - .905	20.0 - 23.0	HC9-14SS
HC9-15	.866 - .984	22.0 - 25.0	HC9-15SS
HC9-16	.905 - 1.063	23.0 - 27.0	HC9-16SS
HC9-17	.984 - 1.102	25.0 - 28.0	HC9-17SS
HC9-18	1.063 - 1.220	27.0 - 31.0	HC9-18SS
HC9-21	1.220 - 1.339	31.0 - 34.0	HC9-21SS
HC9-23	1.339 - 1.457	34.0 - 37.0	HC9-23SS
HC9-24	1.457 - 1.575	37.0 - 40.0	HC9-24SS
HC9-26	1.575 - 1.693	40.0 - 43.0	--
HC9-28	1.693 - 1.811	43.0 - 46.0	--

TWO EAR CLAMP KIT



PART No.
OE-SB80

- PLASTIC BOX
- PINCER TOOL
- 2 EAR CLAMP ASSORTMENT

KIT CONTENTS

PART No.	Qty	PART No.	Qty	PART No.	Qty
HC9-5	15	HC9-10	15	HC9-16	12
HC9-6	15	HC9-12	12	HC9-R	1
HC9-8	15	HC9-14	12		
HC9-9	15	HC9-15	12		

STEPLESS® EAR CLAMPS



STEPLESS®:

The term "Stepless" relates to the absence of gaps or steps on the clamp's inner circumference. The unique tongue-in-groove design provides uniform compression and a 360° seal.

APPLICATIONS:

Standard Series Stepless Ear Clamps were perfected for demanding applications where lighter, thin-walled hose or tube is being used.

SPECIFICATIONS:

The standard HC10 series is made from type 304 AISI stainless steel.

PACKAGING: 25 Piece Bags.

PART No.	Range (IN.)	Range (MM)
HC10-6	.307 - .374	7.8 - 9.5
HC10-7	.378 - .445	9.6 - 11.3
HC10-7-1/2	.398 - .465	10.1 - 11.8
HC10-8	.425 - .524	10.8 - 13.3
HC10-9	.472 - .571	12.0 - 14.5
HC10-10	.520 - .618	13.2 - 15.7
HC10-11	.571 - .669	14.5 - 16.9
HC10-11-1/2	.602 - .728	15.3 - 18.5
HC10-12	.654 - .779	16.6 - 19.8
HC10-13	.701 - .827	17.8 - 21.0
HC10-14	.764 - .890	19.4 - 22.6
HC10-17	.945 - 1.067	23.9 - 27.1
HC10-21	1.181 - 1.303	29.9 - 33.1
HC10-25	1.378 - 1.500	34.9 - 38.1

TUBE STRAPS AND HANGERS

Fairview



**RUBBER
CUSHIONED
WRAP AROUND
TUBE STRAPS
(1/4 INCH HOLE)**

Steel – Zinc Plated

PART No.	Tube O.D.	Band Width
TS17R-4	1/4	1/2
TS17R-5	5/16	1/2
TS17R-6	3/8	1/2
TS17R-8	1/2	1/2
TS17R-10	5/8	1/2
TS17R-12	3/4	1/2
TS17R-14	7/8	1/2
TS17R-16	1	1/2
TS17R-18	1-1/8	1/2
TS17R-20	1-1/4	1/2
TS17R-24	1-1/2	1/2
TS17R-28	1-3/4	1/2
TS17R-32	2	1/2
TS17R-38	2-3/8	1/2
TS17R-40	2-1/2	1/2
TS17R-48	3	1/2
TS17R-56	3-1/2	1/2
TS17R-64	4	1/2



**RUBBER
CUSHIONED
WRAP AROUND
TUBE STRAPS
(1/4 INCH HOLE)**

Stainless Steel

PART No.	Tube O.D.	Band Width
TSS17R-4	1/4	1/2
TSS17R-6	3/8	1/2
TSS17R-8	1/2	1/2
TSS17R-10	5/8	1/2
TSS17R-12	3/4	1/2
TSS17R-16	1	1/2
TSS17R-20	1-1/4	1/2
TSS17R-24	1-1/2	1/2
TSS17R-32	2	1/2



**RUBBER
CUSHIONED
WRAP AROUND
TUBE STRAPS
(3/8 INCH HOLE)**

Steel – Zinc Plated

PART No.	Tube O.D.	Band Width
TS16R-4	1/4	5/8
TS16R-5	5/16	5/8
TS16R-6	3/8	5/8
TS16R-8	1/2	5/8
TS16R-10	5/8	5/8
TS16R-12	3/4	5/8
TS16R-14	7/8	5/8
TS16R-16	1	5/8
TS16R-18	1-1/8	5/8
TS16R-20	1-1/4	5/8
TS16R-24	1-1/2	5/8
TS16R-32	2	5/8
TS16R-40	2-1/2	5/8



**ONE HOLE
TUBE
STRAPS**

Steel – Zinc Plated Heavy Type

PART No.	Tube O.D.	Band Width
TS20-3	3/16	1/2
TS20-4	1/4	1/2
TS20-6	3/8	5/8
TS20-8	1/2	5/8
TS20-10	5/8	3/4
TS20-12	3/4	3/4
TS20-16	1	7/8



**ONE HOLE
TUBE
STRAPS**

Everdur Copper Heavy Type

PART No.	Tube O.D.	Band Width
TS21-4	1/4	1/2
TS21-6	3/8	5/8
TS21-8	1/2	5/8



**“DUPLEX”
DOUBLE
TUBE STRAP**

Steel – Zinc Plated

PART No.	Tube O.D.	Tube O.D.
TS19-44	1/4	1/4
TS19-66	3/8	3/8



**TWO HOLE
STRADDLE
TUBE STRAPS**

Steel - Copper Coated

PART No.	Tube O.D.	Nominal I.D.
TS14-6	3/8	1/4
TS14-8	1/2	3/8
TS14-10	5/8	1/2
TS14-14	7/8	3/4



**TWO HOLE
STRADDLE
TUBE STRAPS**

Solid Copper

PART No.	Tube O.D.	Nominal I.D.
TS15-8	1/2	3/8



**TWO HOLE
STRADDLE
PIPE STRAPS**

Steel – Zinc Plated

PART No.	For Pipe Size
TS22-D	1/2
TS22-E	3/4
TS22-H	1
TS22-J	1-1/4
TS22-K	1-1/2
TS22-M	2
TS22-N	2-1/2



**HANGER
STRAP
3/4" Wide x
1/32" Thick**

Steel - Copper Coated

PART No.	Length (FT.)
HS11-25	25

AIR BRAKE HOSE SUPPORTS



HOSE SUPPORT

Used in conjunction with hose support spring and truck to trailer air brake line. (Page

PART No.	Hose I.D. (IN.)
HAB-SPW-HB	One Size

HOSE SUPPORT SPRING KIT



Heavy Duty
Abrasion Resistant
Cover

(Complete Kit) PART No.	Spring Length (IN.)	Description
HAB-SPRING-16.4-TKP	16.4	Spring, Protective Cover & Hangers with Retail Packaging
HAB-SPRING-25-TKP	25	
HAB-SPRING-16.4-TKP2	16.4	DOUBLE Spring, Protective Cover & Hangers with Retail Packaging
HAB-SPRING-25-TKP2	25	

(Spring Only) PART No.	Spring Length (IN.)	Description
HAB-SPRING-13	13	
HAB-SPRING-16.4	16.4	Support Springs Only
HAB-SPRING-25	25	

AIR BRAKE HOSE SPACERS



PART No.	Hose I.D. (IN.)
HAB-HANGER-6	3/8
HAB-HANGER-8	1/2

AIR BRAKE HOSE SUPPORTS



(1 BOLT) HOSE SUPPORT
Used in conjunction with hose support spring.

PART No.	Hose I.D. (IN.)
HAB-HCE-6	3/8
HAB-HCE-8	1/2



**STEEL REINFORCED
(2 BOLT) HOSE SUPPORT**
Used in conjunction with hose support spring.

PART No.	Size
HAB-HC2E-6	3/8 Hose I.D.



"U" HOSE SUPPORT
Used in conjunction with hose support spring.

PART No.	Size
HAB-HCU-6	3/8 Hose I.D.
HAB-HCU-8	1/2 Hose I.D.

TIE STRAPS



Material: UL94-V-2 Nylon 6/6 (Natural)
Temperature:
-40°F (-40°C) to 185°F (85°C)
NOTE: Black cable ties and other lengths available on request.

PART No.	Packaged By	Tie Width	Tie Length	Min. Tensile Strength
TIE-50-21-11/16	100	.189	21.69"	50 lbs.



CABINETS, TOOLS, & ACCESSORIES

CRIMP - CUT - FLARE - MEASURE - SPRAY - TEST

AIR GUNS AND WANDS.....	145
BEND PROTECTORS.....	148
CABINETS & RACKS	
BIN CABINETS (WALL/FLOOR)	139
BIN - LARGE SLIDER CABINET (FLOOR)	136
BIN & DRAWER COMBO CABINET (FLOOR)	137
CABINET PRODUCT ASSORTMENTS (KIT)	140,141
CLAMP RACK KITS	144
DRAWER CABINETS (WALL/FLOOR)	137,138
PLASTIC DRAWERS / BINS	136-138
PRESSURE GAUGE DISPLAY	142
PRODUCT STAND ALONE - GANG HOOK.....	142,143
WALL HOSE DISPLAY RACK.....	143
CRIMPERS.....	151,153
CUTTERS.....	147
HOSE TOOLS AND ACCESSORIES	147-148
LEAK DETECTION FLUID	150
MEASURING DEVICES	147
PINCERS (EAR CLAMP)	147
PROPANE TORCHES.....	149
ROTO-REAL.....	147
SPIRAL HOSE GUARD WRAP	148
SPLIT LOOM WRAP	148
SPRING GUARD, SLEEVE.....	148
STOCK BOXES.....	144
THREAD SEALANTS	150
UNIVERSAL SWIVEL.....	145
WATER NOZZLES	146

QUANTUM CABINET

Stand Alone Slider Cabinet (UP to 336 BINS)

PART No.
 QS-305306-52A (Assembled)
 QS-000 (Slider Frame only No bins)
 See below for bin configurations.

This system features four individual panels filled with tip out bins of which two are fixed to the back side and two slide easily from left to right allowing free access to all four panels. Manufactured of tough 14 gauge steel with putty powder coat finish.

Overall:
Height 66-1/4 inches
Width 48 inches
Depth 16 inches



QS-305306-52A


Slider cabinet shown uses just two bins sizes; QTB-305 and QTB-306. Custom configurations are available. (Up to 336 Bins)

Slider Cabinet Bin Configuration Chart (How many of each bin in the pre-configured set up)			
PART No.	Bin Unit QTB-305	Bin Unit QTB-306	Total Bins
QS-305306-52A	9	43	303


Bin Units Available




QTB-309
 9 Bin - 2-1/2"L x 23-5/8"W x 3-1/8"H




QTB-306
 6 Bin - 3-5/8"L x 23-5/8"W x 4-1/2"H



QTB-305
 5 Bin - 5-1/4"L x 23-5/8"W x 6-1/2"H



QTB-304
 4 Bin - 6-5/8"L x 23-5/8"W x 8-1/8"H



QTB-303
 3 Bin - 7-3/4"L x 23-5/8"W x 9-1/2"H



FAIRVIEW FITTING CENTER

Fairview Fitting Center (70 Drawers - 10 BINS)

PART No. XC80-CA

This steel fitting center is the best of both worlds, with 50 single and 20 double size clear plastic sliding drawers. It also has 10 bin compartments for larger items. It is featured in Fairview's red, black and yellow colors.

It's equipped with steel tubular legs that can safely hold this Industrial cabinet. Large open bottom shelf for overstock is also supplied.

Note: Cards, Dividers and Label sets are not included in the price of the cabinet. For suggested product fitting packages contact your local Fairview branch.

Overall:

Height 61 inches
Width 33-1/2 inches
Depth 18 inches



PART No.
ZZCOS-PD-110-CARD
(Single)
ZZCOS-PD-55-CARD
(Double)

Blank yellow drawer front cards are available. Printed on heavy duty card stock, just affix the stickers and slide into place.

PART NO.XB80-CA
(No Legs or Shelf)
Height 48-7/8 inches
Width 31-1/2 inches
Depth 6-1/8 inches



Standard Drawer Dimensions:

PART No. PD-110

Width: 2-3/4 inches
Length: 5-3/4 inches
Depth: 2-1/2 inches

Double Drawer Dimensions:(Optional)

PART No. PD-55

Width: 5-3/4 inches
Length: 5-3/4 inches
Depth: 2-1/2 inches

- State PD-55 quantity requirements when ordering.



PART No.
PM-PLASTIC INSERT

Durable plastic inserts for dividing drawers into sections allow you to totally customize your cabinet. Remove the protective blue film, affix the stickers and slide into place.

FAIRVIEW FITTING CENTER

Stand Alone Storage Cabinet (Up to 110 Drawers) PART No. XC110-CA

This steel cabinet has 110 clear plastic sliding drawers, each with the option of dividing into 4 compartments. It is featured in Fairview's red, black and yellow colors.

It's equipped with steel tubular legs that can safely hold this Industrial cabinet. Large open bottom shelf for overstock is also supplied.

Note: Label sets are not included with the cabinet. For suggested product fitting packages see page 140 - 141.

Overall:
Height: 61 inches
Width: 33-1/2 inches
Depth: 18 inches



PART NO. XB110-CA
(No Legs or Shelf)
Height 41-3/4 inches
Width 31-1/2 inches
Depth 6 inches

Standard cabinet drawer is the PD-110.

Double size cabinet drawers (PD-55) are available.
• State PD-55 quantity requirements when ordering.



Standard Drawer Dimensions:	Double Drawer Dimensions:(Optional)
PART No. PD-110	PART No. PD-55
Width: 2-3/4 inches	Width 5-3/4 inches
Length: 5-3/4 inches	Length 5-3/4 inches
Depth: 2-1/2 inches	Depth 2-1/2 inches

COMPACT FAIRVIEW FITTING CENTER

Counter / Wall Mounting Drawer Cabinet (Up to 20 Drawers) PART No. XB20-CA

This cabinet has 20 drawers, each one with the capability of dividing into 4 separate compartments. It is featured in Fairview's red, black and yellow colors.

Overall:
Height: 16 inches
Width: 17 inches
Depth: 6 inches



Note: Label sets are not included with the cabinet. For suggested product fitting packages see page 140 - 141.
For drawer dimensions see above.



PART No. 42-CA

This heavy gauge metal cabinet can be used for floor or wall mounting. It has **42 large compartments** for easy access.

Overall:

Height: 47-1/2 inches

Width: 36-1/4 inches

Depth: 8 inches

Bin Size:

6-1/2 inches

6 inches

8 inches

**Floor / Wall Mounting
Storage Cabinet for
Fittings or Large Items**



PART No. 72-CA

This heavy gauge metal cabinet can be used for floor or wall mounting. It has **72 medium compartments** for easy access.

Overall:

Height: 47-1/2 inches

Width: 36-1/8 inches

Depth: 8 inches

Bin Size:

5 inches

4-1/4 inches

8 inches

**Floor / Wall Mounting
Storage Cabinet for
Fittings or Medium Size Items**

Note: Product selections and suggested drawer quantities in these label sets are based on specified industry or product groups and cabinet space availability. Cabinets & Product Must Be Purchased Separately.

Automotive Assortment for 20 Drawer Cabinet KIT-AUTO-20

Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.
60-2	20	62-3	10	110-DC	10	122-C	10	S141-4	20	240-B	10
60-3	20	62-4	10	112-B	10	141-3	10	S141-5	10		
60-4	20	62-5	10	120-BA	10	141-4	10	S141-6	10		
60-6	20	62-6	10	120-CB	10	142-3	10	SL141-3	25		
61-2	10	103-A	10	121-A	10	142-4	10	SL141-4	20		
61-3	10	103-B	10	121-B	10	142-5	10	X115-A	10		
61-4	10	110-BA	10	121-C	10	142-6	10	X115-B	10		
61-6	10	110-CB	10	122-B	10	S141-3	20	WH-7818	10		

1400 Series (DOT Air Brake) Assortment for 20 Drawer Cabinet KIT-1400-20

Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.
1460-4	20	1461-8	10	1464-4	5	1468-6C	10	1469-4C	5	1471-6B	5
1460-6	20	1461-10	10	1464-6	5	1468-8B	5	1469-6A	10	1472-6B	5
1460-8	20	1462-4	10	1468-4A	10	1468-8C	10	1469-6B	10	1474-6B	10
1460-10	20	1462-6	10	1468-4B	10	1468-8D	5	1469-6C	10	1474-6C	5
1461-4	10	1462-8	5	1468-6A	5	1469-4A	10	1469-8C	5	1474-8C	5
1461-6	10	1462-10	5	1468-6B	10	1469-4B	10	1469-8D	5		

PC1400 Series (DOT Air Brake Push-To-Connect) Assortment for 20 Drawer Cabinet KIT-PC1400-20

Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.
PC1462-5/32	5	PC1464-6	5	PC1468-8B	5	PC1469-6A	5	PC1469SW-6B	5	PC1474-8C	5
PC1462-4	10	PC1468-4A	10	PC1468-8C	5	PC1469-6B	10	PC1469SW-6C	5	PC1477-4	5
PC1462-6	10	PC1468-4B	10	PC1468-8D	5	PC1469-6C	5	PC1469SW-8C	5		
PC1462-8	5	PC1468-6A	10	PC1469-5/32A	5	PC1469-8C	5	PC1471SW-6B	5		
PC1462-10	5	PC1468-6B	10	PC1469-4A	10	PC1469SW-4A	10	PC1472SW-6B	5		
PC1464-4	5	PC1468-6C	10	PC1469-4B	10	PC1469SW-4B	5	PC1474-6C	5		

Fitting and Valve Truck & Trailer Assortment for 80 Drawer / Bin Cabinet KIT-TRUCK-80

Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.
103-A	10	121-E	10	1464-6	5	1474-6C	10	PC1462-4	5	X101-C	10
103-B	10	122-B	10	1468-4A	10	1481-4	10	PC1462-6	5	X107-A	10
103-C	10	122-C	10	1468-4B	10	1481-6	10	PC1462-8	5	X107-B	5
103-D	10	122-CB	10	1468-6A	10	1481-8	10	PC1464-4	5	X107-C	10
110-BA	10	122-D	10	1468-6B	10	1490-6	10	PC1464-6	5	X107-D	5
110-CB	10	240-A	10	1468-6C	10	1490-8	10	PC1464-8	5	X115-A	10
110-DB	10	240-B	10	1468-8B	10	1491-6	10	PC1468-4A	5	X115-B	10
110-DC	10	1460-4	10	1468-8C	10	1491-8	10	PC1468-4B	5	X115-C	10
110-ED	5	1460-6	10	1468-8D	10	1492-6B	5	PC1468-6B	5	X115-D	5
120-AA	10	1460-8	10	1469-4A	10	1492-6C	5	PC1468-6C	5	X124-A	10
120-BA	10	1461-4	10	1469-4B	10	1492-6D	5	PC1468-8C	5	X124-B	10
120-CB	10	1461-6	10	1469-6B	10	1492-6S	2	PC1469SW-4A	5	X124-C	10
120-DC	10	1461-8	10	1469-6C	10	1492-8C	2	PC1469SW-4B	5	X124-D	5
121-A	10	1462-4	10	1469-8C	5	1492-8D	2	PC1469SW-6B	5		
121-B	10	1462-6	10	1471-6B	5	1492-8S	2	PC1469SW-6C	5		
121-C	10	1462-8	5	1472-6B	5	2120-B	5	PC1471SW-6B	5		
121-D	10	1464-4	10	1474-6B	10	4134-6C	10	X101-B	10		



Label Sets:

Standard or custom label sets are available. Print, peel and stick to drawer cards, plastic dividers or stock boxes. Contact your nearest Fairview location for label generating information.

START-UP INDUSTRY PRODUCT ASSORTMENTS

Fairview

Note: Product selections and suggested drawer quantities in these label sets are based on specified industry or product groups and cabinet space availability. Cabinets & Product Must Be Purchased Separately.

Industrial Distributor Assortment for 80 Drawer / Bin Cabinet KIT-INDUST-80

Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.
41-4	10	61-2	10	109-B	10	113-B2	10	122-C	10	X101-D	2	Cabinet Bin Products	
41-5	10	61-3	10	109-C	10	113-B2-1/2	10	122-CB	10	X107-A	10	BV2103-B	5
41-6	10	61-4	10	109-D	10	116-A	10	122-D	5	X107-B	10	BV2103-C	4
48-4A	10	61-6	10	110-BA	10	116-B	10	122-DC	5	X107-C	5	BV2103-D	4
48-4B	10	61-8	10	110-CA	10	116-C	5	122-E	5	X115-A	10	BV2103-E	3
48-5B	5	62-4	10	110-CB	10	116-D	2	125-4B	10	X115-B	10	BV2103-H	2
48-6B	10	62-6	10	110-DB	10	118-A	10	125-6B	10	X115-C	10	BVCS2103-D	3
48-6C	10	62-8	5	110-DC	10	118-B	10	125-6C	10	X115-D	5	BVCS2103-E	3
48-8C	10	62-10	5	110-EB	5	119-BA	10	125-8C	10	X124-A	10	BVSS2203-C	2
48-8D	5	68-4A	10	110-EC	5	119-CB	10	125-8D	5	X124-B	10	BVSS2203-D	2
48-10D	5	68-4B	10	110-ED	5	119-DC	5	125-10D	5	X124-C	10	BVSS2203-E	2
49-4A	10	68-6B	10	110-HE	5	120-BA	10	125-12D	5	X124-D	5		
49-4B	10	68-6C	10	112-A	10	120-CB	10	125-12E	5				
49-6B	10	69-4A	10	112-B	10	120-CC	10	129-4	10				
49-6C	10	69-4B	10	112-C	10	120-DC	10	129-6	10				
60-2	20	103-A	10	112-D	10	121-A	10	129-8	10				
60-3	20	103-B	10	112-E	5	121-B	10	X100-A	10				
60-4	20	103-C	10	113-A1-1/2	10	121-C	10	X100-B	10				
60-6	20	103-D	5	113-A2	10	121-D	10	X101-A	10				
60-8	20	103-E	5	113-A3	10	122-A	10	X101-B	10				
60-10	10	109-A	10	113-B1-1/2	10	122-B	10	X101-C	5				


Industrial Distributor Assortment for 110 Drawer Cabinet KIT-INDUST-110

Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.
41-4	10	61-2	10	103-B	10	112-A	10	120-BA	10	125-4B	10	193-8	10
41-5	10	61-3	10	103-C	10	112-B	10	120-BB	10	125-4C	10	193-10	10
41-6	10	61-4	10	103-D	5	112-C	10	120-CB	10	125-4D	5	193-12	5
42-4	10	61-6	10	103-E	5	112-D	10	120-CC	10	125-5B	10	194-D	5
42-6	10	61-8	10	108-A	10	112-E	5	120-DB	5	125-6A	10	195-8	10
42-8	10	62-3	10	108-B	10	113-A1-1/2	10	120-DC	10	125-6B	10	195-10	10
48-4A	10	62-4	10	108-C	10	113-A2	10	120-ED	5	125-6C	10	195-12	5
48-4B	10	62-5	10	108-D	5	113-A3	10	121-A	10	125-6D	5	196-D	5
48-5B	5	62-6	10	108-E	5	113-B1-1/2	10	121-B	10	125-8B	10	196-E	5
48-6B	10	62-8	5	109-A	10	113-B2	10	121-C	10	125-8C	10	196-W	5
48-6C	10	62-10	5	109-B	10	113-B2-1/2	10	121-D	10	125-8D	5	197-D	5
48-8C	10	66-4A	10	109-C	10	116-A	10	121-E	5	125-10C	5	197-E	5
48-8D	5	66-4B	10	109-D	10	116-B	10	122-A	10	125-10D	5	199S-D	5
48-10D	5	68-3A	10	109-E	5	116-C	5	122-B	10	125-12D	5	199S-E	5
49-4A	10	68-4A	10	110-BA	10	116-D	2	122-BA	10	125-12E	5	200-HKC	5
49-4B	10	68-4B	10	110-CA	10	118-A	10	122-C	10	125-16E	2	200-W	10
49-6B	10	68-6B	10	110-CB	10	118-B	10	122-CB	10	125-16H	2	480-4	20
49-6C	10	68-6C	10	110-DA	10	118-C	10	122-D	5	129-3	10	480-6	20
60-2	20	68-6D	5	110-DB	10	118-D	10	122-DB	5	129-4	10	480-8	20
60-3	20	68-8D	5	110-DC	10	119-BA	10	122-DC	5	129-5	10	481-4	20
60-4	20	69-4A	10	110-EB	5	119-CB	10	122-E	5	129-6	10	481-4H	10
60-6	20	69-4B	10	110-EC	5	119-DB	5	125-2A	10	129-8	10	481-6	20
60-8	20	69-6B	10	110-ED	5	119-DC	5	125-3B	10	129-10	5	481-8	20
60-10	10	103-A	10	110-HE	5	120-AA	10	125-4A	10	129-12	5	GHW	10


Truck & Trailer Assortment for 110 Drawer Cabinet KIT-TRUCK-110

Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.	Fairview PART No.	Drawer Qty.
103-A	10	120-CC	10	240-B	10	1468-4B	10	1472-6B	5	1492-8D	2	PC1468-6C	5
103-B	10	120-DC	10	1460-4	10	1468-6A	10	1472-6C	5	1492-8S	2	PC1468-8C	5
103-C	10	120-ED	5	1460-6	10	1468-6B	10	1474-4A	10	1493-6B	2	PC1469SW-4A	5
103-D	10	121-A	10	1460-8	10	1468-6C	10	1474-6B	10	1493-6C	2	PC1469SW-4B	5
110-BA	10	121-B	10	1460-10	10	1468-6D	10	1474-6C	10	1493-6D	2	PC1469SW-6B	5
110-CA	10	121-C	10	1460-12	10	1468-8B	10	1474-8C	5	1493-8C	2	PC1469SW-6C	5
110-CB	10	121-D	10	1461-4	10	1468-8C	10	1481-4	10	1493-8D	2	PC1469SW-8C	5
110-DB	10	121-E	10	1461-6	10	1468-8D	10	1481-6	10	1496-DC	2	PC1471SW-6B	5
110-DC	10	122-A	10	1461-8	10	1468-10D	5	1481-8	10	4134-6C	10	PC1471SW-6C	5
110-ED	5	122-B	10	1461-10	10	1469-4A	10	1481-10	10	PC1462-4	5	PC1474-4A	5
112-A	10	122-BA	10	1461-12	10	1469-4B	10	1481-12	10	PC1462-6	5	PC1474-6B	5
112-B	10	122-C	10	1462-4	10	1469-6B	10	1490-6	10	PC1462-8	5	PC1474-8C	5
118-A	10	122-CB	10	1462-6	10	1469-6C	10	1490-8	10	PC1464-4	5	X100-B	10
118-B	10	122-D	10	1462-8	5	1469-6D	5	1491-6	10	PC1464-6	5	X100-C	10
118-C	10	122-DB	10	1462-10	5	1469-8C	5	1491-8	10	PC1464-8	5	X101-A	10
118-D	10	122-DC	10	1462-12	5	1469-8D	5	1492-6B	5	PC1468-4A	5	X101-B	5
120-AA	10	125-4B	10	1464-4	10	1469-10D	5	1492-6C	5	PC1468-4B	5	X101-C	5
120-BA	10	125-6B	10	1464-6	5	1471-6B	5	1492-6D	5	PC1468-4C	5	X101-D	2
120-BB	10	125-8C	10	1464-8	5	1471-6C	5	1492-6S	2	PC1468-6A	5	X106-B	5
120-CB	10	125-10D	5	1468-4A	10	1471-8C	5	1492-8C	2	PC1468-6B	5	X106-C	5

Featured in Fairview's Black and Yellow colors; Fairview carries a wide assortment of packaged / bar coded items. Suitable for use on our Fairview Display Rack or your Pegboard System. Hose assemblies are supplied bagged with one hole punched header cards. Selected items on bubble packed heat sealed cards.

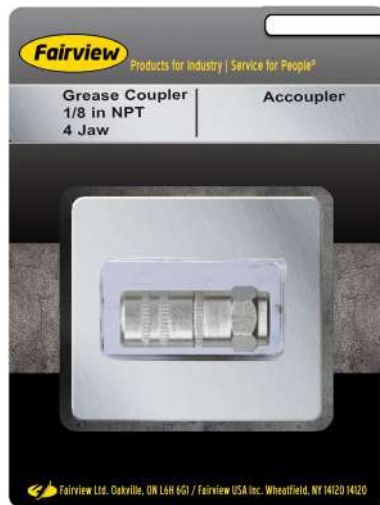

*** ITEMS CAN BE PURCHASED SEPARATELY**
Please Contact Your Nearest Fairview Location.

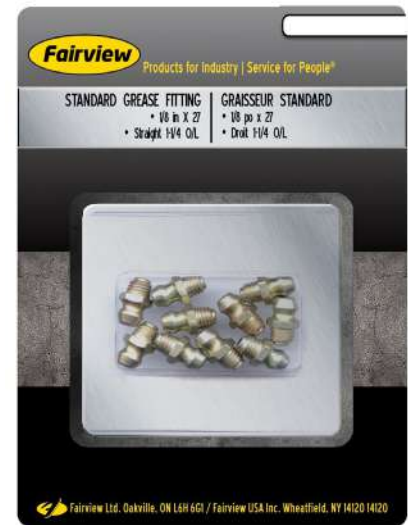

RETAIL PACKAGED GREASE PRODUCTS

PART No.	Description
C10-GN-608	5/16 Drive Fit Grease Fitting x 10
C10-GN-610	1/8 x 27 Straight Grease Fitting x 10
C10-GN-612	1/8 x 27 65° Angle Grease Fitting x 10
C10-GN-613	1/8 x 27 90° Angle Grease Fitting x 10
C10-GN-627	1/4 x 18 Straight Grease Fitting x 10
C10-GN-629	1/4 x 18 65° Angle Grease Fitting x 10
C10-GN-637	1/4 x 28 45° Angle Grease Fitting x 10
C10-GN-641	1/4 x 28 Straight Grease Fitting x 10
C10-GN-652	1/4 x 28 Straight 11/16 O/L Grease Fitting x 10
C10-GN-680	1/4 x 28 Straight 15/16 O/L Grease Fitting x 10
C10-GN-688	1/8 x 27 45° Angle Grease Fitting x 10
C10-GN-728	3/16 Drive Fit Grease Fitting x 10
C10-GN-743	1/4 Drive Fit Grease Fitting x 10

PART No.	Description
C10-GN-911	1/4 x 28 90° Angle Grease Fitting x 10
C10-GNM-045	M6 x 1 45° Angle Metric Grease Fitting x 10
C10-GNM-090	M6 x 1 90° Angle Metric Grease Fitting x 10
C10-GNM-301	M10 x 1 Straight Metric Grease Fitting x 10
C10-GNM-601	M6 x 1 Straight Metric Grease Fitting x 10
C10-GNM-901	M8 x 1 Straight Metric Grease Fitting x 10
C-GWC-A	1/8 NPT 4 - Jaw Grease Coupler
GWR-3-12P	Grease Whip Assy, 12 OAL
GWR-3-18P	Grease Whip Assy, 18 OAL
GWR-3-24P	Grease Whip Assy, 24 OAL

***Many other items available on request.**

PRESSURE GAUGE COUNTER DISPLAY



PART No. PGD-RACK

Rack is featured in Accutek's red, blue and yellow colors. Holds up to 10 Accutek® pressure gauges and documentation.

Height: 14.25 inches
Width: 14.5 inches
Depth: 7.75 inches





**OVERALL
DIMENSIONS:**
Height 67 inches
Depth 24 inches
Width 18 inches
Product Not Included.

FEATURES:

Fairview display racks stand on their own and have the ability to present products in a variety of configurations. Featured in one of three Fairview color schemes. The display racks come complete with frame, legs, back-board panel and shelf for displaying up to 42 individually bubble-packed, bar-coded products. Easy to assemble. (Gang Hooks Selection Below)

Stand Alone Display Racks

BASIC UNIT: Frame, Legs, Shelf & (Back-Board see below)

PART No.	Description
25-DR	Standing Display Rack

BACK-BOARDS (select - 1 per unit)

PART No.	Description
25-DR-PANEL-A	Accutek® Backboard (English)
25-DR-PANEL-AF	Accutek® Backboard (French)
25-DR-PANEL-G	Fairview Backboard (General Use)
25-DR-PANEL-GAS	Gas-Flo® Backboard (English)
25-DR-PANEL-GAS-F	Gas-Flo® Backboard (French)


GANG HOOKS (See gang hook requirements below)

PART No.	Description
DR-3GH	Gang Hook - for 3 Product
DR-4GH	Gang Hook - for 4 Product
DR-5GH	Gang Hook - for 5 Product
DR-6GH	Gang Hook - for 6 Product

LEGS, SHELF AND FRAME

PART No.	Description
25-DR-LEGS	Set of Rack Legs, complete with leveling screw feet.
25-DR-SHELF	Shelf
Shelf Dimensions:	Width: 24 inches, Length: 18 inches
B25-DR	Frame with sign retainer

WALL DISPLAY RACKS

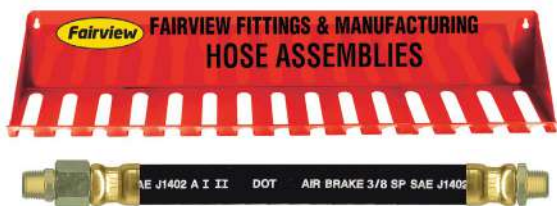

Color Dimensions
Red 4-3/4" H X 24-3/4" W X 6-1/2" D


AIR BRAKE HOSE ASSEMBLY DISPLAY RACK

PART No. HAR-15

- 15 fixed slots 27/32" wide to display hoses.
- Specifically designed for Fairview HAB air brake assemblies.
- Keeps assemblies organized, handy and ready to use.
- Mounts to the wall. (bolts not included)
- Capable of displaying up to 75 hoses, 3/8 O.D. or 1/2 O.D.



PART No. HCR-10-RACK
(Rack & sign only)
Rack Size H: 13.375" W: 20" D: 7"

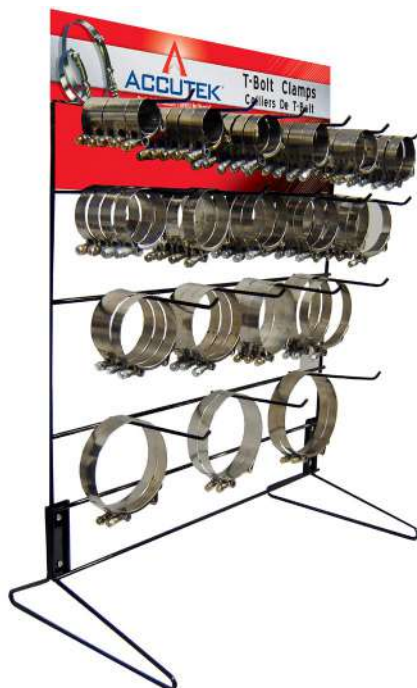

PART No. HCR-18-RACK
(Rack & sign only)
Rack Size H: 24" W: 24" D: 7"

Accutek® Auto Clamp Kit. Containing a selection of common size clamps together with a storage rack.

PART No. HC6-AUTO-KIT-1

Contains: Standard Gear Clamps

PART No.	Quantity in Kit	Range (IN.)	Range (MM)
HC6-4TB *	50	.22 - .63	6 - 16
HC6-6TB *	30	.31 - .88	8 - 22
HC6-8	20	.43 - 1.00	11 - 25
HC6-10	40	.56 - 1.06	14 - 27
HC6-12	20	.56 - 1.25	14 - 32
HC6-16	10	.68 - 1.50	17 - 38
HC6-20	20	.75 - 1.75	19 - 44
HC6-24	20	1.06 - 2.00	27 - 51
HC6-28	20	1.31 - 2.25	33 - 57
HCR-10-RACK	1	Storage Rack	

(Heavy Gauge Steel Wire Rack for Wall / Counter Top)

*Thin Band Gear Clamps

Accutek® T-Bolt Clamp Kit. Containing a selection of common size clamps together with a storage rack.

PART No. HC3-KIT-1

Contains: T-Bolt Style Clamps

PART No.	Quantity in Kit	Range (IN.)	Range (MM)
HC3-150	5	1.31 - 1.56	33 - 40
HC3-175	5	1.56 - 1.81	40 - 46
HC3-188	5	1.69 - 1.94	43 - 49
HC3-200	5	1.81 - 2.06	46 - 52
HC3-225	5	2.06 - 2.31	52 - 59
HC3-238	5	2.19 - 2.50	58 - 64
HC3-250	4	2.31 - 2.62	59 - 67
HC3-275	4	2.56 - 2.87	65 - 73
HC3-288	4	2.69 - 3.00	68 - 76
HC3-300	4	2.81 - 3.12	71 - 79
HC3-325	4	3.06 - 3.37	78 - 86
HC3-350	3	3.31 - 3.62	84 - 92
HC3-375	3	3.56 - 3.87	90 - 98
HC3-400	3	3.81 - 4.12	97 - 105
HC3-425	3	4.06 - 4.37	103 - 111
HC3-450	2	4.31 - 4.62	110 - 117
HC3-475	2	4.56 - 4.87	116 - 124
HC3-500	2	4.81 - 5.12	122 - 130
HCR-18-RACK	1	Storage Rack	

(Heavy Gauge Steel Wire Rack for Wall / Counter Top)

REINFORCED CARDBOARD STOCK BOXES



PART No. GS-STOCK BOX
Description
STANDARD

Sectional for multi-product storage

Dimensions: 5" W X 11" L X 4" D

- Supplied flat for easy storage (folding required)
- Label sets available.



PART No. GS-STOCK BOX-2
Description
DOUBLE

For bulk or large item storage

Dimensions: 10" W X 11" L X 4" D

- Supplied flat for easy storage; (folding required)
- Label sets available.



PART No. GS-STOCK BOX-1
Description
SMALL

Non-sectional for one product storage

Dimensions: 2 3/4" W X 11" L X 4" D

- Supplied flat for easy storage (folding required)
- Label sets available.

LEVER HANDLE TYPE WITH HOOK (O.S.H.A.)



PART No.
AG411E

Female Pipe
1/4

- Meets O.S.H.A. standards.
- Plastic thumb grip.
- Die cast construction.
- Individually carded.
- 145 P.S.I. inlet

TWO IN ONE AIR GUN

WITH METAL TIP



PART No.
AG411EW

Female Pipe
1/4

Wand Length
6"



- Meets O.S.H.A. standards.
- Removable copper wand for optional metal tip replacement.
- Die cast construction.
- Individually bagged with instructions.

LEVER HANDLE TYPE WITH HOOK (O.S.H.A.)

RUBBER TIPPED



PART No.
AG410R

Female Pipe
1/4

- Heavy-duty construction.
- Provides a leak-proof seal between gun and air line.
- Excellent for blowing out cavities or surfaces that could be damaged or scratched by metal tips.
- Die cast construction.
- Individually carded.

SOFT NOSE



PART No.
FA154SN

Female Pipe
1/4

- This soft nose is specially designed for use in both light and medium bench work.
- It is super sensitive, easily flexed, quick to respond to finger pressure and has a soft cushion tip which prevents damaging of delicate surfaces; also avoiding static sparks.
- Full impact of air, if needed for production, can change immediately to a breath of air for close up work depending upon finger pressure applied by operator.
- Packaged individually.

PISTOL GRIP WITH LOOP



PART No.
AG166

Female Pipe
1/4

Wand Length
4-1/4"

- Provides narrow, high velocity jet of air into blind holes as small as .200 and hard to reach areas.
- Slender 4-1/4" long aluminum nozzle.
- Infinitely variable output.
- Spark proof.
- Meets O.S.H.A.
- Sound level: 86 Db
- Brass inlet and valve.
- Flow: 11 CFM
- 150 P.S.I. Inlet

PISTOL GRIP WITH LOOP



PART No.
AG164

Description
1/4 Pipe

- Aluminum construction for heavy duty Services - garages, machine shops and general industry.
- Venturi type nozzle increases air output by 10 times.
- Cone shaped air jet minimizes chip blow back.
- Brass nozzle and valve.
- Flow: 11 CFM
- 150 P.S.I. Inlet

360° UNIVERSAL SWIVEL



PART No.
DS-B

Pipe
1/4

Air Flow Range
Up to 33 C.F.M.

The universal swivel connects portable air tools to an air line. It improves maneuverability, minimizes operator fatigue and extends hose life.

NOTE:
Do Not Exceed
150 P.S.I.
(10.3 Bar)

Features:

- Swivels 360° at two pivot points allowing the air hose to drop directly to the floor while providing superb tool handling.
- New lightweight, non-marking composite construction, industrial quality.



PISTOL GRIP WATER NOZZLES

PART No. GHN

Fairview's GHN Industrial Water Nozzle is ideal for commercial and domestic water hose applications. Sprays from a fine mist to a heavy stream. Thread protector cap included.



Removable
Thread
Protector

PART No. GHN7

Fairview's 7 pattern nozzle features a slim molded grip that prioritizes comfort. Integrated trigger lock allows for long watering sessions. The easy-to-read dial can be twisted in either direction to get one of the seven spray patterns ranging from a fine mist to a jet stream.



PART No. GHN-BN

Fairview's heavy-duty nozzle features an all brass stem, nut and adjustable tip for ultimate durability. A rear trigger design with an integrated trigger lock allows for long watering sessions and the spray pattern ranges from a fine mist to a jet stream.



PART No. GHTN-RG

For those who prioritize comfort and lightness, Fairview's metal twist nozzle provides a molded rubber grip on both the body and tip for ultimate comfort. All metal construction provides durability but keeps it light in your hand.



BRASS INDUSTRIAL WATER NOZZLES

PART No. GHPS

Fairview's 2" Brass Industrial Water Nozzle is ideal for commercial and domestic water hose applications.



PART No. GHTN

Fairview's heavy duty 4" all brass twist nozzle is durable and dependable while delivering a fully adjustable spray intensity. Diamond pattern ridges make it easy to grip in any condition.



* Water Nozzle Models Change From Time To Time. May Not Be Exactly As Shown.

MULTI-CUTTER



ALL METAL CONSTRUCTION

PART No.
MC-1
MCB-1

O.D. Capacity
1-1/8
Replacement blade

P.V.C. coated handles
Will cut soft rubber hose & plastic tube.

CSST SOFT JAW PLIERS



PART No.
HCCSST-RT

A handy adjustable style tool, with padded jaws, ideally suited for crimping the full range of CSST Brass Split Rings . Vinyl cushioned grips.

O-CLAMP PINCERS



PART No.
HC9-R (Regular)
HC9-S (Side Jaw)

One of these handy tools is all that is needed to apply or remove O-Clamps. Side jaw pincer is recommended for work in confined areas, since it allows O-Clamp to be closed while holding pincer parallel to hose.

ROTO REEL




PART No. RR12

Features:

- The easy way to reel off hose.
- Nominal load capacity is 1,000 LBS.
- Rotates on precision ground ball bearings.
- Made of metal for durability.
- Plated for rust resistance.
- Shipped pre-assembled.

MEASURING DEVICES

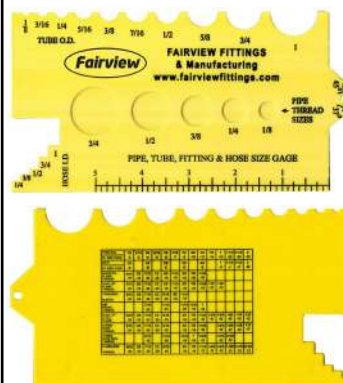

PLASTIC PIPE, TUBE, FITTING & HOSE SIZE GAGE

PART No.
PIPE PG/1

Range
1/8 TO 1 IN.

Includes Fairview Size Codes on Back

SPIRAL HOSE GUARD WRAP



Dispenser
Carton



Designed for use with Hydraulic hose, Air Brake hose and tubing, Propane / Natural Gas hose and electrical wire bundles, Fairview's tough and flexible spiral wrap is available in custom lengths up to 164 FT. (50 Meters)

PART No.	I.D (IN.)	Wall (IN.)	Pitch (IN.)
SPW-8BLK	0.38"	0.05"	0.4"
SPW-10BLK	0.53"	0.05"	0.5"
SPW-12BLK	0.63"	0.08"	0.6"
SPW-16BLK	0.81"	0.09"	0.8"
SPW-20BLK	1.06"	0.10"	0.9"
SPW-24BLK	1.36"	0.11"	1.0"
SPW-32BLK	1.69"	0.14"	1.2"
SPW-40BLK	2.19"	0.15"	1.2"
SPW-48BLK	2.61"	0.17"	1.7"
SPW-56BLK	3.16"	0.19"	1.8"
SPW-64BLK	3.90"	0.22"	2.0"
SPW-72BLK	4.46"	0.23"	2.2"

SPLIT LOOM



Designed to hold & protect cables, harnesses and hoses. Quick & easy to Install. Slit automatically closes after installation. Black provides superior outdoor ultraviolet light protection.

-40°C (-40°F) to + 85°C (185°F)

PART No.	Maximum I.D.		PART No.	Maximum I.D.	
	(IN.)	(MM)		(IN.)	(MM)
SPL-4BLK-CTN	.266	6.76	SPL-12BLK-CTN	.759	19.28
SPL-6BLK-CTN	.380	9.65	SPL-16BLK-CTN	1.069	27.16
SPL-8BLK-CTN	.515	13.07			

BEND PROTECTORS



MATERIAL: POLYVINYLCHLORIDE

TEMPERATURE: -40°F to +200°F (-40°C to +93°C)

Smooth finish, friction fit, bend protector reduces bending stress near hose end for longer, trouble free hose life.

STYLES MAY VARY.

Note: Other sizes available upon request.

NYLON SLEEVE HOSE PROTECTOR



Reduces abrasions and increases hose life. Protects against UV, physical abrasion and deterioration. Meets ISO 6945 abrasion standard, MSHA approved Color – black

Sleeve I.D.		Sleeve I.D.	
PART No.	(IN.)	PART No.	(IN.)
NS-10	.71	NS-28	1.85
NS-14	.90	NS-30	2.09
NS-16	1.14	NS-32	2.25
NS-20	1.25	NS-38	2.38
NS-22	1.38	NS-46	2.87
NS-26	1.57	NS-64	4.50

POLYVINYLCHLORIDE			STEEL		
PART No.	I.D.	Length (IN.)	PART No.	I.D.	Length (IN.)
MP-BP-4	.625	5.50	MP-SBP-6	.672	5.00
MP-BP-6	.735	6.38			
MP-BP-8	.835	7.00			

SPRING GUARD - HOSE PROTECTOR



- Prevents kinking.
- Reduces abrasions, increases hose life.
- Covers entire length of hose.

PART No.
SG-650
SG-686

Spring I.D. (IN.)
.650
.686



PART No.: T95-B

CONSTRUCTION:

Cast iron head, single barber jet with flash protection, steel stem. Neoprene hand grip and needle valve

BTU RATING: 208,000 BTU @ 30lbs. P.S.I

LENGTH: 28 inches



PART No.: W80

CONSTRUCTION:

Cast iron head, brass valve, orifice and bushings.

1/2" Standard pipe manifold with comfort hand grip

BTU RATING: 220,000 BTU @ 30lbs. P.S.I

LENGTH: 26 inches

28" OAL Torch



PART No.
I4C180FWGR330POLHN
15 FT. Assembly



PART No.: T95-B KIT
(with 15ft assy.)

KIT CONTAINS:

- | QTY. | Item |
|------|---|
| 1 | Burner Torch (PART No. T95-B) |
| 1 | 15 Ft. Type I Hose Assembly (PART No. I4C180FWFW) |
| 1 | Regulator & P.O.L. 0-30 PSI (PART No. GR-338) |
| 1 | Brass welding adapter (PART No. 135-LB) |

• Hose, Adapter & Regulator Fully Assembled and Ready for Service.

• Custom Configurations Available.

T95-B KIT-10 (with 10 Ft. Assy.)
T95-B KIT-20 (with 20 Ft. Assy.)
T95-B KIT-25 (with 25 Ft. Assy.)



26" OAL Torch



PART No.
I4C180FWGR330POLHN
15 FT. Assembly



PART No.: W80-KIT

KIT CONTAINS:

- | QTY. | Item |
|------|---|
| 1 | Burner Torch (PART No. W80) |
| 1 | 15 Ft. Type I Hose Assembly (PART No. I4C180FWFW) |
| 1 | Regulator & P.O.L. 0-30 PSI (PART No. GR-338) |
| 1 | Brass welding adapter (PART No. 135-LB) |

• Hose, Adapter & Regulator Fully Assembled and Ready for Service.

• Custom Configurations Available.



Safety Tips for Hand-held Torches

- 1) Never leave torches ignited and unattended.
- 2) Make sure the cylinder is securely braced or tied so that it can't fall or be knocked over.
- 3) Use only approved high-pressure hoses to connect torches to regulators.
- 4) Operate the torch at the manufacturer's recommended pressure.
- 5) Never direct the flame at, near or toward the cylinder.
- 6) Never use hand-held torches inside a building.

U.L. & U.L.C. LISTED PTFE THREAD SEALANT TAPE



The ideal sealant for pipe thread connections. It is non-toxic and will not contaminate fluids or gases. Chemically inert, it resists corrosive action of acids, alkalis and solvents. U.L. and U.L.C. listed for Natural Gas (TO 1000 P.S.I.) and Propane installations.

- **TEMPERATURE RANGE:**
-450°F to +500°F (-268°C to +260°C)

PART No.	Tape Width	Length/Roll (IN.)
121-M8UL	1/2"	236
121-M12UL	3/4"	236

PTFE THREAD SEALANT TAPE



The ideal sealant for pipe thread connections. It is non-toxic and will not contaminate fluids or gases. Chemically inert, it resists corrosive action of acids, alkalis and solvents.

- **TEMPERATURE RANGE:**
-450°F to +500°F (-268°C to +260°C)

INDUSTRIAL SEALANT TAPE

PART No.	Tape Width	Tape Thickness	Length/Roll (IN.)
121-M8	1/2"	.003	480
121-M12	3/4"	.003	480
121-M16	1"	.003	480

HIGH DENSITY INDUSTRIAL SEALANT TAPE

PART No.	Tape Width	Tape Thickness	Length/Roll (IN.)
121-M8PINK	1/2"	.004	540
121-M12PINK	3/4"	.004	540
121-M16PINK	1"	.004	540

METALLIC PTFE THREAD SEALANT



BRUSH TOP TIN



Masters Metallic Compound is a heavy duty pipe thread sealant of proven quality for use on both metal and plastic thread connections. This all-weather product: Lubricates during assembly - Never sets up hard - Can be easily disassembled even after years of service. Masters Metallic Compound is non-corrosive and prevents galling and seizing. It will not dry out or harden in the container. Available in plain and brush-top. Masters Metallic Compound effectively seals most liquids and gases against leakage up to 6900 kpa / 1000 psi and +700°F, +371°C.

PART No.	Size	Carton Qty.
TTSM-8	8 oz. Tin	25
TTSM-32	32 oz. Tin	6

PTFE THREAD SEALANT COMPOUND



BRUSH TOP TIN



TUBE



- **TEMPERATURE RANGES:**
-50°F to +400°F (-45°C to +204°C)
- **BRUSHABLE TO:** -50°F, -46°C
- **PRESSURE RANGES:**
Gases to 2000 P.S.I.
Liquids to 8000 P.S.I.
- **MATERIAL USE:** Brass and All Metal, ABS, PVC, CPVC, Nylon

• **NOTE: NOT SUITABLE FOR OXYGEN**

PART No.	Size	Carton Qty.
TTS-2	2 oz. Tube	72
TTS-4	4 oz. Tin	24
TTS-8	8 oz. Tin	24
TTS-16	16 oz. Tin	12



BRUSH TOP TIN



TUBE



- **TEMPERATURE RANGES:**
-50°F to +400°F (-45°C to +204°C)
- **BRUSHABLE TO:** -50°F, -46°C
- **PRESSURE RANGES:**
Gases to 3000 P.S.I.
Liquids TO 6000 P.S.I.
- **MATERIAL USE:** Brass and All Metal, ABS, PVC, CPVC, Nylon
- **NOTE: NOT SUITABLE FOR OXYGEN. CERTIFIED TO CSA NO. 4-90 US AND CAN/ULC-S642-M87 METAL THREADS ONLY THROUGH 2" DIA. +125°F TO -40°F 125 PSIG FOR USE WITH NATURAL, PROPANE & BUTANE (VAPOR STATE) GASES ONLY.**

PART No.	Size	Carton Qty.
TTSG-2	2 oz. Tube	72
TTSG-4	4 oz. Tin	24
TTSG-8	8 oz. Tin	24

GAS-FLO® LEAK DETECTION FLUID (LOW - TEMP)



Test It Before You Use It.

A low cost method of testing gas connections for leaks prior to use. Non-Corrosive. Halogen and Chloride Free.

Good for use in temperatures down to: -40°C / -40°F.

PART No.	DESCRIPTION
LD-8LT	8 oz. Squirt Bottle Meets ASME Requirements

HYDRAULIC CRIMPERS

PART No. FF105



Die stand sold separately

MAX. CYLINDER FORCE	35 Ton
MAX. HOSE DIAMETER (2 Wire)	1
MAX. HOSE DIAMETER (4 Wire)	3/4"
MAX. HOSE (DA Tool-6 Wire)	N/A
CRIMPER DEPTH	20"
CRIMPER WIDTH	12-1/2"
CRIMPER HEIGHT	19"
WEIGHT	125 Lb.
PUMP	Electric
PUMP HP	1 HP
POWER REQUIREMENT	110V-15A
APPROX. CRIMPS/Hr (3)	450

PART No. FF165



Light & Die stand sold separately

MAX. CYLINDER FORCE	60 Ton
MAX. HOSE DIAMETER (2 Wire)	1 1/4"
MAX. HOSE DIAMETER (4 Wire)	1 1/4"
MAX. HOSE (DA Tool-6 Wire)	1"
CRIMPER DEPTH	22"
CRIMPER WIDTH	12 1/2"
CRIMPER HEIGHT	22 1/4"
WEIGHT	140 Lb
PUMP	Electric
PUMP HP	1 HP
POWER REQUIREMENT	110V-15A
APPROX. CRIMPS/Hr (3)	300

Hydraulic crimpers come complete with 8 standard numbered die sets.

Die Set PART No.	Die Closed		Crimp Face	
	Dia. IN.	Dia. MM	Length IN.	Length MM
P100D-14	0.551	14	1.73	44
P100D-16	0.669	16	1.73	44
P100D-20	0.787	20	1.73	44
P100D-24	0.945	24	1.73	44
P100D-27	1.060	27	2.24	57
P100D-31	1.270	31	2.24	57
P100D-34	1.339	34	2.24	57
P100D-38	1.496	38	2.52	64



Fairview PART No.	WeatherHead	Parker	Dayco	Gates	OmniCrimp	Eaton
SC600 Series	T-400 T-407 T-410 T-420 T-440 T-450 T-460 T-462		NP-30 NP-60	PC707	3000B	FT1380
SC900 Series		Minicrimp Karrykrimp 1 & 2 Parkrimp 1 & 2 PHastkrimp	NP-30 NP-60	PC707	3000B	FT1380
SCT900MS Series		Karrykrimp 2 Parkrimp 2 PHastkrimp	NP-30 NP-60	PC707	3000B	FT1380

MANUALLY OPERATED FERRULE CRIMPER

PART No. J660 Crimper

Die Sets SOLD SEPARATELY; TO ORDER STANDARD OR RIBBED DIES
PREFIX THE REQUIRED CRIMP SIZE WITH:“D” FOR STANDARD DIE OR
“R” FOR RIBBED DIE.

EXAMPLE: R-400, .400 RIBBED DIE SET D-400, .400 STANDARD DIE SET

FERRULES ARE LISTED ON PAGE 41

MANUALLY OPERATED CRIMPING TOOL CRIMPS FBL AND FBS FERRULES.

Crimps up to 1-1/2 In. Outside Dia. Hose.

- BASE – 8”
- BODY – 7-3/8”
- HEIGHT – 27”
- WEIGHT – 29 lbs



FBL
(Long)



FBS
(Short)



HOSE CUT-OFF BLADES




BEVELED




SCALLOPED

PART No.	Arbor Hole Diameter	Blade Diameter	Blade Type
HCB-7	5/8"	7"	Beveled Edge
HCB-10	3/4"	10"	Beveled Edge
HCBS-7	5/8"	7"	Scalloped Edge
HCBS-8	5/8"	8"	Scalloped Edge
HCBS-10	3/4"	10"	Scalloped Edge

ACTUAL OUTSIDE DIAMETERS OF PIPE THREADS

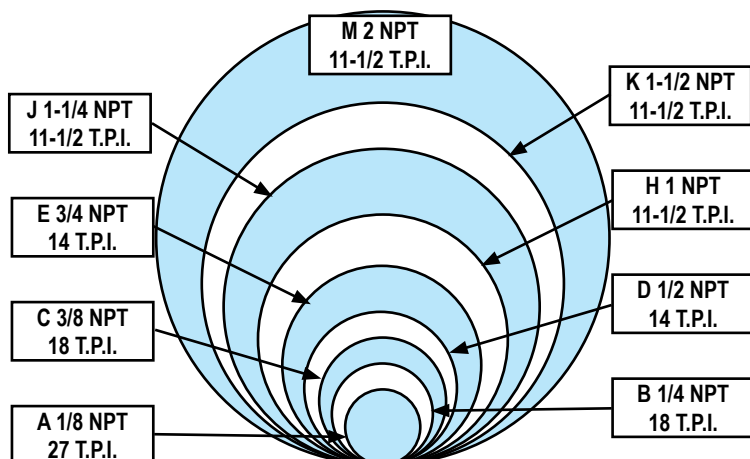

ACTUAL OUTSIDE DIAMETERS OF TUBE

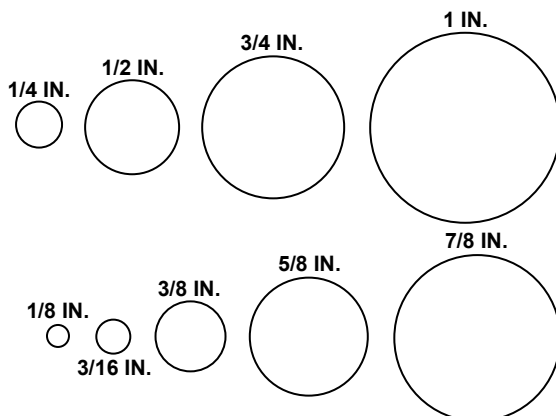

FRACTIONAL SIZE CODES

Used with all Part Numbers to designate Tube and Pipe Fractional Sizes.

Tube Size Code -- 1/16ths

1/8	3/16	1/4	5/16	3/8	7/16	1/2	5/8	3/4	7/8	1	1-1/4	1-1/2	2	2-1/2	3	4
2	3	4	5	6	7	8	10	12	14	16	20	24	32	40	48	64

Pipe Size Code

1/16	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2-1/2	3	4
1	A	B	C	D	E	H	J	K	M	N	P	S

METRIC THREAD STANDARDS

Tube Size MM	DIN Metric (Light)	DIN Metric (Heavy)
6	M12x1.5	M14x1.5
8	M14x1.5	M16x1.5
10	M16x1.5	M18x1.5
12	M18x1.5	M20x1.5
14	--	M22x1.5
15	M22x1.5	--
16	--	M24x1.5
18	M26x1.5	--
20	--	M30x2.0
22	M30x2.0	--
25	--	M36x2.0
28	M36x2.0	--
30	--	M42x2.0
35	M45x2.0	--
38	--	M52x2.0
42	M52x2.0	--

TUBE FITTING SIZE AND THREAD STANDARDS

DASH SIZE	O.D. TUBE SIZE	45° S.A.E. FLARE		37° J.I.C. FLARE		COMPRESSION		45° INVERTED FLARE		THREADED SLEEVE	
		O.D.	THREAD	O.D.	THREAD	O.D.	THREAD	O.D.	THREAD	O.D.	THREAD
-2	1/8	5/16	24	5/16	24	5/16	24	5/16	28	5/16	24
-3	3/16	3/8	24	3/8	24	3/8	24	3/8	24	3/8	24
-4	1/4	7/16	20	7/16	20	7/16	24	7/16	24	7/16	24
-5	5/16	1/2	20	1/2	20	1/2	24	1/2	20	1/2	20
-6	3/8	5/8	18	9/16	18	9/16	24	5/8	18	9/16	20
-8	1/2	3/4	16	3/4	16	5/8	24	11/16	18	5/8	18
-10	5/8	7/8	14	7/8	14	11/16	20	3/4	18	11/16	16
-12	3/4	1-1/16	14	1-1/16	12	13/16	18	7/8	18	--	--
-14	7/8	1-1/4	12	1-3/16	12	1	18	1-1/16	16	--	--
-16	1	1-3/8	12	1-5/16	12	1-1/8	18	1-3/16	16	--	--
-20	1-1/4	--	--	1-5/8	12	1-1/4	16	--	--	--	--
-24	1-1/2	--	--	1-7/8	12	--	--	--	--	--	--
-32	2	--	--	2-1/2	12	--	--	--	--	--	--

TUBE FITTING SIZE AND THREAD STANDARDS

DASH SIZE	O.D. TUBE SIZE	O-RING BOSS		FLARELESS		O-RING FACE SEAL		BRITISH PIPE TAPER		BRITISH PIPE PARALLEL	
		O.D.	THREAD	O.D.	THREAD	O.D.	THREAD	O.D.	THREAD	O.D.	THREAD
-2	1/8	5/16	24	5/16	24	--	--	--	--	--	--
-3	3/16	3/8	24	3/8	24	--	--	--	--	--	--
-4	1/4	7/16	20	7/16	20	9/16	18	1/4	19	1/4	19
-5	5/16	1/2	20	1/2	20	--	--	--	--	--	--
-6	3/8	9/16	18	9/16	18	11/16	16	3/8	19	3/8	19
-8	1/2	3/4	16	3/4	16	13/16	16	1/2	14	1/2	14
-10	5/8	7/8	14	7/8	14	1	14	5/8	14	5/8	14
-12	3/4	1-1/16	12	1-1/16	12	1-3/16	12	3/4	14	3/4	14
-14	7/8	1-3/16	12	1-3/16	12	--	--	--	--	--	--
-16	1	1-5/16	12	1-5/16	12	1-7/16	12	1	11	1	11
-20	1-1/4	1-5/8	12	1-5/8	12	1-11/16	12	--	--	--	--
-24	1-1/2	1-7/8	12	1-7/8	12	2	12	--	--	--	--
-32	2	2-1/2	12	2-1/2	12	--	--	--	--	--	--

INDEX

SERIES	PAGE	SERIES	PAGE	SERIES	PAGE	SERIES	PAGE	SERIES	PAGE	SERIES	PAGE
14DV	115	129	40	1472	58	BLT	33	GS-STOCK BOX	144	MC-1	147
25-DR	143	130	39	1474	58	BSCM	114	GWC	73	MCB-1	147
25-DR-PANEL	143	131	39	1476	58	BTB	115	GWN	24	MP-BP	148
30	70	134	39	1477	58	BV2062	104	GWR	24	MP-SBP	148
31	69	139	39	1478	58	BV2101	103	GWR-*P	142	NS-	148
32	69	140	39	1481	58	BV2101T	103	HAB3-ABS	7	OE-SB80	132
33	70	202	66	1485	30	BV2103	102	HAB-4	2, 5	P100D	151
34	70	217	108	1486L	7	BV3103	104	HAB-6	2-6	PAR6*	23
34R	70	224	108	1486S	24	BV3120	104	HAB-8	2-6	PC1400	62
35	70	239	110	1490	36	BV4103	102	HABA-*REEL	2	PC1462	61
36	71	240	110	1491	36	BV4103-*SSH	102	HABA-6	3-5	PC1464	61
39	69	241	110	1492	36	BVC4103	102	HABA-8	3-5	PC1464R	61
40	69	241HP	110	1492SW	36	BVCS2103	105	HABBLU	7	PC1465	61
40R	69	242	110	1493	36	BVCS2203	106	HAB-HANGER	134	PC1466	61
41	69	243	110	1493SW	36	BVCS2303	106	HAB-HC2E	134	PC1468	61
41S	69	245	110	1494	36	BVCS2403	107	HAB-HCE	134	PC1469	61
42	70	293	111	1495	36	BVCS2434	107	HAB-HCU	134	PC1469SW	61
42-CA	139	298	111	1495B	36	BVSE2103	103	HAB-NOSE-BOX	6	PC1470	61
42R	70	325	41	1495N	36	BVSE2103-*LH	103	HABRED	7	PC1471	62
44	71	335	41	1496	36	BVSS2003	105	HAB-SPRING	134	PC1471SW	62
44R	71	339	41	1497	36	BVSS2103	105	HABSPW	7	PC1472	62
45	71	359	31	1498	36	BVSS2203	106	HAB-SPW-HB	134	PC1472SW	62
46	70	360	31	1498N	36	BVSS2403	107	HAR-15	143	PC1474	61
47	70	525	40	1499	36	BVT3103	104	HC10	132	PC1474SW	61
48	70	526	40	1499N	36	BVT3120	104	HC19	130	PC1477	61
49	70	529	40	1925	39	C10-GN-*	142	HC2	129	PC1478	62
50	70	539	40	1936	23	C10-GNM-*	142	HC20	130	PC1478SW	62
51	71	544	40	2042	109	C-GWC-A	142	HC21	131	PC1483	61
52	71	555	40	2062	109	CHS	18	HC3	129	PC1483S	36
53	71	678	66	2068	109	CPC1462	60	HC3-KIT-1	131, 144	PC1486	61
54	71	725	38	2101	108	CPC1464	60	HC5	128	PC1495S	36
55	71	725SW	38	2102	108	CPC1464Y	60	HC6-AUTO-KIT-1	131, 144	PD-	137, 138
55R	71	726	38	2103	109	CPC1464YR	60	HC8	131	PG-*CD15	123
56	71	727	38	2120	109	CPC1465	60	HC9	132, 147	PG-*CG25	120
58	71	728	38	2122	109	CPC1468	60	HCB	153	PG-*CG25LT	120
59	71	729	38	2815	24	CPC1469SW	60	HCBS	153	PG-*CG25SS	121
72-CA	139	731	38	4120R	37	CPC1470SW	60	HCCSST-RT	147	PG-*CG25SSLT	121
99	65	732	38	4129R	37	CPC1471SW	60	HCFK	128	PG-*SD15	123
99HB	40	735	38	4134	36	CPC1472SW	60	HH	17	PG-*SD2	123
100	65	736	38	5103	109	CPC1472YSW	60	HHP	17	PG-*SD25	123
101	66	737	38	5120	109	CPC1474SW	60	HHR	17	PG-*SG25	120
101CA	66	738	38	ABFR-KIT*	56	CTG	33	HHS	18	PG-*SG25LT	120
101M	66	739	38	ABFR-KIT*-PC	56, 57	CTR	33	HR16LT	13	PG-*SG25SS	121
102	66	750	42	ABKR-KIT-HAB	37	CV1	111	HR17LT	14	PG-*SG25SSLT	121
103	63	751	42	AG164	145	DR-*GH	143	HR18	14	PG-*SG4	120
103CA	63	752	42	AG166	145	DS-B	143	HR4	11	PG-*SG4LT	120
103CV	111	760	20	AG410R	145	ET	128	HR5	8	PG-*SG4SS	121
103CV-*3000	111	761	20	AG411E	145	ETM	128	HR7	12, 49	PG-*SG4SSLT	121
104	64	860	72	AG411EW	145	FA154SN	145	HR8	12	PG-*SGRF	122
105	66	861	72	ASGK-1	24	FBL	41	HRA12	13	PG-*SGRFLT	122
106	66	862	72	ASTM-KIT	72	FF105	151	HS11	133	PG-*ZRCD25	124
107	66	868	72	ASTM-KIT-PC	72	FF165	151	HT	16	PG-*ZRCD25SS	126
108	66	869	72	B1120-CC-3000	100	FLH	19	HV1139	108	PG-*ZRS25	124
108CA	65	962	42	B1492	36	FLT	32	J660	153	PG-*ZRS25SS	126
109	64	964	42	BBV	114	FO41S	69	JFT	32	PG-*ZRS4	124
110	64	965	42	BBV-ORB	114	FW-CYLINDER-1	116	JFTA	32	PG-*ZRS4SS	125
110CA	64	966	42	BC-	115	FWSK-1	24	LAS	131	PG-*ZRS4SS-D	126
111	64	968	42	BEM	114	GH-BRACKET	113	LD-8LT	150	PG-30SGV25	122
112	63	969	42	BI-100	68	GH-DUMMY	113	LF-101	66	PG-30V30CG25	122
112RED	63	977	42	BI-101	68	GH-DUMMY-NVI	113	LF-102	66	PG-35WCSD-2.5	123
113	63	1049	108	BI-102	69	GHE	112	LF-103	63	PGD-RACK	142
113RED	63	1054	108	BI-103	67	GHE-SEAL	112	LF-104	64	PG-MB25	122
114	66	1115	108	BI-103HMC	85	GH-GRIP	113	LF-107	66	PG-PM25	122
116	65	1139	108	BI-103MC	85	GHM	112	LF-108	65	PG-SNUBBER	122
116H	65	1160	59	BI-104	67	GHM-*SC	112	LF-109	64	PIPE PG/1	147
117	64	1161	59	BI-105	68	GHN	146	LF-110	64	PM-PLASTIC	137
118	64	1162	59	BI-108	69	GHN7	146	LF-112	63	PPV90PC	115
119	64	1164	59	BI-109	68	GHN-BN	146	LF-113	63	PW*-*REEL	26
120	64	1168	59	BI-109MC	85	GHPs	146	LF-116	65	PW*A	27, 28
121	65	1169	59	BI-110	68	GHS	112	LF-118	64	PW*K	28
121-M*	150	1170	59	BI-110MC	85	GH-SEAL	112	LF-119	64	QD-AGC	90
121-M*PINK	150	1171	59	BI-111	68	GHS-SEAL	112	LF-120	64	QD-AGN	90
121-M*UL	150	1172	59	BI-112	67	GHTN	146	LF-121	65	QD-AROAC	97
121S	65	1174	59	BI-113	67	GHTN-RG	146	LF-121S	65	QD-ARON	97
122	63	1460	58	BI-114	69	GHU	112	LF-122	63	QD-BISOBC	91
122L	63	1461	58	BI-116	68	GHV	113	LF-124	65	QD-BISOBN	91
123	40	1462	58	BI-119	67	GHV-*BH	113	LF-125	39	QD-BSTC	100
123Y	40	1464	58	BI-124	68	GI-125	41	LF-40	69	QD-BSTN	100
124	65	1465	58	BI-125	41	GI-129	41	LF-41S	69	QD-BTTWC	89
125	39	1466	58	BI-129	41	GL4RED	22	LF-48	70	QD-BTTWDC	89
125CA	39	1468	58	BL	34	GL6*	23	LF-49	70	QD-BTTWDP	89
126	39	1469	58	BLA	34	GLH	22	LF-99	65	QD-BTTWN	89
127	39	1470	58	BLE	34	GN	73	LF-BV2062	104	QD-CEJNN	99
128	39	1471	58	BLJ	34	GNM	73	LF-BV4103	102	QD-HTMAC	93

SERIES	PAGE	SERIES	PAGE	SERIES	PAGE	SERIES	PAGE	SERIES	PAGE	SERIES	PAGE
QD-HTMAN	93	S3551	74	SC635	45	SO1120	85				
QD-INDAC	96	S3554	74	SC636	46	SO1124	85				
QD-INDMC	95	S3599	74	SC637	45	SO1125	49				
QD-INDN	95, 96	S3616	80	SC638	45	SO1139	49				
QD-ISOAC	92	S3618	79	SC639	46	SO1140	49				
QD-ISOAN	92	S3620	79	SC639L	46	SPL-*BLK-CTN	148				
QD-ISOBC	91	S3621	79	SC640	46	SPW-*BLK	148				
QD-ISOBN	91	S3622	79	SC641	46	SR425	51				
QD-KARCHER	100	S3622F	79	SC643	45	SR428	51				
QD-KARN	100	S3623	79	SC643SW	45	SR438	51				
QD-LINMC	98	S3631R	80	SC650	46	SR468	51				
QD-LINN	98	S3642	79	SC653	45	SR4S	51				
QD-MINIAC	98	S3645	80	SC658	45	SR525	53				
QD-MININ	98	S3648	79	SC659	46	SR527	53				
QD-PDP	91, 92	S3649	80	SC725	49	SR528	53				
QD-SCAROMC	99	S3649EL	80	SC725SW	49	SR535	53				
QD-SCCEJNC	99	S3651	80	SC738	49	SR537	53				
QD-SCINDMC	99	S3654	80	SC916SW	44	SR538	53				
QD-SISOBC	91	S3655	80	SC925	43	SR539	53				
QD-SISOBN	91	S3699	80	SC925SW	43	SR540	53				
QD-SP90	90	S3700BT	78	SC926	43	SR541	53				
QD-STFN	97	S3700BT62	78	SC926GT	43	SR725SW	49				
QD-TCC	92	S3720	75	SC926SW	43	SR738	49				
QD-TCN	92	S3721	75	SC928	43	SRT125	50				
QD-TFMC	97	S3735	75	SC929	44	SRT138	50				
QD-TFN	97	S3736	76	SC931	44	SRT225	50				
QD-UNIAC	98	S3740BT	78	SC931BSP	44	SRT238	50				
QD-WHCF	100	S3742	75	SC931JIS	44	SV-100B12V3O	116				
QD-WHNM	100	S3744	76	SC931LM	44	SV-120B12V	116				
QD-WHVCF	100	S3745	76	SC935	43	T1-	10				
QS-000	136	S3746	75	SC936	44	T1SN	9				
QS-305306	136	S3748	75	SC937	43	T2-	10				
QTB-	136	S3748BSPP	75	SC938	43	T241	110				
R16-*-.000	116	S3749	76	SC939	44	T2SN	9				
RG4RED	21	S3749EEL	76	SC939BSP	44	T95-B	149				
RGP	21	S3749EL	76	SC939L	44	TCS2	18				
RR12	147	S3749L	76	SC940	44	TCS3	18				
S1000	84	S3750	76	SC940BSP	44	TIE-50	134				
S1001	84	S3751	76	SC941	44	TS14	133				
S1001M	84	S3754	76	SC943	43	TS15	133				
S1002	84	S3755	76	SC943SW	43	TS16R	133				
S1003	83	S3756	75	SC950	44	TS17R	133				
S1004	84	S3758	75	SC953	43	TS19	133				
S1005	84	S3790BT	78	SC958	43	TS20	133				
S1005M	84	S3790BT62	78	SC959	44	TS21	133				
S1006	84	S3831N	77	SC967	43	TS22	133				
S1006M	84	S3842	77	SCK631BSP	46	TSS17R	133				
S1007	84	S3845	77	SCK639BSP	46	TTS	150				
S1008	83	S3848	77	SCT425	50	TTSG	150				
S1009	83	S3854	77	SCT438	50	TTSM	150				
S1010	83	S3855	77	SCT900MS	47	W80	149				
S1012	83	S3931N	82	SCT925MS	47	WH*BLK	25				
S1013	83	S3931R	82	SCT931BPMS	47	WH*BLU	25				
S1016	84	S3935	81	SCT937MS	47	WH*YEL	25				
S1016SW	84	S3935F	81	SCT938MS	47	WH-705	114				
S1018	83	S3937	81	SCT939BPSM	47	WHGL*GRN	25				
S1020	83	S3942	81	SCT939MS	47	WHRV8BLU	25				
S1021	83	S3942BH	81	SCT940MS	47	X100	65				
S1022	83	S3947	81	SCT945MS	47	X101	66				
S1024	84	S3948	81	SCT950MS	47	X102	66				
S1099	84	S3951F	81	SCT958MS	47	X105	66				
S1099SW	84	S3956	81	SCT959MS	47	X106	66				
S1100	86	S3958	81	SCT990MS	47	X107	66				
S1101	86	S3968	81	SCTP25	54	X115	65				
S1103	86	S3969	81	SCTP25SW	54	X124	65				
S1105	86	S3974	81	SCTP26SW	54	XB20-CA	138				
S1106	86	S6760	82	SCTP37	54	XB80-CA	137				
S1111	86	S6761	82	SCTP38	54	XC110-CA	138				
S1116	86	S6762	82	SCTP39	54	ZZCOS-PD-*CARD	137				
S1120	86	S6764	82	SCTP40	54						
S1124	86	S6765	82	SCTP58	54						
S1125	49	S6766	82	SCV1003	111						
S1139	49	S6768	82	SCW525	52						
S1140	49	S6769	82	SCW528	52						
S3516	74	SC616SW	46	SCW538	52						
S3520	74	SC625	45	SCW539	52						
S3522	74	SC625SW	45	SCW540	52						
S3526	74	SC626	45	SCW541	52						
S3542	74	SC626GT	45	SFK61	78						
S3545	74	SC626SW	45	SFK62	78						
S3548	74	SC628	45	SFO	78						
S3549	74	SC629	46	SFPK2661	78						
S3549BT	74	SC631	46	SG-	148						
S3549LBT	74	SC632	46	SO1116	85						

Fairview

www.fairviewfittings.com



Fairview Ltd.

Head Office: 1170 Invicta Drive, Unit C
Oakville, Ontario L6H 6G1
Telephone: (905) 338-0800
E-Mail: service@fairviewfittings.com



Fairview USA Inc.

Head Office: 3777 Commerce Court,
Wheatfield, New York 14120 U.S.A.
Telephone: (716) 614-0320
CONTINENTAL USA: (800) 688-4088
E-Mail: ussales@fairviewfittings.com

Warehouse Sales locations Canada

• 145 ENGLISH DRIVE, UNIT 4
MONCTON, NEW BRUNSWICK E1E 3X3
PHONE: (506) 857-1115
EMAIL: sales@moncton.fairviewfittings.com

• 2955 RUE LUCIEN-L'ALLIER
LAVAL, QUEBEC H7P 0A1
PHONE: (450) 978-3341
EMAIL: sales@montreal.fairviewfittings.com

• 6100 KESTREL ROAD UNIT 1
MISSISSAUGA, ONTARIO L5T 1S8
PHONE: (905) 564-7416
EMAIL: torontosales@fairviewfittings.com

• 10 – 19 RONN ROAD
WINNIPEG, MANITOBA R3C 2E6
PHONE: (204) 633-9304
EMAIL: sales@winnipeg.fairviewfittings.com

• 130-3810 ARTHUR ROSE AVENUE
SASKATOON, SASKATCHEWAN S7P 0C7
PHONE: (306) 978-1800
EMAIL: sales@saskatoon.fairviewfittings.com

• 18121 - 111 AVENUE N.W.
EDMONTON, ALBERTA T5S 2P2
PHONE: (780) 438-2177
EMAIL: sales@edmonton.fairviewfittings.com

• 11 BURBIDGE STREET, UNIT 201
COQUITLAM, B.C. V3K 7B2
PHONE: (604) 294-4427
EMAIL: vancouver@fairviewfittings.com

• EXPORT SALES
MISSISSAUGA, ONTARIO L5T 1S8
PHONE: (905) 564-7416
EMAIL: torontosales@fairviewfittings.com

U.S.A.

• 22 PROSPECT STREET, UNITS 3 & 4
WOBBURN, MASSACHUSETTS 01801
PHONE: (781) 932-1392
CONTINENTAL U.S.A.: (800) 695-3101

• 3777 COMMERCE COURT
WHEATFIELD, NEW YORK 14120
PHONE: (716) 614-0320
CONTINENTAL U.S.A.: (800) 688-4088

• 3412 COUNTY RD. 6 E, UNIT 2
ELKHART, IN 46514
PHONE: (574) 206-8884
CONTINENTAL U.S.A.: (877) 459-0700



PRINTED IN CANADA



Gas-Flo & Accutek are registered trademarks of Fairview