



FPC-56

FITTINGS

HOSE &
TUBE ENDS

HOSE &
ASSEMBLIES

TUBE

CLAMPS &
TUBE
STRAPS




VALVES &
COCKS

PRESSURE
GAUGES

TOOLS &
ACCESSORIES

CABINETS &
DISPLAYS

Plumbing Products

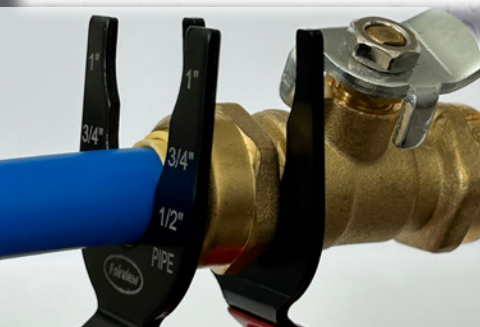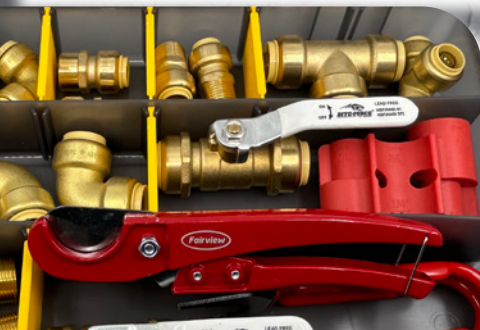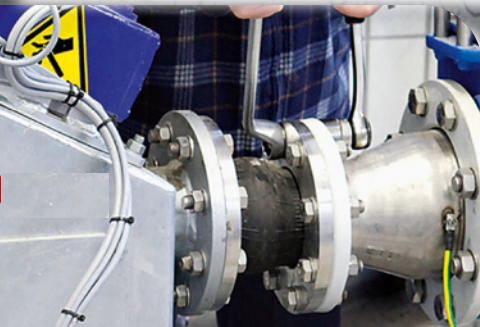

www.fairviewfittings.com

BITE-FORCE
BY FAIRVIEW

MONCTON LAVAL MISSISSAUGA WINNIPEG SASKATOON EDMONTON COQUITLAM

COPYRIGHT 2025

SECTION A

FITTINGS

ACETAL PUSH-IN PLUMBING FITTINGS	9-10
BRASS WATER HOSE (GARDEN HOSE) FITTINGS	26
COMPRESSION FITTINGS-BRASS	12-14
COMPRESSION FITTINGS FOR POLY TUBE-BRASS	15
LEAD FREE BRASS PUSH-IN FITTINGS	5
LEAD FREE BRASS VALVES AND TOOL KIT	5
POLYPROPYLENE PUSH-IN WATER FITTINGS	11
POLYPROPYLENE VALVES & FITTINGS KIT	11
PIPE FITTINGS-BLACK IRON	20-22
PIPE FITTINGS-BRASS	16-19
PIPE FITTINGS-GALVANIZED	22-25
SWEAT FITTINGS-BRASS	14
TWISTLOC PUSH-IN/ TWIST FITTINGS	7
WATER HOSE FITTINGS AND ACCESSORIES	27

SECTION B

HOSE & TUBE ENDS

BRASS RING-BARB FITTINGS FOR POLY TUBE	32
HOSE BARB FITTINGS-BRASS	33-34
HOSE BARB FITTINGS-NYLON	34
PEX FITTINGS & VALVES KITS-LEAD FREE BRASS	32
PEX HOSE ENDS-LEAD FREE	31

SECTION C

HOSE & ASSEMBLIES

DISCHARGE HOSE	38
GENERAL USE P.V.C. BRAIDED HOSE	38
INDUSTRIAL QUALITY WATER HOSE ASSEMBLIES	37

SECTION D

TUBE

CLEAR VINYL TUBE	41
COPPER TUBE	42
INDUSTRIAL GRADE LLDPE TUBE	40
POTABLE WATER LLDPE TUBE	41

SECTION E

CLAMPS & TUBE STRAPS

EAR CLAMPS (ONE)	45
EAR CLAMPS (TWO)	45
GEAR CLAMPS	44
PEX CLAMPS AND CRIMP RINGS	45
PEX TUBE SUPPORTS	45
T-BOLT HOSE CLAMPS	44
TUBE STRAPS AND HANGERS	46

SECTION F

VALVES & COCKS

BALL VALVES-COMPRESSION-LEAD FREE BRASS	50
BALL VALVES-BRASS	48
BALL VALVES-STAINLESS STEEL	49
CHECK VALVES	53
GATE VALVES	50
ICE MAKER / WATER SUPPLY KITS	51
NEEDLE VALVES	52
PEX WATER BALL VALVES	49
PUSH-FIT WATER SHUT-OFF VALVES	49
PUSH-FIT BALL VALVES	49
PUSH-IN POLYPROPYLENE WATER SUPPLY VALVES	51
SADDLE VALVES	52
TWISTLOC PUSH-IN / TWIST SHUT-OFF VALVES	51
WATER THREAD VALVES	50

SECTION G

PRESSURE GAUGES

CENTER BACK MOUNT DRY	56
STEM MOUNT DRY	56

SECTION H

TOOLS & ACCESSORIES

BITE-FORCE REMOVAL TOOL	61
BITE-FORCE COLLECT DEBURRING / GAUGING TOOL	60-61
HYDRONIC PRESSURE TEST KIT	59
INDUSTRIAL WATER NOZZLES	58
MULTI CUTTERS	60
O-CLAMP PINCERS	61
PEX TOOLS	59
PUSH-IN FITTING LOCKING CLIPS	60
TELESCOPIC TUBE CUTTERS	60
THREAD SEALANTS	61
TUBE BENDERS	60
COLLET RELEASE TOOL	60

SECTION I

CABINETS & DISPLAYS

PEG BOARD DISPLAY RACK	65
DRAWER CABINET-COUNTER / WALL MOUNTING	65
STAND ALONE STORAGE CABINET	64

ELAFLEX

ELAFLEX EXPANSION JOINTS	67
--------------------------------	----

FITTINGS

ACETAL PUSH-IN PLUMBING FITTINGS.....	9-10
BRASS WATER HOSE (GARDEN HOSE) FITTINGS	26
COMPRESSION FITTINGS-BRASS.....	12-14
COMPRESSION FITTINGS FOR POLY TUBE-BRASS	15
LEAD FREE BRASS PUSH-IN FITTINGS	5
LEAD FREE BRASS VALVES AND TOOL KIT	5
POLYPROPYLENE PUSH-IN WATER FITTINGS	11
POLYPROPYLENE VALVES & FITTINGS KIT	11
PIPE FITTINGS-BLACK IRON	20-22
PIPE FITTINGS-BRASS.....	16-19
PIPE FITTINGS-GALVANIZED.....	22-25
SWEAT FITTINGS-BRASS	14
TWISTLOC PUSH-IN / TWIST FITTINGS.....	7
WATER HOSE FITTINGS AND ACCESSORIES	27



**BITE-FORCE
FITTINGS AND VALVES
ARE AVAILABLE
INDIVIDUALLY RETAIL
PACKAGED WITH
INSTALLATION
INSTRUCTIONS.
SUFFIX PART NUMBER
WITH "P"
WHEN ORDERING.**



LEAD-FREE BRASS PUSH-IN PLUMBING SYSTEM INSTALLATION INSTRUCTIONS




Maximum Working Pressure: 200 psi, Maximum temperature: 200°F (93°C),
O-ring EPDM. Design certified to ANSI/NSF-61 and ASSE 1061 product standard
for use with potable water, grey water and hydronic heating systems.
Suitable for use under floors and behind walls where local plumbing code recommends.
FOR USE WITH PEX, COPPER, CPVC PIPE


Certified to
NSF/ANSI 61-G




1. Cut tube square.

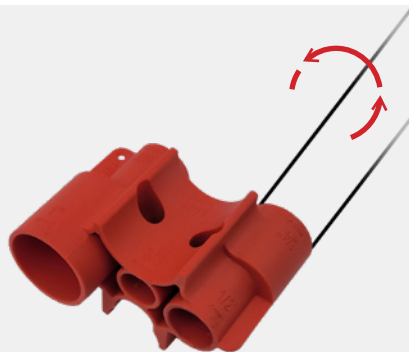

2. Chamfer pipe ends to remove burrs and debris.

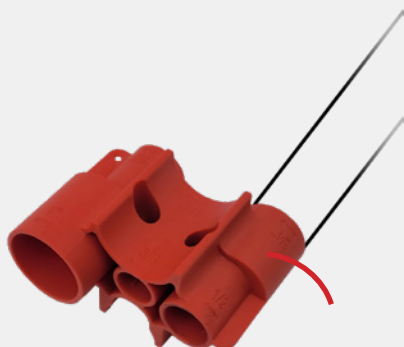

3. Insert pipe into BITE-FORCE gauge and mark depth.

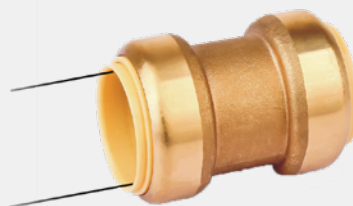

4. With a slight twisting motion, insert pipe into fitting up to the pipe depth mark.

NOTE: Pipe can be easily disconnected from the fitting using the BITE-FORCE removal tool sold separately.
PART No. BFDT-AS

Pipe Size Compatibility / Pipe Insertion Depth

Dash Size	Nominal Size	Actual Pipe / Tube O.D. (IN.)	Pipe Insert Depth (IN. ± 0.02)	Pipe Insert Depth (mm. ± 0.5)
-6	1/4 CTS	3/8	0.654	16.6
-8	3/8 CTS	1/2	0.902	22.9
-10	1/2 CTS	5/8	0.953	24.2
-14	3/4 CTS	7/8	1.094	27.8
-18	1 CTS	1-1/8	1.295	32.9

BITE-FORCE® LEAD FREE BRASS PUSH-IN FITTINGS



Cap



PART No.	CTS Size
BF61CAP-10	1/2
BF61CAP-14	3/4
BF61CAP-18	1

Union Coupling



PART No.	CTS Size
BF62-10	1/2
BF62-14	3/4
BF62-18	1

Reducing Coupling



PART No.	CTS Size
BF62R-1410	3/4 x 1/2
BF62R-1814	1 x 3/4

Male Pipe Connector



PART No.	CTS Size	Pipe
BF68-10D	1/2	1/2
BF68-10E	1/2	3/4
BF68-14D	3/4	1/2
BF68-14E	3/4	3/4
BF68-18H	1	1

Female Pipe Connector



PART No.	CTS Size	Pipe
BF66-10D	1/2	1/2
BF66-10E	1/2	3/4
BF66-14E	3/4	3/4
BF66-18H	1	1

Slip Coupling



PART No.	CTS Size
BF62SL-10	1/2
BF62SL-14	3/4
BF62SL-18	1

90° Elbow



PART No.	CTS Size
BF65-10	1/2
BF65-14	3/4
BF65-18	1

Reducing 90° Elbow



PART No.	CTS Size
BF65R-1410	3/4

Male Pipe 90° Elbow



PART No.	CTS Size	Pipe
BF69-10D	1/2	1/2

Female Pipe 90° Elbow



PART No.	CTS Size	Pipe
BF70-10D	1/2	1/2
BFS70-10D	1/2	1/2

Note: BFS is complete with mounting pad.

Union Tee



PART No.	CTS Size
BF64-10	1/2
BF64-14	3/4
BF64-18	1

Reducing Tee



PART No.	CTS Size
BF64R-1014	1/2 x 3/4
BF64R-1410	3/4 x 1/2
BF64R-141014	3/4 x 1/2 x 3/4

Slip Tee



PART No.	CTS Size
BF64SL-10	1/2
BF64SL-14	3/4

BITE-FORCE® Lead Free Brass Fittings Valves and Tools Kit

PART No.
BFFR-KIT-1



Kit Components:

PART No.	QTY:	PART No.	QTY:
BF61CAP-10	1	BF66-10D	2
BF61CAP-14	1	BF61CAP-14	2
BF62-10	2	BF68-10D	2
BF62-14	2	BF68-14E	2
BF62R-1410	2	BFBV2129-10	1
BF64-10	1	BFBV2129-14	1
BF64-14	1	ABFR KIT 1- BOX	1
BF65-10	2	BFDT-AS	1
BF65-14	2	HCPEX-CT	1



TWISTLOC® PUSH-IN / TWIST FITTINGS INSTALLATION INSTRUCTIONS



Twistloc® products are a one step, fully reusable push-fit plumbing system combining both push-fit and twist locking technology to offer a guaranteed secure, peace of mind leak free connection. NSF/ANSI/CAN 61 & 372, NSF/ANSI 14 and ASTM F877.
MAX W.P.: 175 PSI, MAX TEMP.: 200°F (93°C)

Certified to
NSF/ANSI 61-G

These instructions relate to the installation of TWISTLOC fittings for copper, PB, PEX and cPVC pipes.

Please note that it is the installer's responsibility to ensure that fittings, pipework and other components are appropriate for the intended applications, and that products are installed in accordance with the installation instructions and local plumbing codes.


Before you start, inspect the pipe. Ensure there are no scratches, gouges or any form of damage or deformation on the pipe. It should also be free from dirt and grease that may affect the seal.

Pay close attention to the first inch (25.4mm) from the cut ends. Damage or foreign substances in this area may cause leakage problems. If there are any concerns, cut the affected pipe end to a clean and undamaged point.

Don't use any coarse materials to clean the outside surface of either plastic or copper pipes as this could affect the seal and result in leakage.




1. Cut the pipe squarely using a plastic pipe cutting tool. Ensure the outside of the pipe is free from burrs and score marks. Push pipe insert into the pipe. Pipe inserts are not required when using Copper pipe. Ensure screw cap is in the open position, the coloured ring will be visible.

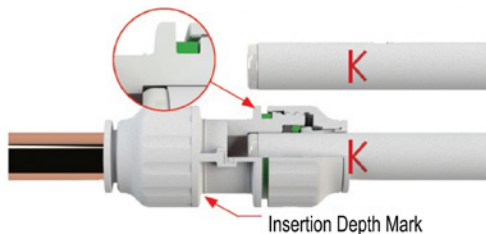

2. Measure and mark the insertion depth on the pipe using a suitable marker. Push fitting onto the end of the pipe until it reaches the pipe stop and insertion depth marking.

PIPE Size (OD)	1/4"	3/8"	1/2"	5/8"	7/8"	1-1/8"
Insertion Depth	.79"	.87"	1.06"	1.26"	1.46"	1.61"

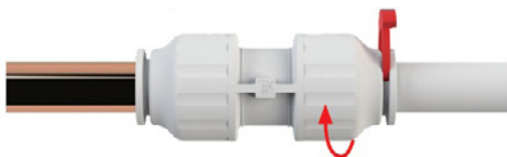

3. Twist the screw cap until coloured ring is no longer visible. Only use hand force to twist the screw cap; using a wrench or other tools can easily damage the fitting and would not be covered by warranty. Pull the pipe away from the fitting to check connection is secure.

NOTE Test system to ensure water tightness.



4. To disconnect:
Make sure that the system is depressurized. Unlock fitting by twisting until coloured ring is visible. Press collet squarely against the face of the fitting. With the collet depressed, pull on the pipe to remove it from the fitting.



Insert



PART No.	CTS Size
TL481-8	3/8
TL481-10	1/2
TL481-14	3/4
TL481-18	1

Cap



PART No.	CTS Size
TL61CAP-10	1/2
TL61CAP-14	3/4

Male Pipe Connector



PART No.	CTS Size	Pipe
TL68-8D	3/8	1/2
TL68-10D	1/2	1/2
TL68-10E	1/2	3/4
TL68-14E	3/4	3/4
TL68-18H	1	1

NPS Brass



PART No.	CTS Size
TLBR66-7F10	1/2

Stem Reducer



PART No.	CTS Size
TL62-10-8ST	1/2 x 3/8
TL62-14-10ST	3/4 x 1/2

Connector to Female Pipe



PART No.	CTS Size	Pipe
TL66-8D	3/8	1/2
TL66-10D	1/2	1/2
TL66-10E	1/2	3/4
TL66-14E	3/4	3/4
TL66-18H	1	1

Union Coupling



PART No.	CTS Size
TL62-8	3/8
TL62-10	1/2
TL62-14	3/4
TL62-18	1
TL62R-108	1/2 x 3/8
TL62R-1410	3/4 x 1/2
TL62R-1814	1 x 3/4

Slip Union



PART No.	CTS Size
TL62SL-10	1/2
TL62SL-14	3/4
TL62SL-108	1/2 x 3/8
TL62SL-1814	1 x 3/4

Elbow



PART No.	CTS Size
TL65-8	3/8
TL65-10	1/2
TL65-14	3/4
TL65-18	1
TL65R-1410	3/4 x 1/2

Elbow



PART No.	CTS Size
TL69-10D	1/2

Stem Elbow



PART No.	CTS Size	Pipe
TL65-10-10ST	1/2	1/2
TL65-14-14ST	3/4	3/4

Swivel Elbow



PART No.	CTS Size
TL69NH-10E	1/2

Tee



PART No.	CTS Size
TL64-8	3/8
TL64-10	1/2
TL64-12	3/4
TL64-14	1
TL64R-1410	3/4 x 3/4 x 1/2
TL64R-141010	3/4 x 1/2 x 1/2
TL64R-1814	1 x 1 x 3/4


Stem Tee




PART No.	CTS Size
TL64-10-10ST	1/2
TL64-14-14ST	3/4




POLYPROPYLENE AND ACETAL WATER TREATMENT PUSH-IN FITTINGS INSTALLATION INSTRUCTIONS




- Cut the tube square, clean and deburr the tube end.
- Inspect tube for any foreign material, nicks or cracks. Cut the tube back farther if necessary.




- Remove any obstructions, then gently push the tube into the fitting with a slight twist until fully inserted.
- Take care not to scratch or damage the tubing during the assembly process, as this may result in leaks later on.



- To make sure that the fitting is properly connected to the tube, pull it gently once.
- After pulling, push the tube into the fitting once more to ensure complete insertion.



- Use our Locking Clips if necessary, to eliminate any play in the fitting and tube connection.



- Make sure to completely eliminate pressure before disassembling the fitting from the tube.
- To disassemble the tube, push the clip in the direction of the fitting body and pull the tube out.

ACETAL PUSH-IN INCH-SIZE PLUMBING FITTINGS



Cap



PART No.	Tube
PI61CAP-4	1/4
PI61CAP-6	3/8

Plug



PART No.	Tube
PI67-4	1/4
PI67-6	3/8

Reducer



PART No.	Stem	Tube
PI62-4-6ST	3/8	1/4

Union



Part No.	Tube
PI62-4	1/4
PI62-6	3/8
PI62R-64	3/8 x 1/4

Female Pipe Connector



PART No.	Tube	Pipe
PI66-4B	1/4	1/4
PI66-6B	3/8	1/4

Male Pipe Connector



PART No.	Tube	Pipe
PI68-4A	1/4	1/8
PI68-4B	1/4	1/4
PI68-4C	1/4	3/8
PI68-6B	3/8	1/4
PI68-6C	3/8	3/8
PI68-6D	3/8	1/2

Faucet Connector



PART No.	Tube	Faucet
PI66-7S4	1/4	7/16 x 24 UNS
PI66-7S6	3/8	7/16 x 24 UNS

BSPP Connector



PART No.	Tube	BSPP
PI66BSPP-6E	3/8	3/4

Max. Working Pressure: 230 psi (1/4) / 170 psi (3/8) at 70°F(21°C).
Max. Temp.: 150°F(65°C) at up to 150 psi for 1/4, 100 psi for 3/8.
ANSI/NSF-51/61, WRAS, ACS, KTW, DVGW-W270, US FDA approved materials. Widely used in water purification, food / beverage. EPDM O-Ring.
FOR USE WITH PE, LLDPE TUBE (FAIRVIEW 363 SERIES)



Certified to
NSF/ANSI 61-G

Brass FWH Connector



PART No.	Tube	Water Thread
PI66NH-6E	3/8	3/4

Tube Barb Connector



PART No.	Stem	Barb
PI129-4-4ST	1/4	1/4
PI129-4-6ST	3/8	1/4

Brass SAE Connector



PART No.	Tube	F.SAE
PIBR66-7F6	3/8	1/4



ACETAL PUSH-IN INCH-SIZE PLUMBING FITTINGS

White Faucet Connector



PART No.	Tube	Faucet
PI66-7F4	1/4	7/16-24 UNS

Bulkhead Union



PART No.	Tube
PI77-4	1/4

Plug in Elbow



PART No.	Stem	Tube
PI65-4-4ST	1/4	1/4
PI65-6-6ST	3/8	3/8

Union Elbow



PART No.	Tube
PI65-4	1/4
PI65-6	3/8
PI65R-64	3/8 x 1/4

Male Pipe Elbow



PART No.	Tube	Pipe
PI69-6B	3/8	1/4
PI69-6C	3/8	3/8

Tube to Hose Elbow



PART No.	Stem
PI99HB-4-4ST	1/4

Male Elbow Swivel



PART No.	Tube	Pipe
PI69SW-4A	1/4	1/8
PI69SW-4B	1/4	1/4
PI69SW-6B	3/8	1/4
PI69SW-6C	3/8	3/8

Max. Working Pressure: 230 psi (1/4) / 170 psi (3/8) at 70°F(21°C).
Max. Temp.: 150°F(65°C) at up to 150 psi for 1/4, 100 psi for 3/8.
ANSI/NSF-51/61, WRAS, ACS, KTW, DVGW-W270, US FDA approved materials. Widely used in water purification, food / beverage. EPDM O-Ring.
FOR USE WITH PE, LLDPE TUBE (FAIRVIEW 363 SERIES)



Certified to
NSF/ANSI 61-G

Union Tee



PART No.	Tube
PI64-4	1/4
PI64-6	3/8
PI64R-64	3/8 x 1/4

Two Way Divider



PART No.	Tube
PI64Y-4	1/4

POLYPROPYLENE INCH-SIZE PUSH-IN WATER FITTINGS



Union Connector



PART No.	Tube
PP62-4	1/4
PP62-6	3/8
PP62R-64	3/8 x 1/4

Female Pipe Connector



PART No.	Tube	Faucet
PP66-4B	1/2	1/4
PP66-6B	1/2	1/4

Male Pipe Connector



PART No.	Tube	Faucet
PP68-4B	1/4	1/4
PP68-4C	1/4	3/8
PP68-4D	1/4	1/2
PP68-6B	3/8	1/4
PP68-6C	3/8	3/8
PP68-6D	3/8	1/2

Faucet Connector



PART No.	Tube	Faucet
PP66-4-7S	1/4	7/16 x 24 UNS
PP66-6-7S	3/8	7/16 x 24 UNS

Bulkhead Union



PART No.	Tube
PP77-4	1/4
PP77-6	3/8
PP77R-64	3/8 x 1/4

Male Pipe Elbow



PART No.	Tube	Pipe
PP69-4B	1/4	1/4
PP69-6B	3/8	1/4
PP69-6C	3/8	3/8

Union Elbow



PART No.	Tube
PP65-4	1/4
PP65-6	3/8
PP65R-64	3/8 x 1/4

Max. Working Pressure:

150 psi at 70°F (21°C).

Max. Temp.: 150°F (65°C) at up to

60 psi. ANSI/NSF-51/61, WRAS,

ACS, KTW, DVGW-W270, US FDA

approved materials. Widely used

in water purification, food/

beverage. EPDM O-Ring.

FOR USE WITH PE, LLDPE TUBE

(FAIRVIEW 363 SERIES)



Certified to
NSF/ANSI 61-G

Union Tee



PART No.	Tube
PP64-4	1/4
PP64-6	3/8

Two Way Divider



PART No.	Tube
PP64Y-4	1/4
PP64Y-6	3/8



PART No.
BFPP-KIT-1

Kit Components:

PART No.	QTY:	PART No.	QTY:	PART No.	QTY:
PP62-4	5	PP65-4	5	PPWSB64-7F4	2
PP62-6	5	PP65-6	5	PPWSB64-6-4T	5
PP62R-64	5	PP69-4B	5	PPWSB64-6-6T	1
PP68-4B	5	PP69-6C	5	TSNIP	1
PP68-6B	5	PP64-4	5	PI66-7F4	2
PP68-6C	5	PP64-6	5	ABFR-BOX-1	1
PP66-4-7S	5	PPWS62-4	3		


Standard Sleeve

PART No.	Tube
60-2	1/8
60-2-1/2	5/32
60-3	3/16
60-4	1/4
60-5	5/16
60-6	3/8
60-7	7/16
60-8	1/2
60-10	5/8
60-12	3/4
60-14	7/8

Lead Free
PART No.

LF-60-3	3/16
LF-60-4	1/4
LF-60-5	5/16
LF-60-6	3/8
LF-60-8	1/2
LF-60-10	5/8
LF-60-12	3/4
LF-60-14	7/8


In- Line Sleeve

PART No.	Tube
260-2	1/8
260-3	3/16
260-4	1/4
260-5	5/16
260-6	3/8
260-8	1/2

THIS SLEEVE IS FOR USE WITH NYLON TUBE.


Standard Nut

PART No.	Tube
61-2	1/8
61-2-1/2	5/32
61-3	3/16
61-4	1/4
61-5	5/16
61-6	3/8
61-7	7/16
61-8	1/2
61-10	5/8
61-12	3/4
61-14	7/8

Lead Free
PART No.

LF-61-3	3/16
LF-61-4	1/4
LF-61-5	5/16
LF-61-6	3/8
LF-61-8	1/2
LF-61-10	5/8
LF-61-12	3/4
LF-61-14	7/8


Cap

PART No.	Tube
61CAP-4	1/4
61CAP-6	3/8
61CAP-8	1/2
61CAP-10	5/8

Lead Free
PART No.

LF-61CAP-4	1/4
------------	-----


Long Nut

PART No.	Tube
161-6	3/8
161-10	5/8

LONG NUTS PROVIDE EXTRA TUBE SUPPORT WHEN SEVERE VIBRATION IS A FACTOR.


Union Coupling

PART No.	Tube
62-2	1/8
62-2-1/2	5/32
62-3	3/16
62-4	1/4
62-5	5/16
62-6	3/8
62-8	1/2
62-10	5/8
62-12	3/4
62-14	7/8

Lead Free
PART No.

LF-62-2	1/8
LF-62-3	3/16
LF-62-4	1/4
LF-62-5	5/16
LF-62-6	3/8
LF-62-8	1/2
LF-62-10	5/8
LF-62-12	3/4
LF-62-14	7/8

PART No.	Reducing
62R-42	1/4 to 1/8
62R-43	1/4 to 3/16
62R-54	5/16 to 1/4
62R-64	3/8 to 1/4
62R-65	3/8 to 5/16
62R-86	1/2 to 3/8
62R-106	5/8 to 3/8
62R-108	5/8 to 1/2

Lead Free
PART No.

LF-62R-64	3/8 to 1/4
LF-62R-65	3/8 to 5/16
LF-62R-86	1/2 to 3/8
LF-62R-106	5/8 to 3/8
LF-62R-108	5/8 to 1/2

Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.


Connecteur pour Tube vers Female Pipe

PART No.	Hose I.D.	Pipe
66-2A	1/8	10/32 UNF
66-3A	1/8	1/8
66-4A	1/8	1/4
66-4B	3/16	1/8
66-4C	3/16	1/4
66-4D	1/4	1/8
66-5A	1/4	1/4
66-5B	1/4	3/8
66-6A	1/4	1/2
66-6B	5/16	1/8
66-6C	5/16	1/4
66-6D	5/16	3/8
66-8C	3/8	1/8
66-8D	3/8	1/4
66-8E	3/8	3/8
66-10C	3/8	1/2
66-10D	3/8	3/4
66-10E	1/2	1/4
66-12D	1/2	3/8
66-12E	1/2	1/2
66-14E	1/2	3/4

Lead Free
PART No.

LF-66-4A	1/4	1/8
LF-66-4B	1/4	1/4
LF-66-6B	3/8	1/4
LF-66-6C	3/8	3/8
LF-66-6D	3/8	1/2
LF-66-8C	1/2	3/8
LF-66-8D	1/2	1/2
LF-66-10D	5/8	1/2


Sealing Plug

PART No.	Tube
67-4	1/4

USED TO PLUG 1/4 O.D. TUBE.

BRASS COMPRESSION FITTINGS

Fairview

FITTINGS



Connector Tube to Male Pipe

PART No.	Tube	Pipe
68-2-1	1/8	1/16
68-2A	1/8	1/8
68-2-1/2A	5/32	1/8
68-3A	3/16	1/8
68-3B	3/16	1/4
68-4A	1/4	1/8
68-4B	1/4	1/4
68-4C	1/4	3/8
68-4D	1/4	1/2
68-5A	5/16	1/8
68-5B	5/16	1/4
68-5C	5/16	3/8
68-6A	3/8	1/8
68-6B	3/8	1/4
68-6C	3/8	3/8
68-6D	3/8	1/2
68-6E	3/8	3/4
68-8B	1/2	1/4
68-8C	1/2	3/8
68-8D	1/2	1/2
68-8E	1/2	3/4
68-10C	5/8	3/8
68-10D	5/8	1/2
68-10E	5/8	3/4
68-12D	3/4	1/2
68-12E	3/4	3/4
68-14E	7/8	3/4

Lead Free

PART No.	Tube	Pipe
LF-68-2A	1/8	1/8
LF-68-3A	3/16	1/8
LF-68-4A	1/4	1/8
LF-68-4B	1/4	1/4
LF-68-4C	1/4	3/8
LF-68-4D	1/4	1/2
LF-68-5B	5/16	1/4
LF-68-5C	5/16	3/8
LF-68-6A	3/8	1/8
LF-68-6B	3/8	1/4
LF-68-6C	3/8	3/8
LF-68-6D	3/8	1/2
LF-68-6E	3/8	3/4
LF-68-8B	1/2	1/4
LF-68-8C	1/2	3/8
LF-68-8D	1/2	1/2
LF-68-10C	5/8	3/8
LF-68-10D	5/8	1/2
LF-68-12E	3/4	3/4
LF-68-14E	7/8	3/4



Tank Fitting Tube to Male Pipe

PART No.	Tube	Pipe
T68-4A	1/4	1/8
T68-5B	5/16	1/4
T68-6C	3/8	3/8
T68-6D	3/8	1/2
T68-8D	1/2	1/2

THESE COMPRESSION FITTINGS ARE DRILLED THROUGH TO ALLOW THE TUBE TO PASS THROUGH THE FITTING INTO THE CONTAINER.



Bulkhead Union

PART No.	Tube
77-4	1/4
77-6	3/8



45° Elbow Tube to Male Pipe

PART No.	Tube	Pipe
74-3A	3/16	1/8
74-4A	1/4	1/8
74-4B	1/4	1/4
74-6B	3/8	1/4
74-8C	1/2	3/8
74-8D	1/2	1/2
74-10D	5/8	1/2



90° Elbow Tube to Tube

PART No.	Tube
65-2	1/8
65-3	3/16
65-4	1/4
65-5	5/16
65-6	3/8
65-8	1/2
65-10	5/8
65-12	3/4
65-14	7/8

PART No.	Reducing
65R-86	1/2 to 3/8

Lead Free

PART No.	Tube
LF-65-4	1/4
LF-65-6	3/8
LF-65-8	1/2
LF-65-10	5/8



90° Elbow Tube to Female Pipe

PART No.	Tube	Pipe
70-3A	3/16	1/8
70-4A	1/4	1/8
70-4B	1/4	1/4
70-5A	5/16	1/8
70-5B	5/16	1/4
70-6A	3/8	1/8
70-6B	3/8	1/4
70-6C	3/8	3/8
70-6D	3/8	1/2
70-6E	3/8	3/4
70-8B	1/2	1/4
70-8C	1/2	3/8
70-8D	1/2	1/2
70-10D	5/8	1/2
70-12E	3/4	3/4

The compression connection is a three-piece assembly that consists of a cap-shaped nut with female threads, a compression sleeve that looks like a simple wedding ring and a seat section with male threads.

The cap nut and the seat are screwed together causing the compression sleeve to squeeze tightly against them, as well as the adjoining tube. This causes a compressed or compression type watertight connection.



90° Elbow Tube to Male Pipe

PART No.	Tube	Pipe
69-2A	1/8	1/8
69-2-1/2A	5/32	1/8
69-3A	3/16	1/8
69-3B	3/16	1/4
69-4A	1/4	1/8
69-4B	1/4	1/4
69-4C	1/4	3/8
69-4D	1/4	1/2
69-5A	5/16	1/8
69-5B	5/16	1/4
69-5C	5/16	3/8
69-6A	3/8	1/8
69-6B	3/8	1/4
69-6C	3/8	3/8
69-6D	3/8	1/2
69-6E	3/8	3/4
69-7B	7/16	1/4
69-8B	1/2	1/4
69-8C	1/2	3/8
69-8D	1/2	1/2
69-8E	1/2	3/4
69-10C	5/8	3/8
69-10D	5/8	1/2
69-10E	5/8	3/4
69-12D	3/4	1/2
69-12E	3/4	3/4
69-14E	7/8	3/4

Lead Free

PART No.	Tube	Pipe
LF-69-4A	1/4	1/8
LF-69-4B	1/4	1/4
LF-69-4C	1/4	3/8
LF-69-6B	3/8	1/4
LF-69-6C	3/8	3/8
LF-69-6D	3/8	1/2
LF-69-8C	1/2	3/8
LF-69-8D	1/2	1/2

BRASS COMPRESSION FITTINGS



**Tee Tube
Three Ends**

PART No.	Tube
64-2	1/8
64-2-1/2	5/32
64-3	3/16
64-4	1/4
64-5	5/16
64-6	3/8
64-8	1/2
64-10	5/8
64-12	3/4
64-14	7/8

Lead Free

PART No.	Tube
LF-64-4	1/4
LF-64-5	5/16
LF-64-6	3/8
LF-64-8	1/2
LF-64-10	5/8

PART No.	Reducing		
	1	2	3
64R-46	1/4	1/4	3/8
64R-64	3/8	3/8	1/4
64R-86	1/2	1/2	3/8

Lead Free

PART No.	1	2	3
LF-64R-64	3/8	3/8	1/4



**Tee Ends Tube
& Male Pipe
Center Tube**

PART No.	Tube	Pipe
71-3A	3/16	1/8
71-4A	1/4	1/8
71-4B	1/4	1/4
71-6A	3/8	1/8
71-6B	3/8	1/4
71-6C	3/8	3/8
71-8D	1/2	1/2



**TEE Ends Tube
Center
Male Pipe**

PART No.	Tube	Pipe
72-3A	3/16	1/8
72-4A	1/4	1/8
72-4B	1/4	1/4
72-5A	5/16	1/8
72-5B	5/16	1/4
72-6A	3/8	1/8
72-6B	3/8	1/4
72-6C	3/8	3/8
72-6D	3/8	1/2
72-8C	1/2	3/8
72-8D	1/2	1/2
72-10D	5/8	1/2
72-12D	3/4	1/2

Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.



**Tee Ends Tube
Center
Female Pipe**


PART No.	Tube	Pipe
78-4B	1/4	1/4
78-6A	3/8	1/8
78-6B	3/8	1/4



**TEE Ends Tube
Center
Female Pipe**


PART No.	Tube	Pipe
79-4A	1/4	1/8

BRASS SWEAT FITTINGS (BAR STOCK)



**Union
Female Solder
Both Ends**

PART No.	Type K / L	Actual
	Size	Tube O.D.
42SW-10	1/2	5/8
42SW-14	3/4	7/8



**Connector
Female Solder End
to Female Pipe**

PART No.	Type K / L	Actual	Pipe
	Size	Tube O.D.	
46SW-10B	1/2	5/8	1/4
46SW-10C	1/2	5/8	3/8
46SW-10D	1/2	5/8	1/2
46SW-10E	1/2	5/8	3/4
46SW-14D	3/4	7/8	1/2
46SW-14E	3/4	7/8	3/4

46SW SERIES IS ANNEALED (HEAT TREATED)
TO HELP PREVENT CRACKING.



**Connector
Female Solder End
to Male Pipe**

PART No.	Type K / L	Actual	Pipe
	Size	Tube O.D.	
48SW-10B	1/2	5/8	1/4
48SW-10C	1/2	5/8	3/8
48SW-10D	1/2	5/8	1/2
48SW-10E	1/2	5/8	3/4
48SW-14D	3/4	7/8	1/2
48SW-14E	3/4	7/8	3/4

COMPRESSION FITTINGS FOR POLY TUBE

(COMPLETE WITH FIXED INSERTS)

Fairview

FITTINGS



Brass Insert

PART No.	Tube I.D.
481-4H	.125
481-4	.170
481-5	.187
481-6	.250
481-8	.375
481-10	.500

Lead Free

Part No.

LF-481-4	.170
LF-481-5	.187
LF-481-6	.250
LF-481-8	.375
LF-481-10	.500



Derlin Sleeve

PART No.	Tube O.D.
480-4	1/4
480-5	5/16
480-6	3/8
480-8	1/2
480-10	5/8

THE 480 SLEEVE AND 481 INSERT WILL COVERT STANDARD COMPRESSION FITTINGS AND VALVES FOR USE WITH POLY TUBE.



Nut

PART No.	Tube O.D.
61-4	1/4
61-5	5/16
61-6	3/8
61-8	1/2
61-10	5/8



Union Coupling Poly Tube

PART No.	Tube O.D.
462-4	1/4
462-5	5/16
462-6	3/8
462-8	1/2

PART No.	Reducing
462R-64	3/8 to 1/4
462R-86	1/2 to 3/8

Lead Free


Part No.

LF-462-4	1/4
----------	-----



Coupling Poly Tube to Copper Tube

PART No.	Tube
467-44	1/4
467-66	3/8



Bulkhead Poly Tube to Poly Tube

PART No.	Tube
477-4	1/4
477-6	3/8



Connector Poly Tube to Female Pipe

PART No.	Tube	Pipe
466-4A	1/4	1/8
466-4B	1/4	1/4
466-6B	3/8	1/4
466-6C	3/8	3/8
466-8C	1/2	3/8



Connector Poly Tube to Male Pipe

PART No.	Tube	Pipe
468-4A	1/4	1/8
468-4B	1/4	1/4
468-4C	1/4	3/8
468-4D	1/4	1/2
468-5A	5/16	1/8
468-5B	5/16	1/4
468-6A	3/8	1/8
468-6B	3/8	1/4
468-6C	3/8	3/8
468-6D	3/8	1/2
468-8B	1/2	1/4
468-8C	1/2	3/8
468-8D	1/2	1/2

Lead Free

Part No.

LF-468-4A	1/4	1/8
LF-468-4B	1/4	1/4
LF-468-6B	3/8	1/4
LF-468-6C	3/8	3/8
LF-468-8D	1/2	1/2



90° Elbow Poly Tube to Poly Tube

Part No.	Tube
465-4	1/4
465-6	3/8



90° Elbow Poly Tube to Male Pipe

PART No.	Tube	Pipe
469-4A	1/4	1/8
469-4B	1/4	1/4
469-4C	1/4	3/8
469-5B	5/16	1/4
469-6B	3/8	1/4
469-6C	3/8	3/8
469-6D	3/8	1/2
469-8C	1/2	3/8
469-8D	1/2	1/2

Lead Free

Part No.

LF-469-4A	1/4	1/8
LF-469-4B	1/4	1/4
LF-469-6A	3/8	1/8
LF-469-6B	3/8	1/4
LF-469-6C	3/8	3/8
LF-469-8C	1/2	3/8
LF-469-8D	1/2	1/2




90° Elbow Poly Tube to Female Pipe

PART No.	Tube	Pipe
470-4A	1/4	1/8
470-4B	1/4	1/4
470-6B	3/8	1/4



45° Elbow Poly Tube to Male Pipe

PART No.	Tube	Pipe
474-4A	1/4	1/8



Tee Poly Tube Three Ends

PART No.	Tube
464-4	1/4
464-6	3/8
464-8	1/2

PART No.	1	2	3
464R-64	3/8	3/8	1/4



Tee Ends Poly Tube & Male Pipe Center Poly

PART No.	Tube	Pipe
471-4A	1/4	1/8
471-6B	3/8	1/4



Tee Ends Poly Tube Center Male Pipe

PART No.	Tube	Pipe
472-4B	1/4	1/4
472-6B	3/8	1/4



TEE Ends Poly Tube Center Female Pipe

PART No.	Tube	Pipe
478-4A	1/4	1/8
478-6B	3/8	1/4



Hex Nipple

PART No.	Length (IN)	Pipe
122-A		1/8
122-B		1/4
122L-B *	1-3/8	1/4
122-C		3/8
122-D		1/2
122L-D *	1-3/4	1/2
122-E		3/4
122-H		1

* LONG PATTERN

Lead Free

PART No.	Pipe
LF-122-A	1/8
LF-122-B	1/4
LF-122-C	3/8
LF-122-D	1/2
LF-122-E	3/4
LF-122-H	1

Reducing

PART No.	Pipe	to	Pipe
122-BA	1/4	to	1/8
122-CA	3/8	to	1/8
122-CB	3/8	to	1/4
122-DB	1/2	to	1/4
122-DC	1/2	to	3/8
122-ED	3/4	to	1/2

Lead Free

PART No.	Pipe	to	Pipe
LF-122-BA	1/4	to	1/8
LF-122-CB	3/8	to	1/4
LF-122-DB	1/2	to	1/4
LF-122-DC	1/2	to	3/8
LF-122-ED	3/4	to	1/2



Close Nipple

PART No.	Pipe
112-A	1/8
112-B	1/4
112-C	3/8
112-D	1/2
112-E	3/4
112-H	1
112-J	1-1/4
112-K	1-1/2
112-M	2
112-N	2-1/2
112-P	3

Lead Free

PART No.	Pipe
LF-112-A	1/8
LF-112-B	1/4
LF-112-C	3/8
LF-112-D	1/2
LF-112-E	3/4



Close Nipple (Red Brass)

Lead Free

PART No.	Pipe
112RED-D	1/2
112RED-E	3/4



Long Nipple

PART No.	Pipe	Length (IN)
1/8NPT		
113-A1-1/2	1/8	1-1/2
113-A2	1/8	2
113-A2-1/2	1/8	2-1/2
113-A3	1/8	3
113-A3-1/2	1/8	3-1/2

Lead Free

PART No.	Pipe	Length (IN)
LF-113-A1-1/2	1/8	1-1/2
LF-113-A2	1/8	2

1/4NPT

113-B1-1/2	1/4	1-1/2
113-B2	1/4	2
113-B2-1/2	1/4	2-1/2
113-B3	1/4	3
113-B3-1/2	1/4	3-1/2
113-B4	1/4	4
113-B4-1/2	1/4	4-1/2
113-B5	1/4	5
113-B5-1/2	1/4	5-1/2
113-B6	1/4	6

Lead Free

PART No.	Pipe	Length (IN)
LF-113-B1-1/2	1/4	1-1/2
LF-113-B2	1/4	2
LF-113-B2-1/2	1/4	2-1/2
LF-113-B3	1/4	3

3/8NPT

113-C1-1/2	3/8	1-1/2
113-C2	3/8	2
113-C2-1/2	3/8	2-1/2
113-C3	3/8	3
113-C3-1/2	3/8	3-1/2
113-C4	3/8	4
113-C4-1/2	3/8	4-1/2
113-C5	3/8	5
113-C6	3/8	6

Lead Free

PART No.	Pipe	Length (IN)
LF-113-C1-1/2	3/8	1-1/2
LF-113-C2	3/8	2
LF-113-C2-1/2	3/8	2-1/2
LF-113-C3	3/8	3

1/2NPT

113-D1-1/2	1/2	1-1/2
113-D2	1/2	2
113-D2-1/2	1/2	2-1/2
113-D3	1/2	3
113-D3-1/2	1/2	3-1/2
113-D4	1/2	4
113-D4-1/2	1/2	4-1/2
113-D5	1/2	5
113-D5-1/2	1/2	5-1/2
113-D6	1/2	6

Lead Free

PART No.	Pipe	Length (IN)
LF-113-D1-1/2	1/2	1-1/2
LF-113-D2	1/2	2
LF-113-D2-1/2	1/2	2-1/2
LF-113-D3	1/2	3
LF-113-D3-1/2	1/2	3-1/2
LF-113-D4	1/2	4

3/8NPT

113-D1-1/2	3/4	2
113-D2	3/4	2-1/2
113-D2-1/2	3/4	3
113-D3	3/4	3-1/2
113-D3-1/2	3/4	4
113-D4	3/4	4-1/2
113-D4-1/2	3/4	5
113-D5	3/4	5-1/2
113-D5-1/2	3/4	6

Lead Free

PART No.	Pipe	Length (IN)
LF-113-E2	3/4	2
LF-113-E2-1/2	3/4	2-1/2
LF-113-E3	3/4	3



Long Nipple

PART No.	Pipe	Length (IN)
113-H2	1	2
113-H2-1/2	1	2-1/2
113-H3	1	3
113-H3-1/2	1	3-1/2
113-H4	1	4
113-H6	1	6

1-1/4NPT

113-J2	1-1/4	2
113-J2-1/2	1-1/4	2-1/2
113-J3	1-1/4	3
113-J3-1/2	1-1/4	3-1/2
113-J4	1-1/4	4
113-J5	1-1/4	5
113-J6	1-1/4	6

1-1/2NPT

113-K2	1-1/2	2
113-K3	1-1/2	3
113-K3-1/2	1-1/2	3-1/2
113-K4	1-1/2	4
113-K6	1-1/2	6

2NPT

113-M2-1/2	2	2-1/2
113-M3	2	3
113-M3-1/2	2	3-1/2
113-M4	2	4
113-M5	2	5
113-M6	2	6



Long Nipple (Red Brass)

Lead Free

PART No.	Pipe	Length (IN)
113RED-D1-1/2	1/2	1-1/2
113RED-D2-1/2	1/2	2-1/2
113RED-D3	1/2	3
113RED-D4	1/2	4

3/4NPT

113RED-E1-1/2	3/4	1-1/2
113RED-E2	3/4	2
113RED-E2-1/2	3/4	2-1/2
113RED-E3	3/4	3
113RED-E4	3/4	4



Coupling

PART No.	Pipe
103-A	1/8
103-B	1/4
103-C	3/8
103-D	1/2
103-E	3/4

Lead Free

PART No.	Pipe
LF-103-A	1/8
LF-103-B	1/4
LF-103-C	3/8
LF-103-D	1/2
LF-103-E	3/4

Coupling (Cast Bronze)

PART No.	Pipe
103CA-D	1/2
103CA-E	3/4
103-H	1
103-J	1-1/4
103-K	1-1/2
103-M	2
103-N	2-1/2

BRASS PIPE FITTINGS

Fairview

FITTINGS



Reducing Coupling

PART No.	Pipe		Pipe
119-BA	1/4	to	1/8
119-CA	3/8	to	1/8
119-CB	3/8	to	1/4
119-DA	1/2	to	1/8
119-DB	1/2	to	1/4
119-DC	1/2	to	3/8
119-ED	3/4	to	1/2

Lead Free

PART No.

LF-119-BA	1/4	to	1/8
LF-119-CB	3/8	to	1/4
LF-119-ED	3/4	to	1/2



**Reducing Coupling
(Cast Bronze)**

PART No.	Pipe		Pipe
119-EB	3/4	to	1/4
119-EC	3/4	to	3/8
119-HD	1	to	1/2
119-HE	1	to	3/4
119-JE	1-1/4	to	3/4
119-JH	1-1/4	to	1
119-KH	1-1/2	to	1
119-KJ	1-1/2	to	1-1/4
119-MK	2	to	1-1/2



Union Coupling

PART No.	Pipe
104-A	1/8
104-B	1/4
104-C	3/8
104-D	1/2
104-E	3/4

Lead Free

PART No.

LF-104-D	1/2
----------	-----



**Union Coupling
(Cast Bronze)**

PART No.	Pipe
104-H	1
104-J	1-1/4
104-K	1-1/2
104-M	2



Adapter

PART No.	Female Pipe		Male Pipe
120-AA	1/8	to	1/8
120-BB	1/4	to	1/4
120-CC	3/8	to	3/8
120-DD	1/2	to	1/2

Lead Free

PART No.

LF-120-BB	1/4	to	1/4
LF-120-DD	1/2	to	1/2



**Adapter
(Cont.)**

PART No.	Female Pipe		Male Pipe
120-A-1	1/8	to	1/16
120-BA	1/4	to	1/8
120-CA	3/8	to	1/8
120-CB	3/8	to	1/4
120-DB	1/2	to	1/4
120-DC	1/2	to	3/8
120-EC	3/4	to	3/8
120-ED	3/4	to	1/2

Lead Free

PART No.

LF-120-BA	1/4	to	1/8
LF-120-CB	3/8	to	1/4
LF-120-DB	1/2	to	1/4
LF-120-ED	3/4	to	1/2



Bushing

PART No.	Female Pipe		Male Pipe
110-BA	1/4	to	1/8
110-CA	3/8	to	1/8
110-CB	3/8	to	1/4
110-DA	1/2	to	1/8
110-DB	1/2	to	1/4
110-DC	1/2	to	3/8
110-EA	3/4	to	1/8
110-EB	3/4	to	1/4
110-EC	3/4	to	3/8
110-ED	3/4	to	1/2
110-HB	1	to	1/4
110-HC	1	to	3/8
110-HD	1	to	1/2
110-HE	1	to	3/4

Lead Free

PART No.

LF-110-BA	1/4	to	1/8
LF-110-CA	3/8	to	1/8
LF-110-CB	3/8	to	1/4
LF-110-DA	1/2	to	1/8
LF-110-DB	1/2	to	1/4
LF-110-DC	1/2	to	3/8
LF-110-EB	3/4	to	1/4
LF-110-EC	3/4	to	3/8
LF-110-ED	3/4	to	1/2
LF-110-HB	1	to	1/4
LF-110-HD	1	to	1/2
LF-110-HE	1	to	3/4



**Bushing
(Cast Bronze)**

PART No.	Female Pipe		Male Pipe
110CA-ED	3/4	to	1/2
110CA-HC	1	to	3/8
110CA-HD	1	to	1/2
110CA-HE	1	to	3/4
110-JD	1-1/4	to	1/2
110-JE	1-1/4	to	3/4
110-JH	1-1/4	to	1
110-KD	1-1/2	to	1/2
110-KE	1-1/2	to	3/4
110-KH	1-1/2	to	1
110-KJ	1-1/2	to	1-1/4
110-ME	2	to	3/4
110-MH	2	to	1
110-MJ	2	to	1-1/4
110-MK	2	to	1-1/2
110-NM	2-1/2	to	2
110-PM	3	to	2
110-PN	3	to	2-1/2



Lock Nut

PART No.	Pipe
111-A	1/8
111-B	1/4
111-C	3/8
111-D	1/2
111-E	3/4



**Lock Nut
(Cast Bronze)**

PART No.	Pipe
111-H	1



Plug Square Head

PART No.	Pipe
109-A	1/8
109-B	1/4
109-C	3/8
109-D	1/2
109-E	3/4

Lead Free

PART No.

LF-109-A	1/8
LF-109-E	3/4



**Plug Square Head
(Cast Bronze)**

PART No.	Pipe
109-H	1
109-J	1-1/4
109-K	1-1/2
109-M	2
109-N	2-1/2



Plug Slotted

PART No.	Pipe
117-A	1/8
117-B	1/4
117-C	3/8



Plug Hex Countersunk

PART No.	Pipe
118-A	1/8
118-B	1/4
118-C	3/8
118-D	1/2
118-E	3/4

Lead Free

PART No.

LF-118-A	1/8
LF-118-B	1/4



**Plug
Hex Head**

PART No.		Pipe
121-1	Cored	1/16
121-A	Cored	1/8
121-B	Cored	1/4
121-C	Cored	3/8
121-D	Cored	1/2
121-E	Cored	3/4
121-H	Cored	1

Lead Free

PART No.		Pipe
LF-121-A	Cored	1/8
LF-121-B	Cored	1/4



PART No.		Pipe
121S-A	Solid	1/16
121S-B	Solid	1/8
121S-C	Solid	1/4
121S-D	Solid	3/8
121S-E	Solid	1/2

Lead Free

PART No.		Pipe
LF-121S-B	Solid	1/4
LF-121S-C	Solid	3/8
LF-121S-D	Solid	1/2
LF-121S-E	Solid	3/4



Cap

PART No.	Pipe
108-A	1/8
108-B	1/4
108-C	3/8
108-D	1/2
108-E	3/4

Lead Free

PART No.	Pipe
LF-108-B	1/4
LF-108-C	3/8
LF-108-D	1/2



**Cap
(Cast Bronze)**

PART No.	Pipe
108CA-D	1/2
108CA-E	3/4
108-H	1
108-J	1-1/4
108-K	1-1/2
108-M	2



**Forged
90° Elbow**

PART No.	Pipe
99-A	1/8
99-B	1/4
99-C	3/8
99-D	1/2

Lead Free

PART No.	Pipe
LF-99-C	3/8


PART No.	Pipe	Pipe
99-BA	1/4	to 1/8
99-CB	3/8	to 1/4
99-DC	1/2	to 3/8



**Extruded
90° Street
Elbow**

PART No.	Pipe
X115-A	1/8
X115-B	1/4
X115-C	3/8
X115-D	1/2
X115-E	3/4

PART No.	Female Pipe	Male Pipe
X115-BA	1/4	to 1/8
X115-DC	1/2	to 3/8



**Forged
90° Street
Elbow**

PART No.	Pipe
116-A	1/8
116-B	1/4
116-C	3/8
116-D	1/2
116-E	3/4

Lead Free

PART No.	Pipe
LF-116-A	1/8
LF-116-B	1/4
LF-116-C	3/8
LF-116-D	1/2

PART No.	Female Pipe	Male Pipe
116-AB	1/8	to 1/4
116-BA	1/4	to 1/8
116-CB	3/8	to 1/4
116-CD	3/8	to 1/2
116-DC	1/2	to 3/8

Lead Free

PART No.	Pipe
LF-116-BA	1/2 to 3/8



**90° Street
Elbow
(Cast Bronze)**

PART No.	Pipe
116CA-D	1/2
116CA-E	3/4
116-H	1
116-J	1-1/4
116-K	1-1/2
116-M	2
116-N	2-1/2
116-P	3



**Forged
90° Street
Elbow
(Heavy Pattern)**

PART No.	Pipe
116H-B	1/4
116H-C	3/8



**Forged
90° Elbow**

PART No.	Pipe
100-A	1/8
100-B	1/4
100-C	3/8
100-D	1/2
100-E	3/4



**Forged
90° Elbow**

PART No.	Pipe	Pipe
100-BA	1/4	to 1/8
100-CB	3/8	to 1/4
100-DC	1/2	to 3/8

Lead Free

PART No.	Pipe
LF-100-B	1/4
LF-100-C	3/8
LF-100-D	1/2
LF-100-E	3/4



**90° Elbow
(Cast Bronze)**

PART No.	Pipe
100CA-D	1/2
100CA-E	3/4
100-H	1
100-J	1-1/4
100-K	1-1/2
100-M	2
100-N	2-1/2
100-P	3

PART No.	Pipe	Pipe
100-ED	3/4	to 1/2
100-HE	1	to 3/4



**Extruded
90° Elbow**

PART No.	Pipe
X100-A	1/8
X100-B	1/4
X100-C	3/8
X100-D	1/2



**Forged
45° Street
Elbow**

PART No.	Pipe
124-A	1/8
124-B	1/4
124-C	3/8

Lead Free

PART No.	Pipe
LF-124-B	1/4
LF-124-C	3/8



**45° Street
Elbow
(Cast Bronze)**

PART No.	Pipe
124-D	1/2
124-E	3/4
124-H	1



**Extruded
45° Street
Elbow**

PART No.	Pipe
X124-A	1/8
X124-B	1/4
X124-C	3/8
X124-D	1/2
X124-E	3/4



45° Elbow
(Cast Bronze)

PART No.	Pipe
105-B	1/4
105-C	3/8
105-D	1/2
105-E	3/4
105-H	1
105-J	1-1/4
105-K	1-1/2
105-M	2



Extruded 45° Elbow

PART No.	Pipe
X105-A	1/8
X105-B	1/4



Forged Cross

PART No.	Pipe
102-A	1/8
102-B	1/4
102-C	3/8
102-D	1/2

Lead Free

PART No.	Pipe
LF-102-B	1/4
LF-102-C	3/8
LF-102-D	1/2



Cross
(Cast Bronze)

PART No.	Pipe
102-E	3/4
102-H	1



Extruded Cross

PART No.	Pipe
X102-A	1/8
X102-B	1/4
X102-C	3/8
X102-D	1/2



Forged Male Branch Tee

PART No.	Pipe
106-A	1/8
106-B	1/4
106-C	3/8
106-D	1/2



Extruded Male Branch Tee

PART No.	Pipe
X106-A	1/8
X106-B	1/4
X106-C	3/8



Forged Male Tee

PART No.	Pipe
101M-A	1/8
101M-B	1/4
101M-C	3/8
101M-D	1/2
101M-E	3/4



Forged Street Tee

PART No.	Pipe
107-A	1/8
107-B	1/4
107-C	3/8
107-D	1/2
107-E	3/4

Lead Free

PART No.	Pipe
LF-107-B	1/4
LF-107-C	3/8



Extruded Street Tee

PART No.	Pipe
X107-A	1/8
X107-B	1/4
X107-C	3/8
X107-D	1/2
X107-E	3/4



Forged Tee

PART No.	Pipe
101-A	1/8
101-B	1/4
101-C	3/8
101-D	1/2
101-E	3/4

Lead Free

PART No.	Pipe
LF-101-A	1/8
LF-101-B	1/4
LF-101-C	3/8
LF-101-D	1/2




Tee
(Cast Bronze)

PART No.	Pipe
101CA-C	3/8
101CA-D	1/2
101CA-E	3/4
101-H	1
101-J	1-1/4
101-K	1-1/2
101-M	2




Extruded Tee

PART No.	Pipe
X101-A	1/8
X101-B	1/4
X101-C	3/8
X101-D	1/2



Reducing Forged Tee

PART No.	Reducing		
	1	2	3
101-BA	1/4	1/4	1/8
101-CB	3/8	3/8	1/4
101-DC	1/2	1/2	3/8
101-ED	3/4	3/4	1/2



Reducing Tee
(Cast Bronze)

PART No.	Reducing		
	1	2	3
101-DB	1/2	1/2	1/4
101-EDE	3/4	1/2	3/4
101-HDH	1	1/2	1
101-HE	1	1	3/4
101-JDJ	1-1/4	1/2	1-1/4
101-JE	1-1/4	1-1/4	3/4
101-KDK	1-1/2	1/2	1-1/2



Y Block

PART No.	Female Pipe	Male Pipe
678-YB	1/4	1/4



Y Splitter

PART No.	Female Pipe	Male Pipe
202-B	1/4	1/4



Close Nipple

PART No.	Pipe
BI-112-A	1/8
BI-112-B	1/4
BI-112-C	3/8
BI-112-D	1/2
BI-112-E	3/4
BI-112-H	1
BI-112-J	1-1/4
BI-112-K	1-1/2
BI-112-M	2
BI-112-N	2-1/2
BI-112-P	3
BI-112-S	4



Long Nipple

PART No.	Pipe	Length (IN.)
1/8 NPT		
BI-113-A1-1/2	1/8	1-1/2
BI-113-A2	1/8	2
BI-113-A2-1/2	1/8	2-1/2
BI-113-A3	1/8	3
BI-113-A3-1/2	1/8	3-1/2
BI-113-A4	1/8	4
BI-113-A4-1/2	1/8	4-1/2
BI-113-A5	1/8	5
BI-113-A5-1/2	1/8	5-1/2
BI-113-A6	1/8	6

1/4 NPT		
BI-113-B1-1/2	1/4	1-1/2
BI-113-B2	1/4	2
BI-113-B2-1/2	1/4	2-1/2
BI-113-B3	1/4	3
BI-113-B3-1/2	1/4	3-1/2
BI-113-B4	1/4	4
BI-113-B4-1/2	1/4	4-1/2
BI-113-B5	1/4	5
BI-113-B5-1/2	1/4	5-1/2
BI-113-B6	1/4	6
BI-113-B8	1/4	8

3/8 NPT		
BI-113-C1-1/2	3/8	1-1/2
BI-113-C2	3/8	2
BI-113-C2-1/2	3/8	2-1/2
BI-113-C3	3/8	3
BI-113-C3-1/2	3/8	3-1/2
BI-113-C4	3/8	4
BI-113-C4-1/2	3/8	4-1/2
BI-113-C5	3/8	5
BI-113-C5-1/2	3/8	5-1/2
BI-113-C6	3/8	6

1/2 NPT		
BI-113-D1-1/2	1/2	1-1/2
BI-113-D2	1/2	2
BI-113-D2-1/2	1/2	2-1/2
BI-113-D3	1/2	3
BI-113-D3-1/2	1/2	3-1/2
BI-113-D4	1/2	4
BI-113-D4-1/2	1/2	4-1/2
BI-113-D5	1/2	5
BI-113-D5-1/2	1/2	5-1/2
BI-113-D6	1/2	6
BI-113-D7	1/2	7
BI-113-D8	1/2	8



Long Nipple

PART No.	Pipe	Length (IN.)
3/4 NPT		
BI-113-E1-1/2	3/4	1-1/2
BI-113-E2	3/4	2
BI-113-E2-1/2	3/4	2-1/2
BI-113-E3	3/4	3
BI-113-E3-1/2	3/4	3-1/2
BI-113-E4	3/4	4
BI-113-E4-1/2	3/4	4-1/2
BI-113-E5	3/4	5
BI-113-E5-1/2	3/4	5-1/2
BI-113-E6	3/4	6
BI-113-E8	3/4	8
BI-113-E10	3/4	10
BI-113-E12	3/4	12

1 NPT		
BI-113-H2	1	2
BI-113-H2-1/2	1	2-1/2
BI-113-H3	1	3
BI-113-H3-1/2	1	3-1/2
BI-113-H4	1	4
BI-113-H4-1/2	1	4-1/2
BI-113-H5	1	5
BI-113-H5-1/2	1	5-1/2
BI-113-H6	1	6
BI-113-H8	1	8
BI-113-H12	1	12

1-1/4 NPT		
BI-113-J2	1-1/4	2
BI-113-J2-1/2	1-1/4	2-1/2
BI-113-J3	1-1/4	3
BI-113-J3-1/2	1-1/4	3-1/2
BI-113-J4	1-1/4	4
BI-113-J4-1/2	1-1/4	4-1/2
BI-113-J5	1-1/4	5
BI-113-J5-1/2	1-1/4	5-1/2
BI-113-J6	1-1/4	6

1-1/2 NPT		
BI-113-K2	1-1/2	2
BI-113-K2-1/2	1-1/2	2-1/2
BI-113-K3	1-1/2	3
BI-113-K3-1/2	1-1/2	3-1/2
BI-113-K4	1-1/2	4
BI-113-K4-1/2	1-1/2	4-1/2
BI-113-K5	1-1/2	5
BI-113-K5-1/2	1-1/2	5-1/2
BI-113-K6	1-1/2	6

2 NPT		
BI-113-M2-1/2	2	2-1/2
BI-113-M3	2	3
BI-113-M3-1/2	2	3-1/2
BI-113-M4	2	4
BI-113-M4-1/2	2	4-1/2
BI-113-M5	2	5
BI-113-M5-1/2	2	5-1/2
BI-113-M6	2	6

2-1/2 NPT		
BI-113-N3	2-1/2	3
BI-113-N3-1/2	2-1/2	3-1/2
BI-113-N4	2-1/2	4
BI-113-N5	2-1/2	5
BI-113-N6	2-1/2	6

3 NPT		
BI-113-P3	3	3
BI-113-P4	3	4
BI-113-P5	3	5
BI-113-P6	3	6

4 NPT		
BI-113-S4	4	4
BI-113-S5	4	5
BI-113-S6	4	6

SCHEDULE 80:
Replace prefix BI- with BI80-
for schedule 80 (300LB.)



Coupling

PART No.	Pipe
BI-103-A	1/8
BI-103-B	1/4
BI-103-C	3/8
BI-103-D	1/2
BI-103-E	3/4
BI-103-H	1
BI-103-J	1-1/4
BI-103-K	1-1/2
BI-103-M	2
BI-103-N	2-1/2
BI-103-P	3
BI-103-S	4



Reducing Coupling

PART No.	Pipe
BI-119-BA	1/4 to 1/8
BI-119-CA	3/8 to 1/8
BI-119-CB	3/8 to 1/4
BI-119-DA	1/2 to 1/8
BI-119-DB	1/2 to 1/4
BI-119-DC	1/2 to 3/8
BI-119-EB	3/4 to 1/4
BI-119-EC	3/4 to 3/8
BI-119-ED	3/4 to 1/2
BI-119-HB	1 to 1/4
BI-119-HC	1 to 3/8
BI-119-HD	1 to 1/2
BI-119-HE	1 to 3/4
BI-119-JD	1-1/4 to 1/2
BI-119-JE	1-1/4 to 3/4
BI-119-JH	1-1/4 to 1
BI-119-KD	1-1/2 to 1/2
BI-119-KE	1-1/2 to 3/4
BI-119-KH	1-1/2 to 1
BI-119-KJ	1-1/2 to 1-1/4
BI-119-MD	2 to 1/2
BI-119-ME	2 to 3/4
BI-119-MH	2 to 1
BI-119-MJ	2 to 1-1/4
BI-119-MK	2 to 1-1/2
BI-119-NK	2-1/2 to 1-1/2
BI-119-NM	2-1/2 to 2
BI-119-PM	3 to 2
BI-119-PN	3 to 2-1/2
BI-119-SP	4 to 3

BLACK IRON PIPE FITTINGS

SCHEDULE 40 (150 LB.)

Fairview

FITTINGS



Union

PART No.	Pipe
BI-104-A	1/8
BI-104-B	1/4
BI-104-C	3/8
BI-104-D	1/2
BI-104-E	3/4
BI-104-H	1
BI-104-J	1-1/4
BI-104-K	1-1/2
BI-104-M	2
BI-104-N	2-1/2
BI-104-P	3
BI-104-S	4



Bushing

PART No.	Pipe
BI-110-BA	1/4 to 1/8
BI-110-CA	3/8 to 1/8
BI-110-CB	3/8 to 1/4
BI-110-DA	1/2 to 1/8
BI-110-DB	1/2 to 1/4
BI-110-DC	1/2 to 3/8
BI-110-EA	3/4 to 1/8
BI-110-EB	3/4 to 1/4
BI-110-EC	3/4 to 3/8
BI-110-ED	3/4 to 1/2
BI-110-HB	1 to 1/4
BI-110-HC	1 to 3/8
BI-110-HD	1 to 1/2
BI-110-HE	1 to 3/4
BI-110-JC	1-1/4 to 3/8
BI-110-JD	1-1/4 to 1/2
BI-110-JE	1-1/4 to 3/4
BI-110-JH	1-1/4 to 1
BI-110-KD	1-1/2 to 1/2
BI-110-KE	1-1/2 to 3/4
BI-110-KH	1-1/2 to 1
BI-110-KJ	1-1/2 to 1-1/4
BI-110-MD	2 to 1/2
BI-110-ME	2 to 3/4
BI-110-MH	2 to 1
BI-110-MJ	2 to 1-1/4
BI-110-MK	2 to 1-1/2
BI-110-NH	2-1/2 to 1
BI-110-NJ	2-1/2 to 1-1/4
BI-110-NK	2-1/2 to 1-1/2
BI-110-NM	2-1/2 to 2
BI-110-PM	3 to 2
BI-110-PN	3 to 2-1/2
BI-110-SM	4 to 2
BI-110-SN	4 to 2-1/2
BI-110-SP	4 to 3



Lock Nut

PART No.	Pipe
BI-111-B	1/4
BI-111-C	3/8
BI-111-D	1/2
BI-111-E	3/4



**Plug
(Square Head)**

PART No.	Pipe
BI-109-A	1/8
BI-109-B	1/4
BI-109-C	3/8
BI-109-D	1/2
BI-109-E	3/4
BI-109-H	1
BI-109-J	1-1/4
BI-109-K	1-1/2
BI-109-M	2
BI-109-N	2-1/2
BI-109-P	3
BI-109-S	4



90° Elbow

PART No.	Pipe
BI-100-A	1/8
BI-100-B	1/4
BI-100-C	3/8
BI-100-D	1/2
BI-100-E	3/4
BI-100-H	1
BI-100-J	1-1/4
BI-100-K	1-1/2
BI-100-M	2
BI-100-N	2-1/2
BI-100-P	3
BI-100-S	4



**Reducing
90° Elbow**

PART No.	Pipe
BI-100-CB	3/8 to 1/4
BI-100-DB	1/2 to 1/4
BI-100-DC	1/2 to 3/8
BI-100-EC	3/4 to 3/8
BI-100-ED	3/4 to 1/2
BI-100-HD	1 to 1/2
BI-100-HE	1 to 3/4
BI-100-JD	1-1/4 to 1/2
BI-100-JE	1-1/4 to 3/4
BI-100-JH	1-1/4 to 1
BI-100-KH	1-1/2 to 1
BI-100-KJ	1-1/2 to 1-1/4
BI-100-MH	2 to 1
BI-100-MJ	2 to 1-1/4
BI-100-MK	2 to 1-1/2

SCHEDULE 80:
Replace prefix BI- with BI80-
for schedule 80 (300LB.)



45° Elbow

PART No.	Pipe
BI-105-A	1/8
BI-105-B	1/4
BI-105-C	3/8
BI-105-D	1/2
BI-105-E	3/4
BI-105-H	1
BI-105-J	1-1/4
BI-105-K	1-1/2
BI-105-M	2
BI-105-N	2-1/2
BI-105-P	3
BI-105-S	4



**90° Street
Elbow**

PART No.	Pipe
BI-116-A	1/8
BI-116-B	1/4
BI-116-C	3/8
BI-116-D	1/2
BI-116-E	3/4
BI-116-H	1
BI-116-J	1-1/4
BI-116-K	1-1/2
BI-116-M	2
BI-116-N	2-1/2
BI-116-P	3
BI-116-S	4



**45° Street
Elbow**

PART No.	Pipe
BI-124-A	1/8
BI-124-B	1/4
BI-124-C	3/8
BI-124-D	1/2
BI-124-E	3/4
BI-124-H	1
BI-124-J	1-1/4
BI-124-K	1-1/2
BI-124-M	2




Tee

PART No.	Pipe
BI-101-A	1/8
BI-101-B	1/4
BI-101-C	3/8
BI-101-D	1/2
BI-101-E	3/4
BI-101-H	1
BI-101-J	1-1/4
BI-101-K	1-1/2
BI-101-M	2
BI-101-N	2-1/2
BI-101-P	3
BI-101-S	4



Reducing Tee

PART No.	Pipe Size		
	1	2	3
BI-101-DB	1/2	1/2	1/4
BI-101-DC	1/2	1/2	3/8
BI-101-EB	3/4	3/4	1/4
BI-101-EBE	3/4	1/4	3/4
BI-101-ED	3/4	3/4	1/2
BI-101-EDD	3/4	1/2	1/2
BI-101-EDE	3/4	1/2	3/4
BI-101-EH	3/4	3/4	1
BI-101-HB	1	1	1/4
BI-101-HBH	1	1/4	1
BI-101-HD	1	1	1/2
BI-101-HDD	1	1/2	1/2
BI-101-HDH	1	1/2	1
BI-101-HE	1	1	3/4
BI-101-HED	1	3/4	1/2
BI-101-HEE	1	3/4	3/4
BI-101-HEH	1	3/4	1
BI-101-JDJ	1-1/4	1/2	1-1/4



Reducing Tee (Cont.)

PART No.	Pipe Size		
	1	2	3
BI-101-JE	1-1/4	1-1/4	3/4
BI-101-JEE	1-1/4	3/4	3/4
BI-101-JH	1-1/4	1-1/4	1
BI-101-KD	1-1/2	1-1/2	1/2
BI-101-KDK	1-1/2	1/2	1-1/2
BI-101-KE	1-1/2	1-1/2	3/4
BI-101-KH	1-1/2	1-1/2	1
BI-101-KJ	1-1/2	1-1/2	1-1/4
BI-101-MD	2	2	1/2
BI-101-ME	2	2	3/4
BI-101-MH	2	2	1
BI-101-MHH	2	1	1
BI-101-MHM	2	1	2
BI-101-MJ	2	2	1-1/4
BI-101-MK	2	2	1-1/2
BI-101-NK	2-1/2	2-1/2	1-1/2



Cap

PART No.	Pipe
BI-108-A	1/8
BI-108-B	1/4
BI-108-C	3/8
BI-108-D	1/2
BI-108-E	3/4
BI-108-H	1
BI-108-J	1-1/4
BI-108-K	1-1/2
BI-108-M	2
BI-108-N	2-1/2
BI-108-P	3
BI-108-S	4



SCHEDULE 80:
Replace prefix BI- with BI80-
for schedule 80 (300LB.)



Cross

PART No.	Pipe
BI-102-C	3/8
BI-102-D	1/2
BI-102-E	3/4
BI-102-H	1
BI-102-J	1-1/4
BI-102-K	1-1/2
BI-102-M	2



Flange

PART No.	Pipe
BI-114-B	1/4
BI-114-C	3/8
BI-114-D	1/2
BI-114-E	3/4
BI-114-H	1
BI-114-J	1-1/4
BI-114-K	1-1/2
BI-114-M	2
BI-114-N	2-1/2

NOTE: For Thread Sealants
See Page 61

GALVANIZED PIPE FITTINGS

SCHEDULE 40 (150 LB.)



Close Nipple

PART No.	Pipe
GI-112-A	1/8
GI-112-B	1/4
GI-112-C	3/8
GI-112-D	1/2
GI-112-E	3/4
GI-112-H	1
GI-112-J	1-1/4
GI-112-K	1-1/2
GI-112-M	2
GI-112-N	2-1/2
GI-112-P	3
GI-112-S	4



Long Nipple

PART No.	Pipe	Length (IN.)
1/8 NPT		
GI-113-A1-1/2	1/8	1-1/2
GI-113-A2	1/8	2
GI-113-A2-1/2	1/8	2-1/2
GI-113-A3	1/8	3
GI-113-A3-1/2	1/8	3-1/2
GI-113-A4	1/8	4
GI-113-A4-1/2	1/8	4-1/2
GI-113-A5	1/8	5
GI-113-A5-1/2	1/8	5-1/2
GI-113-A6	1/8	6
GI-113-B1-1/2	1/4	1-1/2
GI-113-B2	1/4	2

Galvanization is the process of applying a protective zinc coating to steel or iron in order to prevent premature rust and corrosion.



Long Nipple (Cont.)

1/4 NPT	Pipe	Length (IN.)
GI-113-B2-1/2	1/4	2-1/2
GI-113-B3	1/4	3
GI-113-B3-1/2	1/4	3-1/2
GI-113-B4	1/4	4
GI-113-B4-1/2	1/4	4-1/2
GI-113-B5	1/4	5
GI-113-B5-1/2	1/4	5-1/2
GI-113-B6	1/4	6

GALVANIZED PIPE FITTINGS

SCHEDULE 40 (150 LB.)

Fairview

FITTINGS



Long Nipple

PART No.	Pipe	Length (IN.)
3/8 NPT		
GI-113-C1-1/2	3/8	1-1/2
GI-113-C2	3/8	2
GI-113-C2-1/2	3/8	2-1/2
GI-113-C3	3/8	3
GI-113-C3-1/2	3/8	3-1/2
GI-113-C4	3/8	4
GI-113-C4-1/2	3/8	4-1/2
GI-113-C5	3/8	5
GI-113-C6	3/8	6

1/2 NPT		
GI-113-D1-1/2	1/2	1-1/2
GI-113-D2	1/2	2
GI-113-D2-1/2	1/2	2-1/2
GI-113-D3	1/2	3
GI-113-D3-1/2	1/2	3-1/2
GI-113-D4	1/2	4
GI-113-D4-1/2	1/2	4-1/2
GI-113-D5	1/2	5
GI-113-D5-1/2	1/2	5-1/2
GI-113-D6	1/2	6
GI-113-D8	1/2	8

3/4 NPT		
GI-113-E1-1/2	3/4	1-1/2
GI-113-E2	3/4	2
GI-113-E2-1/2	3/4	2-1/2
GI-113-E3	3/4	3
GI-113-E3-1/2	3/4	3-1/2
GI-113-E4	3/4	4
GI-113-E4-1/2	3/4	4-1/2
GI-113-E5	3/4	5
GI-113-E5-1/2	3/4	5-1/2
GI-113-E6	3/4	6

1 NPT		
GI-113-H2	3/4	2
GI-113-H2-1/2	3/4	2-1/2
GI-113-H3	3/4	3
GI-113-H3-1/2	3/4	3-1/2
GI-113-H4	3/4	4
GI-113-H4-1/2	3/4	4-1/2
GI-113-H5	3/4	5
GI-113-H5-1/2	3/4	5-1/2
GI-113-H6	3/4	6

1-1/4 NPT		
GI-113-J2	1-1/4	2
GI-113-J2-1/2	1-1/4	2-1/2
GI-113-J3	1-1/4	3
GI-113-J3-1/2	1-1/4	3-1/2
GI-113-J4	1-1/4	4
GI-113-J4-1/2	1-1/4	4-1/2
GI-113-J5	1-1/4	5
GI-113-J6	1-1/4	6

1-1/2 NPT		
GI-113-K2	1-1/2	2
GI-113-K2-1/2	1-1/2	2-1/2
GI-113-K3	1-1/2	3
GI-113-K3-1/2	1-1/2	3-1/2
GI-113-K4	1-1/2	4
GI-113-K4-1/2	1-1/2	4-1/2
GI-113-K5	1-1/2	5
GI-113-K5-1/2	1-1/2	5-1/2
GI-113-K6	1-1/2	6



Long Nipple (Cont.)

2 NPT		
GI-113-M2-1/2	2	2-1/2
GI-113-M3	2	3
GI-113-M3-1/2	2	3-1/2
GI-113-M4	2	4
GI-113-M5	2	5
GI-113-M5-1/2	2	5-1/2
GI-113-M6	2	6

2-1/2 NPT		
GI-113-N6	2-1/2	6

3 NPT		
GI-113-P4	3	4
GI-113-P6	3	6

4 NPT		
GI-113-S4	4	4
GI-113-S6	4	6



Coupling

PART No.	Pipe
GI-103-A	1/8
GI-103-B	1/4
GI-103-C	3/8
GI-103-D	1/2
GI-103-E	3/4
GI-103-H	1
GI-103-J	1-1/4
GI-103-K	1-1/2
GI-103-M	2
GI-103-N	2-1/2



Reducing Coupling

PART No.	Pipe
GI-119-BA	1/4 to 1/8
GI-119-CA	3/8 to 1/8
GI-119-CB	3/8 to 1/4
GI-119-DB	1/2 to 1/4
GI-119-DC	1/2 to 3/8
GI-119-ED	3/4 to 1/2
GI-119-HD	1 to 1/2
GI-119-HE	1 to 3/4
GI-119-JD	1-1/4 to 1/2
GI-119-JE	1-1/4 to 3/4
GI-119-JH	1-1/4 to 1
GI-119-KE	1-1/2 to 3/4
GI-119-KH	1-1/2 to 1
GI-119-KJ	1-1/2 to 1-1/4
GI-119-ME	2 to 3/4
GI-119-MH	2 to 1
GI-119-MJ	2 to 1-1/4
GI-119-MK	2 to 1-1/2
GI-119-NM	2-1/2 to 2
GI-119-PM	3 to 2
GI-119-SP	4 to 3

Galvanization is the process of applying a protective zinc coating to steel or iron in order to prevent premature rust and corrosion.



Union

PART No.	Pipe
GI-104-A	1/8
GI-104-B	1/4
GI-104-C	3/8
GI-104-D	1/2
GI-104-E	3/4
GI-104-H	1
GI-104-J	1-1/4
GI-104-K	1-1/2
GI-104-M	2
GI-104-P	3



Bushing

PART No.	Pipe
GI-110-BA	1/4 to 1/8
GI-110-CA	3/8 to 1/8
GI-110-CB	3/8 to 1/4
GI-110-DA	1/2 to 1/8
GI-110-DB	1/2 to 1/4
GI-110-DC	1/2 to 3/8
GI-110-EA	3/4 to 1/8
GI-110-EB	3/4 to 1/4
GI-110-EC	3/4 to 3/8
GI-110-ED	3/4 to 1/2
GI-110-HB	1 to 1/4
GI-110-HC	1 to 3/8
GI-110-HD	1 to 1/2
GI-110-HE	1 to 3/4
GI-110-JD	1-1/4 to 1/2
GI-110-JE	1-1/4 to 3/4
GI-110-JH	1-1/4 to 1
GI-110-KD	1-1/2 to 1/2
GI-110-KE	1-1/2 to 3/4
GI-110-KH	1-1/2 to 1
GI-110-KJ	1-1/2 to 1-1/4
GI-110-ME	2 to 3/4
GI-110-MH	2 to 1
GI-110-MJ	2 to 1-1/4
GI-110-MK	2 to 1-1/2
GI-110-NK	2-1/2 to 1-1/2
GI-110-NM	2-1/2 to 2
GI-110-PM	3 to 2
GI-110-PN	3 to 2-1/2
GI-110-SM	4 to 2
GI-110-SP	4 to 3



Plug
(Square Head)

PART No.	Pipe
GI-109-A	1/8
GI-109-B	1/4
GI-109-C	3/8
GI-109-D	1/2
GI-109-E	3/4
GI-109-H	1
GI-109-J	1-1/4
GI-109-K	1-1/2
GI-109-M	2
GI-109-N	2-1/2
GI-109-P	3
GI-109-S	4



Cap

PART No.	Pipe
GI-108-A	1/8
GI-108-B	1/4
GI-108-C	3/8
GI-108-D	1/2
GI-108-E	3/4
GI-108-H	1
GI-108-J	1-1/4
GI-108-K	1-1/2
GI-108-M	2
GI-108-N	2-1/2
GI-108-P	3
GI-108-S	4



90° Elbow

PART No.	Pipe
GI-100-A	1/8
GI-100-B	1/4
GI-100-C	3/8
GI-100-D	1/2
GI-100-E	3/4
GI-100-H	1
GI-100-J	1-1/4
GI-100-K	1-1/2
GI-100-M	2
GI-100-N	2-1/2
GI-100-P	3
GI-100-S	4



Reducing
90° Elbow

PART No.	Pipe
GI-100-CB	3/8 to 1/4
GI-100-DC	1/2 to 3/8
GI-100-ED	3/4 to 1/2
GI-100-HD	1 to 1/2
GI-100-HE	1 to 3/4
GI-100-JH	1-1/4 to 1
GI-100-KH	1-1/2 to 1
GI-100-KJ	1-1/2 to 1-1/4



45° Elbow

PART No.	Pipe
GI-105-A	1/8
GI-105-B	1/4
GI-105-C	3/8
GI-105-D	1/2
GI-105-E	3/4
GI-105-H	1
GI-105-J	1-1/4
GI-105-K	1-1/2
GI-105-M	2
GI-105-P	3
GI-105-S	4



90° Street
Elbow

PART No.	Pipe
GI-116-A	1/8
GI-116-B	1/4
GI-116-C	3/8
GI-116-D	1/2
GI-116-E	3/4
GI-116-H	1
GI-116-J	1-1/4
GI-116-K	1-1/2
GI-116-M	2
GI-116-N	2-1/2
GI-116-P	3



45° Street
Elbow


PART No.	Pipe
GI-124-A	1/8
GI-124-B	1/4
GI-124-C	3/8
GI-124-D	1/2
GI-124-E	3/4
GI-124-H	1
GI-124-J	1-1/4
GI-124-K	1-1/2
GI-124-M	2



Tee

PART No.	Pipe
GI-101-A	1/8
GI-101-B	1/4
GI-101-C	3/8
GI-101-D	1/2
GI-101-E	3/4
GI-101-H	1
GI-101-J	1-1/4
GI-101-K	1-1/2
GI-101-M	2
GI-101-N	2-1/2
GI-101-P	3
GI-101-S	4

Other sizes available. Minimums apply.



Reducing
Tee

PART No.	Pipe Size		
	1	2	3
GI-101-EB	3/4	3/4	1/4
GI-101-ED	3/4	3/4	1/2
GI-101-EDD	3/4	1/2	1/2
GI-101-EDE	3/4	1/2	3/4
GI-101-EH	3/4	3/4	1
GI-101-HB	1	1	1/4
GI-101-HD	1	1	1/2
GI-101-HE	1	1	3/4
GI-101-HEH	1	3/4	1
GI-101-JE	1-1/4	1-1/4	3/4
GI-101-KE	1-1/2	1-1/2	3/4
GI-101-KH	1-1/2	1-1/2	1
GI-101-MD	2	2	1/2
GI-101-ME	2	2	3/4
GI-101-MH	2	2	1

Galvanization is the process of applying a protective zinc coating to steel or iron in order to prevent premature rust and corrosion.

GALVANIZED PIPE FITTINGS

SCHEDULE 40 (150 LB.)

Fairview

FITTINGS



Cross



Floor
Flange



Lock
Nut

PART No.	Pipe
GI-102-C	3/8
GI-102-D	1/2
GI-102-E	3/4

PART No.	Pipe
GI-114-D	1/2
GI-114-E	3/4
GI-114-H	1
GI-114-J	1-1/4
GI-114-K	1-1/2
GI-114-M	2
GI-114-N	2-1/2

PART No.	Pipe
GI-111-B	1/4
GI-111-D	1/2

Galvanization is the process of applying a protective zinc coating to steel or iron in order to prevent premature rust and corrosion.

If you can't find what you're looking for,
contact your local FAIRVIEW branch.

Special orders are available,
with minimum quantities required.



Fairview

HOSE | VALVES | FITTINGS



**Swivel
Hose Barb
to Female Hose**

HEX NUT (201-H)


PART No.	Hose I.D.
195-6	3/8
195-8	1/2
195-10	5/8
195-12	3/4
195-16 *	1

* 1" NPS - 11-1/2 T.P.I.

[Lead Free](#)

[PART No.](#)

[LF-195-8](#) [1/2](#)



**Hose Barb
to Male Hose**

HEX NUT (201-H)

PART No.	Hose I.D.
193-6	3/8
193-8	1/2
193-10	5/8
193-12	3/4
193-16 *	1

* 1" NPS - 11-1/2 T.P.I.

[Lead Free](#)

[PART No.](#)

[LF-193-8](#) [1/2](#)



GHW



GHW-EPDM



GHW-S

PART No.	Description
GHW	Garden Hose Washer
GHW-EPDM	EPDM Washer
GHW-S	Stainless Steel Screened Washer



200-W



201-H

PART No.	Description
200-W	Knurled Cap Nut
201-H	Open Hex Nut



**Water Line
Air Drain Valve**

PART No.	Description
204	Hex Knurled Cap Nut to Air Valve

IDEALLY SUITED FOR RECREATIONAL VEHICLE
WINTER PREP.



Water Plug

PART No.	Style
206-WP	Square Head Plug



**Water Cap
(with Chain)**

HEX-KNURL CAP NUT (with Chain)

PART No.	Style
200-HKC	Square Head Plug



**Swivel Coupling
Female Hose
Both Ends**

PART No.	Description
203-W	Water Thread



**Swivel Coupling
Female Hose
to Female Pipe**

Part No.	Pipe
199S-D	1/2
199S-E	3/4

[Lead Free](#)


[PART No.](#)

[LF-199S-D](#) [1/2](#)



**Swivel Connector
Female Hose
to Female Pipe**

PART No.	Pipe
194-B	1/4
194-C	3/8
194-D	1/2




**Female Hose
to Male Pipe**

PART No.	Pipe
199-D	1/2
199-E	3/4



**Coupling
Male Hose
to Female Pipe**

PART No.	Pipe
197-B	1/4
197-C	3/8
197-D	1/2
197-E	3/4




**Coupling
Male Hose
to Male Pipe**

PART No.	Pipe
196-C	3/8
196-D	1/2
196-E	3/4

[Lead Free](#)

[PART No.](#)

[LF-196-E](#) [1/4](#)



**Coupling
Male Hose
to Male Hose**

PART No.	Description
196-W	Male Hose to Male Hose




**Coupling
Male Hose
to Female Pipe**

PART No.	Pipe
198-D	1/2
198-E	3/4

WATER PRESSURE REGULATOR

- Lead-Free Design
- Keeps outlet pressure at 55 psi
- Highest water flow available
- Screened washer filters debris
- Fits all standard water hose and riser connections
- Heavy-Duty impact resistant design



PART No.	Description
WR-RV55	Female Water Hose X Male Water Hose Regulator (Retail Packaged)


Water Pressure Gauge

- Lead free brass
- 0-160 PSI pressure gauge
- Heavy-duty swivel nut
- Full flow design
- Fits all standard water hose connections



PART No.	Description
WR-PG160SD15	Female Water Hose X Male Water Hose

DISHWASHER INLET WATER CONNECTION



Includes EPDM Washer, Compression Nut & Sleeve

PART No.	Description
DWF-6	Female Water Hose X Male Water Hose Regulator

BRASS WATER HOSE (GARDEN HOSE) ACCESSORIES




Y Coupling 2 Male Hose X Female Hose

PART No.	Style
202-WV	Valved
202-W	Plain



Splitter Coupling 4 Male Hose X Female Hose

PART No.	Style
404-WV	Valved

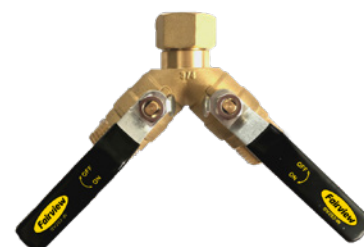

Ball Valve Y Coupling 2 Male Hose X Female Hose

PART No.	Style
BV202-W	Valved

Lead Free
PART No.
BV202-W-LF Valved

Straight Coupling Male Hose X Female Hose

PART No.	Style
199-WV	Valved



Ball Valve Straight Coupling Male Hose X Female Hose

PART No.	Style
BV199-W	Valved

Lead Free
PART No.
BV199-W-LF Valved



BRASS WATER HOSE (GARDEN HOSE) QUICK DISCONNECTS







PART No.	Style
QD-WHCF	Quick Disconnect Coupler X Water Hose Thread
QD-WHVCF	Valved QD Coupler X Water Hose Thread



PART No.	Style
QD-WHNM	Quick Disconnect Nipple X Water Hose Thread



**BITE-FORCE FITTINGS AND VALVES
ARE AVAILABLE INDIVIDUALLY RETAIL PACKAGED
WITH INSTALLATION INSTRUCTIONS.
SUFFIX PART NUMBER WITH "P" WHEN ORDERING.**

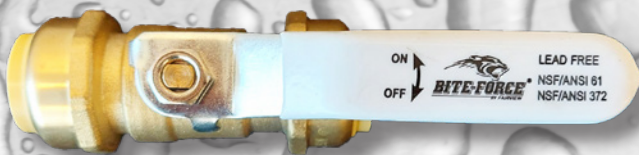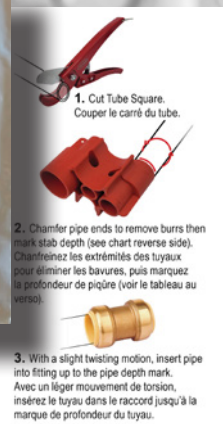


HOSE | VALVES | FITTINGS



HOSE & TUBE ENDS

BRASS RING-BARB FITTINGS FOR POLY TUBE.....	32
HOSE BARB FITTINGS-BRASS.....	33-34
HOSE BARB FITTINGS-NYLON.....	34
PEX FITINGS & VALVES KITS-LEAD FREE BRASS.....	32
PEX HOSE ENDS-LEAD FREE.....	31

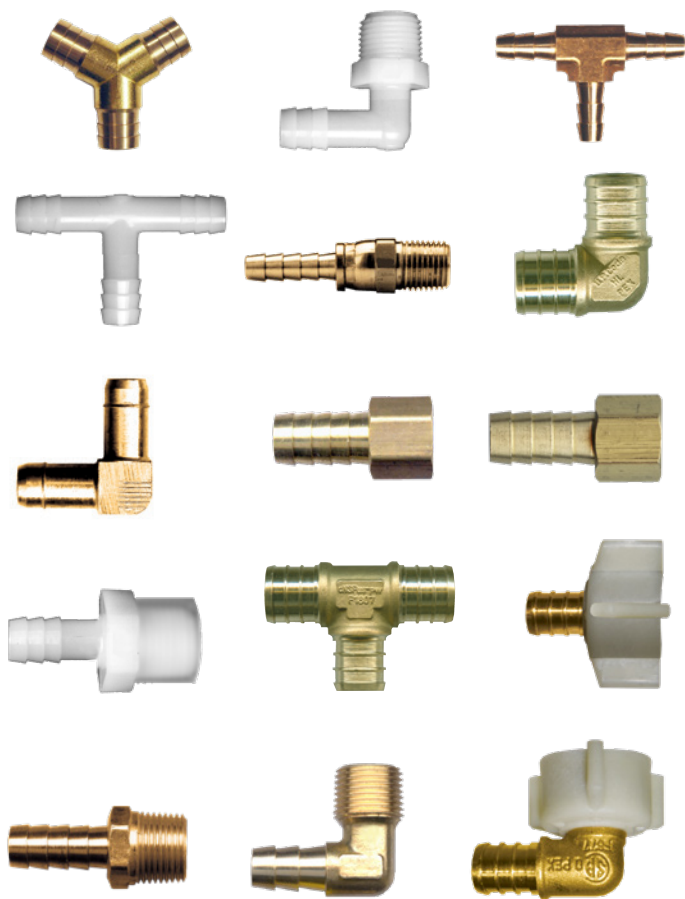

CONNECTING PEX TUBE TO INSERT FITTINGS



1. Cut Pex pipe squarely. Check pipe I.D. and O.D. and remove any burrs.
2. Apply copper ring or PEX clamp on top of PEX pipe.
3. Insert fitting into the end of the pipe and pull clamp or ring over the fitting within 1/8 to 1/4 inch from the end of the tube. This process presses the fitting ribs into the pipe.
4. Crimp copper ring or PEX clamp using the required Fairview tool.
5. Check crimp using the Go-No-Go Gauge to determine if the crimp connection was properly made.
6. The GO opening should go freely across a crimped copper ring. The No-Go opening should not go across a crimped copper ring.
7. All water systems should be pressure tested prior to use.



STEP 1



STEP 2



STEP 3




STEP 4



STEP 5



STEP 6



**Pex to
Male Pipe**

Lead Free

PART No.	Hose I.D.	Pipe
LF-PEX-125-8D	3/8	1/2
LF-PEX-125-10D	1/2	1/2
LF-PEX-125-10E	1/2	3/4
LF-PEX-125-14D	3/4	1/2
LF-PEX-125-14E	3/4	3/4
LF-PEX-125-14H	3/4	1
LF-PEX-125-18E	1	3/4
LF-PEX-125-18H	1	1



**Pex to
Male Sweat**

Lead Free

PART No.	Pex	Copper Tube
LF-PEX-125SW-10	1/2	1/2 K
LF-PEX-125SW-14	3/4	3/4 K
LF-PEX-125SW-18	1	1 K



**Pex to
Female Pipe**

Lead Free

PART No.	Pex	Pipe
LF-PEX-126-10D	1/2	1/2
LF-PEX-126-10E	1/2	3/4
LF-PEX-126-14E	3/4	3/4
LF-PEX-126-14H	3/4	1
LF-PEX-126-18H	1	1



**Pex to FPT
Swivel Adapter**

Lead Free

PART No.	Pex	Pipe
LF-PEX-126SPN-8D	3/8	1/2
LF-PEX-126SPN-10D	1/2	1/2



**Pex to
Female Sweat**

Lead Free

PART No.	Pex	Copper Tube
LF-PEX-126SW-10	1/2	1/2 K
LF-PEX-126SW-14	3/4	3/4 K
LF-PEX-126SW-18	1	1 K



**Splicer
Pex to Pex**

Lead Free

PART No.	Pex	Pex
LF-PEX-129-8	3/8	3/8
LF-PEX-129-108	1/2	3/8
LF-PEX-129-10	1/2	1/2
LF-PEX-129-14	3/4	3/4
LF-PEX-129-1410	3/4	1/2
LF-PEX-129-1814	1	3/4



Pex Plug

Lead Free

PART No.	Pex
LF-PEX-121HB-10	1/2
LF-PEX-121HB-14	3/4
LF-PEX-121HB-18	1



**90° Elbow
Pex to Pex**

Lead Free

PART No.	Pex	Pex
LF-PEX-99HB-8	3/8	3/8
LF-PEX-99HB-10	1/2	1/2
LF-PEX-99HB-14	3/4	3/4
LF-PEX-99HB-1410	3/4	1/2
LF-PEX-99HB-18	1	1



**90° Elbow
Pex to
Male Pipe**

Lead Free

PART No.	Pex	Pipe
LF-PEX-139-10D	1/2	1/2
LF-PEX-139-14E	3/4	3/4



**90° Elbow
Pex to FPT
Swivel Adapter**

Lead Free

PART No.	Pex	Pipe
LF-PEX-139FSPN-8D	3/8	3/8
LF-PEX-139FSPN-10D	1/2	1/2
LF-PEX-139FSPN-14E	3/4	3/4



**Flanged
90° Elbow
Pex to
Female Pipe**

Lead Free

PART No.	Pex	Pipe
LF-PEX-S139F-10D	1/2	1/2
LF-PEX-S139F-14E	3/4	3/4



**90° Elbow
Pex To
Male Sweat**

Lead Free

PART No.	Pex	Copper Tube
LF-PEX-139SW-10	1/2	1/2 K
LF-PEX-139SW-1014	1/2	3/4 K
LF-PEX-139SW-14	3/4	3/4 K



**90° Elbow
Pex to
Female Sweat**

Lead Free


PART No.	Pex	Copper Tube
LF-PEX-139FSW-10	1/2	1/2 K
LF-PEX-139FSW-1014	1/2	3/4 K
LF-PEX-139FSW-14	3/4	3/4 K



**Tee Pex
Three Ends**

Lead Free

PART No.	Pex	Pex
LF-PEX-123-8	3/8	1/8
LF-PEX-123-10	1/2	1/2
LF-PEX-123-14	3/4	3/4
LF-PEX-123-18	1	1



**Tee Pex
Three Ends
Reducing**

Lead Free

PART No.	Pex 1	Pex 2	Pex 3
LF-PEX-123-1014	1/2	1/2	3/4
LF-PEX-123-1410	3/4	3/4	1/2
LF-PEX-123-141010	3/4	1/2	1/2
LF-PEX-123-141014	3/4	1/2	3/4
LF-PEX-123-1814	1	1	3/4

LEAD FREE BRASS PEX FITTINGS & VALVES KITS

PEX Fittings & Valves Kit with Stainless Ear Clamps



PART No.
LF-PEX-KIT-HC

Kit Components:

PART No.	QTY:	PART No.	QTY:	PART No.	QTY:	PART No.	QTY:
LF-PEX-99HB-10	2	LF-PEX-125-14E	2	LF-PEX-126SW-14	2	LF-WSPEX68-106	1
LF-PEX-99HB-14	2	LF-PEX-125SW-10	2	LF-PEX-129-10	2	LF-WSPEX69-106	1
LF-PEX-121HB-10	2	LF-PEX-125SW-14	2	LF-PEX-129-14	2	HCPEX-10	10
LF-PEX-121HB-14	2	LF-PEX-126-10D	2	LF-PEX-139-10D	1	HCPEX-14	10
LF-PEX-123-10	1	LF-PEX-126-10E	2	LF-PEX-139-14E	1	PEX-JC-10	10
LF-PEX-123-14	1	LF-PEX-126-14E	2	LF-BVPEX2129-10	1	PEX-JC-14	10
LF-PEX-125-10D	2	LF-PEX-126SW-10	2	LF-BVPEX2129-14	1	HCPEX-CT	1

PEX Fittings & Valves Kit with Black Copper Rings



PART No.
LF-PEX-KIT-BCR

Kit Components:

PART No.	QTY:	PART No.	QTY:	PART No.	QTY:	PART No.	QTY:
LF-PEX-99HB-10	2	LF-PEX-125-14E	2	LF-PEX-126SW-14	2	LF-WSPEX68-106	1
LF-PEX-99HB-14	2	LF-PEX-125SW-10	2	LF-PEX-129-10	2	LF-WSPEX69-106	1
LF-PEX-121HB-10	2	LF-PEX-125SW-14	2	LF-PEX-129-14	2	HCPEX-10-BCR	10
LF-PEX-121HB-14	2	LF-PEX-126-10D	2	LF-PEX-139-10D	1	HCPEX-14-BCR	10
LF-PEX-123-10	1	LF-PEX-126-10E	2	LF-PEX-139-14E	1	PEX-JC-10	10
LF-PEX-123-14	1	LF-PEX-126-14E	2	LF-BVPEX2129-10	1	PEX-JC-14	10
LF-PEX-125-10D	2	LF-PEX-126SW-10	2	LF-BVPEX2129-14	1	HCPEX-CT	1


BRASS RING-BARB FITTINGS FOR POLY TUBE

(USE WITH LLDPE POLYETHYLENE TUBE: 361, 363 SERIES)



Coupling Tube to Tube

PART No.	Tube O.D.	Tube I.D.
962-4	1/4	.170
962-6	3/8	.250



Connector Tube to Female pipe

PART No.	Tube O.D.	Tube I.D.	Pipe
966-4A	1/4	.170	1/8
966-4B	1/4	.170	1/4



Connector Tube to Male pipe

PART No.	Tube O.D.	Tube I.D.	Pipe
968-4A	1/4	.170	1/8
968-4B	1/4	.170	1/4
968-6A	3/8	.250	1/8
968-6B	3/8	.250	1/4



BulkHead Union

PART No.	Tube O.D.	Tube I.D.
977-4	1/4	.170




90° Elbow Tube to Tube

PART No.	Tube O.D.	Tube I.D.
965-4	1/4	.170
965-6	3/8	.250
965-8	1/2	.375



90° Elbow Tube to Male Pipe

PART No.	Tube O.D.	Tube I.D.	Pipe
969-4A	1/4	.170	1/8
969-4B	1/4	.170	1/4
969-6A	3/8	.250	1/8
969-6B	3/8	.250	1/4



Tee Tube Three Ends

PART No.	Tube O.D.	Tube I.D.
964-4	1/4	.170
964-6	3/8	.250
964-8	1/2	.375

RING-BARB fittings are designed

for use with FAIRVIEW

POLYETHYLENE TUBE. The barb has a raised ring that imbeds into the tube. This assures a leakproof connection when used within the normal temperature and pressure range of the tube. Simply push fitting into tube to assemble.

No tools or clamps required.



Note:

Use of Fairview hose and tube with other than Fairview original recommended fittings, may void warranty. Verify with a Fairview representative prior to installation.

BRASS HOSE BARB FITTINGS

Fairview




**Coupler
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Pipe
125-2-10/32	1/8	10/32 UNF
125-2A	1/8	1/8
125-2B	1/8	1/4
125-3A	3/16	1/8
125-3B	3/16	1/4
125-4A	1/4	1/8
125-4B	1/4	1/4
125-4C	1/4	3/8
125-4D	1/4	1/2
125-5A	5/16	1/8
125-5B	5/16	1/4
125-5C	5/16	3/8
125-6A	3/8	1/8
125-6B	3/8	1/4
125-6C	3/8	3/8
125-6D	3/8	1/2
125-6E	3/8	3/4
125-8B	1/2	1/4
125-8C	1/2	3/8
125-8D	1/2	1/2
125-8E	1/2	3/4
125-10C	5/8	3/8
125-10D	5/8	1/2
125-10E	5/8	3/4
125-12D	3/4	1/2
125-12E	3/4	3/4
125-16E	1	3/4
125-16H	1	1

Lead Free

PART No.

LF-125-8D 1/2 1/2



**Coupler
Hose Barb
to Male Pipe
(Cast Bronze)**

PART No.	Hose I.D.	Pipe
125CA-8D	1/2	1/2
125CA-12E	3/4	3/4
125CA-16H	1	1
125CA-20J	1-1/4	1-1/4
125CA-24K	1-1/2	1-1/2
125CA-32M	2	2



**Working
Swivel Coupler
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Pipe
1925-4B	1/4	1/4
1925-6B	3/8	1/4
1925-6C	3/8	3/8
1925-6D	3/8	1/2
1925-8C	1/2	3/8
1925-8D	1/2	1/2



**Coupler
Hose Barb
to Female Pipe**

PART No.	Hose I.D.	Pipe
126-2A	1/8	1/8
126-2B	1/8	1/4
126-3A	3/16	1/8
126-3B	3/16	1/4
126-4A	1/4	1/8
126-4B	1/4	1/4



**Coupler
Hose Barb
to Female Pipe
(Cont.)**

PART No.	Hose I.D.	Pipe
126-4C	1/4	3/8
126-5A	5/16	1/8
126-5B	5/16	1/4
126-5C	5/16	3/8
126-6A	3/8	1/8
126-6B	3/8	1/4
126-6C	3/8	3/8
126-6D	3/8	1/2
126-8B	1/2	1/4
126-8C	1/2	3/8
126-8D	1/2	1/2
126-12D	3/4	1/2
126-16H	1	1



**Swivel Coupler
Hose Barb
Flat Seat
with Gasket
to Female
Straight Pipe**

PART No.	Hose I.D.	Straight Pipe
130-4A	1/4	1/8
130-4B	1/4	1/4
130-6B	3/8	1/4
130-6C	3/8	3/8



**Swivel Coupler
Hose Barb
Ball Seat
to Female
Straight Pipe**

PART No.	Hose I.D.	Straight Pipe
131-3A	3/16	1/8
131-3B	3/16	1/4
131-4A	1/4	1/8
131-4B	1/4	1/4
131-4C	1/4	3/8
131-5B	5/16	1/4
131-6B	3/8	1/4
131-6C	3/8	3/8
131-8C	1/2	3/8
131-8D	1/2	1/2
131-12E	3/4	3/4



**Coupler
Hose Barb
to Male 45°
S.A.E. Flare**

PART No.	Hose I.D.	Pipe
127-4A	1/4	1/4
127-4B	1/4	3/8
127-55	5/16	5/16
127-66	3/8	3/8
127-68	3/8	1/2



**Connector
Male Straight
Pipe Thread
with Ball Seat
to Male Taper
Pipe Thread**

PART No.	Straight Pipe	Pipe
134-BB	1/4	1/4
134-CC	3/8	3/8
134-CD	3/8	1/2
134-DD	1/2	1/2

USE WITH 130, 131 SERIES.



**Swivel Coupler
Hose Barb
to Female 45°
S.A.E. Flare**

PART No.	Hose I.D.	Tube
128-34	3/16	1/4
128-44	1/4	1/4
128-46	1/4	3/8
128-55	5/16	5/16
128-56	5/16	3/8
128-66	3/8	3/8
128-68	3/8	1/2
128-88	1/2	1/2
128-810	1/2	5/8
128-1212	3/4	3/4



**90° Elbow
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Pipe
139-3A	3/16	1/8
139-4A	1/4	1/8
139-4B	1/4	1/4
139-4C	1/4	3/8
139-5A	5/16	1/8
139-5B	5/16	1/4
139-5C	5/16	3/8
139-6A	3/8	1/8
139-6B	3/8	1/4
139-6C	3/8	3/8
139-6D	3/8	1/2
139-8B	1/2	1/4
139-8C	1/2	3/8
139-8D	1/2	1/2
139-10C	5/8	3/8
139-10D	5/8	1/2
139-12D	3/4	1/2
139-12E	3/4	3/4
139-16E	1	3/4
139-16H	1	1



**45° Elbow
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Tube
140-4A	1/4	1/8
140-4B	1/4	1/4
140-5A	5/16	1/8
140-6A	3/8	1/8
140-6B	3/8	1/4
140-6C	3/8	3/8
140-8C	1/2	3/8
140-10C	5/8	3/8

HOSE & TUBE
ENDS

BRASS HOSE BARB FITTINGS



**Splicer
Hose Barb**

PART No.	Hose I.D.
129-3	3/16
129-4	1/4
129-5	5/16
129-6	3/8
129-8	1/2
129-10	5/8
129-12	3/4



**Y Connector
Hose Barb
All Ends**

PART No.	Hose I.D.
123Y-4	1/4
123Y-6	3/8
123Y-8	1/2
123Y-10	5/8
123Y-12	3/4



**90° Elbow
Hose Barb
to Hose Barb**

PART No.	Hose I.D.
99HB-4	1/4
99HB-5	5/16
99HB-6	3/8
99HB-8	1/2



**TEE
Hose Barb
All Ends**


PART No.	Hose I.D.
123-4	1/4
123-5	5/16
123-6	3/8

NOTE: **Lead Free** Brass hose barbs are available on request. Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.

(Special Order)

Minimum quantities apply.

NYLON HOSE BARB FITTINGS (MADE WITH NSF APPROVED RESINS)



**Coupler
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Pipe
525-4A	1/4	1/8
525-4B	1/4	1/4
525-4D	1/4	1/2
525-6B	3/8	1/4
525-6C	3/8	3/8
525-6D	3/8	1/2
525-8C	1/2	3/8
525-8D	1/2	1/2
525-8E	1/2	3/4
525-10D	5/8	1/2
525-10E	5/8	3/4
525-12E	3/4	3/4



**Coupler
Hose Barb
to Female Pipe**

PART No.	Hose I.D.	Pipe
526-4B	1/4	1/4
526-4D	1/4	1/2
526-6B	3/8	1/4
526-6C	3/8	3/8
526-8D	1/2	1/2




**Splicer
Hose Barb**

PART No.	Hose I.D.
529-4	1/4
529-6	3/8
529-8	1/2
Reducing	
529-42	1/4
529-64	3/8
529-86	1/2



**90° Elbow
Hose Barb
to Male Pipe**

PART No.	Hose I.D.	Pipe
539-4A	1/4	1/8
539-4B	1/4	1/4
539-6B	3/8	1/4
539-6C	3/8	3/8
539-6D	3/8	1/2
539-8C	1/2	3/8
539-8D	1/2	1/2
539-10E	5/8	3/4



**90° Elbow
Hose Barb
to Hose Barb**

PART No.	Hose I.D.
555-4	1/4
555-6	3/8
555-8	1/2
555-10	5/8
555-12	3/4




**Tee
Hose Barb
All Ends**

PART No.	Hose I.D.
544-3	3/16
544-4	1/4
544-6	3/8
544-8	1/2
544-10	5/8

HOSE & ASSEMBLIES

DISCHARGE HOSE	38
GENERAL USE P.V.C. BRAIDED HOSE	38
INDUSTRIAL QUALITY WATER HOSE ASSEMBLIES.....	37





WHBLU SERIES



WHBLK SERIES



WHGL SERIES

Material	PVC blend	EPDM rubber	Engineered PVC based resin
Colour	Blue	Black	Green
ID Sizes Available	1/2, 5/8, 3/4	1/2, 5/8, 3/4	1/2, 5/8
Max Working Pressure	1/2 300 PSI, 5/8 and 3/4 250 PSI	1/2, 5/8 200 PSI, 3/4 150 PSI	1/2 300 PSI, 5/8 250 PSI
Temperature Range	-40°F to +150°F, -40°C to +66°C	-22°F to +167°F, -30°C to +75°C	-65°F to +150°F, -54°C to +65°C
Cold Temp Flexibility	❄️❄️❄️❄️	❄️❄️❄️❄️	❄️❄️❄️❄️❄️
Features	• Very good flexibility • Easily re-coiled after use • Non-marking cover • U. V. and weather resistant • ROHS 2011/65/EU & 2015/863 compliant • Heavy machined brass ends	• Very good flexibility • Durable and long-lasting • Excellent resistance to heat • U.V., ozone and weather resistant • Heavy machined brass ends	• Unparalleled low temperature flexibility • Non-kinking / excellent shape retention • Non-marking cover • Excellent abrasion resistance • U.V. and weather resistant • Heavy machined brass ends



WHRVBLU SERIES



WHYEL SERIES

Material	PVC	PVC
Colour	Blue	Yellow
ID Sizes Available	1/2	1/2, 3/4
Max Working Pressure	300 PSI	125 PSI
Temperature Range	-15°F to +150°F, -26°C to +66°C	+25°F to +150°F, -4°C to +65°C
Cold Temp Flexibility	❄️❄️❄️	❄️❄️
Features	• Economical • Lightweight • Excellent abrasion resistance • U.V. and weather resistant • Heavy machined brass ends	• High visibility • Economical • Extremely lightweight • U.V. resistant • Heavy machined brass ends

NOTE: WORKING PRESSURE RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

INDUSTRIAL QUALITY WATER HOSE ASSEMBLIES

Fairview

- HEAVY BRASS MACHINED ENDS, FOR ALL ASSEMBLIES.
- OTHER LENGTHS AND END COMBINATIONS AVAILABLE UPON REQUEST.

NOTE: WORKING PRESSURE RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

Fairview Premium Blue Assemblies

Heavy Hex Female End

by Male Water Thread

Working Pressure: 1/2" I.D. 300 P.S.I.,

5/8" & 3/4" I.D. 250 P.S.I.

Temp: -40°F to +150°F, -40°C to +66°C

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WH8BLU-25H	25	1/2	300
WH8BLU-50H	50	1/2	300
WH8BLU-75H	75	1/2	300
WH8BLU-100H	100	1/2	300
WH10BLU-25H	25	5/8	250
WH10BLU-50H	50	5/8	250
WH10BLU-75H	75	5/8	250
WH10BLU-100H	100	5/8	250
WH12BLU-25H	25	3/4	250
WH12BLU-50H	50	3/4	250
WH12BLU-75H	75	3/4	250
WH12BLU-100H	100	3/4	250

Quality Blue PVC Assemblies


Heavy Hex Female End

by Male Water Thread

Working Pressure: 300 P.S.I.

Temp: -15°F to +150°F, -26°C to +66°C

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WHRV8BLU-50H	50	1/2	300

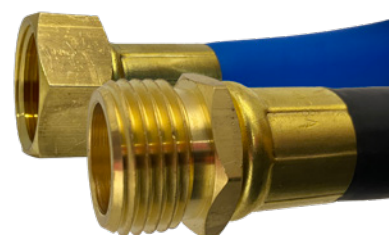

High Quality Contractor's Black Rubber

Double or Heavy Hex Female End

by Male Water Thread

Working Pressure: 1/2" & 5/8" I.D. 200 P.S.I.,

3/4" I.D. 150 P.S.I.

Temp: -22°F to +167°F, -30°C to +75°C

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WH8BLK-25H	25	1/2	200
WH8BLK-50H	50	1/2	200
WH8BLK-75H	75	1/2	200
WH8BLK-100H	100	1/2	200
WH10BLK-25H	25	5/8	200
WH10BLK-50H	50	5/8	200
WH10BLK-75H	75	5/8	200
WH10BLK-100H	100	5/8	200
WH12BLK-25H	25	3/4	150
WH12BLK-50H	50	3/4	150
WH12BLK-75H	75	3/4	150
WH12BLK-100H	100	3/4	150



Green Arctic Force - Low Temp

Heavy Hex Female End

by Male Water Thread

Working Pressure: 1/2" I.D. 300 P.S.I.,

5/8" I.D. 250 P.S.I.

Temp: -65°F to +150°F, -54°C to +65°C

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WHGL8GRN-25H	25	1/2	300
WHGL8GRN-50H	50	1/2	300
WHGL8GRN-75H	75	1/2	300
WHGL8GRN-100H	100	1/2	300
WHGL10GRN-25H	25	5/8	250
WHGL10GRN-50H	50	5/8	250
WHGL10GRN-75H	75	5/8	250
WHGL10GRN-100H	100	5/8	250



Commercial Yellow PVC

Heavy Hex Female End

by Male Water Thread

Working Pressure: 1/2" & 3/4" I.D. 125 P.S.I.

Temp: +25°F to +150°F, -4°C to +65°C

PART No.	Length (FT.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
WH8YEL-50H	50	1/2	125
WH12YEL-50H	50	3/4	125



HOSE &
ASSEMBLIES

RUBBER (EPDM) DISCHARGE HOSE



This flexible non-corrosive core, yarn reinforced black hose is designed for the discharge of water from automatic dishwashers, and other similar applications.

- **COLOR:** Black
- **TEMPERATURE:** -40°F to +190°F, -40°C to +88°C
- **CLAMPS:** HC5, HC6



NOTE:
WORKING PRESSURE RATED
AT +70°F +21°C. ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.

PART No.	Hose O.D. (IN.)	Actual I.D. (IN.)	Working Pressure(P.S.I)	Packaging
DWH-10-50	.910	5/8	100	50' Carton
DWH-10-100	.910	5/8	100	100' Coil
DWH-10-REEL	.910	5/8	100	500' Reel

GENERAL USE P.V.C. BRAIDED HOSE



NOTE:
WORKING PRESSURE RATED
AT +70°F +21°C. ANY AMBIENT
OR INTERNAL INCREASE IN
TEMPERATURE WILL LOWER THE
WORKING PRESSURE.

PART No.	Hose O.D. (IN.)	Actual I.D. (IN.)	Working Pressure(P.S.I)	Coil Length (FT.)
PVC-63-50	.375	3/16	250	50
PVC-63-100	.375	3/16	250	100
PVC-84-50	.460	1/4	250	50
PVC-84-100	.460	1/4	250	100
PVC-95-50	.525	5/16	250	50
PVC-95-100	.525	5/16	250	100
PVC-106-50	.600	3/8	225	50
PVC-106-100	.600	3/8	225	100
PVC-128-50	.750	1/2	200	50
PVC-128-100	.750	1/2	200	100
PVC-1410-50	.875	5/8	200	50
PVC-1410-100	.875	5/8	200	100
PVC-1712-50	1.025	3/4	150	50
PVC-1712-100	1.025	3/4	150	100
PVC-2116-25	1.312	1	125	25
PVC-2116-100	1.312	1	125	100
PVC-2820-25	1.620	1-1/4	100	25
PVC-2820-100	1.620	1-1/4	100	100
PVC-3224-25	2.000	1-1/2	100	25
PVC-3224-100	2.000	1-1/2	100	100
PVC-4032-25	2.500	2	75	25
PVC-4032-100	2.500	2	75	100

Polyvinyl-Chloride braided hose is manufactured from F.D.A. approved resins. It has an open mesh nylon braid to withstand higher pressures. It is transparent (blockages can be easily detected), flexible, light, and non conductive. It is suitable for use with air, mineral salts, plating solution, water, salt water, and hydrocarbons.

- **PACKAGING:** 25 FT, 50 FT & 100 FT Coils
500 FT reels 1/8" to 1/2" I.D.
300 FT reels 5/8" to 1" I.D.
- **TEMPERATURE:** -5°F to +160°F, -21°C to +71°C
- **FITTINGS:** Hose Barbs


NOTE: To order reel lengths change -100 to -REEL
on sizes 1/8" to 1" I.D.

NOTE: THIS HOSE IS NOT RECOMMENDED FOR MILK CONTACT, ALCOHOL OR MEDICAL APPLICATIONS.

TUBE

CLEAR VINYL TUBE.....	41
COPPER TUBE.....	42
INDUSTRIAL GRADE LLDPE TUBE.....	40
POTABLE WATER LLDPE TUBE.....	41



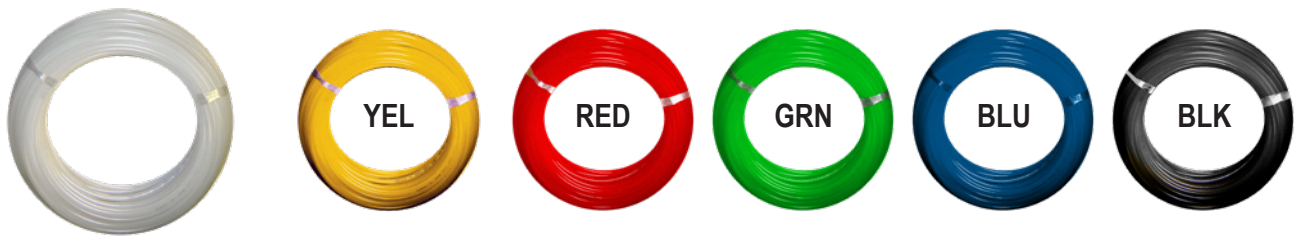

Fairview's Linear Low Density Industrial Grade Polyethylene Tubing (LLDPE) is UV resistant and provides excellent environmental stress crack resistance. It is ideal for general applications such as transfer of industrial air and liquids, humidifier fill lines and air conditioning drain lines.

Features:

- Economical and lightweight
- LLDPE resin provides excellent environmental stress crack resistance
- Resistant to sunlight and ultra-violet radiation
- Chemically inert
- Excellent resistance to solvents
- Phthalate free

TEMPERATURE: -50°F (-45°C) to +140°F (+60°C)

ORDERING INFORMATION

- **PACKAGING:** 50 FT, 100 FT, 500 FT and 1000 FT
- **FITTINGS:** 400 Series
PC60 Series
900 Series
- **COLOR CODES:** BLK (Black), BLU (Blue), GRN (Green), RED (Red), YEL (Yellow)
NOT ALL SIZES ARE AVAILABLE IN ALL COLORS. MINIMUM RUNS MAY APPLY.

NOTE: To order a color, suffix the size code with a color code. Example: 361-6GRN-100, 361-6RED-1000. For natural color (opaque) omit the color code. Dark colors have better U.V. resistance for outdoor applications.

PART No.	Tube O.D. (IN.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)	Coil Length (FT.)
361-4-50	1/4	.170	140	50
361-4-100	1/4	.170	140	100
361-4-500	1/4	.170	140	500
361-4-1000	1/4	.170	140	1000
361-4H-100	1/4	.125	150	100
361-5-100	5/16	.188	150	100
361-6-50	3/8	.250	125	50
361-6-100	3/8	.250	125	100
361-6-500	3/8	.250	125	500
361-6-1000	3/8	.250	125	1000
361-8-50	1/2	.375	100	50
361-8-100	1/2	.375	100	100
361-8-500	1/2	.375	100	500
361-8-1000	1/2	.375	100	1000
361-10-50	5/8	.500	75	50
361-10-100	5/8	.500	75	100
361-12-100	3/4	.625	50	100




WARNING
THIS PRODUCT IS NOT SUITABLE FOR INSTALLATION IN CONCEALED LOCATIONS (BEHIND WALLS, CEILINGS, FLOORS) OR USE AS A POTABLE WATER SUPPLY LINE (REFRIGERATORS, DISHWASHERS, WATER COOLERS). USE ONLY IN CONJUNCTION WITH FAIRVIEW RECOMMENDED FITTINGS.

WARNING
USE OF THIS TUBE WITH FITTINGS OTHER THAN FAIRVIEW ORIGINAL WILL VOID WARRANTY.

NOTE:
THE WORKING PRESSURES LISTED FOR THIS TUBE IS RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE ABOVE LISTED WORKING PRESSURES.



LINEAR LOW DENSITY POLYETHYLENE TUBE

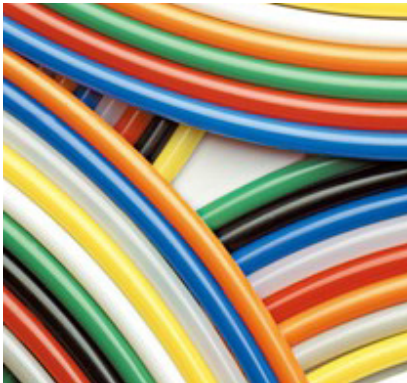

Fairview 363 Series tubing is produced from an advanced grade of LLDPE. It offers superior environmental stress cracking resistance - greatly exceeding that of ordinary polyethylene tubing as measured by ASTM D-1693 (IGEPAL) tests.

Environmental stresses that can shorten the service life of tubing include chemical exposure, aging, connections with barb-type fittings, or high vibration loads with connections to compression fittings.

Features:

- Compliant to ANSI/NSF-51, 61, WRAS and FDA requirements for food contact
- Dimensional stability
- Uniformity and long-term strength
- Higher burst pressure
- Greater tensile strength
- Wide range of available colors



**CERTIFIED FOR
POTABLE WATER
UNDER STANDARD
51 and 61**

PART No.	Color	Tube O.D. (IN.)	Tube I.D. (IN.)	Length (FT.)	Working Pressure (P.S.I.)
363-4-25	Natural	1/4	0.170	25	230
363-4-100	Natural	1/4	0.170	100	230
363-4-500	Natural	1/4	0.170	500	230
363-4BLK-25	Black	1/4	0.170	25	230
363-4BLK-100	Black	1/4	0.170	100	230
363-4BLK-500	Black	1/4	0.170	500	230
363-4BLU-25	Blue	1/4	0.170	25	230
363-4BLU-100	Blue	1/4	0.170	100	230
363-4BLU-500	Blue	1/4	0.170	500	230
363-4ORA-500	Orange	1/4	0.170	500	230

PART No.	Color	Tube O.D. (IN.)	Tube I.D. (IN.)	Length (FT.)	Working Pressure (P.S.I.)
363-4RED-500	Red	1/4	0.170	500	230
363-4WHI-500	White	1/4	0.170	500	230
363-6-25	Natural	3/8	0.250	25	170
363-6-100	Natural	3/8	0.250	100	170
363-6-500	Natural	3/8	0.250	500	170
363-6BLK-100	Black	3/8	0.250	100	170
363-6BLK-500	Black	3/8	0.250	500	170
363-6BLU-25	Blue	3/8	0.250	25	170
363-6BLU-100	Blue	3/8	0.250	100	170
363-6BLU-500	Blue	3/8	0.250	500	170

CLEAR VINYL TUBE



**CERTIFIED
UNDER
STANDARD
51 and 61**

Clear polyvinyl-chloride tube is manufactured from F.D.A. approved resins. It is clear, flexible, easy to clean, abrasion resistant and non-contaminating. It is suitable for the conveyance of air, and water and is used extensively where food and beverages are conveyed.

- **PACKAGING:** 50 FT & 100 FT COILS 1/8" TO 1-1/4" I.D.
500 FT REELS 1/8" TO 1/2" I.D.
- **TEMPERATURE:** +25°F to +149°F, -4°C to +65 °C
- **FITTINGS:** Hose barbs (Page 58 - 59)
- **NOTE:** To order reel lengths change -100 to -REEL
To order 50 foot coils change -100 to -50

PART No.	Tube O.D. (IN.)	Actual I.D. (IN.)	Working Pressure (P.S.I.)
JFT-42-100	1/4	1/8	65
JFT-53-100	5/16	3/16	55
JFT-63-100	3/8	3/16	65
JFT-64-100	3/8	1/4	55
JFT-75-100	7/16	5/16	50
JFT-84-100	1/2	1/4	70
JFT-85-100	1/2	5/16	60
JFT-86-100	1/2	3/8	45
JFT-106-100	5/8	3/8	55
JFT-108-100	5/8	1/2	30
JFT-128-100	3/4	1/2	45
JFT-1210-100	3/4	5/8	30
JFT-1410-100	7/8	5/8	40
JFT-1612-100	1	3/4	35
JFT-1812-100	1-1/8	3/4	50
JFT-2014-100	1-1/4	7/8	35
JFT-2016-100	1-1/4	1	25
JFT-2416-100	1-1/2	1	35
JFT-2420-100	1-1/2	1-1/4	20
JFT-3224-50	2	1-1/2	35

COPPER TUBE

TYPE K (ASTM B88)

THIRD PARTY CERTIFIED (TPC) TUBE




PART No.	K Size (Nominal)	Tube O.D. (IN.)	Working Pressure (P.S.I.)	Wall Thickness	Coil Length (FT.)
CTK-6-100	1/4	3/8	1,074	.035	100
CTK-8-100	3/8	1/2	1,130	.049	100
CTK-10-100	1/2	5/8	891	.049	100
CTK-12-66	5/8	3/4	736	.049	66
CTK-14-100	3/4	7/8	852	.065	100

Working pressure rated @ +100°F, (+38°C)

TYPE L (ASTM B88)

THIRD PARTY CERTIFIED (TPC) TUBE



PART No.	L Size (Nominal)	Tube O.D. (IN.)	Working Pressure (P.S.I.)	Wall Thickness	Coil Length (FT.)
CTL-6-REEL	1/4	3/8	912	.030	**
CTL-6-60	1/4	3/8	912	.030	60

** Please contact us for current reel lengths

* Working Pressure Rated at +100°F, (+38°C)

GENERAL USE (ASTM B75)

FAIRVIEW COPPER TUBE IS SOFT, SEAMLESS AND ANNEALED FOR FLEXIBILITY. CHECK LOCAL CODES TO ENSURE PROPER COPPER TUBE SELECTION TO MEET APPLICATION REQUIREMENTS.



PART No.	Tube O.D. (IN.)	Working Pressure (P.S.I.)	Wall Thickness	Coil Length (FT.)
CTG-4-25	1/4	1,406	.030	25
CTG-5-25	5/16	1,197	.032	25
CTG-6-25	3/8	984	.032	25
CTG-8-25	1/2	727	.032	25
CTG-10-25	5/8	618	.035	25
CTG-12-25	3/4	511	.035	25

Working pressure rated @ +100°F, (+38°C)

REFRIGERATION (ASTM B280)



PART No.	Tube O.D. (IN.)	Working Pressure (P.S.I.)	Wall Thickness	Coil Length (FT.)
CTR-2-50	1/8	3,074	.030	50
CTR-3-50	3/16	1,935	.030	50
CTR-4-50	1/4	1,406	.030	50
CTR-4-100	1/4	1,406	.030	100
CTR-5-50	5/16	1,197	.032	50
CTR-6-50	3/8	984	.032	50
CTR-6-100	3/8	984	.032	100
CTR-8-50	1/2	727	.032	50
CTR-8-100	1/2	727	.032	100
CTR-10-50	5/8	618	.035	50
CTR-10-100	5/8	618	.035	100
CTR-12-50	3/4	511	.035	50
CTR-14-50	7/8	582	.045	50

Working pressure rated @ +100°F, (+38°C)

CLAMPS & TUBE STRAPS

EAR CLAMPS (ONE)	45
EAR CLAMPS (TWO).....	45
GEAR CLAMPS.....	44
PEX CLAMPS AND CRIMP RINGS	45
PEX TUBE SUPPORTS	45
T-BOLT HOSE CLAMPS	44
TUBE STRAPS AND HANGERS	46



STANDARD GEAR CLAMPS

HC5 SERIES



- All Stainless Steel
- S.A.E. 1/2 Inch Wide Stainless Steel Band and Housing
- S.A.E. Stainless Steel Screw

HC6 SERIES



- S.A.E. 1/2 Inch Wide Stainless Steel Band and Housing
- S.A.E. Steel Case Hardened Plated Screw

PACKAGING: 10 Piece Cartons • Sizes 116 and up are Bulk

PART No.	Range (IN.)	Range (MM.)	PART No.
HC5-4TB *	.22 - .63	6 - 16	HC6-4TB *
HC5-5TB *	.44 - .69	11 - 18	HC6-5TB *
HC5-6TB *	.31 - .88	8 - 22	HC6-6TB *
HC5-8TB *	.44 - 1.00	11 - 25	HC6-8TB *
HC5-10TB *	.50 - 1.06	13 - 27	HC6-10TB *
HC5-12TB *	.56 - 1.25	14 - 32	HC6-12TB *
HC5-16TB *	.68 - 1.50	18 - 38	HC6-16TB *
HC5-20TB *	.87 - 1.75	22 - 44	HC6-20TB *
HC5-24TB *	1.31 - 2.00	33 - 51	HC6-24TB *
HC5-28TB *	1.31 - 2.25	33 - 57	--

HC5-6	.37 - .88	10 - 22	HC6-6
HC5-8	.43 - 1.00	11 - 25	HC6-8
HC5-10	.56 - 1.06	14 - 27	HC6-10
HC5-12	.56 - 1.25	14 - 32	HC6-12
HC5-16	.68 - 1.50	17 - 38	HC6-16
HC5-20	.75 - 1.75	19 - 44	HC6-20
HC5-24	1.06 - 2.00	27 - 51	HC6-24
HC5-28	1.31 - 2.25	33 - 57	HC6-28
HC5-32	1.56 - 2.50	40 - 63	HC6-32
HC5-36	1.81 - 2.75	46 - 70	HC6-36
HC5-40	2.06 - 3.00	52 - 76	HC6-40
HC5-44	2.31 - 3.25	59 - 82	HC6-44
HC5-48	2.56 - 3.50	65 - 89	HC6-48
HC5-52	2.81 - 3.75	71 - 95	HC6-52
HC5-56	3.06 - 4.00	78 - 101	HC6-56
HC5-60	3.31 - 4.25	84 - 107	HC6-60
HC5-64	2.50 - 4.50	64 - 114	HC6-64
HC5-72	3.00 - 5.00	76 - 127	HC6-72
HC5-80	3.50 - 5.50	89 - 140	HC6-80
HC5-84	3.75 - 5.75	95 - 146	HC6-84
HC5-88	4.00 - 6.00	102 - 152	HC6-88
HC5-96	4.50 - 6.50	114 - 165	HC6-96
HC5-104	5.00 - 7.00	127 - 178	HC6-104
HC5-116	5.75 - 7.75	146 - 196	HC6-116
HC5-128	6.50 - 8.50	165 - 216	HC6-128
HC5-152	8.00 - 10.00	203 - 254	HC6-152
HC5-164	8.75 - 10.75	222 - 273	HC6-164
HC5-188	10.25 - 12.25	260 - 311	HC6-188
HC5-200	11.00 - 13.00	280 - 330	HC6-200
HC5-212	11.75 - 13.75	299 - 349	HC6-212
HC5-224	12.50 - 14.50	318 - 368	HC6-224
HC5-236	13.25 - 15.25	337 - 387	--
HC5-248	14.75 - 16.00	375 - 406	--
HC5-270	15.37 - 17.38	391 - 441	HC6-270
HC5-312	18.00 - 20.00	457 - 508	HC6-312
HC5-390	22.87 - 24.88	581 - 632	HC6-390

* DENOTES THIN BAND. TB SERIES HAS A 5/16 INCH WIDE BAND.

T-BOLT HOSE CLAMPS



STANDARD



BAND: Stainless Steel
BRIDGE: Stainless Steel
PLATED STEEL BOLT, TRUNNION AND NUT

APPLICATIONS:

- Heavy Duty hose connections
- Used on filter bags, pipe, ducting and center joint irrigation equipment

PACKAGING: 50 and 100 Piece Cartons

PART No.	Range (IN.)	Range (MM.)
HC3-150	1.31 - 1.56	33 - 40
HC3-175	1.56 - 1.81	40 - 46
HC3-188	1.69 - 1.94	43 - 49
HC3-200	1.81 - 2.06	46 - 52
HC3-225	2.06 - 2.31	52 - 59
HC3-238	2.19 - 2.50	58 - 64
HC3-250	2.31 - 2.62	59 - 67
HC3-256	2.38 - 2.69	60 - 68
HC3-263	2.44 - 2.75	62 - 70
HC3-275	2.56 - 2.87	65 - 73
HC3-288	2.69 - 3.00	68 - 76
HC3-300	2.81 - 3.12	71 - 79
HC3-312	2.94 - 3.25	75 - 83
HC3-325	3.06 - 3.37	78 - 86
HC3-350	3.31 - 3.62	84 - 92
HC3-375	3.56 - 3.87	90 - 98
HC3-382	3.63 - 3.94	92 - 100
HC3-400	3.81 - 4.12	97 - 105
HC3-425	4.06 - 4.37	103 - 111
HC3-450	4.31 - 4.62	110 - 117
HC3-475	4.56 - 4.87	116 - 124
HC3-500	4.81 - 5.12	122 - 130
HC3-525	5.06 - 5.37	129 - 137
HC3-550	5.31 - 5.62	135 - 143
HC3-575	5.56 - 5.87	141 - 149
HC3-600	5.81 - 6.12	148 - 156
HC3-625	6.06 - 6.37	154 - 162
HC3-650	6.31 - 6.62	160 - 168
HC3-675	6.56 - 6.87	167 - 175
HC3-700	6.81 - 7.12	173 - 181
HC3-750	7.31 - 7.62	186 - 194
HC3-800	7.81 - 8.12	192 - 200

ONE EAR CLAMPS

(With Mechanical Interlock)



SELECT NOMINAL CLAMP SIZE NEAREST TO BUT LARGER THAN O.D. ON WHICH CLAMP IS TO BE USED.

APPLICATIONS:

1-Ear clamps are intended for low pressure applications such as automotive (not fuel lines), appliances, industrial machinery, underground irrigation systems and beverage dispensing equipment.

SPECIFICATIONS:

The standard HC8 series is manufactured from 1008 carbon steel tube and then zinc plated.

PACKAGING: 25 Piece Bags.

PART No.	Range (IN.)	Range(MM.)
HC8-6	.350 - .414	8.9 - 10.5
HC8-9	.496 - .571	12.6 - 14.5
HC8-11	.549 - .669	15.1 - 17.0
HC8-12	.669 - .779	17.0 - 19.8
HC8-14	.779 - .890	19.8 - 22.6
HC8-16	.898 - 1.010	22.8 - 25.6
HC8-17	.944 - 1.067	24.0 - 27.1
HC8-20	1.122 - 1.244	28.5 - 31.6
HC8-21	1.181 - 1.303	30.0 - 33.1

PEX CLAMPS & CRIMP RINGS



**ASTM F2098
STAINLESS STEEL
STEPLESS CLAMPS**



**BLACK COPPER
CRIMP RING**

PART No.	Pex	PART No.	Pex
HCPEX-8	3/8	HCPEX-8-BCR	3/8
HCPEX-10	1/2	HCPEX-10-BCR	1/2
HCPEX-12	5/8	HCPEX-14-BCR	3/4
HCPEX-14	3/4		
HCPEX-18	1		

TWO EAR CLAMPS



GREAT HOLDING POWER:

Closing the ears builds strength into the clamp which works against the pressure in the hose.

APPLICATIONS:

Two Ear Clamps are ideally suited for maintenance and O.E.M. applications, rubber hose, plastic tube, plastic pipe, and coaxial cable are all readily clamped.

Uses on air, fluid, gas and steam lines are unlimited.

SPECIFICATIONS: The standard HC9 series is made from 1008 steel tube. They are then zinc plated. Stainless Steel clamps are manufactured from type 304 AISI tube.

PACKAGING: 25 Piece Bags.

SELECT NOMINAL CLAMP SIZE NEAREST TO BUT LARGER THAN O.D. ON WHICH CLAMP IS TO BE USED.

PART No.	Range (IN.)	Range(MM.)	PART No.
HC9-2	.122 - .161	3.1 - 4.1	--
HC9-3	.118 - .197	3.0 - 5.0	--
HC9-4	.197 - .276	5.0 - 7.0	--
HC9-5	.276 - .354	7.0 - 9.0	HC9-5SS
HC9-6	.315 - .433	8.0 - 11.0	HC9-6SS
HC9-8	.433 - .512	11.0 - 13.0	HC9-8SS
HC9-9	.512 - .591	13.0 - 15.0	HC9-9SS
HC9-9-1/2	.544 - .669	15.0 - 17.0	HC9-9-1/2SS
HC9-10	.591 - .708	15.0 - 18.0	HC9-10SS
HC9-12	.669 - .787	17.0 - 20.0	HC9-12SS
HC9-13	.748 - .866	19.0 - 22.0	HC9-13SS
HC9-14	.787 - .905	20.0 - 23.0	HC9-14SS
HC9-15	.866 - .984	22.0 - 25.0	HC9-15SS
HC9-16	.905 - 1.063	23.0 - 27.0	HC9-16SS
HC9-17	.984 - 1.102	25.0 - 28.0	HC9-17SS
HC9-18	1.063 - 1.220	27.0 - 31.0	HC9-18SS
HC9-21	1.220 - 1.339	31.0 - 34.0	HC9-21SS
HC9-23	1.339 - 1.457	34.0 - 37.0	HC9-23SS
HC9-24	1.457 - 1.575	37.0 - 40.0	HC9-24SS
HC9-26	1.575 - 1.693	40.0 - 43.0	
HC9-28	1.693 - 1.811	43.0 - 46.0	

PEX TUBE SUPPORTS



**BEND
SUPPORT**

PART No.	Pex
PEX-BS-10	1/2
PEX-BS-14	3/4



**J-CLAMP
(WITH NAIL)**

PART No.	Pex
PEX-JC-10	1/2
PEX-JC-14	3/4



**Rubber
Cushioned
Wrap Around
Tube Straps**
(1/4 Inch Hole)

Steel - Zinc Plated

PART No.	Tube O.D.	Band Width
TS17R-4	1/4	1/2
TS17R-5	5/16	1/2
TS17R-6	3/8	1/2
TS17R-8	1/2	1/2
TS17R-10	5/8	1/2
TS17R-12	3/4	1/2
TS17R-14	7/8	1/2
TS17R-16	1	1/2
TS17R-18	1-1/8	1/2
TS17R-20	1-1/4	1/2
TS17R-24	1-1/2	1/2
TS17R-28	1-3/4	1/2
TS17R-32	2	1/2
TS17R-38	2-3/8	1/2
TS17R-40	2-1/2	1/2
TS17R-48	3	1/2
TS17R-56	3-1/2	1/2
TS17R-64	4	1/2



**Rubber
Cushioned
Wrap Around
Tube Straps**
(1/4 Inch Hole)

Stainless Steel

PART No.	Tube O.D.	Band Width
TSS17R-4	1/4	1/2
TSS17R-6	3/8	1/2
TSS17R-8	1/2	1/2
TSS17R-10	5/8	1/2
TSS17R-12	3/4	1/2
TSS17R-16	1	1/2
TSS17R-20	1-1/4	1/2
TSS17R-24	1-1/2	1/2
TSS17R-32	2	1/2



**Rubber
Cushioned
Wrap Around
Tube Straps**
(3/8 Inch Hole)

PART No.	Tube O.D.	Band Width
TS16R-4	1/4	5/8
TS16R-5	5/16	5/8
TS16R-6	3/8	5/8
TS16R-8	1/2	5/8
TS16R-10	5/8	5/8
TS16R-12	3/4	5/8
TS16R-14	7/8	5/8
TS16R-16	1	5/8
TS16R-18	1-1/8	5/8
TS16R-20	1-1/4	5/8
TS16R-24	1-1/2	5/8
TS16R-32	2	5/8
TS16R-40	2-1/2	5/8



**One Hole
Tube Straps**

PART No.	Tube O.D.	Band Width
TS21-4	1/4	1/2
TS21-6	3/8	1/2
TS21-8	1/2	5/8
TS21-12	3/4	5/8
TS21-16	1	5/8



Hanger Strap
3/4' Wide x 1/32'
Thick

Steel - Copper Coated

PART No.	Length (FT.)
HS11-25	25



**Two Hole
Straddle
Tube Straps**

Steel - Copper Coated

PART No.	Tube O.D.	Nominal I.D.
TS14-6	3/8	1/4
TS14-8	1/2	3/8
TS14-10	5/8	1/2
TS14-14	7/8	3/4



**Two Hole
Straddle
Tube Straps**

Solid Copper


PART No.	Tube O.D.	Nominal I.D.
TS15-8	1/2	3/8



**Two Hole
Straddle
Pipe Straps**

Steel - Zinc Plated

PART No.	For Pipe Size
TS22-D	1/2
TS22-E	3/4
TS22-H	1
TS22-J	1-1/4
TS22-K	1-1/2
TS22-M	2
TS22-N	2-1/2



**"Duplex"
Double
Tube Strap**

Steel - Zinc Plated

PART No.	Pex	Tube O.D.
TS19-44	1/4	1/4
TS19-66	3/8	3/8

VALVES & COCKS


BALL VALVES-COMPRESSION-LEAD FREE BRASS.....	50
BALL VALVES-BRASS.....	48
BALL VALVES-STAINLESS STEEL.....	49
CHECK VALVES.....	53
GATE VALVES.....	50
ICE MAKER / WATER SUPPLY KITS.....	51
NEEDLE VALVES.....	52
PEX WATER BALL VALVES.....	49
PUSH-FIT WATER SHUT-OFF VALVES.....	49
PUSH-FIT BALL VALVES.....	49
PUSH-IN POLYPROPYLENE WATER SUPPLY VALVES.....	51
SADDLE VALVES.....	52
TWISTLOC PUSH-IN / TWIST SHUT-OFF VALVES.....	51
WATER THREAD VALVES.....	50



BITE-FORCE
FITTINGS AND VALVES
ARE AVAILABLE
INDIVIDUALLY RETAIL
PACKAGED WITH
INSTALLATION
INSTRUCTIONS.
SUFFIX PART NUMBER
WITH "P"
WHEN ORDERING.


FORGED BRASS BALL VALVE - FULL PORT

Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.



Pipe
Female
to Female

PART No.	Pipe	W.O.G	W.S.P
BV2103-A	1/8	600	150
BV2103-B	1/4	600	150
BV2103-C	3/8	600	150
BV2103-D	1/2	600	150
BV2103-E	3/4	600	150
BV2103-H	1	600	150
BV2103-J	1-1/4	600	150
BV2103-K	1-1/2	600	150
BV2103-M	2	600	150
BV2103-N	2-1/2	400	150
BV2103-P	3	400	150

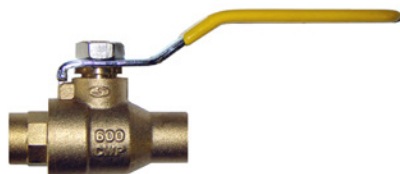

Pipe
Female
to Female

PART No.	Type K Size	W.O.G
BVC4103-10	1/2	600
BVC4103-14	3/4	600
BVC4103-18	1	600
BVC4103-22	1-1/4	600
BVC4103-26	1-1/2	600
BVC4103-34	2	600

**SOLDERING TEMP.
NOT TO EXCEED 400° F.**



Pipe
Female
to Female

Lead Free PART No.	Pipe	W.O.G
LF-BV4103-B	1/4	600
LF-BV4103-C	3/8	600
LF-BV4103-D	1/2	600
LF-BV4103-E	3/4	600
LF-BV4103-H	1	600
LF-BV4103-J	1-1/4	600
LF-BV4103-K	1-1/2	600
LF-BV4103-M	2	600



Pipe
Female
to Female

**With
Locking Handle**

PART No.	Pipe	W.O.G	W.S.P
BV2103-B-LH	1/4	600	150
BV2103-C-LH	3/8	600	150
BV2103-D-LH	1/2	600	150
BV2103-E-LH	3/4	600	150
BV2103-H-LH	1	600	150
BV2103-J-LH	1-1/4	600	150
BV2103-K-LH	1-1/2	600	150
BV2103-M-LH	2	600	150



Pipe
Female
to Female

PART No.	Pipe	W.O.G
BV4103-B	1/4	600
BV4103-C	3/8	600
BV4103-D	1/2	600
BV4103-E	3/4	600
BV4103-H	1	600
BV4103-J	1-1/4	600
BV4103-K	1-1/2	600
BV4103-M	2	600
BV4103-N	2-1/2	400
BV4103-P	3	400
BV4103-S	4	400



**With
Stainless Handle** Pipe
Female
to Female

PART No.	Pipe	W.O.G
BV4103-B-SSH	1/4	600
BV4103-C-SSH	3/8	600
BV4103-D-SSH	1/2	600
BV4103-E-SSH	3/4	600
BV4103-H-SSH	1	600
BV4103-J-SSH	1-1/4	600
BV4103-K-SSH	1-1/2	600
BV4103-M-SSH	2	600
BV4103-N-SSH	2-1/2	400
BV4103-P-SSH	3	400
BV4103-S-SSH	4	400

BRASS WATER BALL VALVES

Fairview

BITE-FORCE®
BY FAIRVIEW

**FORGED LEAD FREE
BRASS PUSHFIT
BALL VALVES**

Maximum Working Pressure: 200 psi,
Maximum Temperature: 200°F (93°C),
O-ring EPDM Design Certified to ANSI/NSF-61
and ASSE 1061 Product Standard for Use in Potable
Water and Hydronic Heating Water Distribution.



Certified to
NSF/ANSI 61-G



**Tube
to Tube**

Lead Free

PART No.

CTS Size

BFBV2129-10

1/2

BFBV2129-14

3/4

BFBV2129-18

1

For use with COPPER, PEX and CPVC PIPE

FORGED BRASS PEX WATER BALL VALVES



**Pex to
Compression
Angle**

Lead Free

PART No.

Pex

Compression

LF-WSPEX69-106

1/2

3/8



**Straight Supply
Valve
(Pex)**

Lead Free

PART No.

Pex

Compression

LF-WSPEX68-106

1/2

3/8



**Pex to
Female Sweat**

Lead Free

PART No.

Pex

CTS Size

LF-BVPEX2126SW-10

1/2

1/2

LF-BVPEX2126SW-14

3/4

3/4



**Pex
to Pex**

Sans Plomb

No. de PIÈCE

Pex

LF-BVPEX2129-10

1/2

LF-BVPEX2129-14

3/4

2-PIECE DESIGN, FULL PORT 316 STAINLESS STEEL



**Pipe
Female
to Female**

PART No.

W.O.G

Pipe

BVSS2003-B-1000

1000

1/4

BVSS2003-C-1000

1000

3/8

BVSS2003-D-1000

1000

1/2

BVSS2003-E-1000

1000

3/4

BVSS2003-H-1000

1000

1

BVSS2003-J-1000

1000

1-1/4

BVSS2003-K-1000


1000

1-1/2

BVSS2003-M-1000

1000

2

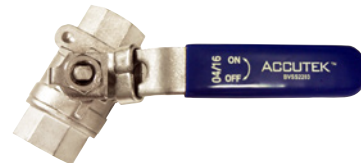

**Pipe
Female
to Female**

PART No.

W.O.G

Pipe

BVSS2203-B

2000

1/4

BVSS2203-C

2000

3/8

BVSS2203-D

2000

1/2

BVSS2203-E

2000

3/4

BVSS2203-H

2000

1

BVSS2203-J

1500

1-1/4

BVSS2203-K

1500

1-1/2

BVSS2203-M

1500

2

BITE-FORCE®
BY FAIRVIEW

PUSH-FIT WATER SHUT-OFF VALVES

Maximum Working Pressure: 200 psi,
Maximum Temperature: 200°F (93°C),
O-ring EPDM Design Certified to ANSI/NSF-61
and ASSE 1061 Product Standard for Use in
Potable Water and Hydronic Heating Water Distribution.



Certified to
NSF/ANSI 61-G

**CTS to
Compression Straight**

PART No.

CTS Size

Compression

BFWS68-106

1/2

3/8



**CTS to
Compression 90° Elbow**

PART No.

CTS Size

Compression

BFWS69-106

1/2

3/8



**CTS to CTS to
Compression Tee**

PART No.

CTS Size

Compression

BFWS64-104

1/2

1/4

BFWS64-106

1/2

3/8



VALVES &
COCKS

FORGED BRASS
BALL VALVE - FULL PORT



Forged Body
Tube to Tube

Copper L

Lead Free

PART No.

CTS Size

LF-BV2062-10

1/2

LF-BV2062-14

3/4

Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.

GATE VALVES



Female Pipe

PART No.	W.O.G	Pipe
217-B	200	1/4
217-C	200	3/8
217-D	200	1/2
217-E	200	3/4
217-H	200	1
217-J	200	1-1/4
217-K	200	1-1/2
217-M	200	2
217-N	200	2-1/2
217-P	200	3
217-S	200	4

C.S.A. CERTIFIED WATER THREAD VALVES
(Also known as Sediment Faucets)



Water Hose
to Male Pipe

PART No.	Pipe
224-D *	1/2
224-E	3/4

* I.D. OF MALE PIPE WILL ACCOMMODATE
1/2 TYPE K COPPER TUBE FOR SOLDERING

CSA Certified to 200 PSI for use with Fuel Oil.
Temperature: -40°F to +149°F
-40°C to +65°C



Water Hose
to Male Pipe

PART No.	Pipe
225-D *	1/2

* I.D. OF MALE PIPE WILL ACCOMMODATE
1/2 TYPE K COPPER TUBE FOR SOLDERING

CSA Certified to 200 PSI for use with Fuel Oil.
Temperature: -40°F to +149°F
-40°C to +65°C

POLYPROPYLENE INCH-SIZE PUSH-IN WATER SUPPLY VALVES



Max. Working Pressure: 150 psi at 70°F (21°C).

Max. Temp.: 150°F (65°C) at up to 60 psi.

ANSI/NSF-51/61, WRAS, ACS, KTW, DVGW-W270, US FDA approved materials.

Widely used in water purification, food/beverage. EPDM O-Ring.

Certified to
NSF/ANSI 61-G

Shut-Off Union Valve



PART No.	Tube
PPWS62-4	1/4
PPWS62-6	3/8

Low Lead Brass NPS Angle Stop



PART No.	NPS	Tube
PPWSB64-7F4	1/2	1/4

Male Pipe Shut- Off Valve



PART No.	Tube	Pipe
PPWS68-4B	1/4	1/4
PPWS68-6C	3/8	3/8

Low Lead Brass Comp. Angle Stop



PART No.	Compression	Tube
PPWSB64-6-4T	3/8	1/4
PPWSB64-6-6T	3/8	3/8

TWISTLOC® PUSH-IN / TWIST SHUT-OFF VALVES



Twistloc® Products are a One Step, Fully Reusable Push-Fit Plumbing System Combining Both Push-Fit and Twist Locking Technology to Offer a Guaranteed Secure, Peace of Mind Leak Free Connection. NSF/ANSI/CAN 61 & 372, NSF/ANSI 14 and ASTM F877.

Max W.P.: 175 psi, Max Temp.: 200°F (93°C)

Certified to
NSF/ANSI 61-G

Union Valve



PART No.	CTS Size
TLWS62-8	3/8
TLWS62-10	1/2
TLWS62-14	3/4

Elbow Union



PART No.	CTS Size
TLWS69-106	1/4 x 1/2



ICE MAKER / WATER SUPPLY KITS

PART No.

PPWSIMK-4-25

KIT CONTAINS:

25 Ft. of 1/4" O.D. FDA approved LLDPE

1 of 3/8" O.D. Angle Stop Valve


1 of 1/4" O.D. Refrigerator Adapter

Other Uses:
Water Coolers
Coffee Machines
R/O Systems
Filtration



BRASS NEEDLE VALVES

(FOR WORKING PRESSURE UP TO 150 P.S.I.)



**Flare Tube
to Tube**

PART No.	Tube
3042-4	1/4
3042-6	3/8

Lead Free

PART No.	Tube
LF-3042-6	3/8



**Flare Elbow
Tube to
Male Pipe**

PART No.	Tube	Pipe
3049-4A	1/4	1/8




**Compression
Tube to Tube**

PART No.	Tube
3062-4	1/4
3062-5	5/16
3062-6	3/8

Lead Free

PART No.	Tube
LF-3062-4	1/4
LF-3062-6	3/8



**Compression
Elbow
Tube to Male Pipe**

PART No.	Tube	Pipe
3069-4A	1/4	1/8
3069-4B	1/4	1/4
3069-6B	3/8	1/4

Lead Free

PART No.	Tube	Pipe
LF-3069-4A	1/4	1/8
LF-3069-4B	1/4	1/4




**Pipe
Female
to Female**

PART No.	Pipe
3103-A	1/8
3103-B	1/4

Lead Free

PART No.	Pipe
LF-3103-A	1/8
LF-3103-B	1/4




**Pipe
Female
to Male**

PART No.	Pipe
3120-A	1/8
3120-B	1/4

Lead Free

PART No.	Pipe
LF-3120-A	1/8
LF-3120-B	1/4



**Pipe
Male
to Male**

PART No.	Tube
3122-A	1/8
3122-B	1/4

Lead Free

PART No.	Tube
LF-3122-A	1/8



**Compression
Poly Tube
to Poly Tube**

PART No.	Tube
3462-4	1/4
3462-6	1/8



**Compression
Poly Tube
to Male Pipe**

PART No.	Tube	Pipe
3469-4A	1/4	1/8

Lead Free

PART No.	Tube	Pipe
LF-3469-4A	1/4	1/8
LF-3469-4B	1/4	1/4

Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.

SADDLE WATER NEEDLE VALVE ASSEMBLIES

PACKAGED COMPLETE WITH INSERT, SLEEVE AND INSTRUCTIONS.



Needle Valve Assembly

Complete with Brass Forged Clamp

PART No.	Description
S3069-4	For 1/4 O.D. Tube Assembly



Needle Valve Assembly

Complete with Steel Clamp (Zinc Plated)

PART No.	Description
S3069-ST-4	Self Tapping Assembly

CHECK VALVES



BRASS LOW PRESSURE CHECK VALVE



Coupling Style Check Valve

PART No.	Female Pipe	Max P.S.I.
103CV-C	3/8	250
103CV-D	1/2	250
103CV-E	3/4	250
103CV-H	1	250
103CV-J	1-1/4	250
103CV-K	1-1/2	250

Features:

- This Valve Is Intended for Use With Air and Water Only
- 250 P.S.I. Non-Shock Cold Water
- Forged Brass Construction for Greater Strength
- May Be Installed Horizontally or Vertically
- Less Than 1 P.S.I. Cracking Pressure
- Temperature: -20°F to +100°F (-29°C to 38°C)

BRASS Y CHECK VALVE



Y Valve Female Pipe Hex Head

ALLOWS FLOW IN ONE DIRECTION ONLY

PART No.	Female Pipe	W.O.G	W.S.P
298-D	1/2	200	125
298-E	3/4	200	125
298-H	1	200	125
298-J	1-1/4	200	125
298-K	1-1/2	200	125
298-M	2	200	125

BRONZE SWING CHECK VALVE




Swing Check Female Pipe Hex Head

ALLOWS FLOW IN ONE DIRECTION ONLY

PART No.	Female Pipe	W.O.G	W.S.P
293-C	3/8	300	150
293-D	1/2	300	150
293-E	3/4	300	150
293-H	1	300	150
293-J	1-1/4	300	150
293-K	1-1/2	300	150



CHECK VALVE

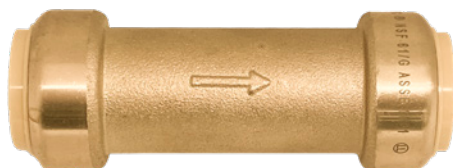

Lead Free

PART No.	CTS Size
LF-BF62CV-10	1/2
LF-BF62CV-14	3/4
LF-BF62CV-18	1

Features:

- Lead Free Brass
- 200 P.S.I Working Pressure

ACETAL INCH-SIZE PUSH-IN CHECK VALVE



Single Check Valve

PART No.	Tube
PICV62-4	1/4
PICV62-6	3/8

Features:

- Can Be Used with Water, Air, and a Variety of Chemicals and Gases
- Superior Function in a Compact Size
- 145 P.S.I Working Pressure @ Ambient Temperatures
- 70 P.S.I Working Pressure @ 150°F (65°C)

ASK US ABOUT...

**Fairview BITE-FORCE KITS:
Lead Free Push-in Fittings,
Valves & Tools**



Part No. BFPP-KIT-1
(CTS Size Push-in Water Treatment)



Part No. BFFR-KIT-1
(Inch Size Push-in)



Part No. LF-PEX-KIT-HC
(With Stainless Ear Clamps)

**Fairview Lead Free
Brass PEX Fittings,
Valves & Tools**



Part No. LF-PEX-KIT-BCR
(With Black Copper Rings)

Fairview

HOSE|VALVES|FITTINGS

PRESSURE GAUGES

CENTER BACK MOUNT DRY	56
STEM MOUNT DRY	56



DRY PRESSURE GAUGES

- Dry Gauge • Steel Case • Accuracy: 3% -2% -3% • Connection: Brass • Bourdon Tube
- Ambient-Process Temp: -40°F to +140°F, -40°C to +60°C • Meets ASME B40.100 Standards

1/8 NPT BRASS STEM MOUNT (1.5" DIAL)

PART No.	Dial Dia. (IN.)	(P.S.I)
PG-100SD15	1.5	0-100
PG-160SD15	1.5	0-100



1/4 NPT BRASS STEM MOUNT (2" DIAL)

PART No.	Dial Dia. (IN.)	(P.S.I)
PG-15SD2	2	0-15
PG-30SD2	2	0-30
PG-30SDV2	2.5	0-30
PG-30V30SDV2	2.5	0-30
PG-60SD2	2	0-60
PG-100SD2	2	0-100
PG-160SD2	2	0-160
PG-200SD2	2	0-200
PG-300SD2	2	0-300



1/4 NPT BRASS STEM MOUNT (2-1/2" DIAL)

PART No.	Dial Dia. (IN.)	(P.S.I)	Kpa
PG-15SD25	2.5	0-15	0-100
PG-30SD25	2.5	0-30	0-200
PG-60SD25	2.5	0-60	0-400
PG-100SD25	2.5	0-100	0-700
PG-160SD25	2.5	0-160	0-1,100
PG-200SD25	2.5	0-200	0-1,400
PG-300SD25	2.5	0-300	0-2,100



1/4 NPT BRASS CENTER BACK MOUNT (2" DIAL)

PART No.	Dial Dia. (IN.)	(P.S.I)
PG-30CD2	2	0-30
PG-60CD2	2	0-60
PG-100CD2	2	0-100
PG-160CD2	2	0-160
PG-200CD2	2	0-200



TOOLS & ACCESSORIES

BITE-FORCE REMOVAL TOOL	61
BITE-FORCE COLLECT DEBURRING / GAUGING TOOL	60-61
HYDRONIC PRESSURE TEST KIT	59
INDUSTRIAL WATER NOZZLES	58
MULTI CUTTERS	60
O-CLAMP PINCERS	61
PEX TOOLS	59
PUSH-IN FITTING LOCKING CLIPS	60
TELESCOPIC TUBE CUTTERS	60
THREAD SEALANTS	61
TUBE BENDERS	60
COLLET RELEASE TOOL	60



**FAIRVIEW
WATER HOSES,
SPRINKLERS, GUNS
AND ACCESSORIES
ARE AVAILABLE
RETAIL PACKAGED.**

**ASK US ABOUT
BECOMING A
STOCKIST FOR
FAIRVIEW'S WATER
PRODUCTS PROGRAM.**



PISTOL GRIP WATER NOZZLES



PART No.
GHN

**Removable
Thread
Protector**

Fairview's GHN industrial water nozzle is ideal for commercial and domestic water hose applications. Sprays from a fine mist to a heavy stream. **Thread protector cap included.**



PART No.
GHN7

Fairview's 7 pattern nozzle features a slim molded grip that prioritizes comfort. Integrated trigger lock allows for long watering sessions. The easy-to-read dial can be twisted in either direction to get one of the seven spray patterns ranging from a fine mist to a jet stream.



PART No.
GHN-BN

Fairview's heavy-duty nozzle features an all brass stem, nut and adjustable tip for ultimate durability. A rear trigger design with an integrated trigger lock allows for long watering sessions and the spray pattern ranges from a fine mist to a jet stream.



PART No.
GHTN-RG

For those who prioritize comfort and lightness, Fairview's metal twist nozzle provides a molded rubber grip on both the body and tip for ultimate comfort. All metal construction provides durability but keeps it light in your hand.

BRASS INDUSTRIAL WATER NOZZLES



PART No.
GHPS

Fairview's 2" brass industrial water nozzle is ideal for commercial and domestic water hose applications.




PART No.
GHTN

Fairview's heavy duty 4" all brass twist nozzle is durable and dependable while delivering a fully adjustable spray intensity. Diamond pattern ridges make it easy to grip in any condition.

*** Water Nozzle Models Change from Time to Time. May Not Be Exactly As Shown.**

HYDRONIC PRESSURE TEST TOOL

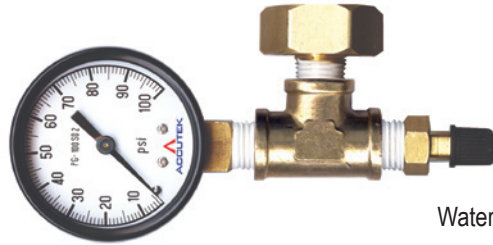

Complete with
Water Thread x 3/4 FPT Adapter

IDEAL FOR LEAK TESTING OF RADIANT / HYDRONIC HEATING SYSTEMS

PART No.	Inlet	Outlet	Pressure Gauge
HPT-KIT-1	Schrader Valve	Female Swivel Boiler	0-100 (P.S.I.)
HPT-KIT-2	Schrader Valve	Female Swivel Boiler	0-200 (P.S.I.)
HPT-KIT-3	Schrader Valve	Female Swivel Boiler	0-30 (P.S.I.)

PEX TOOLS



**Pex Crimp Tool
& Go-No-Go Gauge**

PART No.	Pex	Pex
HCPEX-RT1014	1/2	3/4



HCPEX-RTAC-10

Pex Angle Crimp Tool

PART No.	Pex
HCPEX-RTAC-10	1/2
HCPEX-RTAC-14	3/4

Compact & angled for crimping
rings in tight spaces



HCPEX-RTAC-14



Oetiker Clamp Tool

PART No.
HCPEX-RT

Original OETIKER tool for
stepless clamps



**Crimp Ring
Removing Cutter**

PART No.
HCPEX-CRC

For removing black copper rings



Pex Pipe Cutter

PART No.
HCPEX-CT



Economic Clamp Tool

PART No.
HCPEX-RTE

Clamp tool for stepless clamps

TELESCOPIC TUBE CUTTERS



PART No.	Capacity (IN.)
TC-218	1/4 to 1-3/8 O.D.
TC-218-CSST	(Stainless Wheel for CSST)
TCW-218	Cutter Wheel

- Professional quick-adjusting tube cutter and deburring tool for copper, brass, aluminum, and stainless steel tube
- Easily retracting deburring tool stored in frame
- Grooved rollers for close-to-flare cuts
- Contoured knob stores spare cutter wheel



PART No.	Capacity (IN.)
TC-218E	3/16 to 1-1/4 O.D.

- Aluminum alloy cutter designed for cutting copper, brass, aluminum and thin-walled steel tubing
- Accurate 6-roller tracking system
- Comes complete with 2 replacement blades

Mini Tube Cutter



PART No.	Capacity (IN.)
TC-413	3/16 to 1-1/8 O.D.

- Designed for use in tight spaces on copper, aluminum and brass tubing
- Grooved rollers for close-to-flare cuts
- Large, knurled knob for better control over cutting pressure
- Comes complete with replacement blade

MECHANICAL TUBE BENDER




PART No.	Tube O.D.
T9-456 *	1/4, 5/16, 3/8
T9-8	1/2
T9-10	5/8

- * Will bend a combination of 3 sizes
- Styles may vary depending on size

Special design to bend soft copper, brass, aluminum and thin wall steel tube. A light and easy to handle bending tool which will permit bends on all planes.

NOTE: Tube must be in annealed state: Will not bend hard-drawn material.

SPRING TYPE TUBE BENDER



PART No.	For Tube O.D.
T10-8	1/2

This spring bender is used to bend soft copper tube by hand to avoid collapsing the tube.

MULTI-CUTTER



All Metal Construction

PART No.	Pex
MC-1	1-1/8
MCB-1	Replacement Blade

- P.V.C. coated handles
- Will cut soft rubber hose & plastic tube

COLLET RELEASE TOOL



PART No.	Tube
PNDT-AS	3/16 to 1/2

BITE-FORCE®
BY FAIRVIEW



Acetal / Polypropylene Inch-Size Push-In Locking Clip

PART No.	Tube
PIPPLC-4	1/4
PIPPLC-6	3/8

BITE-FORCE[®] BY FAIRVIEW



Bite-Force Removal Tool

PART No.	For Nominal Sizes
BFDT-AS	1/2, 3/4, 1



**CTS Size
Depth Gauge
& Deburring Tool**

PART No.	For Nominal Sizes
BFDGR-618	1/4, 3/8, 1/2, 3/4, 1

(Copper, PEX, CPVC)

THREAD SEALANTS

PTFE THREAD SEALANT TAPE



The ideal sealant for pipe thread connections. It is non-toxic and will not contaminate fluids or gases. Chemically inert, it resists corrosive action of acids, alkalis and solvents.

- **TEMPERATURE RANGE:**
-450°F to +500°F, -268°C to +260°C

INDUSTRIAL SEALANT TAPE

PART No.	Tape Width (IN.)	Tape Thickness	Length/Roll (IN.)
121-M8	1/2	.003	480
121-M12	3/4	.003	480
121-M16	1	.003	480

HIGH DENSITY INDUSTRIAL SEALANT TAPE

PART No.	Tape Width (IN.)	Tape Thickness	Length/Roll (IN.)
121-M8PINK	1/2	.004	540
121-M12PINK	3/4	.004	540
121-M16PINK	1	.004	540

PTFE THREAD SEALANT COMPOUND



**BRUSH
TOP TIN**

- **TEMPERATURE RANGES:**
-50°F to +400°F, -45°C to +204°C
- **BRUSHABLE TO:** -50°F, -46°C
- **PRESSURE RANGES:**
Gases to 2000 P.S.I.
Liquids to 8000 P.S.I.
- **MATERIAL USE:** Brass and All Metal, ABS, PVC, CPVC, Nylon
- **NOTE: NOT SUITABLE FOR OXYGEN**



TUBE




PART No.	Size	Carton QTY.
TTS-2	2 oz. Tube	72
TTS-4	4 oz. Tin	24
TTS-8	8 oz. Tin	24
TTS-16	16 oz. Tin	12

O-CLAMP PINCERS



Side Jaw Pincer

PART No.
HC9-S




Regular Pincer

PART No.
HC9-R

One of these handy tools is all that is needed to apply or remove O-Clamps. Side jaw pincer is recommended for work in confined areas, since it allows O-Clamp to be closed while holding pincer parallel to hose.

Introducing Fairview's New Modular Design Display Cabinets

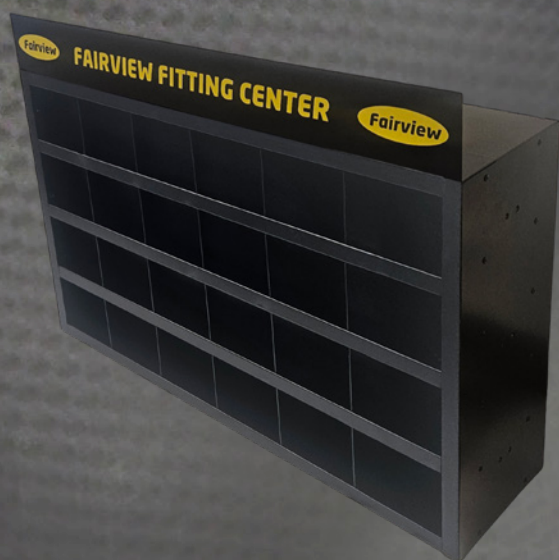

CM-24BIN Module (above) has
24 large bins for bigger parts.
Dimensions: 21"H X 34"W X 9"D



CM-40DWR Module (above) has 40 large
drawers & can divide for up to 160 parts.
Dimensions: 21"H X 34"W X 9"D



Dimensions of suggested configurations
shown, with optional shelf and legs:
74"H X 36"W X 20"D



HOSE | VALVES | FITTINGS

CABINETS & DISPLAYS

DRAWER CABINET-COUNTER / WALL MOUNTING	65
PEGBOARD DISPLAY RACK	65
STAND ALONE STORAGE CABINET.....	64



MODULAR DISPLAY CABINETS

Fairview's all steel, black modular display units can include up to 3 combined modules of 40 drawer and 24 bin cabinets.

40 drawer cabinets include drawers and clear dividers to house up to 80 parts (expandable to 160 parts with additional dividers).

24 bin cabinets feature deep and wide compartments, designed to house larger parts.

All cabinet modules come complete with your choice of Fairview or Accutek cabinet headers in English or French.

Available steel legs, shelf tie your display unit securely together.

CM-40DWR Modular Drawer Cabinet Unit Comes Complete With:

- All metal construction 40 drawer compartment cabinet (PART No. CM-40DWR)
- 40 Single drawers (PART No. PD-40DWR)
- 40 Drawer dividers (PART No. PD-DIV-40DWR)
- Your selection of cabinet header plate with mounting bolts (PART No. CM-SGN-**) *See page 10*

CM-40DWR 40 Drawer Unit Module Dimensions:

Height	21 inches
Width	34 inches
Depth	9 inches

CM-24BIN 24 Bin Unit Module Dimensions:

Height	21 inches
Width	34 inches
Depth	9 inches

PD-40DWR Drawer Dimensions:

Height	3-1/2 inches
Width	3-7/8 inches
Depth	9 inches

CM-SGN-A ———
(Accutek
Cabinet Header)

CM-SGN-F _____
(Fairview
Cabinet Header)



CM-40DWR _____
(40 Drawer Unit)

CM-24BIN (24 Bin Unit)

CM-24BIN
(24 Bin Unit)

CM-LEG _____
(Cabinet Leg
& Extension)

CM-SHF _____
(Modular Shelf)

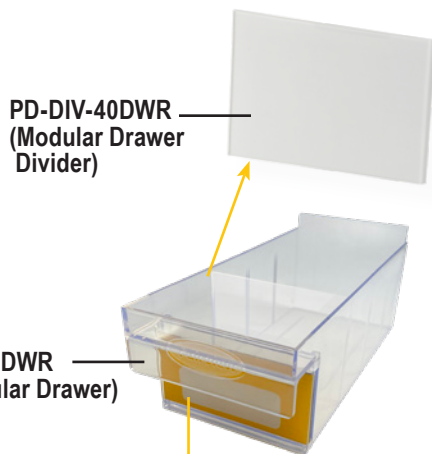

Note: Label sets are NOT INCLUDED with cabinets.
For Information on our label creation app, contact your local Fairview.



69-6D

90 DEGREE ELBOW
TUBE TO MALE PIPE

3/8 TO 1/2

PEGBOARD DISPLAY RACK


DR-PEG-SGN-A
(Accutek Header)



DR-PEG-SGN-GF
(Gas-Flo Header)



DR-PEG-SGN-F
(Fairview Header)

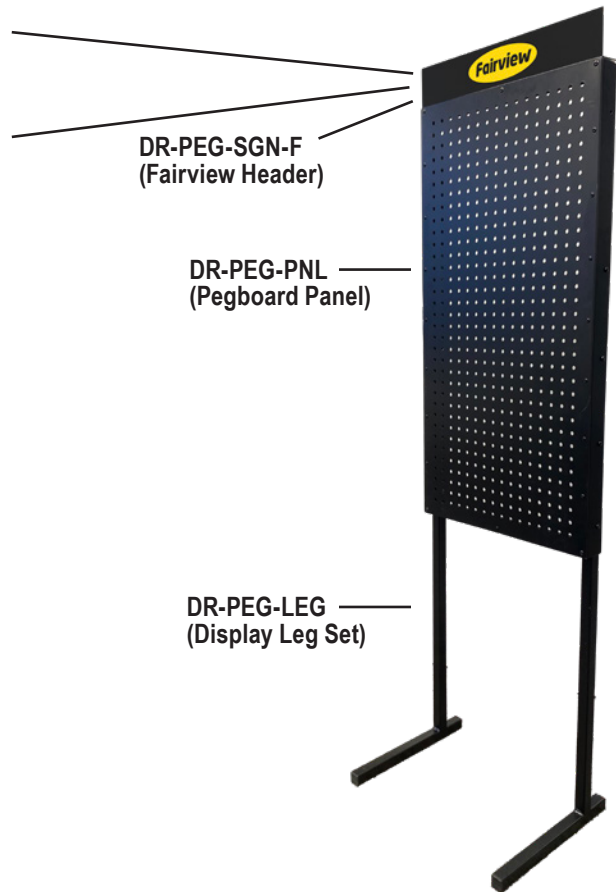

DR-PEG-PNL
(Pegboard Panel)

DR-PEG-LEG
(Display Leg Set)

Fairview display racks can be wall mounted, stand on their own as end cap units, or be fastened together to create additional display area. The 18" x 36" all metal pegboard is built strong to display any of Fairview's many "retail ready" industrial quality products. Easy to assemble and available in Fairview black, with a choice of Fairview, Accutek or Gas-Flo display headers.

PART No.	Description
DR-PEG-LEG	Display Rack Pegboard Leg Set
DR-PEG-PNL	Display Rack Pegboard Panel
DR-HOSEHOOK	Display Rack Hose Hook
DR-PEGHOOK-10	Display Rack Short Peg Hook
DR-PEGHOOK-15	Display Rack Medium Peg Hook
DR-PEG-SGN-A	Display Rack Accutek Sign
DR-PEG-SGN-F	Display Rack Fairview Sign
DR-PEG-SGN-GF	Display Rack Gas-Flo Sign



DR-PEGHOOK-10



DR-PEGHOOK-15



DR-HOSEHOOK

Assembled Unit:	
Height	62-1/4 inches
Width	18 inches
Depth	13 inches

COMPACT FAIRVIEW FITTING CENTER

Counter / Wall Mounting Drawer Cabinet (Up to 20 Drawers) PART No. XB20-CA

This cabinet has 20 drawers, each one with the capability of dividing into 4 separate compartments. It is featured in Fairview's black and yellow colours.



Assembled Unit:	
Height	41-3/4 inches
Width	31-1/2 inches
Depth	6 inches

PD-110 Drawer Dimensions:

Height	2-3/4 inches
Width	5-3/4 inches
Depth	2-1/2 inches

PD-55 Drawer Dimensions:

Height	2-3/4 inches
Width	5-3/4 inches
Depth	2-1/2 inches



Note: Label sets are not included with cabinets. For Information on our label creation app, contact your local Fairview.

INDEX

SERIES	PAGE	SERIES	PAGE	SERIES	PAGE	SERIES	PAGE	SERIES	PAGE	SERIES	PAGE
42SW	14	196-W	26	BFWS64	49	LF-62R	12	PI66	9	X105	19
46SW	14	197	26	BFWS68	49	LF-64	14	PI66-7S	9	X106	19
48SW	14	198	26	BFWS69	49	LF-64R	14	PI66-7F4	10	X107	19
60	12	199	26	BI-100	21	LF-65	13	PI66BSPP	9	X115	18
61	12 & 15	199S	26	BI-101	22	LF-66	12	PI66NH	9	X124	18
61CAP	12	199-WV	27	BI-102	22	LF-68	13	PIBR66-7F6	9	XB20-CA	65
62	12	200-W	26	BI-103	20	LF-69	13	PI67	9		
62R	12	200-HKC	26	BI-104	21	LF-99	18	PI68	9		
64	14	201-H	26	BI-105	21	LF-100	18	PI69	10		
64R	14	202-B	19	BI-108	22	LF-101	19	PI69SW	10		
65	13	202-W	27	BI-109	21	LF-102	19	PI77	10		
65R	13	202-WV	27	BI-110	21	LF-103	16	PI99HB	10		
66	12	203-W	26	BI-111	21	LF-104	17	PI129	9		
67	12	204	26	BI-112	20	LF-107	19	PICV62	53		
68	13	206-WP	26	BI-113	20	LF-108	18	PIPLC	60		
69	13	217	50	BI-114	22	LF-109	17	PNDT-AS	60		
70	13	224	50	BI-116	21	LF-110	17	PP62	11		
71	14	225	50	BI-119	20	LF-112	16	PP62R	11		
72	14	260	12	BI-124	21	LF-113	16	PP64	11		
74	13	293	53	BV199-W	27	LF-116	18	PP64R	11		
77	13	298	53	BV199-W-LF	27	LF-118	17	PP64Y	11		
78	14	361	40	BV202-W	27	LF-119	17	PP65	11		
79	14	363	41	BV202-W-LF	27	LF-120	17	PP65R	11		
99	18	404-WV	27	BV2103	48	LF-121	18	PP66	11		
99HB	34	462	15	BV4103	48	LF-121S	18	PP68	11		
100	18	462R	15	BVC4103	48	LF-122	16	PP69	11		
100CA	18	464	15	BVSS2003	49	LF-124	18	PP77	11		
101	19	464R	15	BVSS2203	49	LF-125	33	PP77R	11		
101CA	19	465	15	CM	64	LF-193	26	PPWS62	51		
101M	19	466	15	CTG	42	LF-195	26	PPWS68	51		
102	19	467	15	CTK	42	LF-196	26	PPWSB64	51		
103	16	468	15	CTL	42	LF-199S	26	PPWSIMK	51		
103CA	16	469	15	CTR	42	LF-462	15	PVC	38		
103CV	53	470	15	DR	65	LF-468	15	QD-WHCF	27		
104	17	471	15	DWF	27	LF-469	15	QD-WHVC	27		
105	19	472	15	DWH	38	LF-481	15	QD-WHNM	27		
106	19	474	15	GHN	58	LF-3042	52	S3069	52		
107	19	477	15	GHN-BN	58	LF-3062	52	S3069-ST	52		
108	18	478	15	GHN7	58	LF-3069	52	T68	13		
108CA	18	480	15	GHPS	58	LF-3103	52	T9	60		
109	17	481	15	GHTN	58	LF-3120	52	T10-8	60		
110	17	525	34	GHTN-RG	58	LF-3122	52	TC	60		
110CA	17	526	34	GHW	26	LF-3469	52	TCW	60		
111	17	529	34	GHW-EPDM	26	LF-BF62CV	53	TL61CAP	7		
112	16	539	34	GHW-S	26	LF-BV2062	50	TL62	7		
112RED	16	544	34	GI-100	24	LF-BV4103	48	TL62R	7		
113	16	555	34	GI-101	24	LF-BVPEX2126SW	49	TL62SL	7		
113RED	16	678-YB	19	GI-102	25	LF-BVPEX2129	49	TL64	7		
116	18	962	32	GI-103	23	LF-PEX-99HB	31	TL64R	7		
116CA	18	964	32	GI-104	23	LF-PEX-121HB	31	TL65	7		
116H	18	965	32	GI-105	24	LF-PEX-123	31	TL65R	7		
117	17	966	32	GI-108	24	LF-PEX-125	31	TL66	7		
118	17	968	32	GI-109	24	LF-PEX-125SW	31	TL68	7		
119	17	969	32	GI-110	23	LF-PEX-126	31	TL69	7		
120	17	977	32	GI-111	25	LF-PEX-126SPN	31	TL69NH	7		
121	18	1925	33	GI-112	22	LF-PEX-126SW	31	TL481	7		
121S	18	3042	52	GI-113	22-23	LF-PEX-129	31	TLBR66	7		
121-M8	61	3049	52	GI-114	25	LF-PEX-139	31	TLWS62	51		
121-M8PINK	61	3062	52	GI-116	24	LF-PEX-139FSPN	31	TLWS69	51		
121-M12	61	3069	52	GI-119	23	LF-PEX-139FSW	31	TS14	46		
121-M12PINK	61	3103	52	GI-124	24	LF-PEX-139SW	31	TS15	46		
121-M16	61	3120	52	HC3	44	LF-PEX-KIT-BCR	32	TS16R	46		
121-M16PINK	61	3122	52	HC5	44	LF-PEX-KIT-HC	32	TS17R	46		
122	16	3462	52	HC5-TB	44	LF-PEX-S139F	31	TSS17R	46		
122L	16	3469	52	HC6	44	LF-WSPEX68	49	TS19	46		
123	34	BF61CAP	5	HC6-TB	44	LF-WSPEX69	49	TS21	46		
123Y	34	BF62	5	HC8	45	MC-1	60	TS22	46		
124	18	BF62R	5	HC9	45	MCB-1	60	TTS	61		
125	33	BF62SL	5	HC9-R	61	PD	64 & 65	WH8BLK	37		
125CA	33	BF64	5	HC9-S	61	PEX-BS	45	WH8BLU	37		
126	33	BF64R	5	HCPEX	45	PEX-JC	45	WH8YEL	37		
127	33	BF64SL	5	HCPEX-CT	59	PG-**CD2	56	WH12YEL	37		
128	33	BF65	5	HCPEX-CRC	59	PG-**SD2	56	WH10BLK	37		
129	34	BF65R	5	HCPEX-RT	59	PG-**SD15	56	WH10BLU	37		
130	33	BF66	5	HCPEX-RT1014	59	PG-**SD25	56	WH12BLK	37		
131	33	BF68	5	HCPEX-RTAC	59	PG-**SDV2	56	WH12BLU	37		
134	33	BF69	5	HCPEX-RTE	59	PI61CAP	9	WHGL8GRN	37		
139	33	BF70	5	HPT-KIT	59	PI62	9	WHGL10GRN	37		
140	33	BFS70	5	HS11	46	PI62R	9	WHRV8BLU	37		
161	12	BFBV2129	49	JFT	41	PI64	10	WR-RV55	27		
193	26	BFDGR-618	61	LF-60	12	PI64R	10	WR-PG160SD15	27		
194	26	BFDT-AS	61	LF-61	12	PI64Y	10	X100	18		
195	26	BFFR-KIT-1	5	LF-61CAP	12	PI65	10	X101	19		
196	26	BFFP-KIT-1	11	LF-62	12	PI65R	10	X102	19		

**Read about Elaflex
Expansion Joints**




**Configure an Elaflex
Expansion Joint**



ELAFLEX

**Fairview is a proud distributor of ELAFLEX®
Rubber Expansion Joints for drinking water,
waste water, seawater, cooling water, etc.**

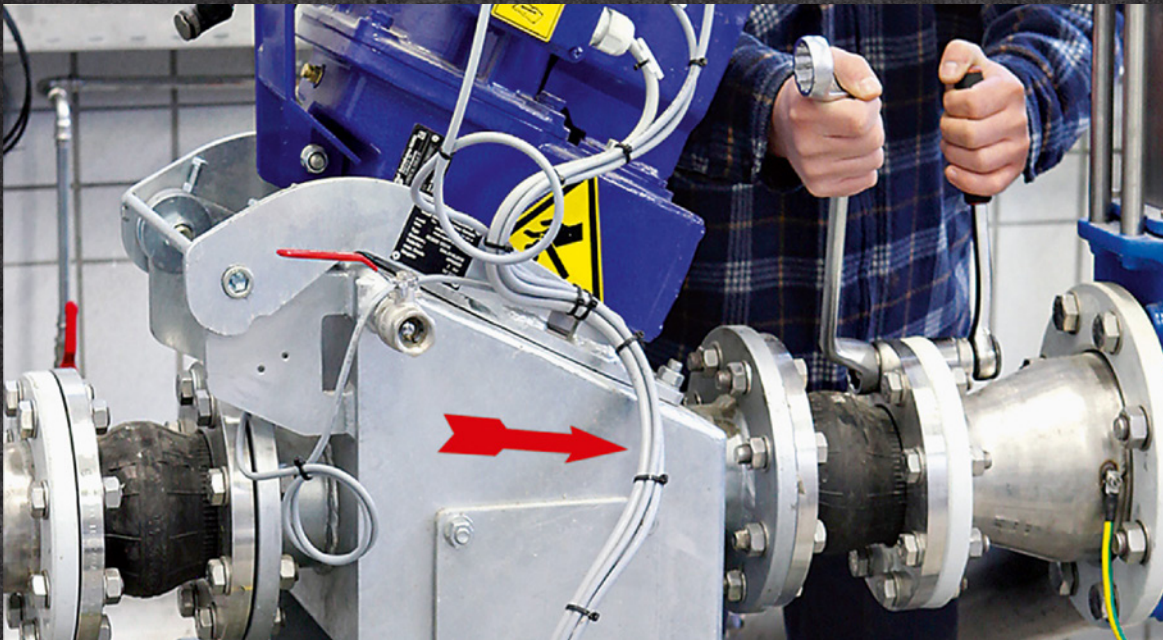

Swiveling flanges
with smooth holes
for bolts

Integrated sealing
surface with steel
wire core

Stabilising rim

Liner (tube)

Cover

Reinforcement



HOSE | VALVES | FITTINGS

VANCOUVER

EDMONTON

SASKATOON

WINNIPEG

MISSISSAUGA

MONTREAL

MONCTON

Fairview

www.fairviewfittings.com



Fairview Ltd.

Head Office: 1170 Invicta Drive, Unit C
Oakville, Ontario L6H 6G1
Telephone: (905) 338-0800
E-Mail: service@fairviewfittings.com



Fairview USA Inc.

Head Office: 3777 Commerce Court,
Wheatfield, New York 14120 U.S.A.
Telephone: (716) 614-0320
CONTINENTAL USA: (800) 688-4088
E-Mail: ussales@fairviewfittings.com

Warehouse Sales Locations

Canada

• 145 ENGLISH DRIVE, UNIT 4
MONCTON, NEW BRUNSWICK E1E 3X3
PHONE: (506) 857-1115
EMAIL: sales@moncton.fairviewfittings.com

• 2955 RUE LUCIEN-L'ALLIER
LAVAL, QUEBEC H7P 0A1
PHONE: (450) 978-3341
EMAIL: sales@montreal.fairviewfittings.com

• 6100 KESTREL ROAD UNIT 1
MISSISSAUGA, ONTARIO L5T 1S8
PHONE: (905) 564-7416
EMAIL: torontosales@fairviewfittings.com

• 10 - 19 RONN ROAD
CENTREPORT, MANITOBA R4B 0A3
PHONE: (204) 633-9304
EMAIL: sales@winnipeg.fairviewfittings.com

• 130-3810 ARTHUR ROSE AVENUE
SASKATOON, SASKATCHEWAN S7P 0C7
PHONE: (306) 978-1800
EMAIL: sales@saskatoon.fairviewfittings.com

• 18121 - 111 AVENUE N.W.
EDMONTON, ALBERTA T5S 2P2
PHONE: (780) 438-2177
EMAIL: sales@edmonton.fairviewfittings.com

• 11 BURBIDGE STREET, UNIT 201
COQUITLAM, B.C. V3K 7B2
PHONE: (604) 294-4427
EMAIL: vancouver@fairviewfittings.com

• EXPORT SALES
MISSISSAUGA, ONTARIO L5T 1S8
PHONE: (905) 564-7416
EMAIL: torontosales@fairviewfittings.com

USA

• 22 PROSPECT STREET, UNITS 3 & 4
WOBBURN, MASSACHUSETTS 01801
PHONE: (781) 932-1392
CONTINENTAL U.S.A.: (800) 695-3101

• 3777 COMMERCE COURT
WHEATFIELD, NEW YORK 14120
PHONE: (716) 614-0320
CONTINENTAL U.S.A.: (800) 688-4088

• 3412 COUNTY RD. 6 E, UNIT 2
ELKHART, IN 46514
PHONE: (574) 206-8884
CONTINENTAL U.S.A.: (877) 459-0700



Accutek® et BITE-FORCE® are registered trademarks of Fairview Ltd.